


GNSS observation file monitoring for 0511


Last RINEX file: 05111321.220
RINEX version: 3.02
Marker: 1241
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

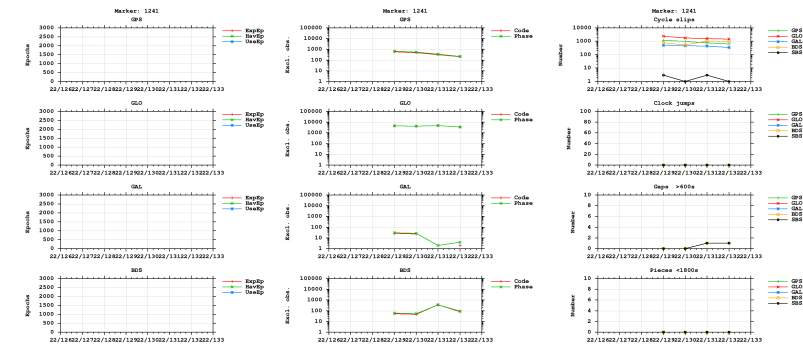



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

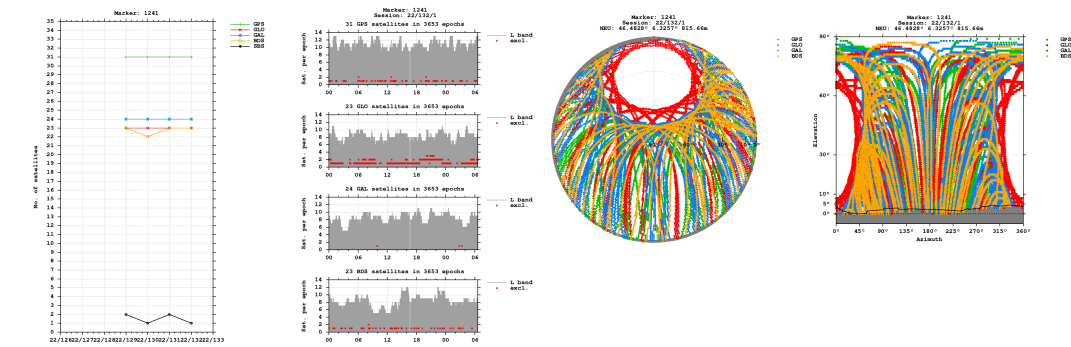


Bands

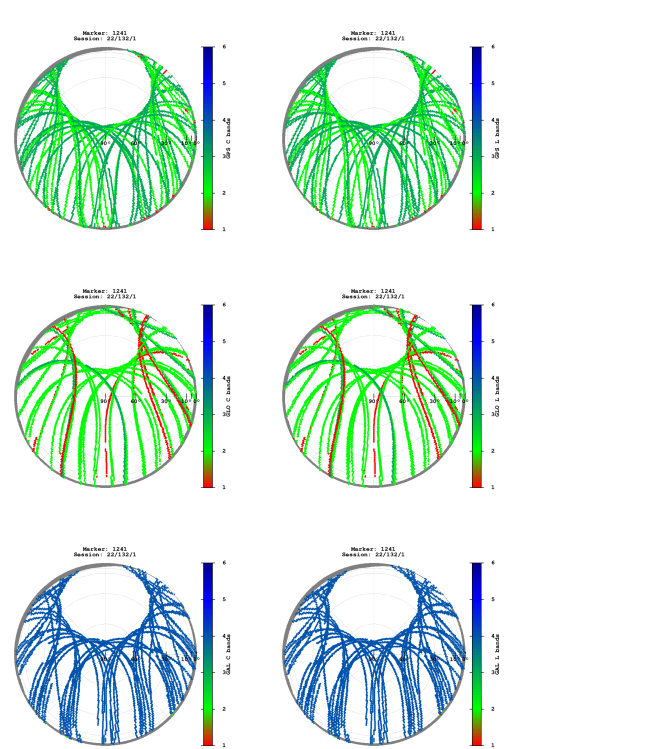


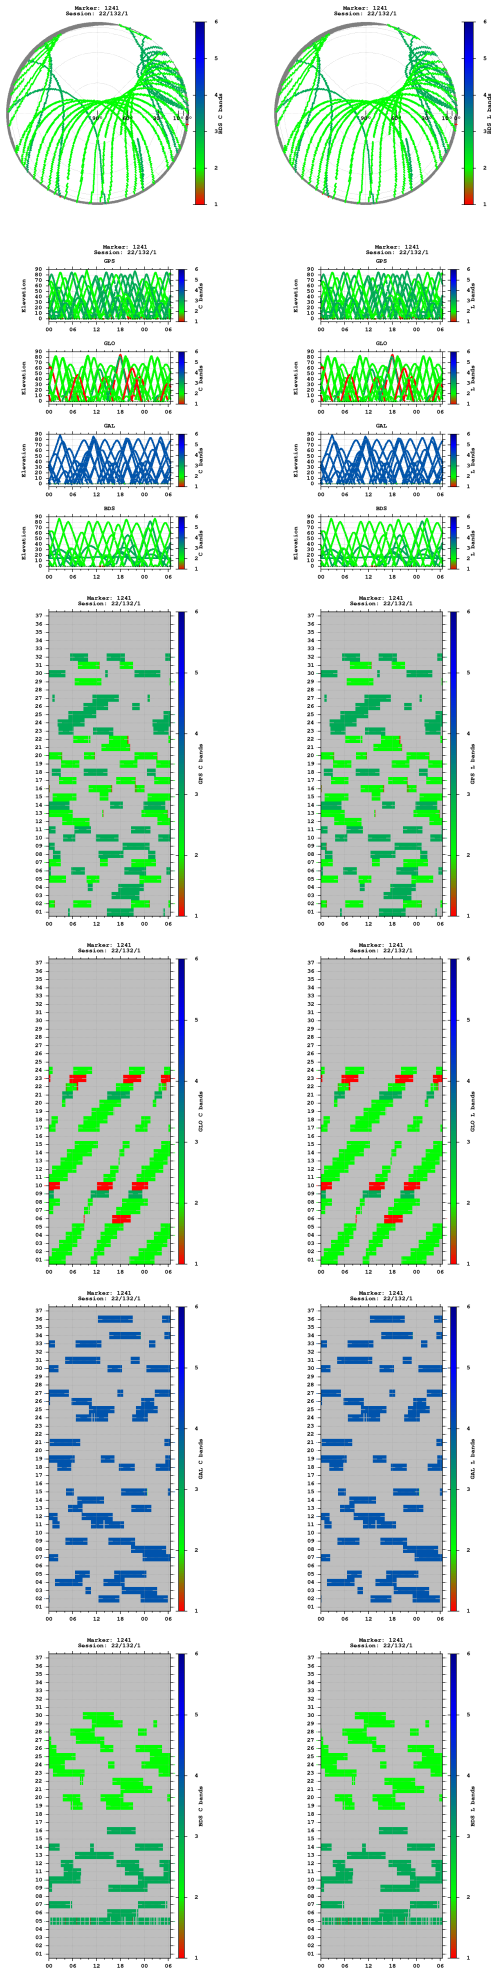


Observations

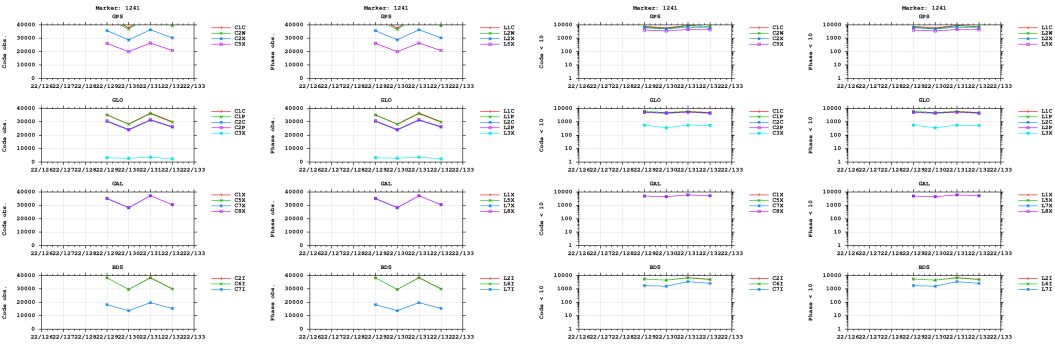


Multipath

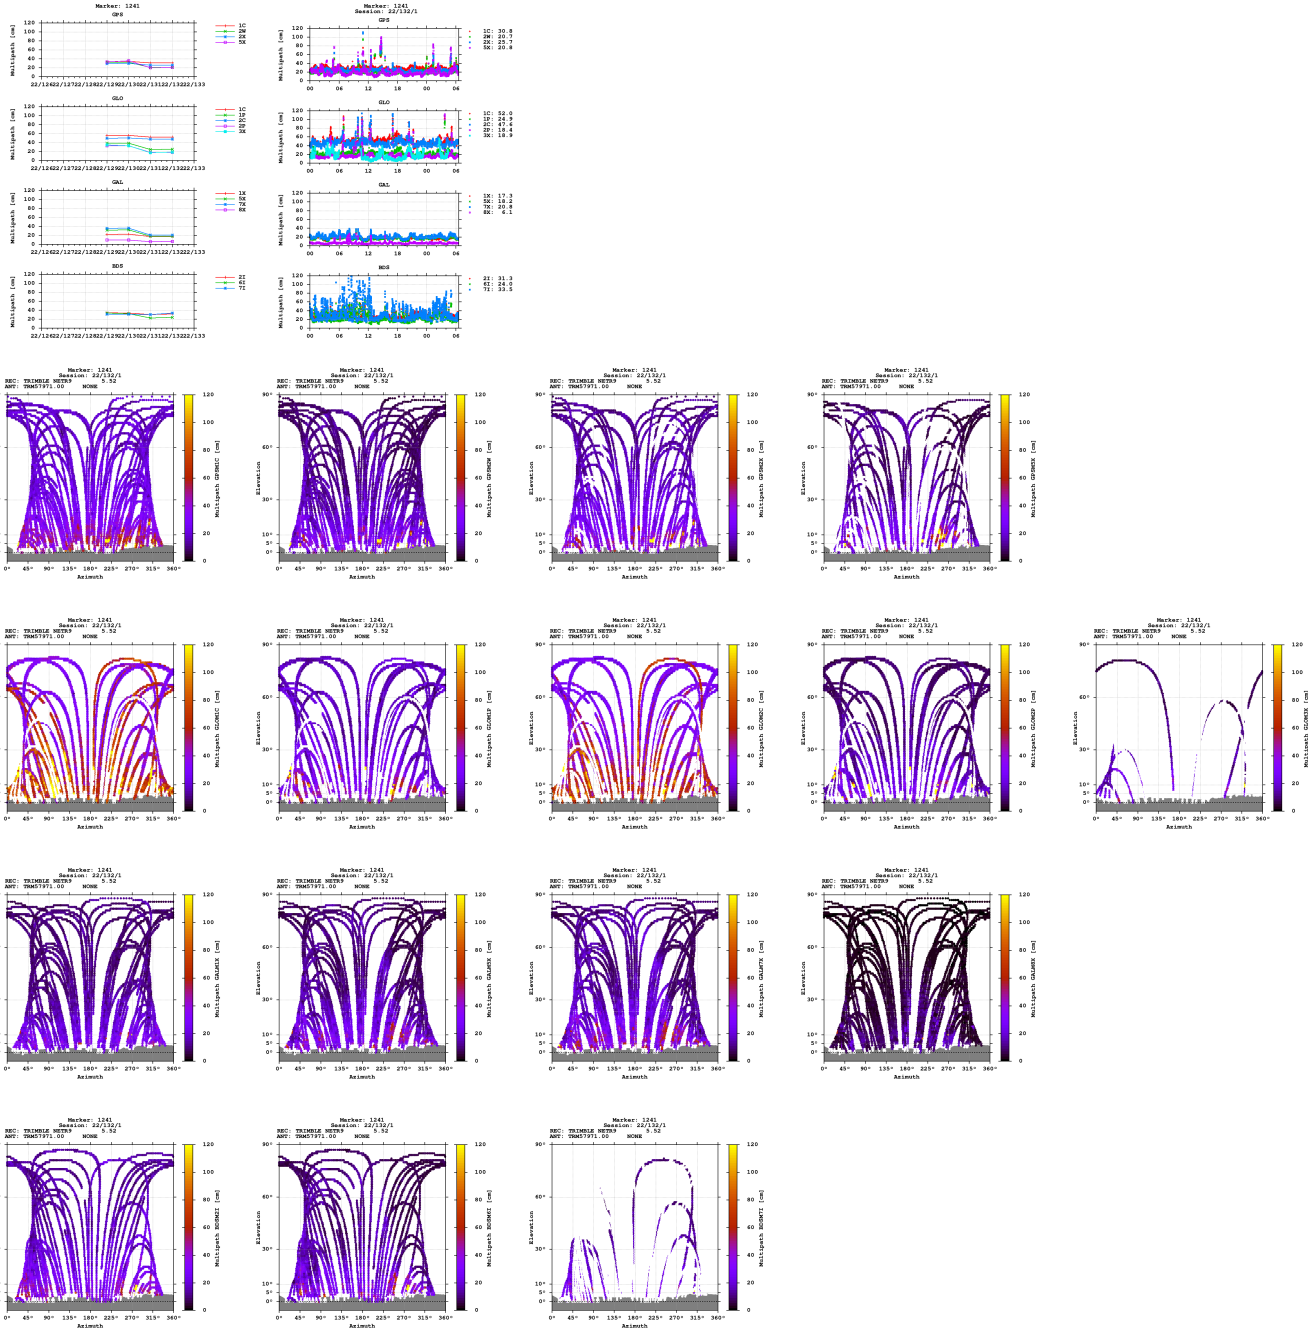


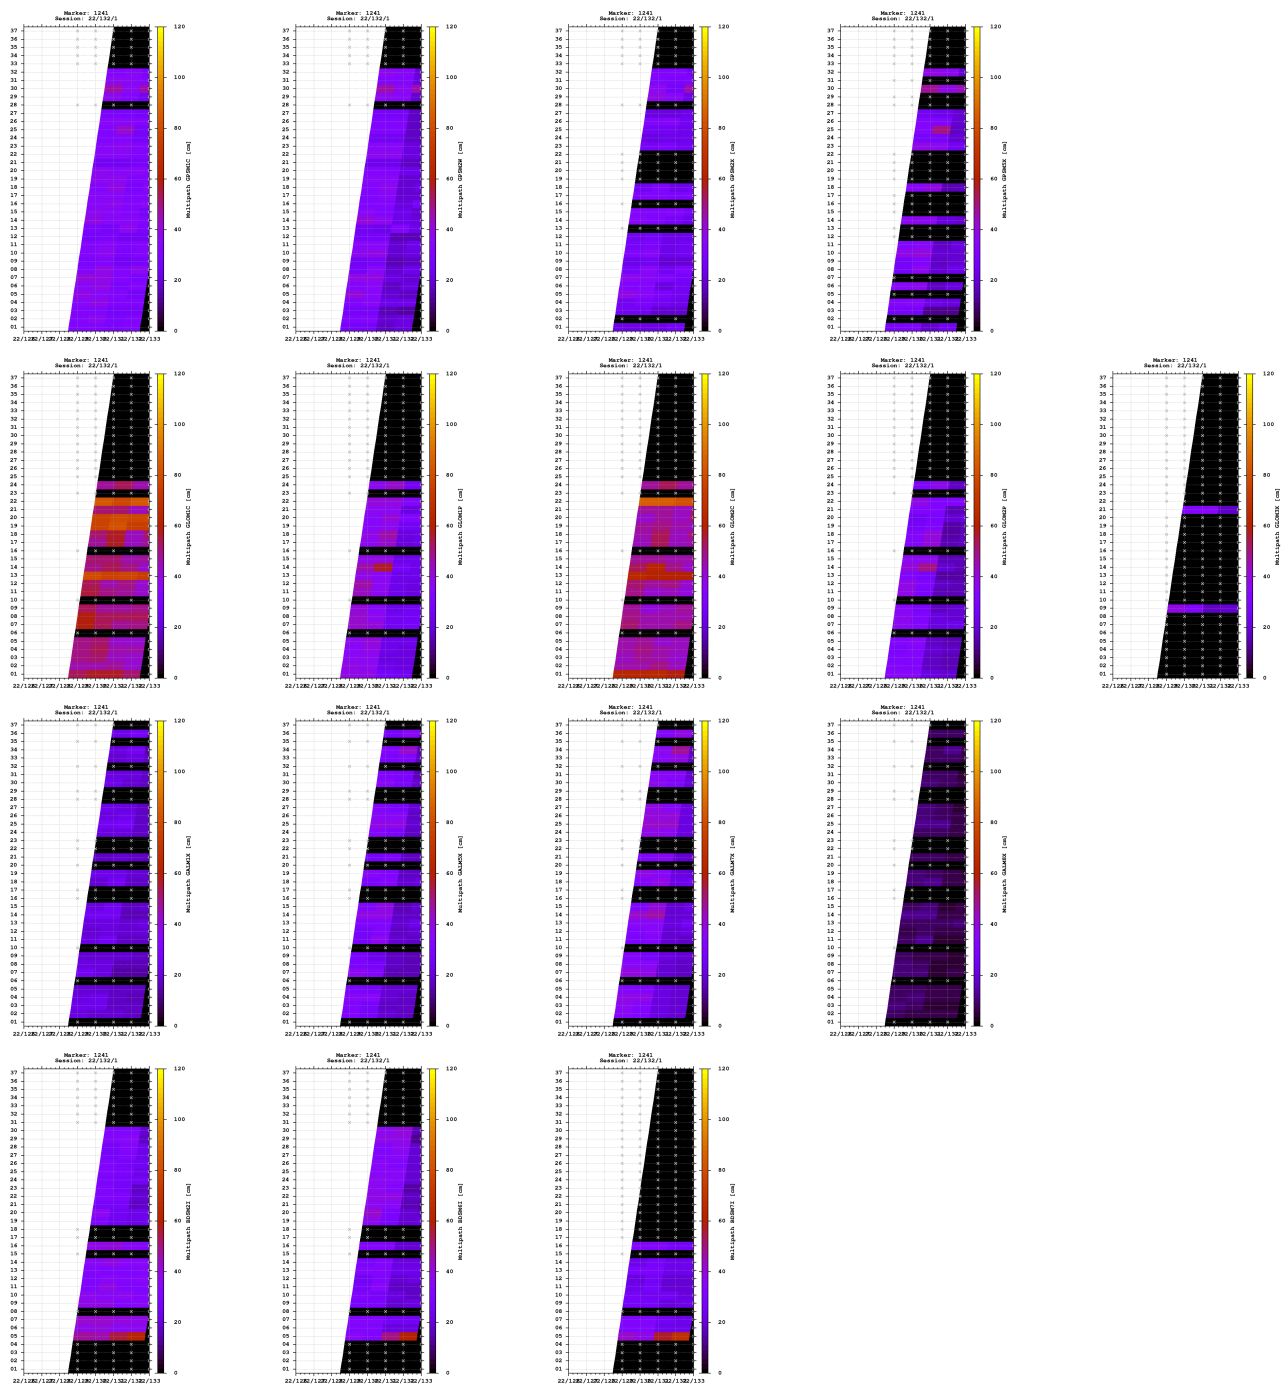


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

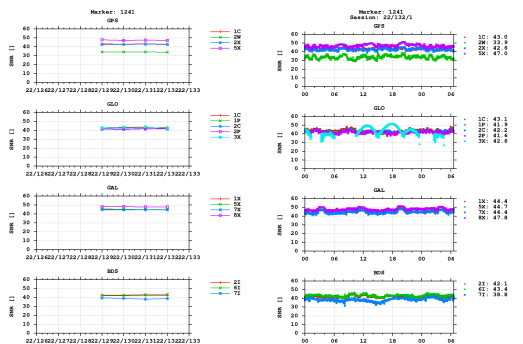


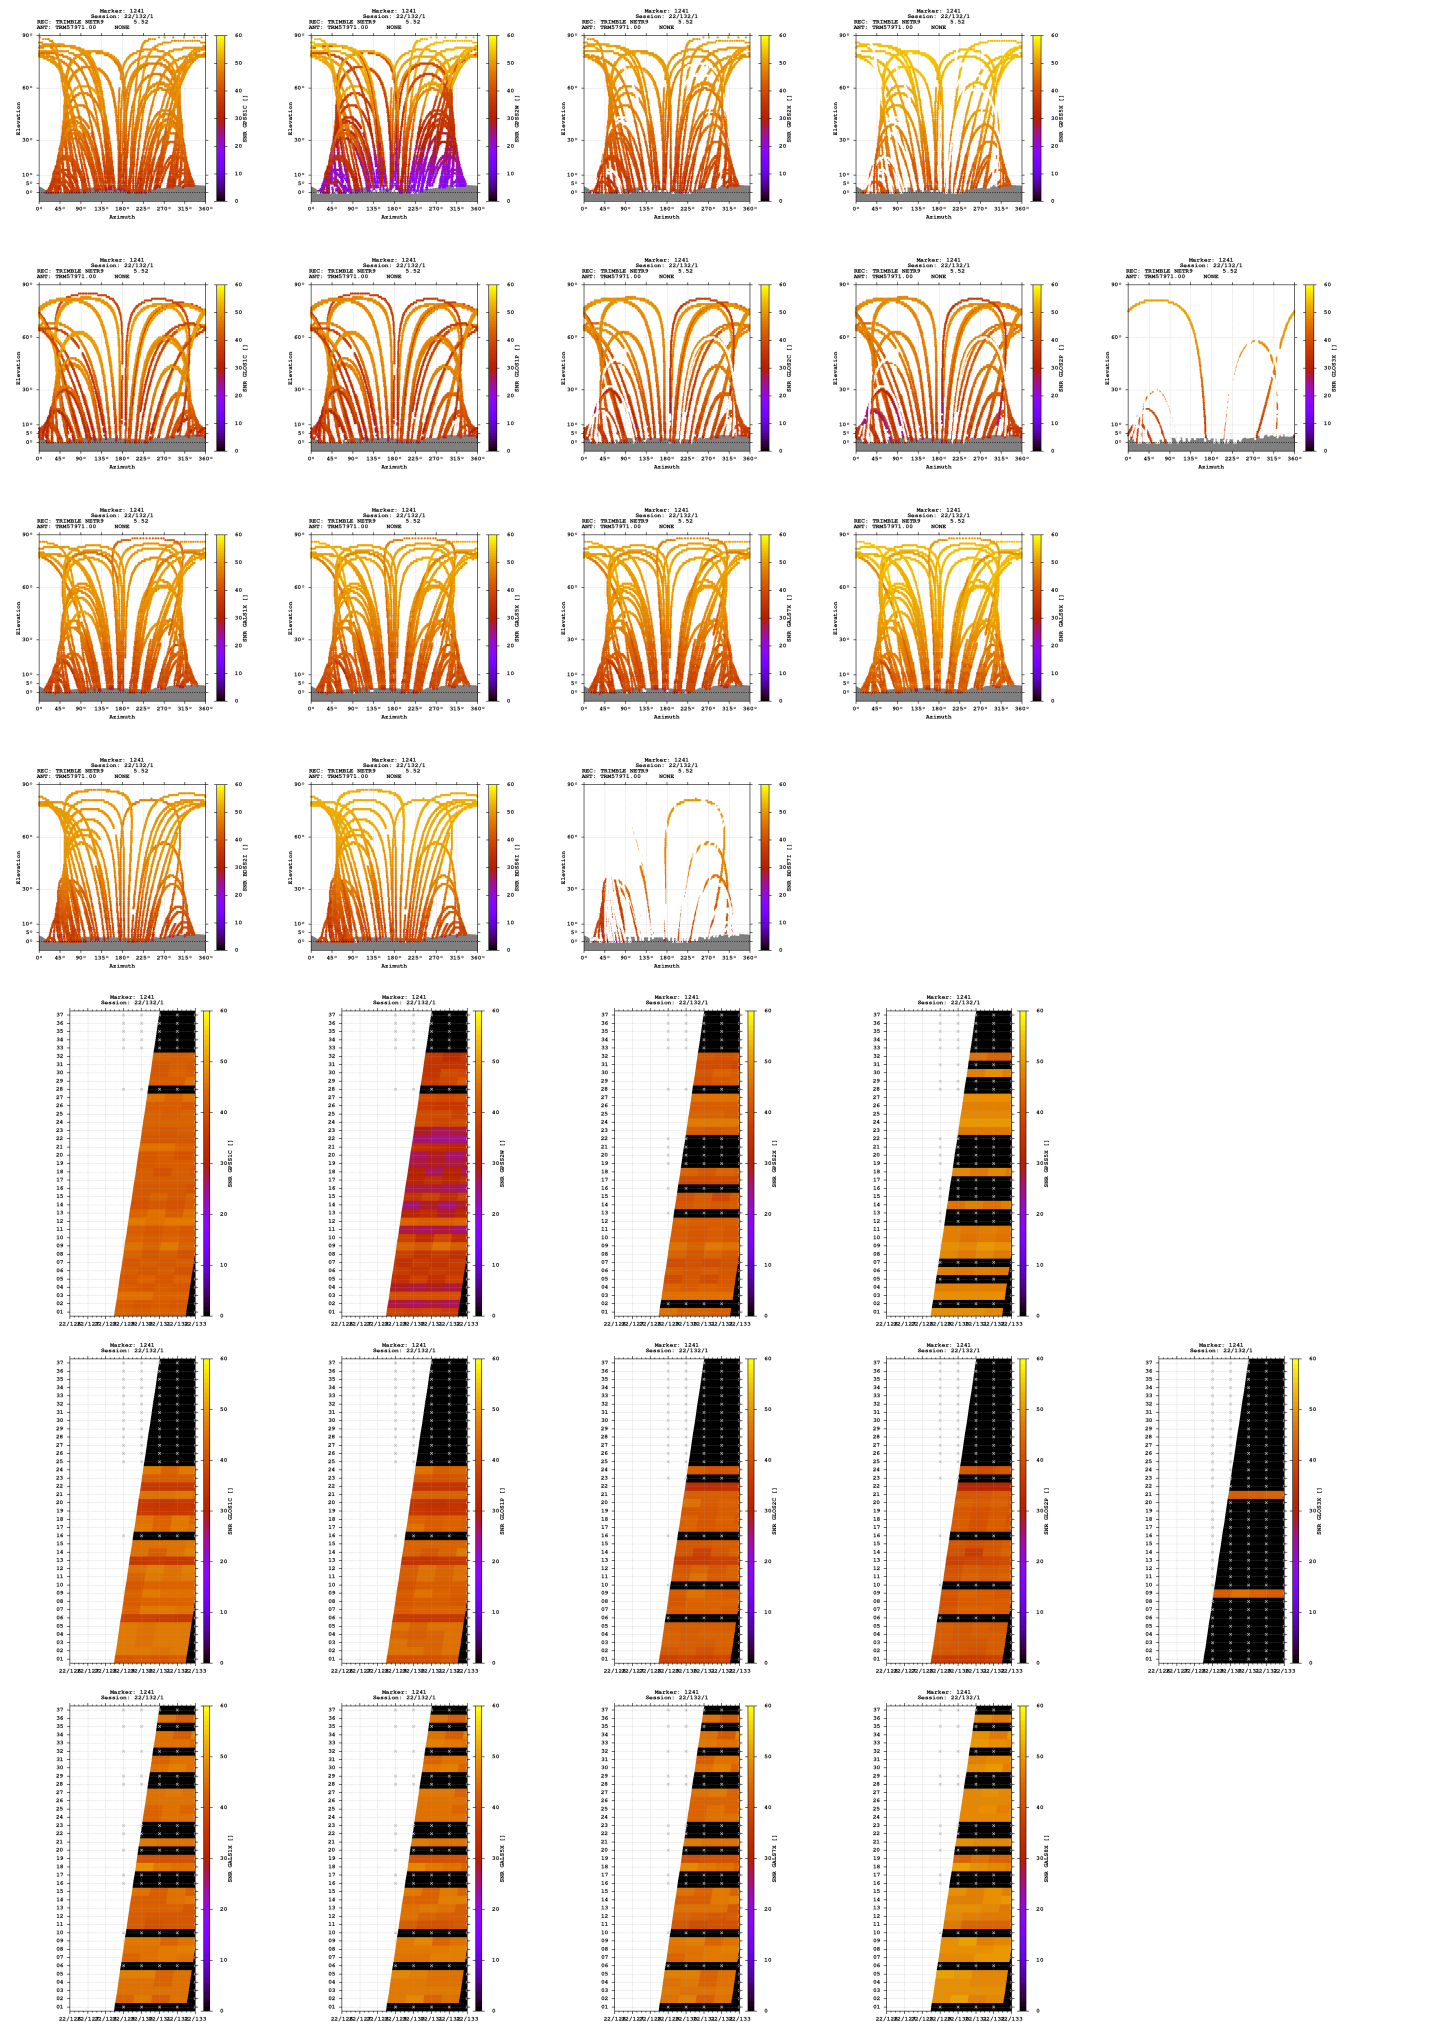

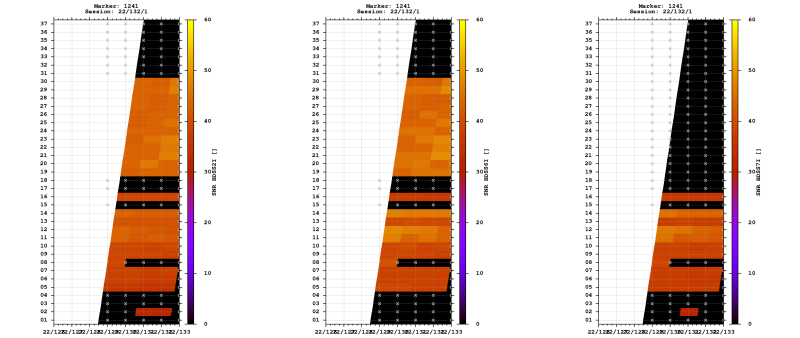


Estimates

2022-05-11 10:39:30	GPS	4373331.2638	484804.1266	4602955.8851	46.482804169	6.325676654	815.6557
2022-05-11 10:39:30	GLO	4373332.6540	484803.7937	4602957.1295	46.482803103	6.325670351	817.4843
2022-05-11 10:39:30	GAL	4373331.2843	484804.0315	4602955.5156	46.482801816	6.325675394	815.3946
2022-05-11 10:39:30	BDS	4373332.7201	484806.3967	4602959.0788	46.482812877	6.325703945	819.1406

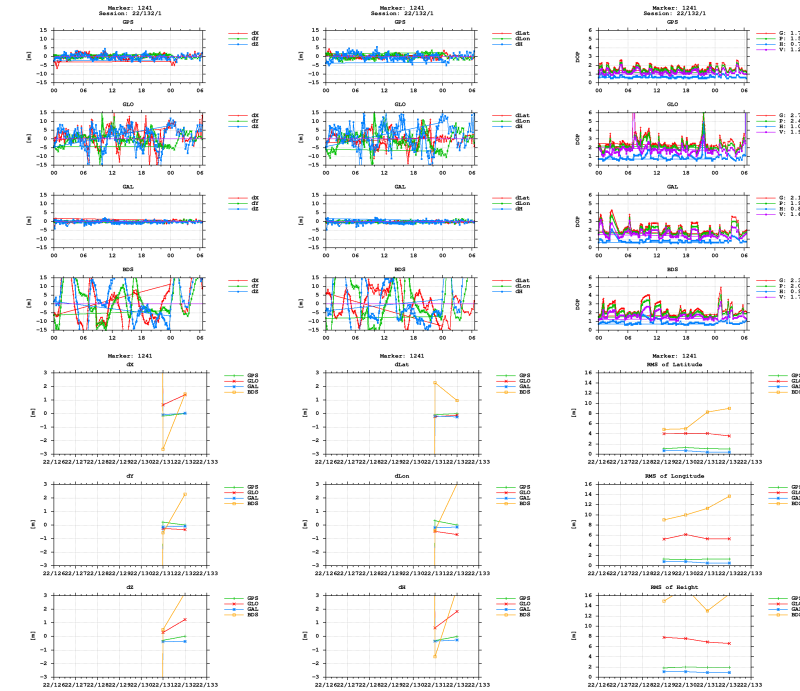

BNC



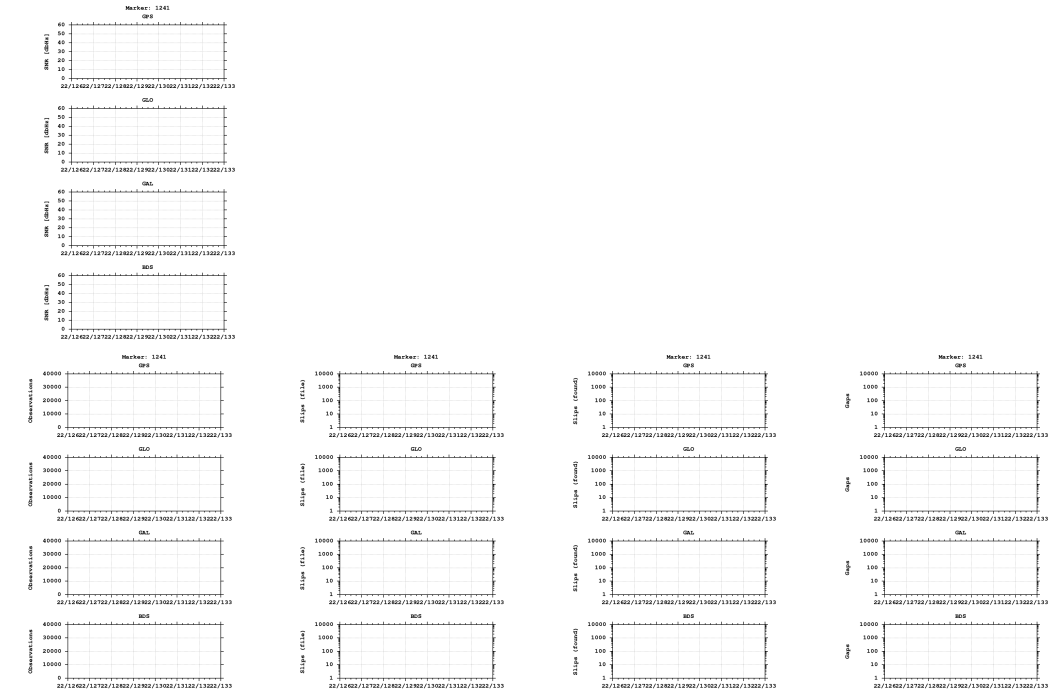

Equipment

2022-05-09 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)