


GNSS observation file monitoring for 0512


Last RINEX file: 05121311.220
RINEX version: 3.02
Marker: 1242
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

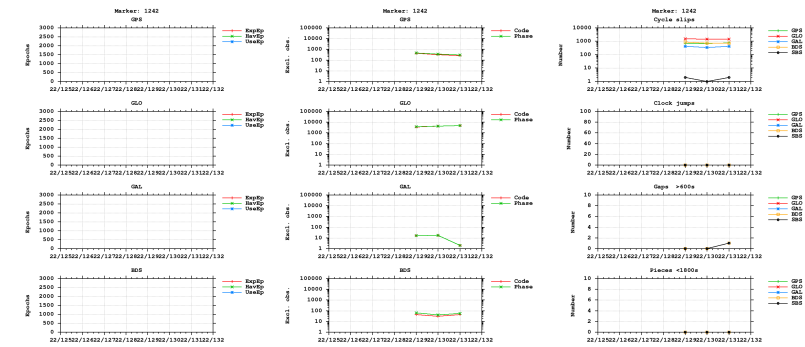



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

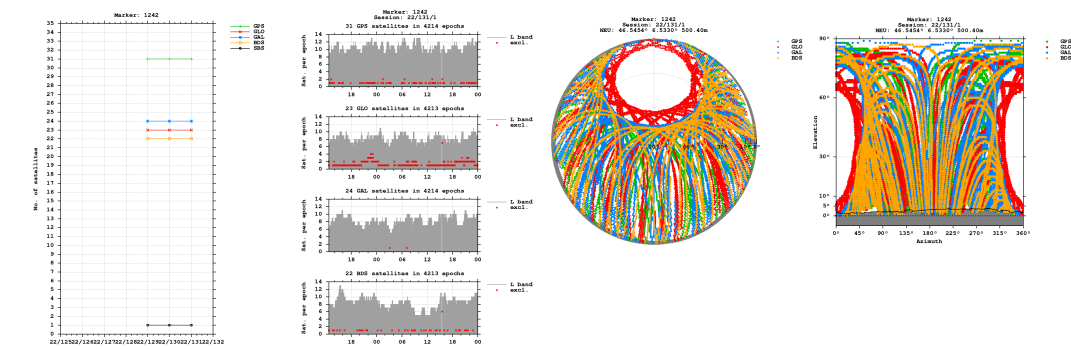


Bands


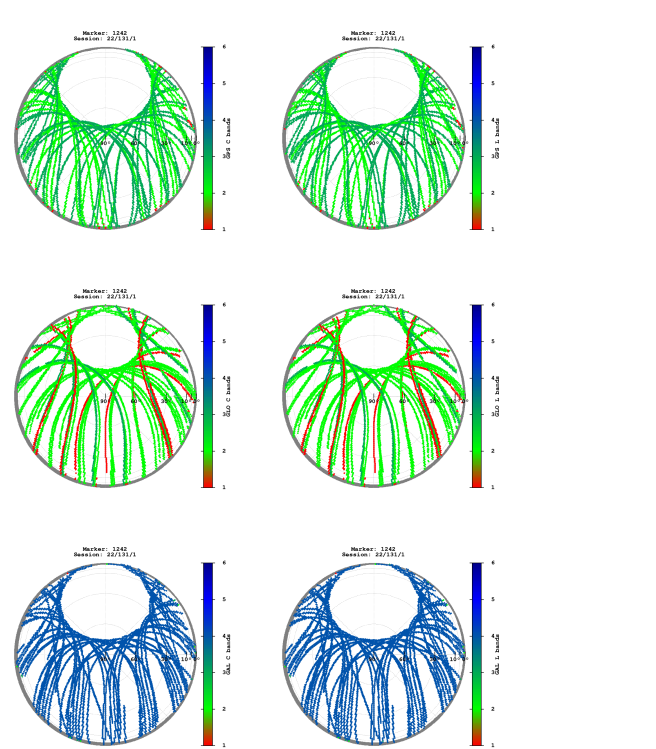


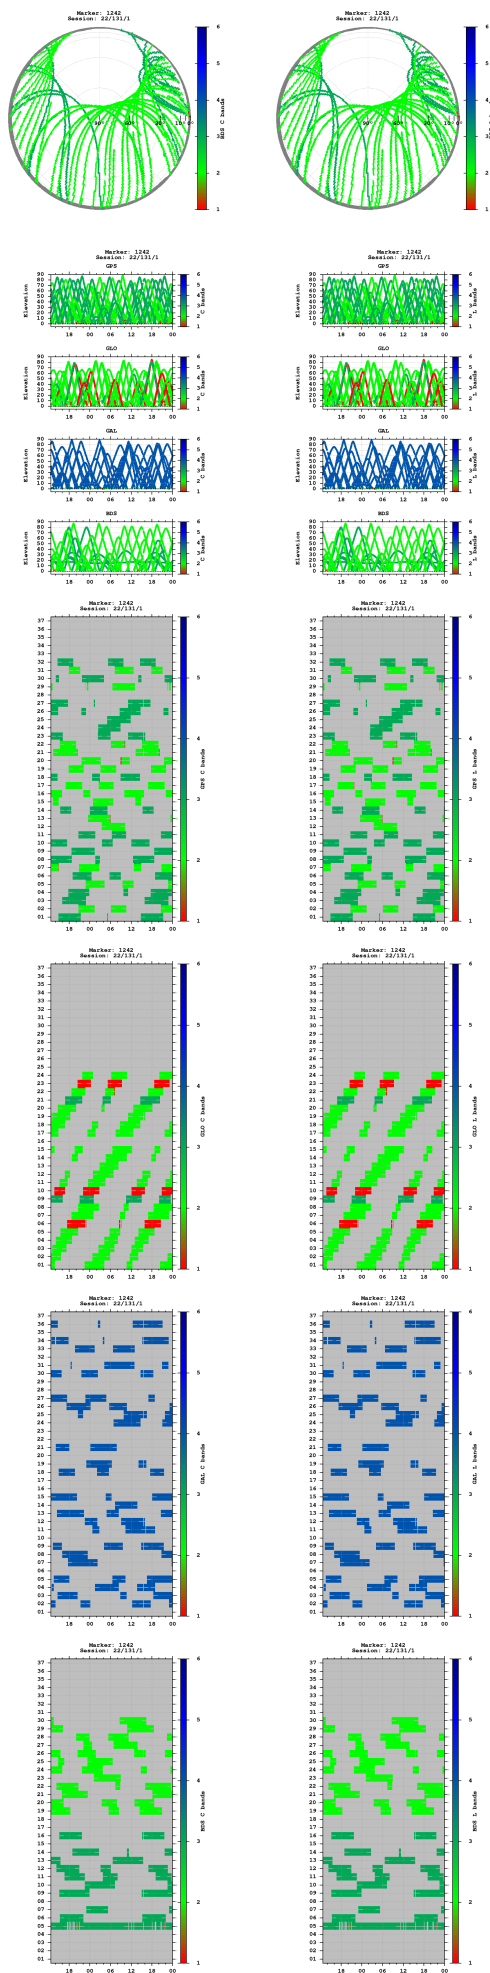


Observations

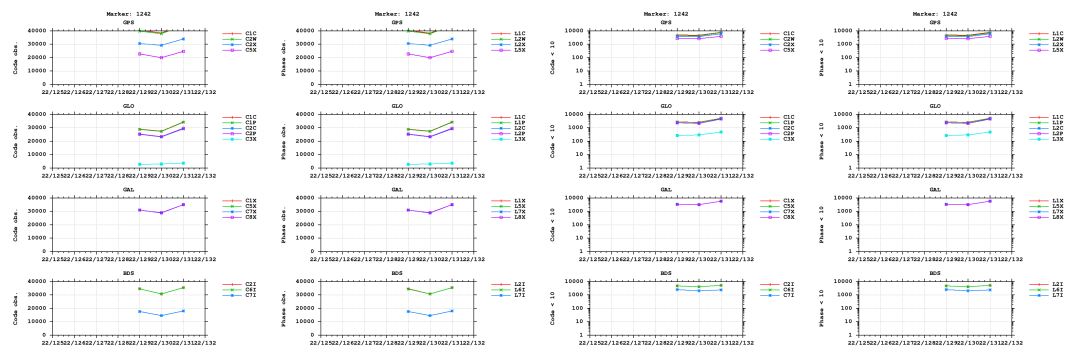


Multipath

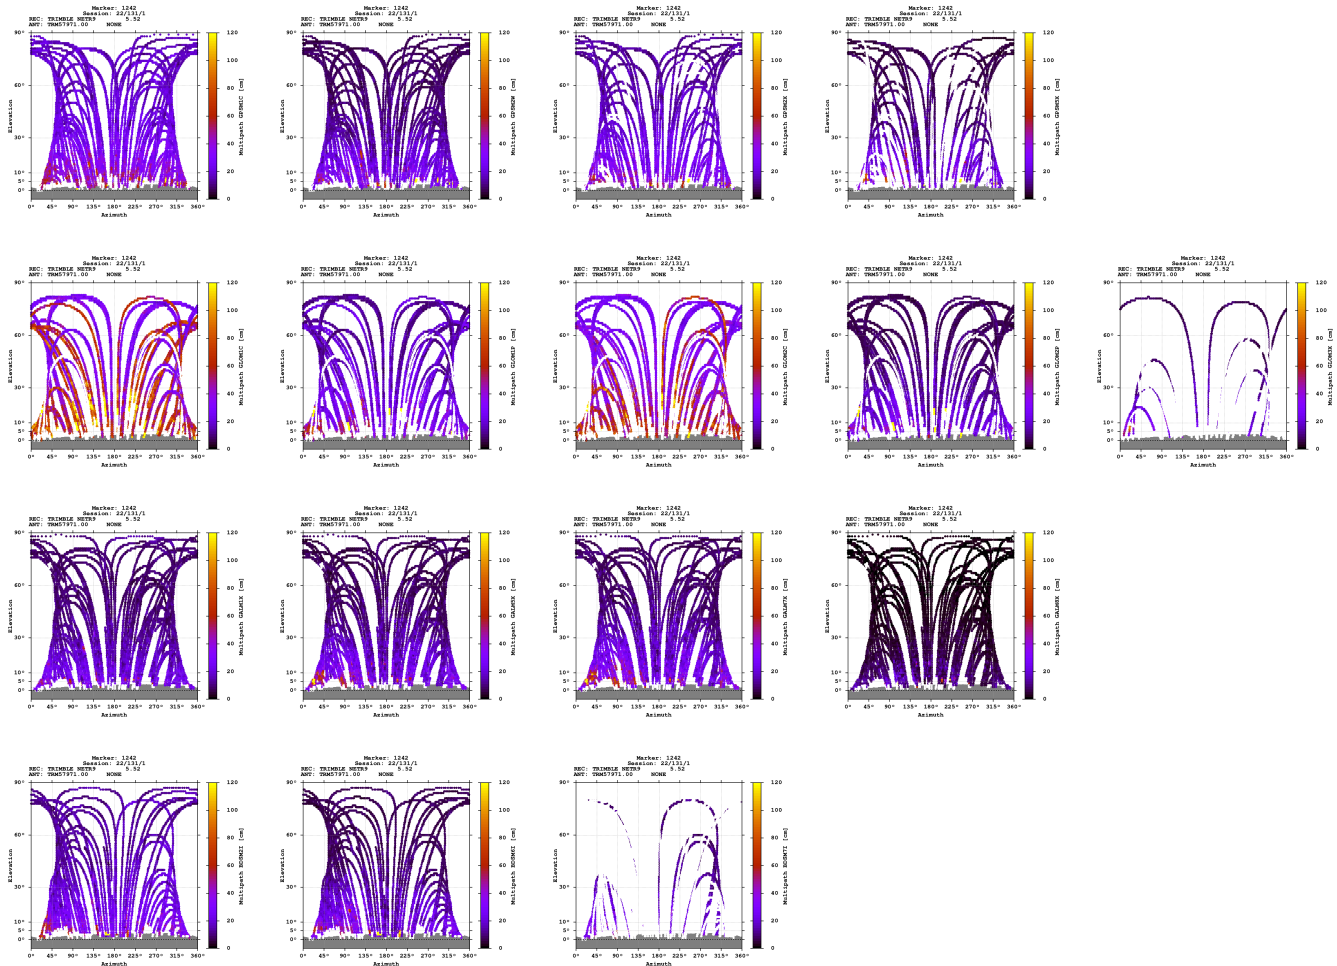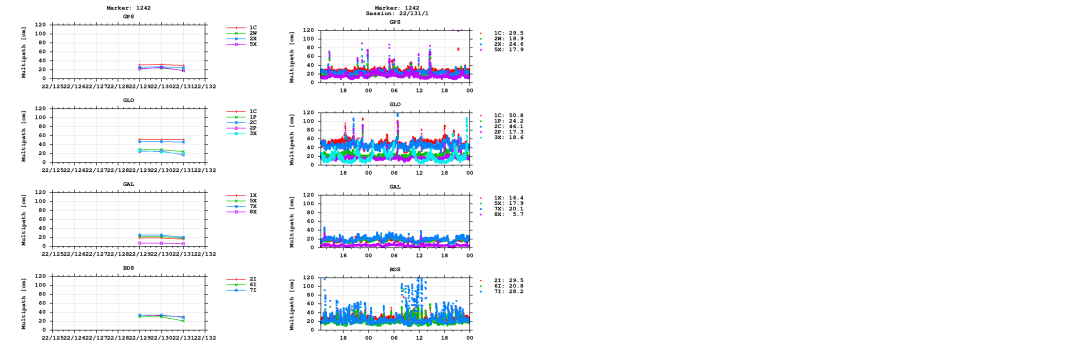


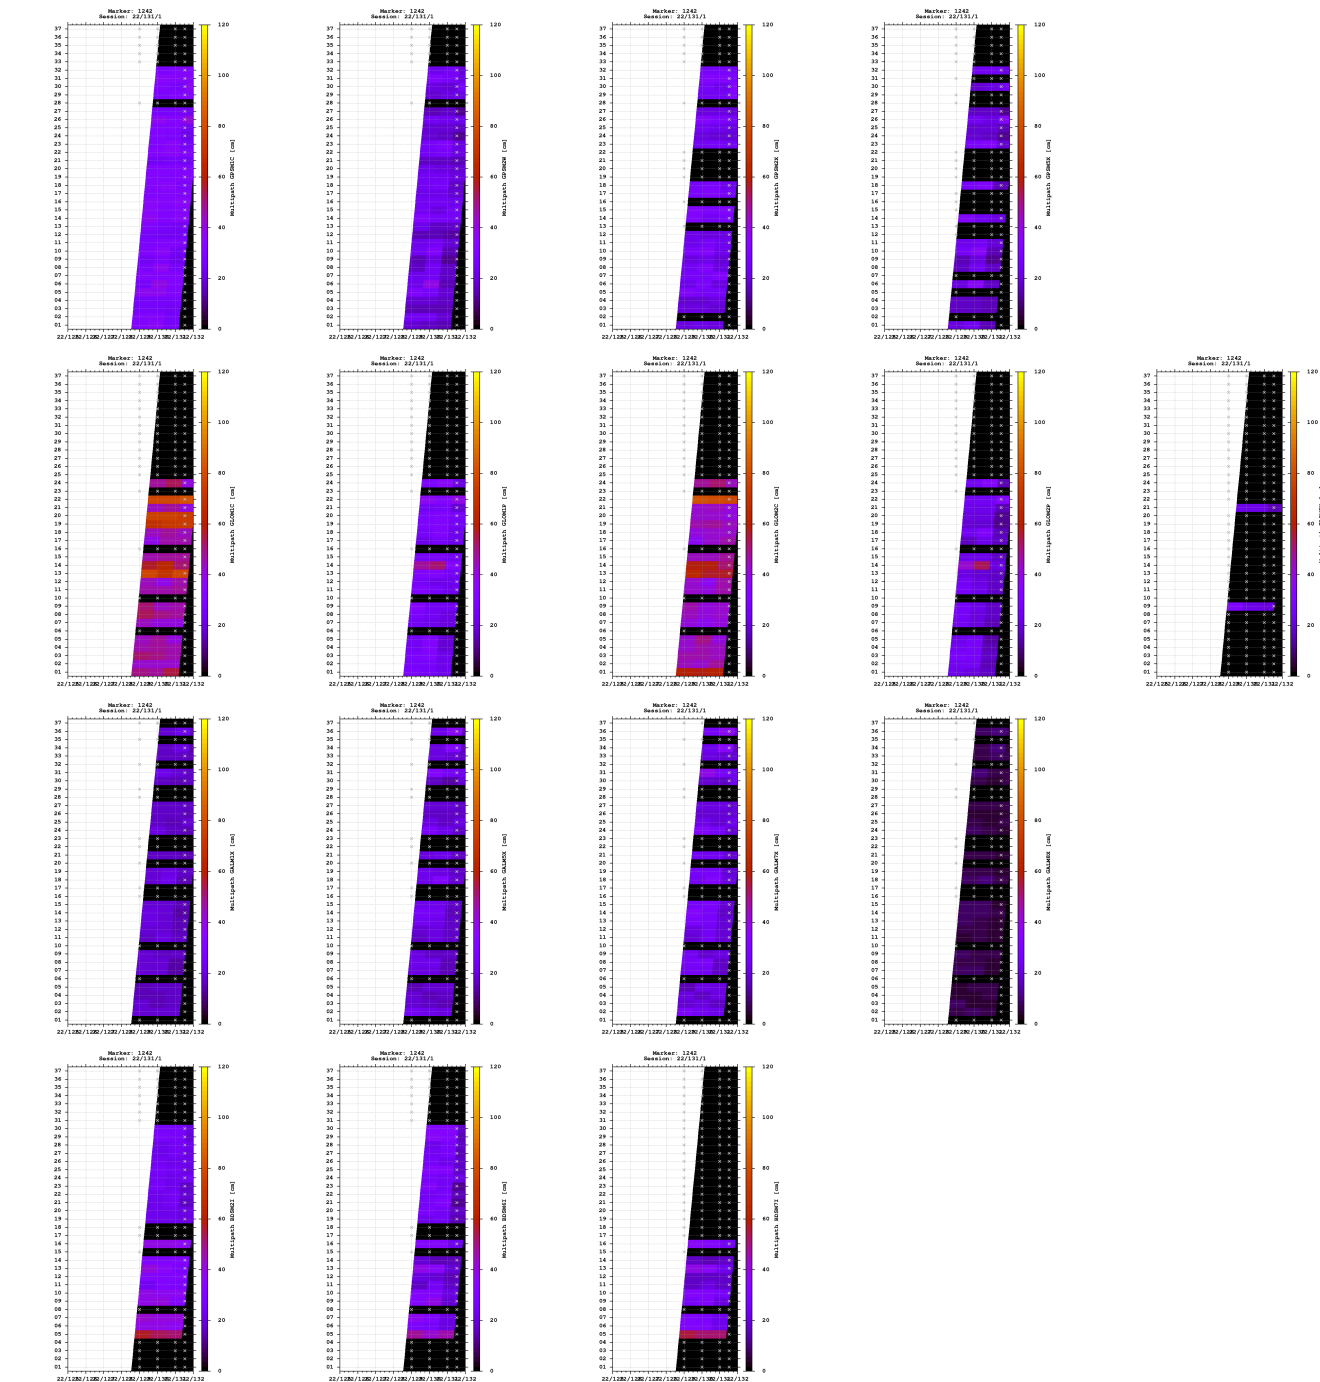


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

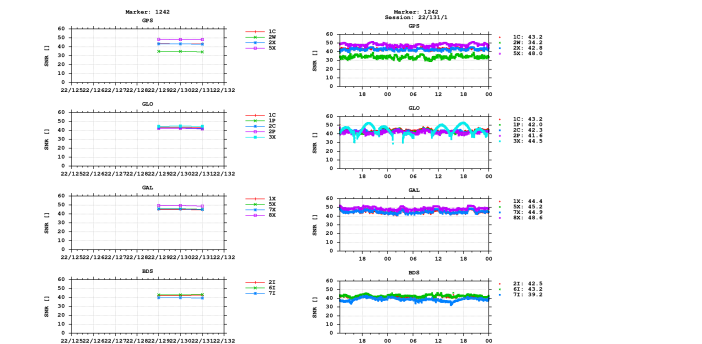


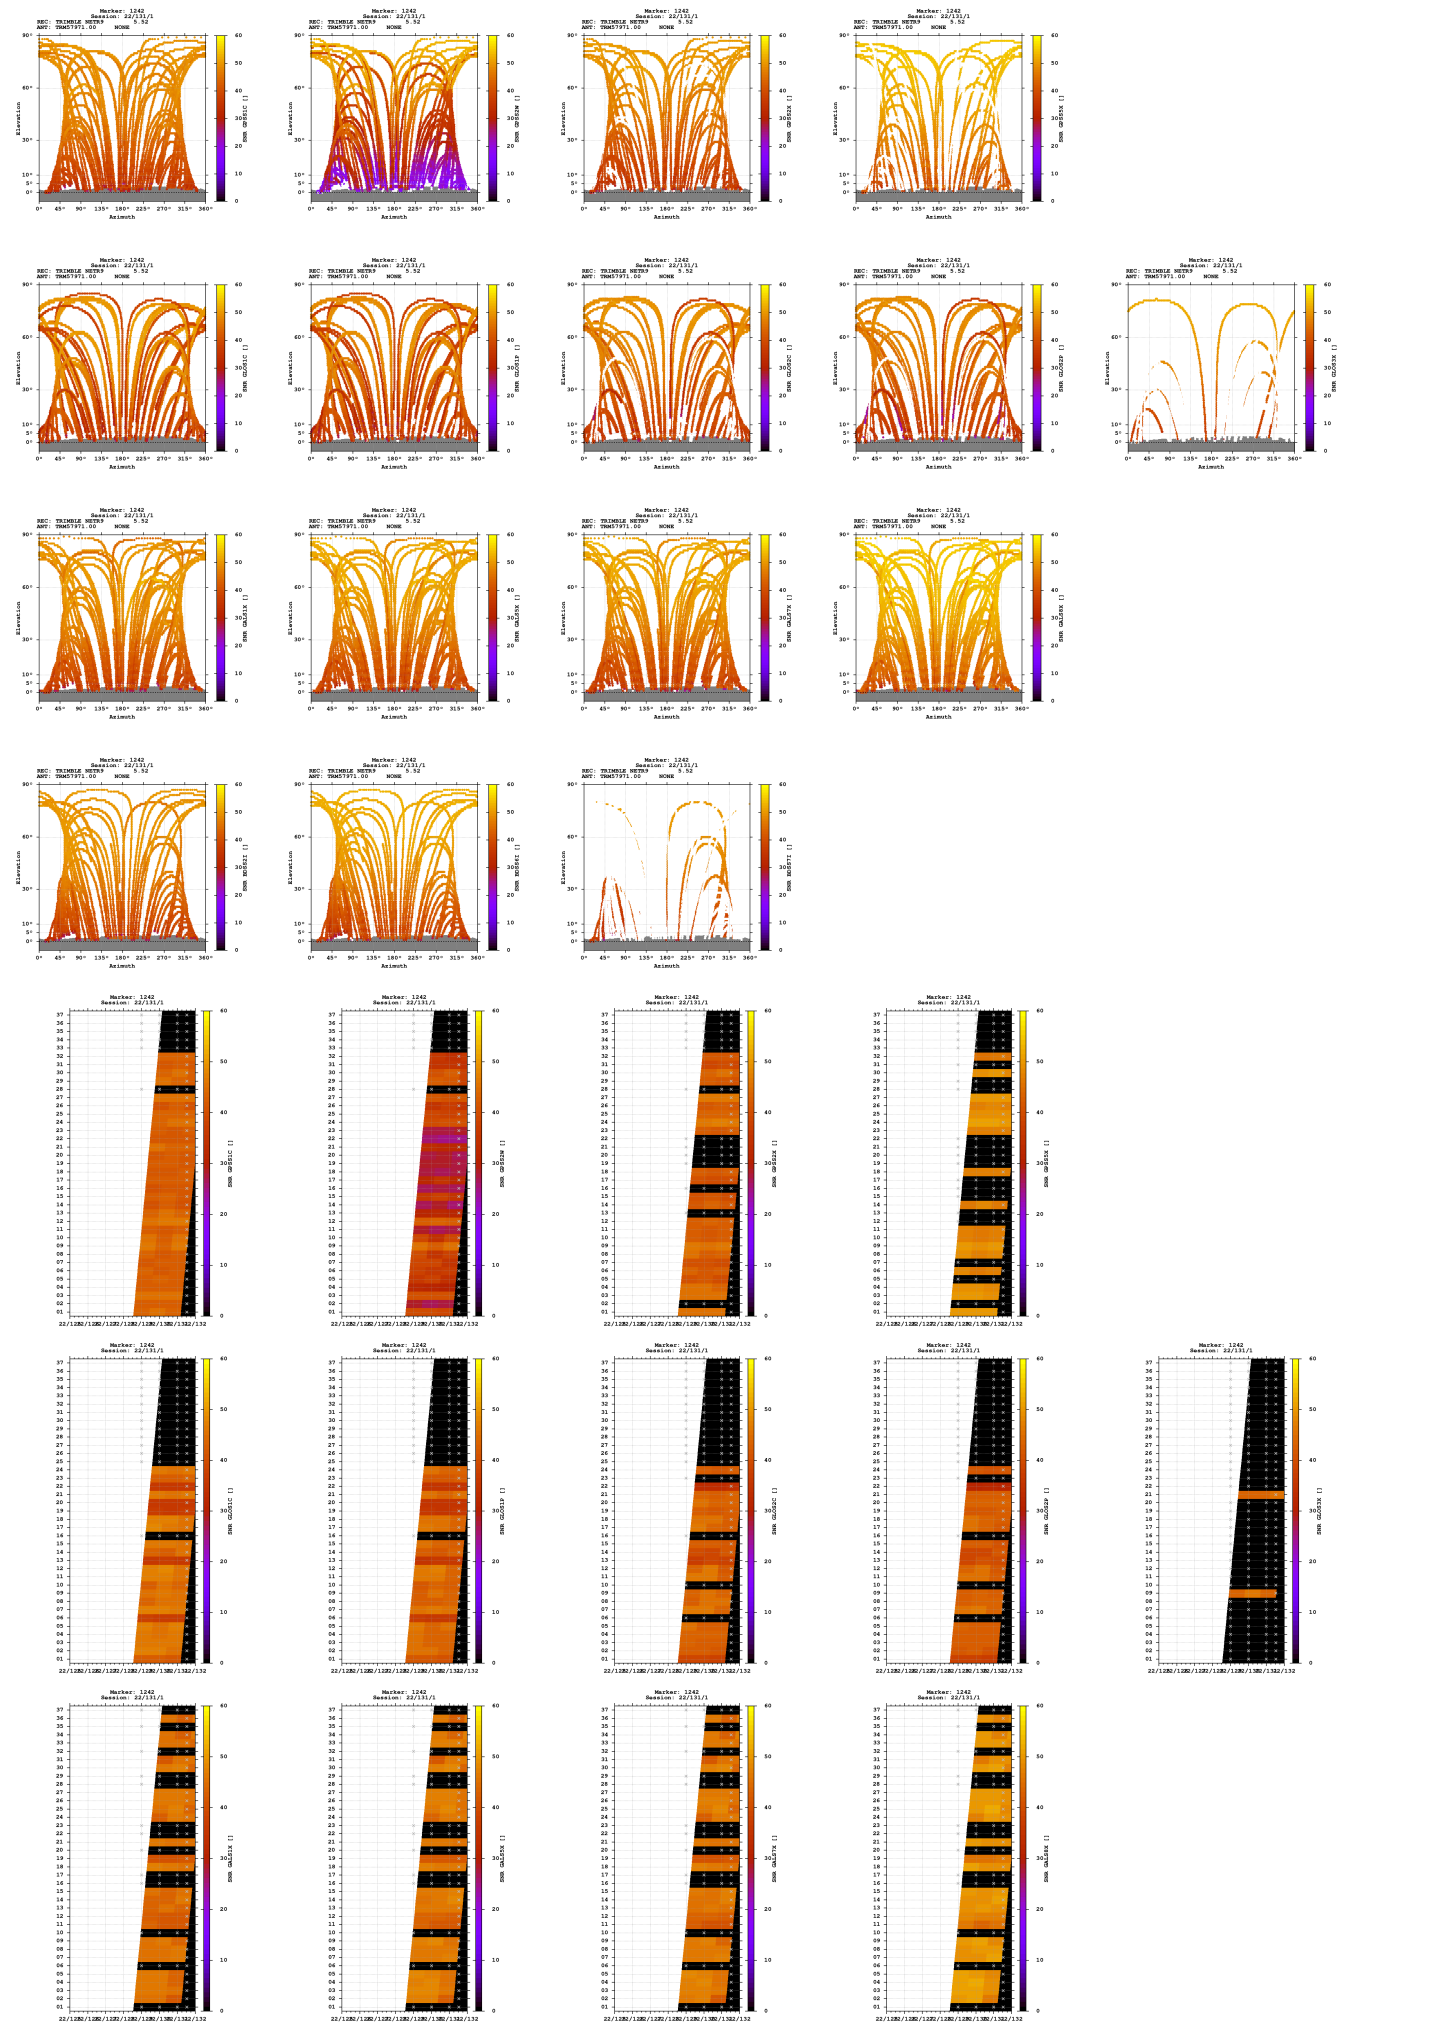

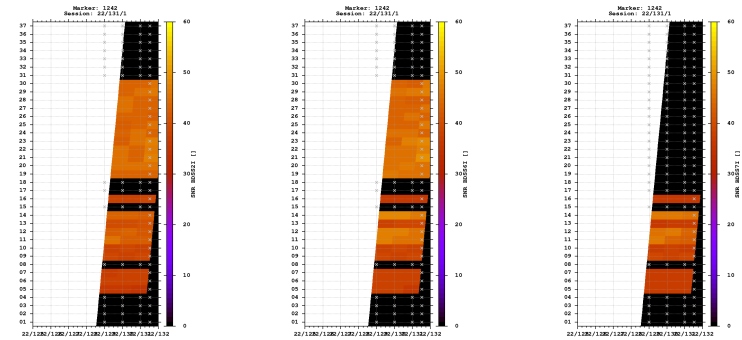



Estimates

2022-05-11 12:41:00	GPS	4366316.2331	500024.3980	4607516.7238	46.545407612	6.532972427	500.4024
2022-05-11 12:41:00	GLO	4366317.1112	500024.3306	4607517.1276	46.545404464	6.532970252	501.2902
2022-05-11 12:41:00	GAL	4366316.2215	500024.0833	4607516.5102	46.545406600	6.532968369	500.2148
2022-05-11 12:41:00	BDS	4366313.3801	500023.5827	4607516.3285	46.545424281	6.532966099	498.1021

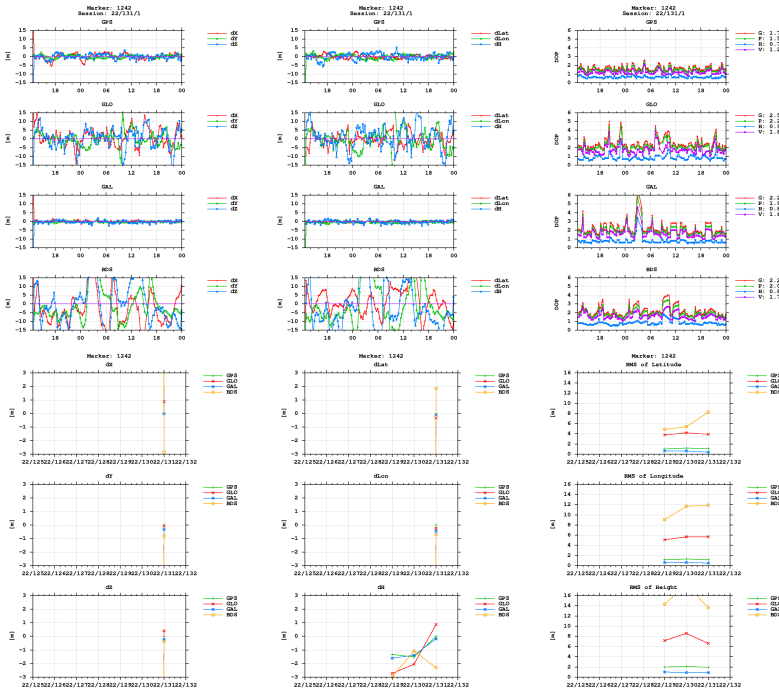

BNC

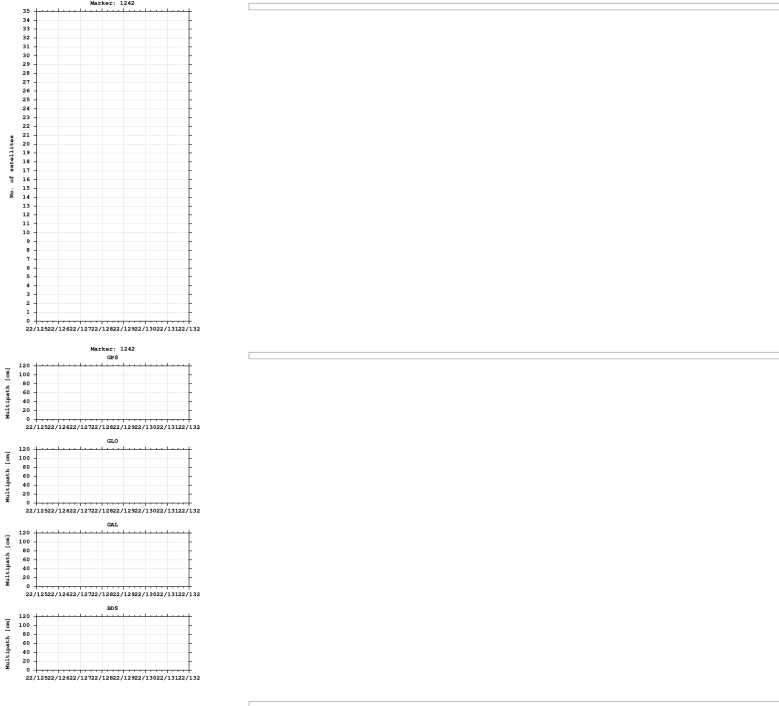

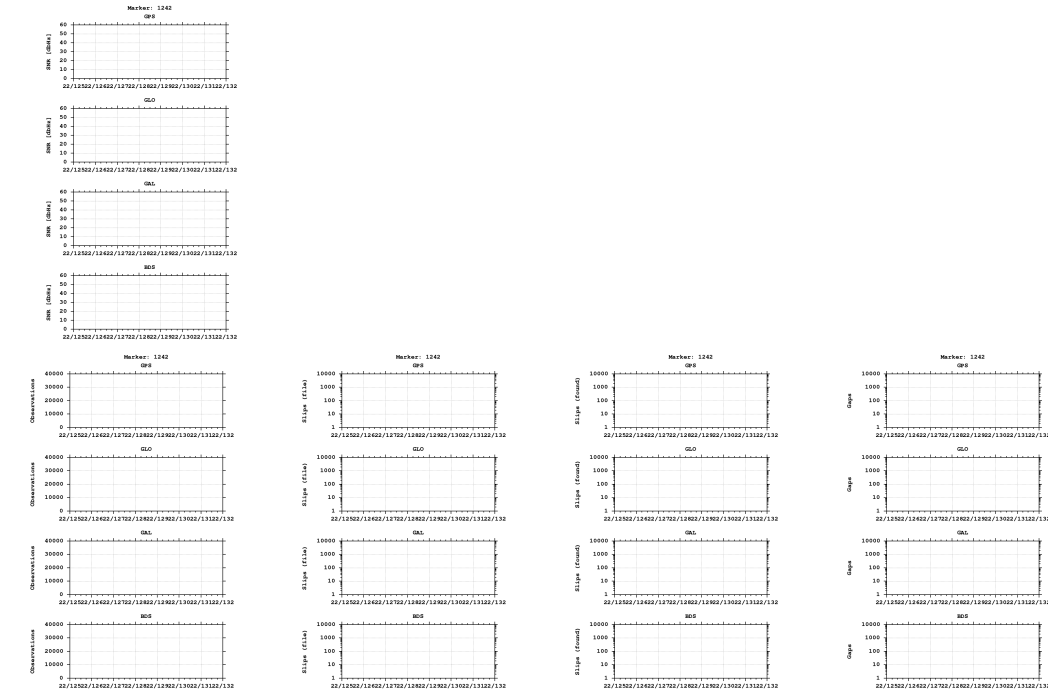

Equipment

2022-05-09 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)