


GNSS observation file monitoring for 0513


Last RINEX file: 05131311.220
RINEX version: 3.02
Marker: 1260
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE

Epochs

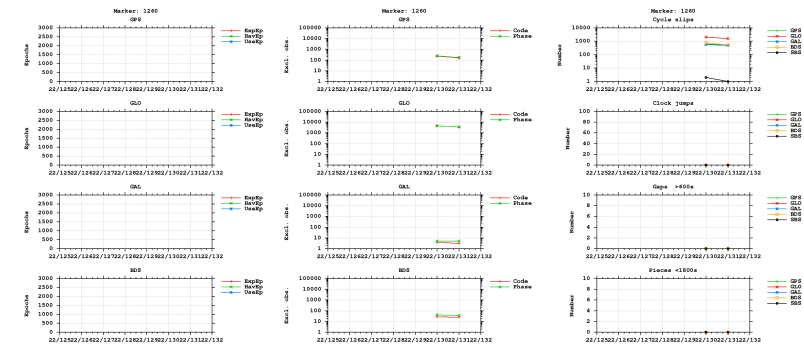



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

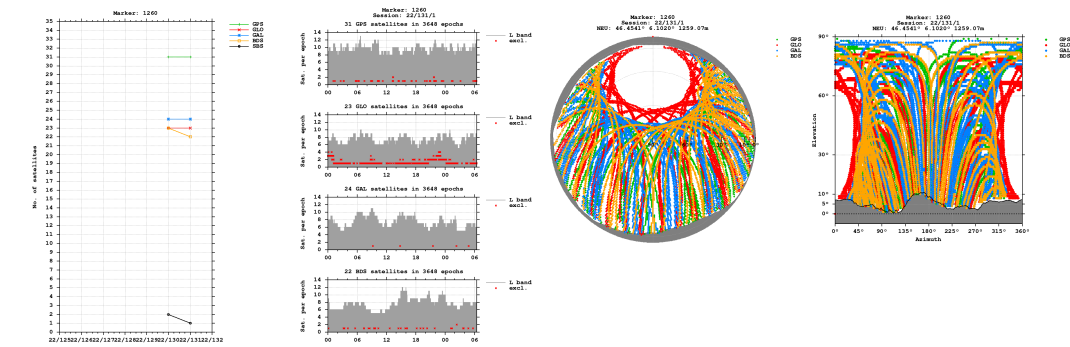


Bands

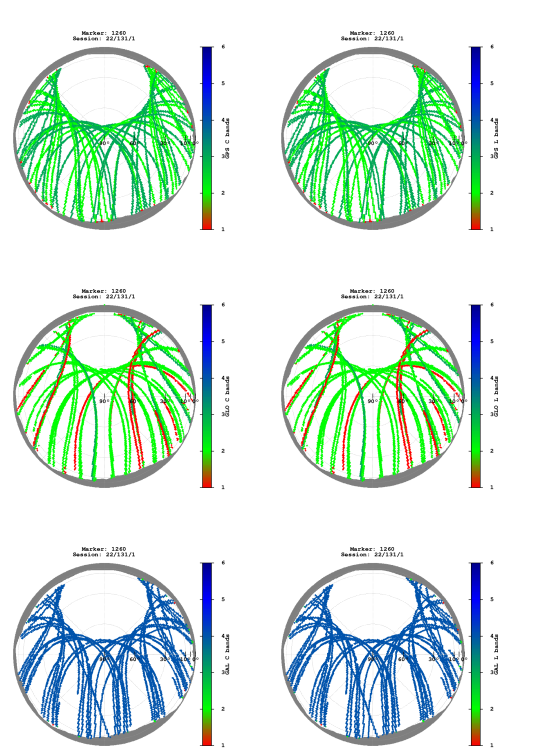


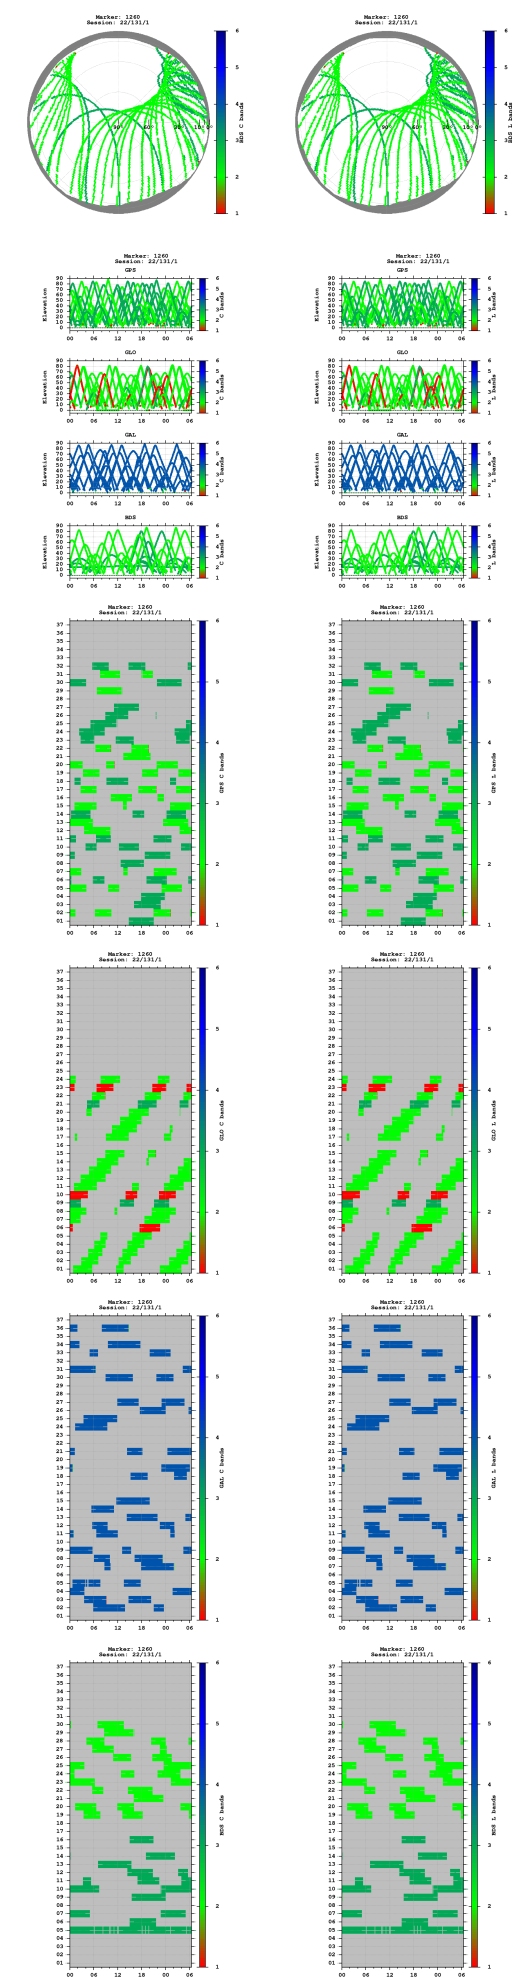


Observations

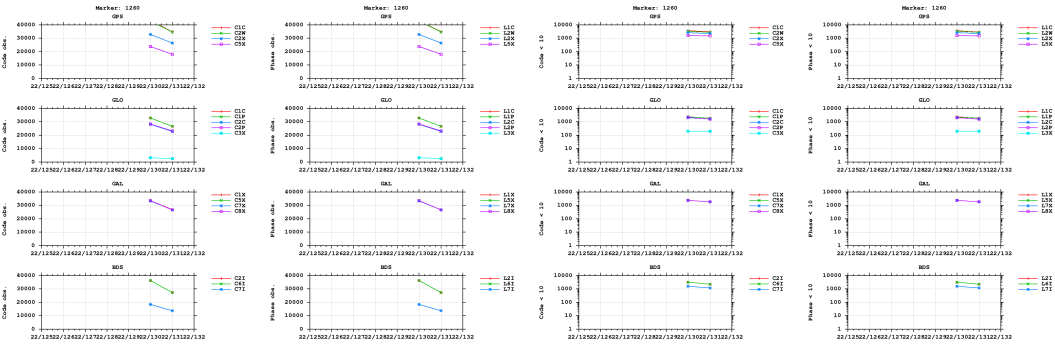


Multipath

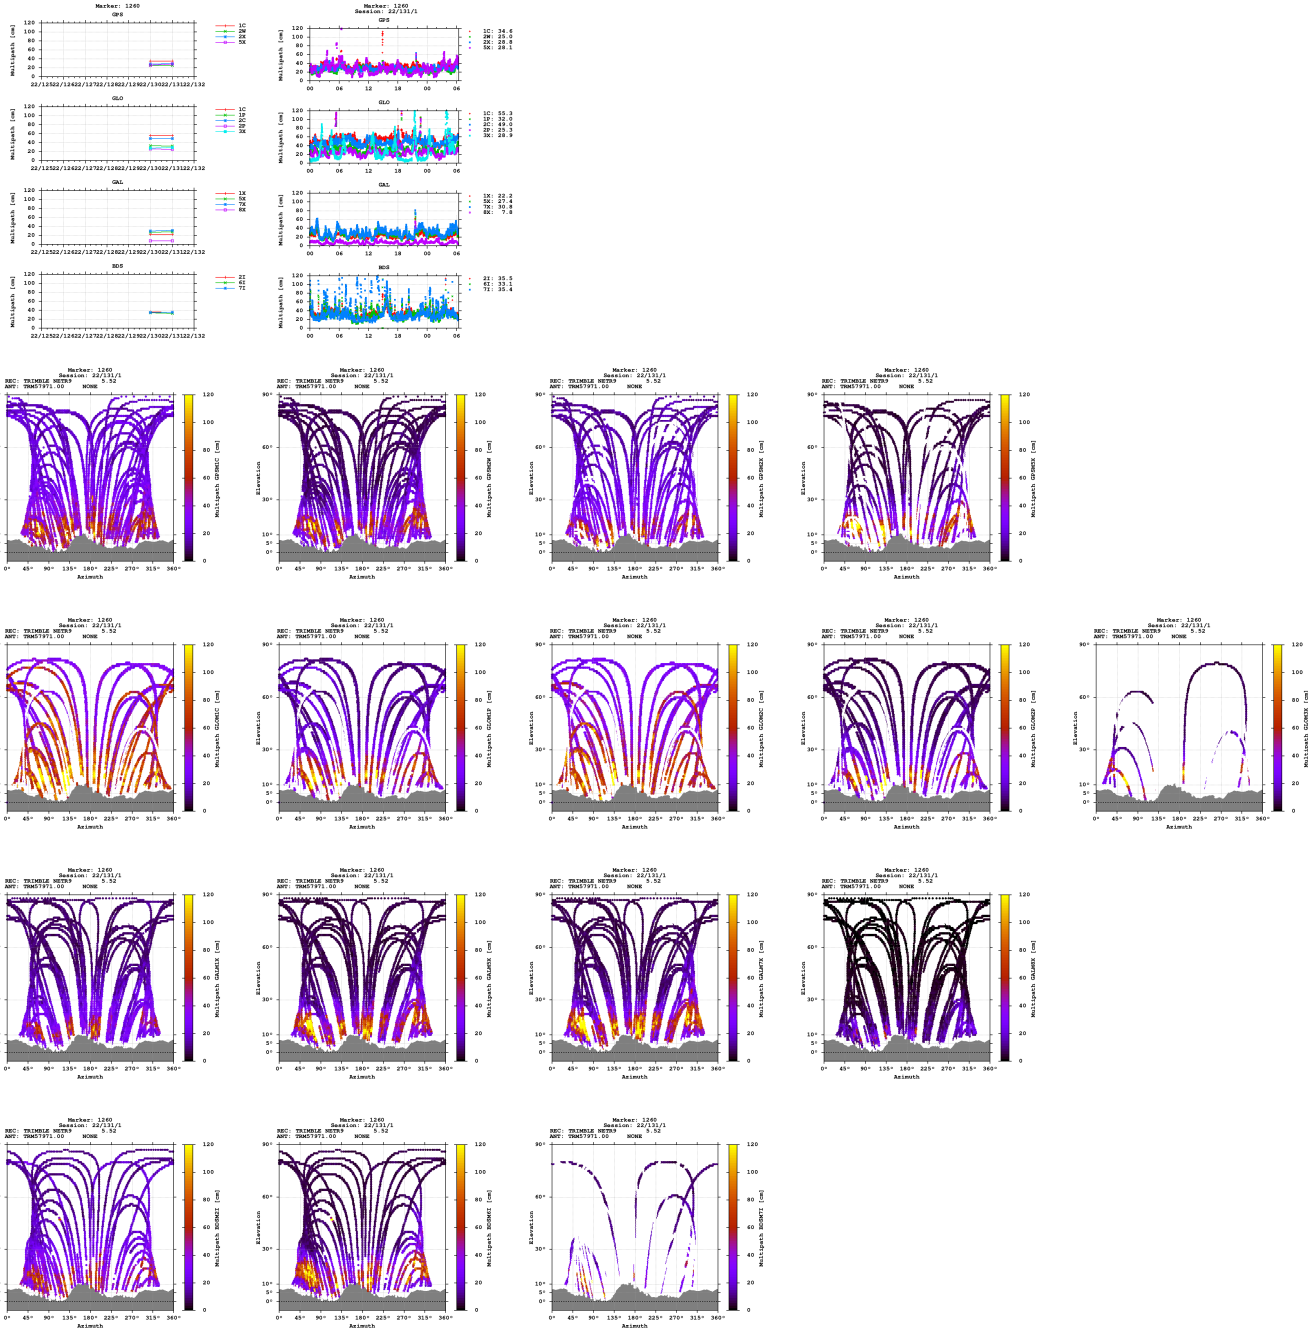


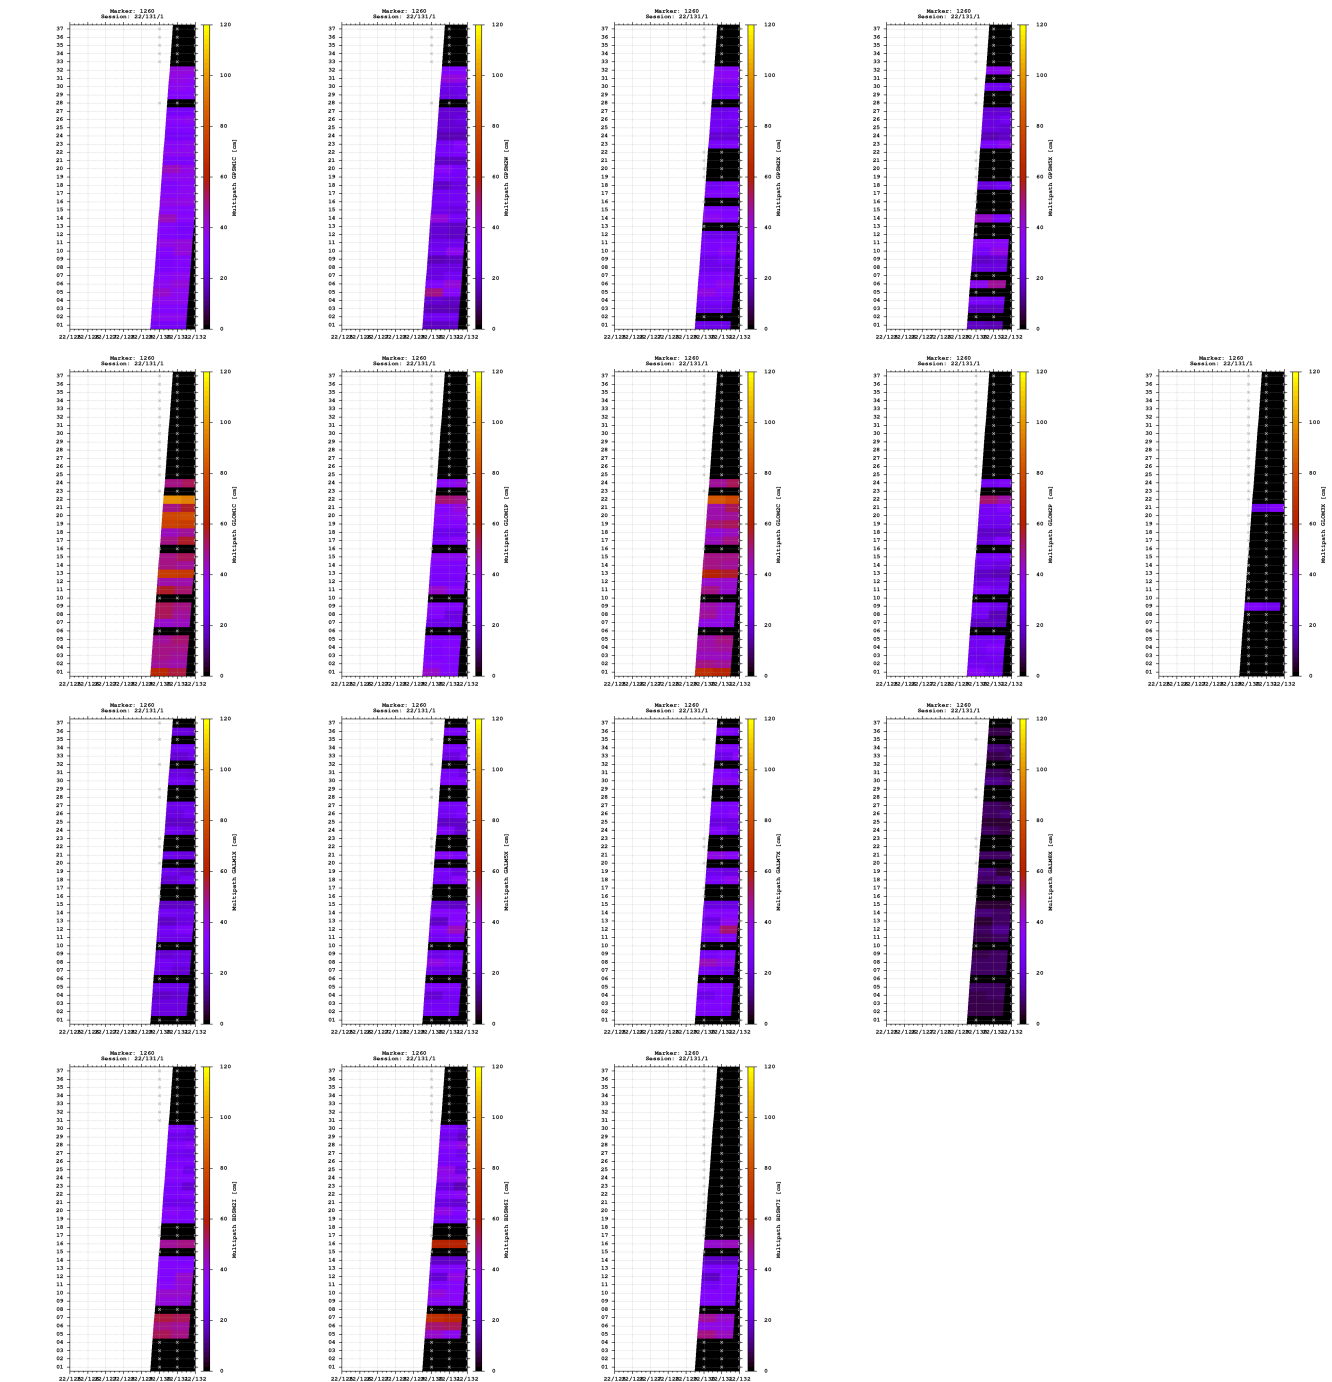


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

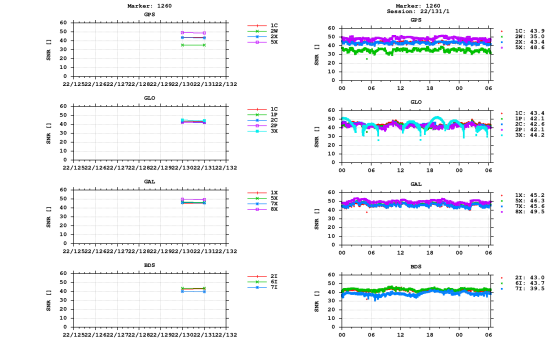


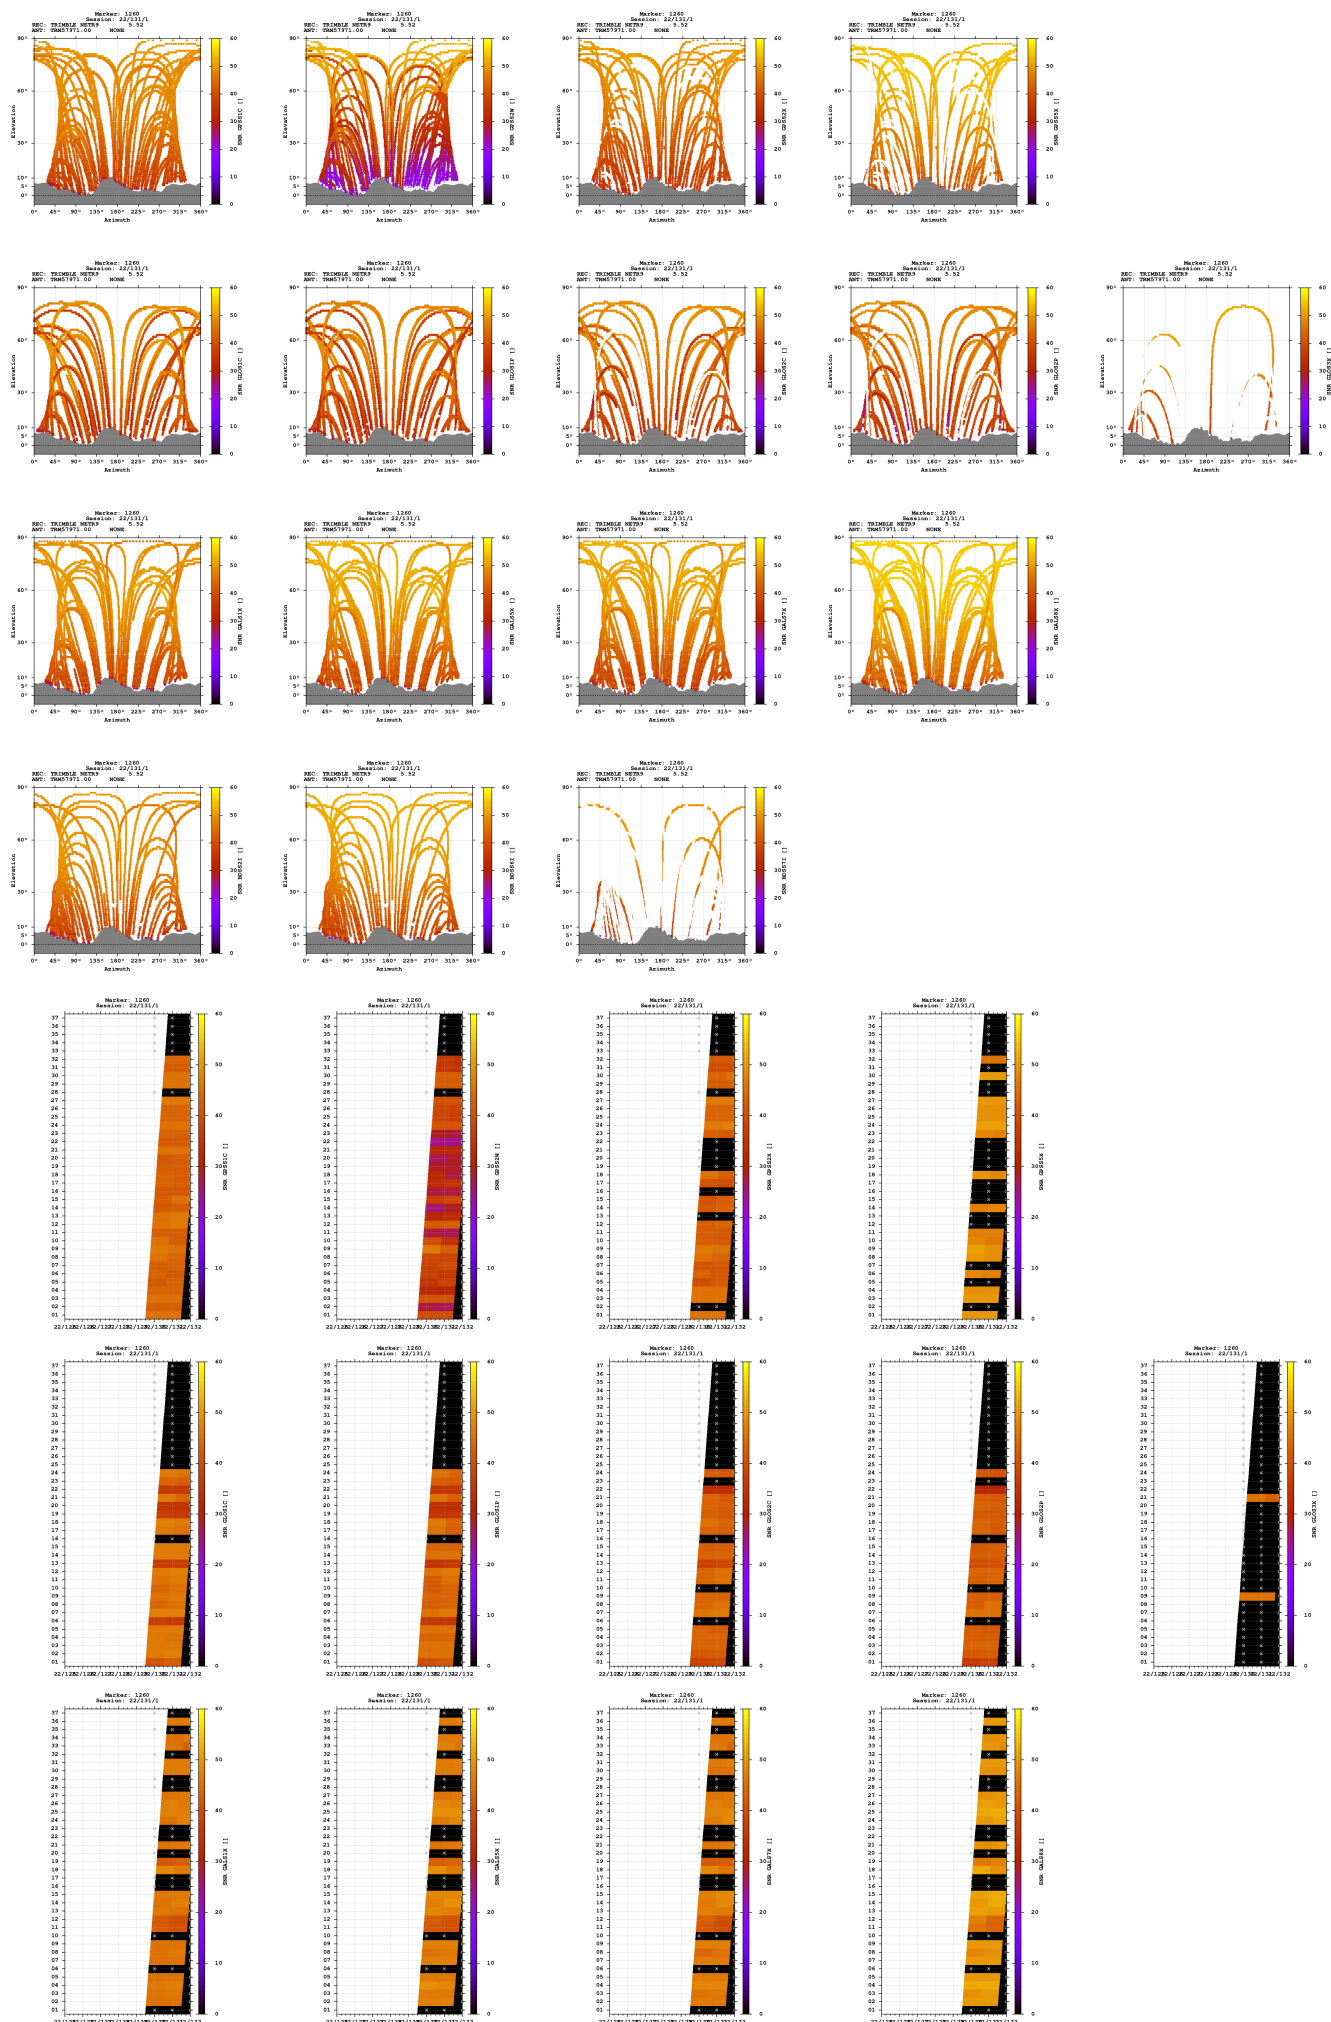

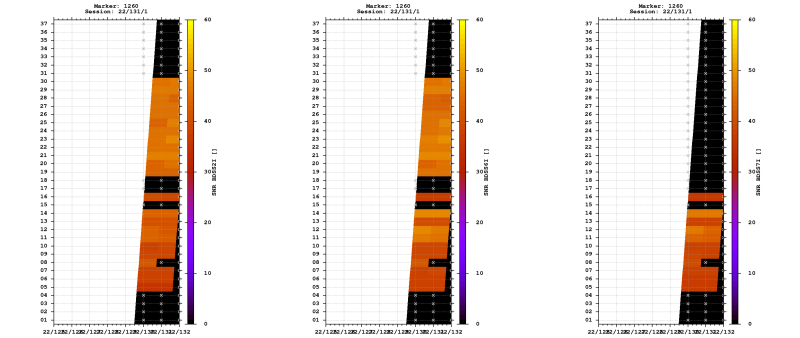


Estimates

2022-05-10 09:50:00	GPS	4377795.2921	468009.2677	4601078.5247	46.454089297	6.102043429	1259.0679
2022-05-10 09:50:00	GLO	4377795.4349	468008.9585	4601077.4657	46.454082024	6.102039231	1258.3756
2022-05-10 09:50:00	GAL	4377795.3091	468009.1055	4601078.0001	46.454086049	6.102041307	1258.6875
2022-05-10 09:50:00	BDS	4377794.9943	468011.9915	4601080.0751	46.454098947	6.102079087	1260.1872

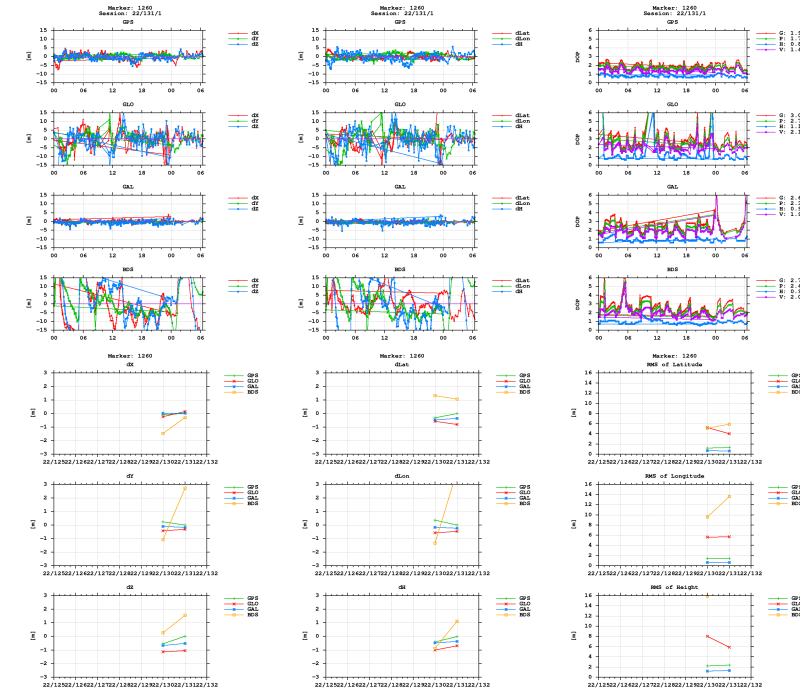

BNC



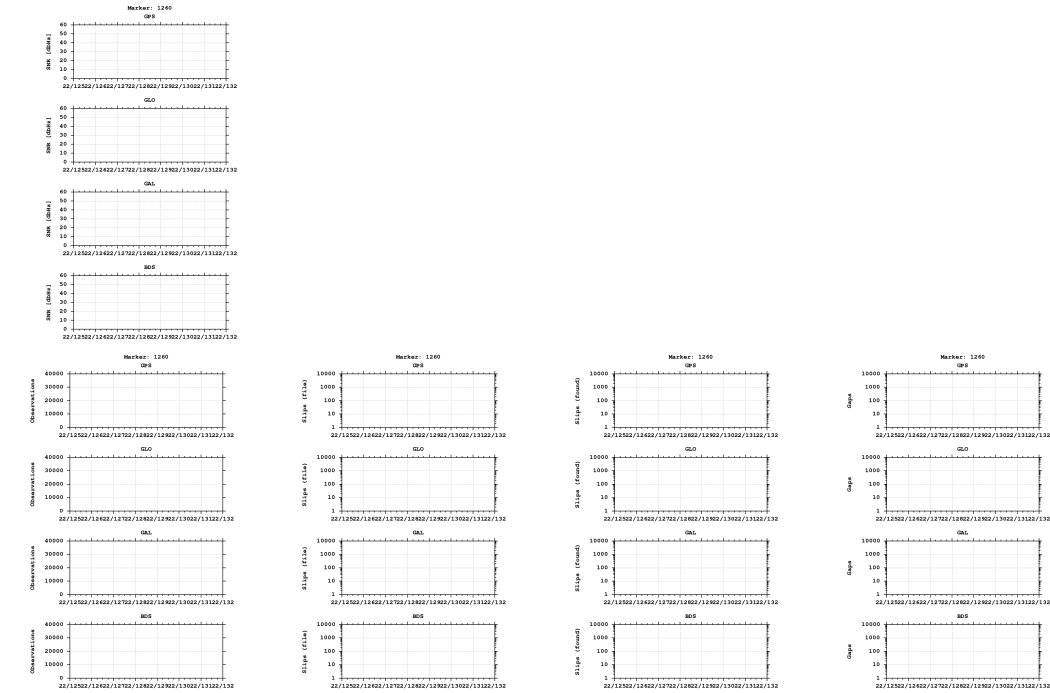

Equipment

2022-05-10 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)