


GNSS observation file monitoring for 0514


Last RINEX file: 05141301.22O
RINEX version: 3.02
Marker: 1221
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.



Satellites

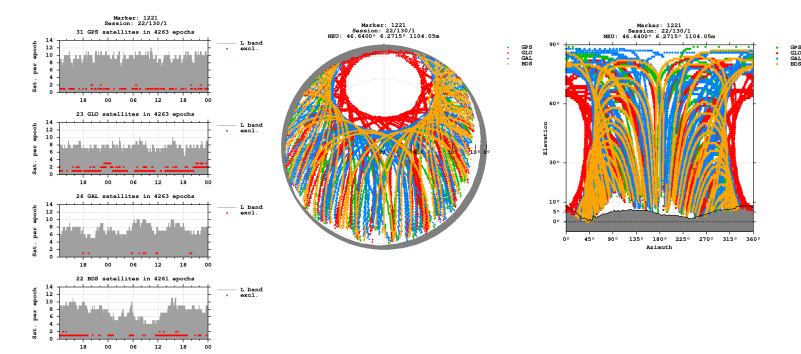

Bands

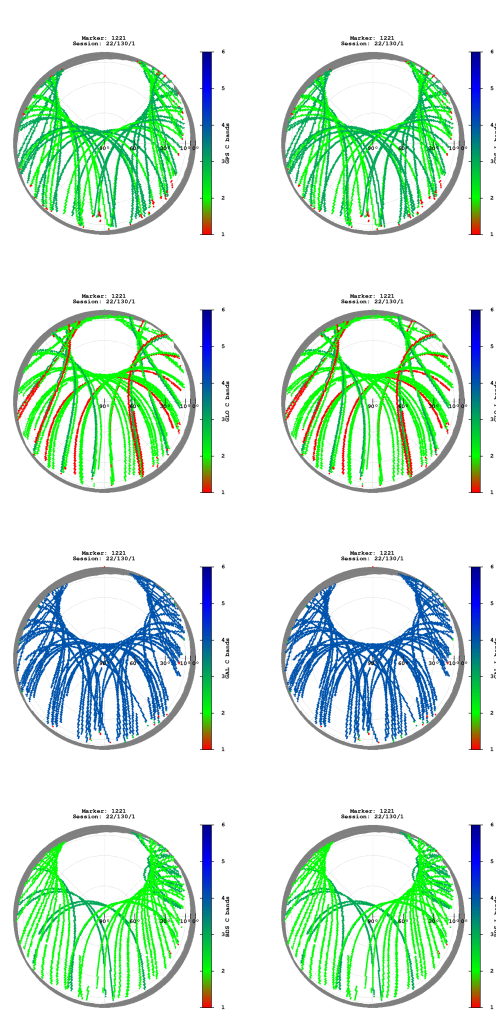


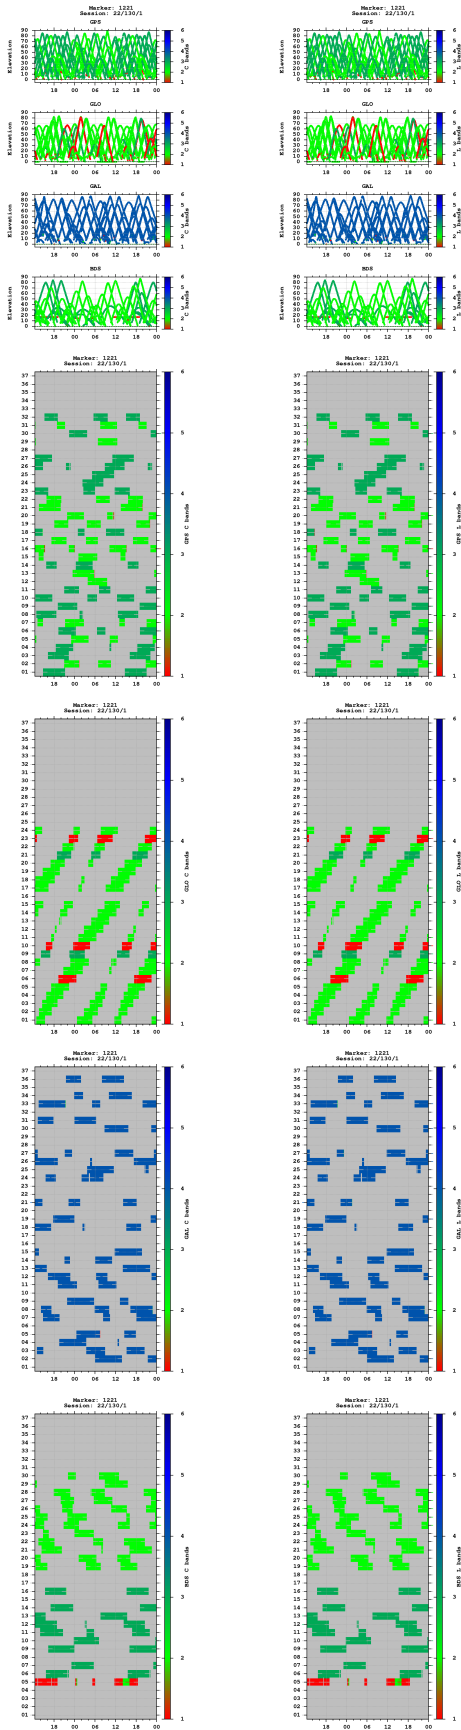


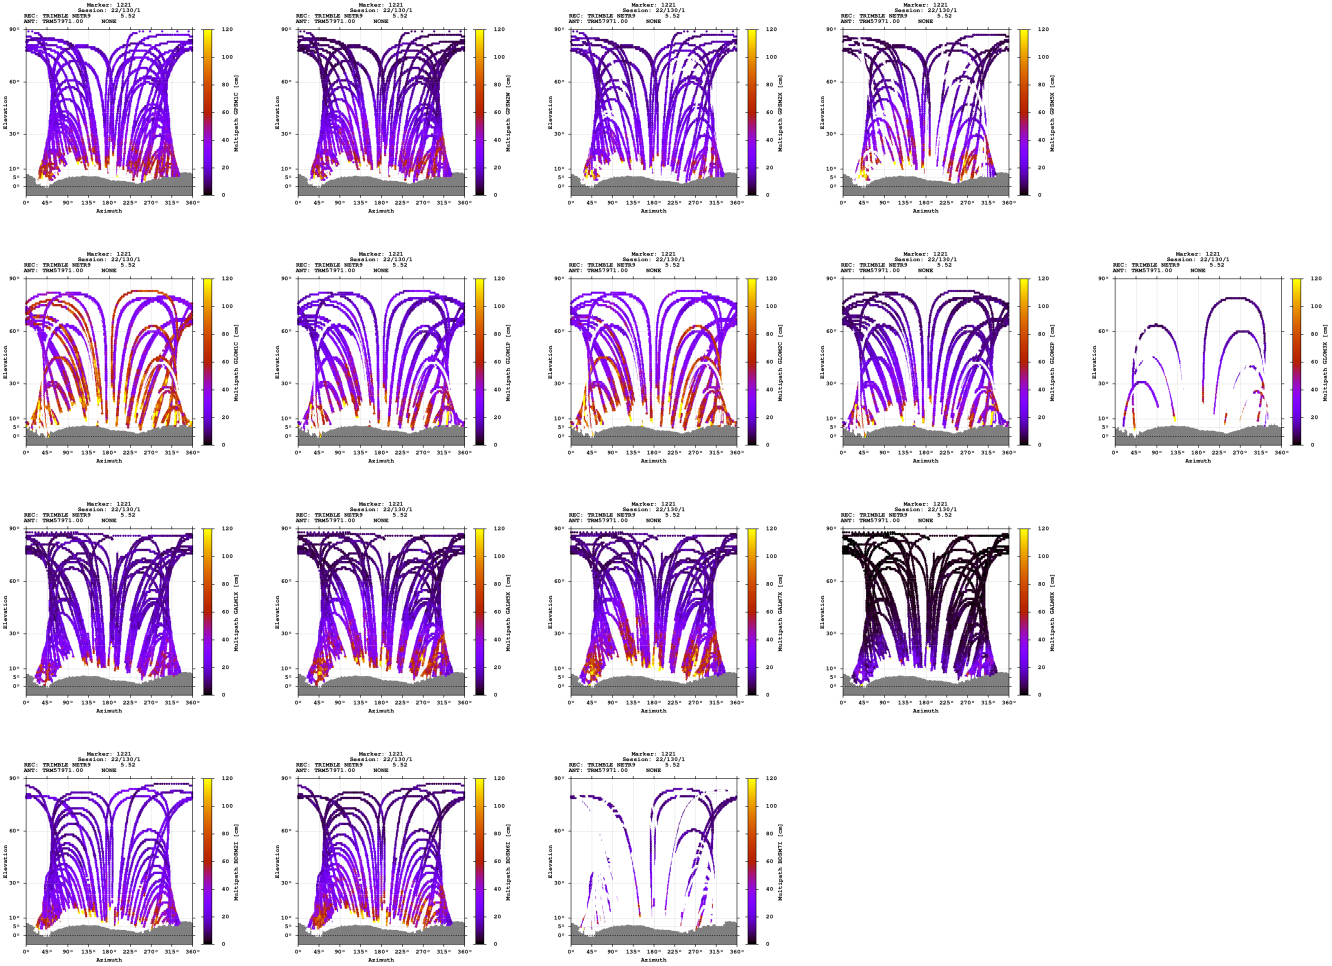

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

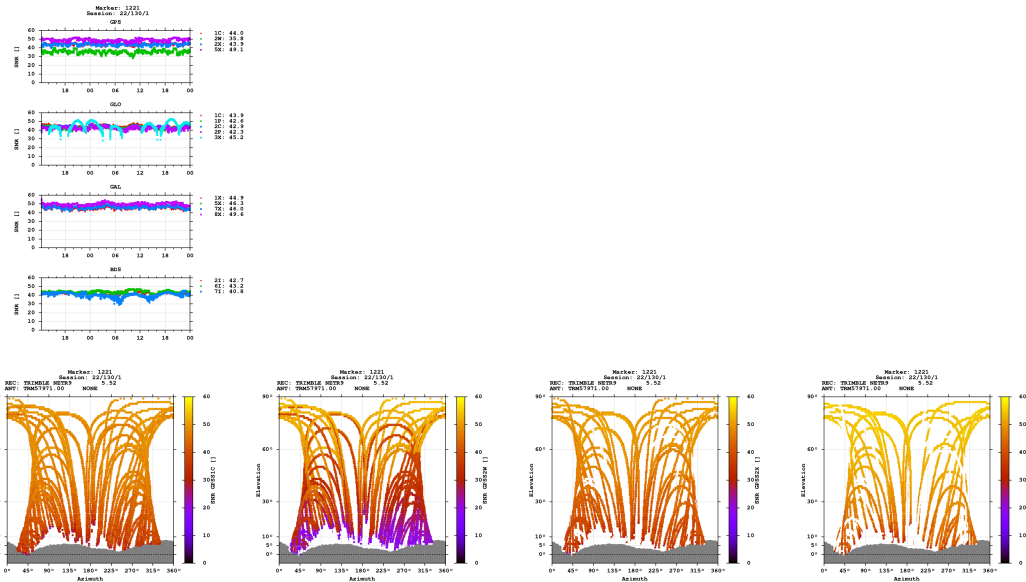

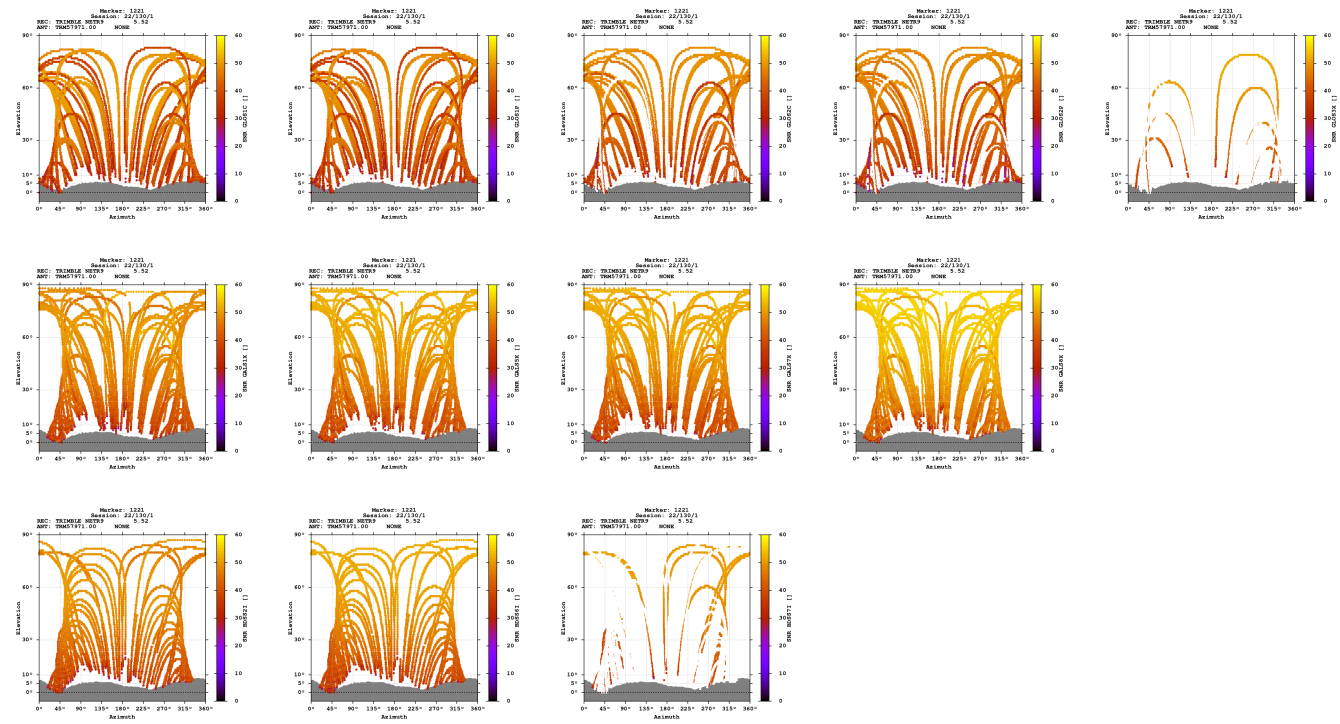

Estimates

2022-05-10 12:22:30	GPS	4361369.8142	479301.6156	4615182.9858	46.640013084	6.271469553	1104.0519
2022-05-10 12:22:30	GLO	4361369.6859	479301.1586	4615182.4096	46.640010687	6.271463803	1103.5112
2022-05-10 12:22:30	GAL	4361370.1840	479301.2756	4615182.8727	46.640010224	6.271464612	1104.1966
2022-05-10 12:22:30	BDS	4361367.0400	479299.1477	4615182.7879	46.640031658	6.271441476	1101.8296

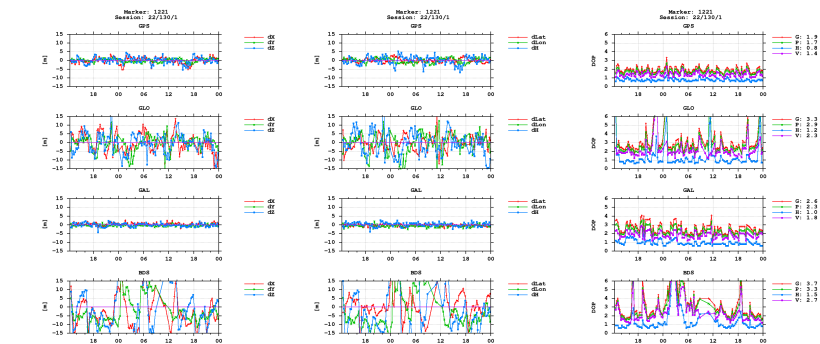

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)