


GNSS observation file monitoring for 0514


Last RINEX file: 05141311.220
RINEX version: 3.02
Marker: 1221
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

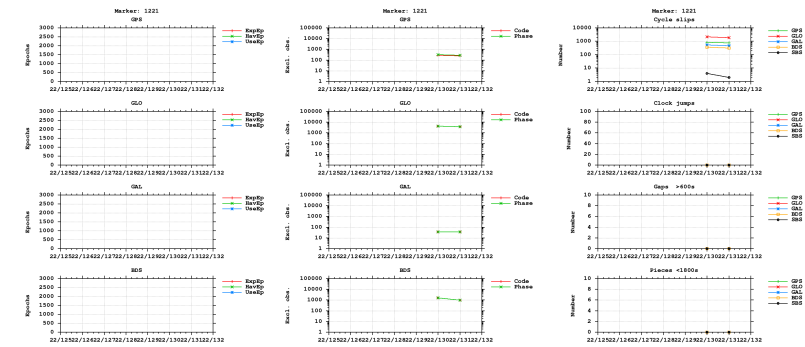



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

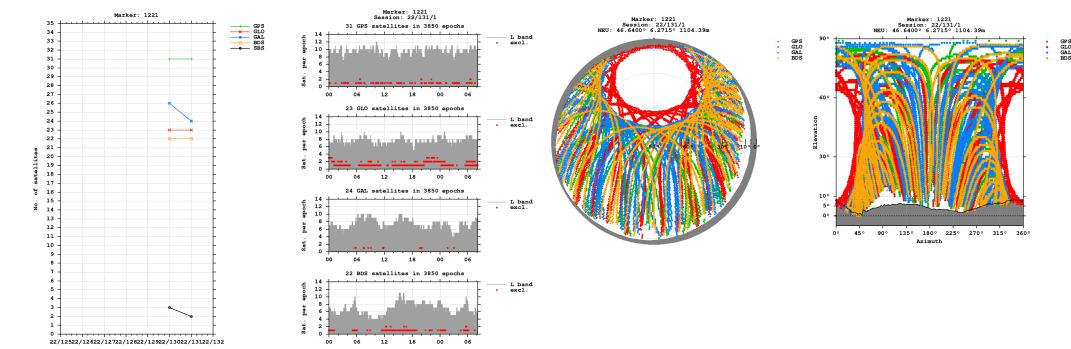


Bands

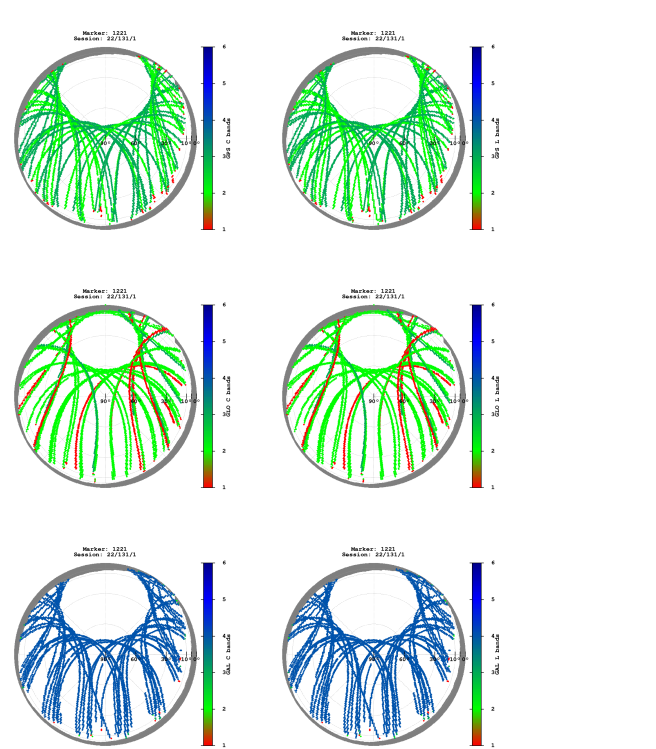


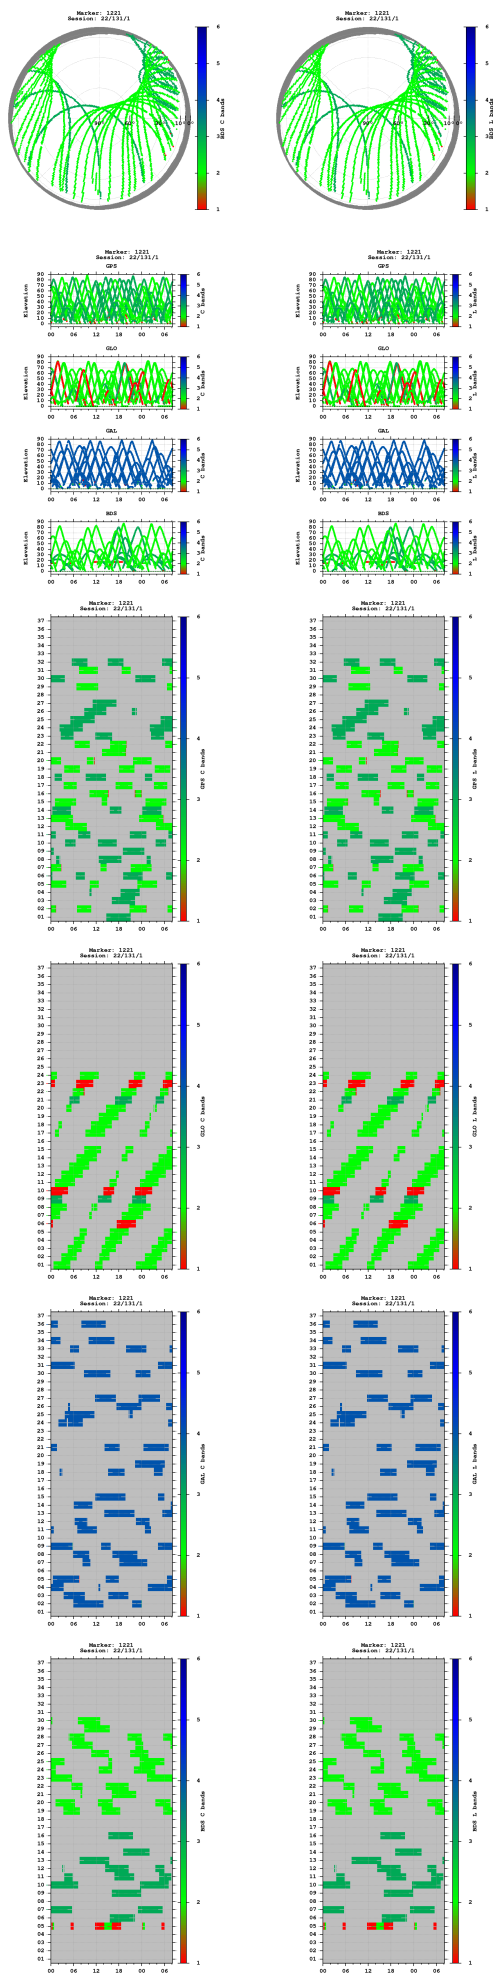


Observations

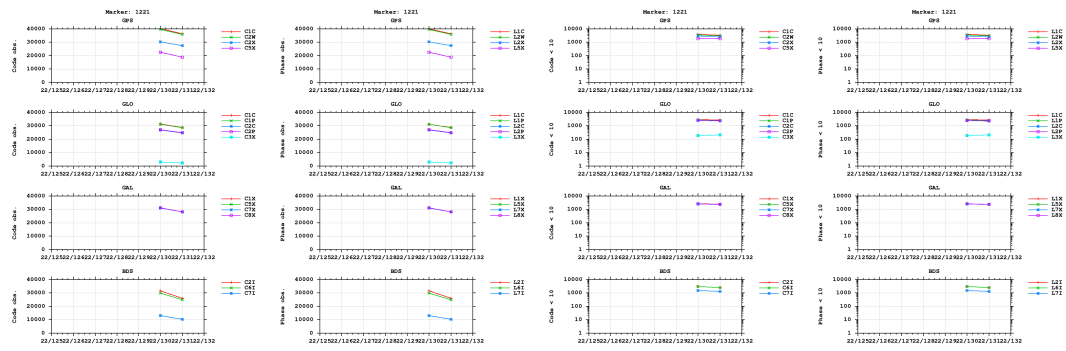



Multipath

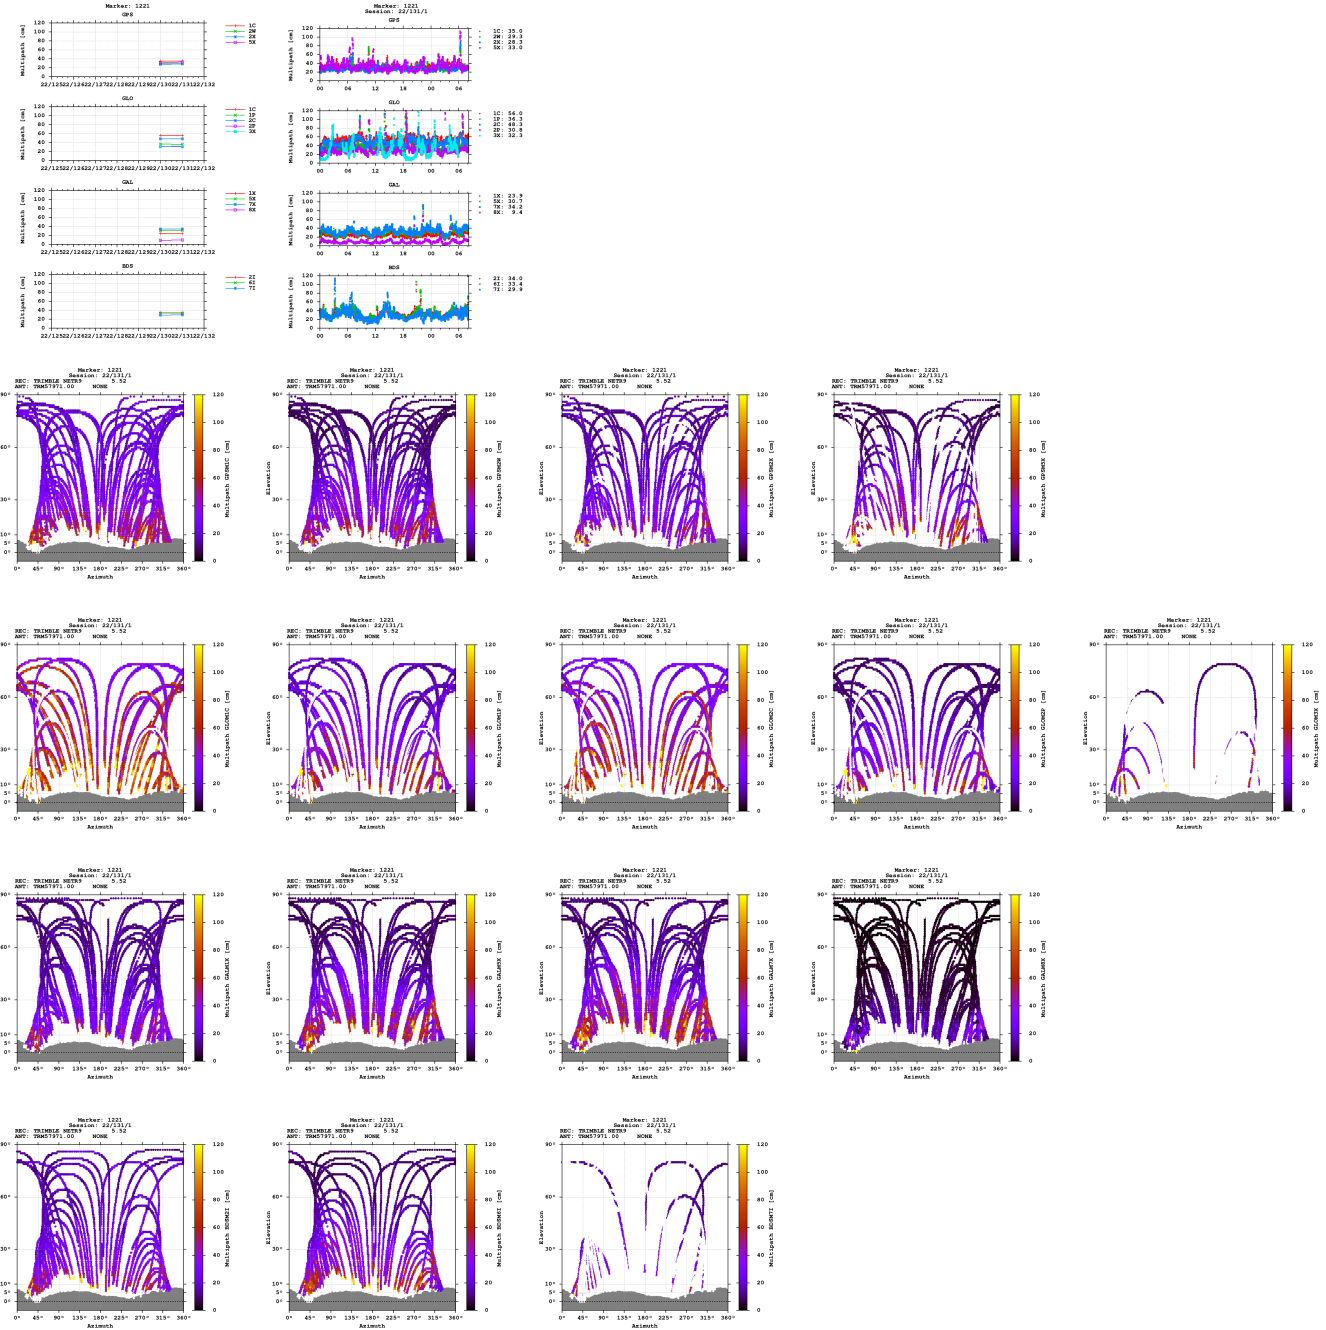


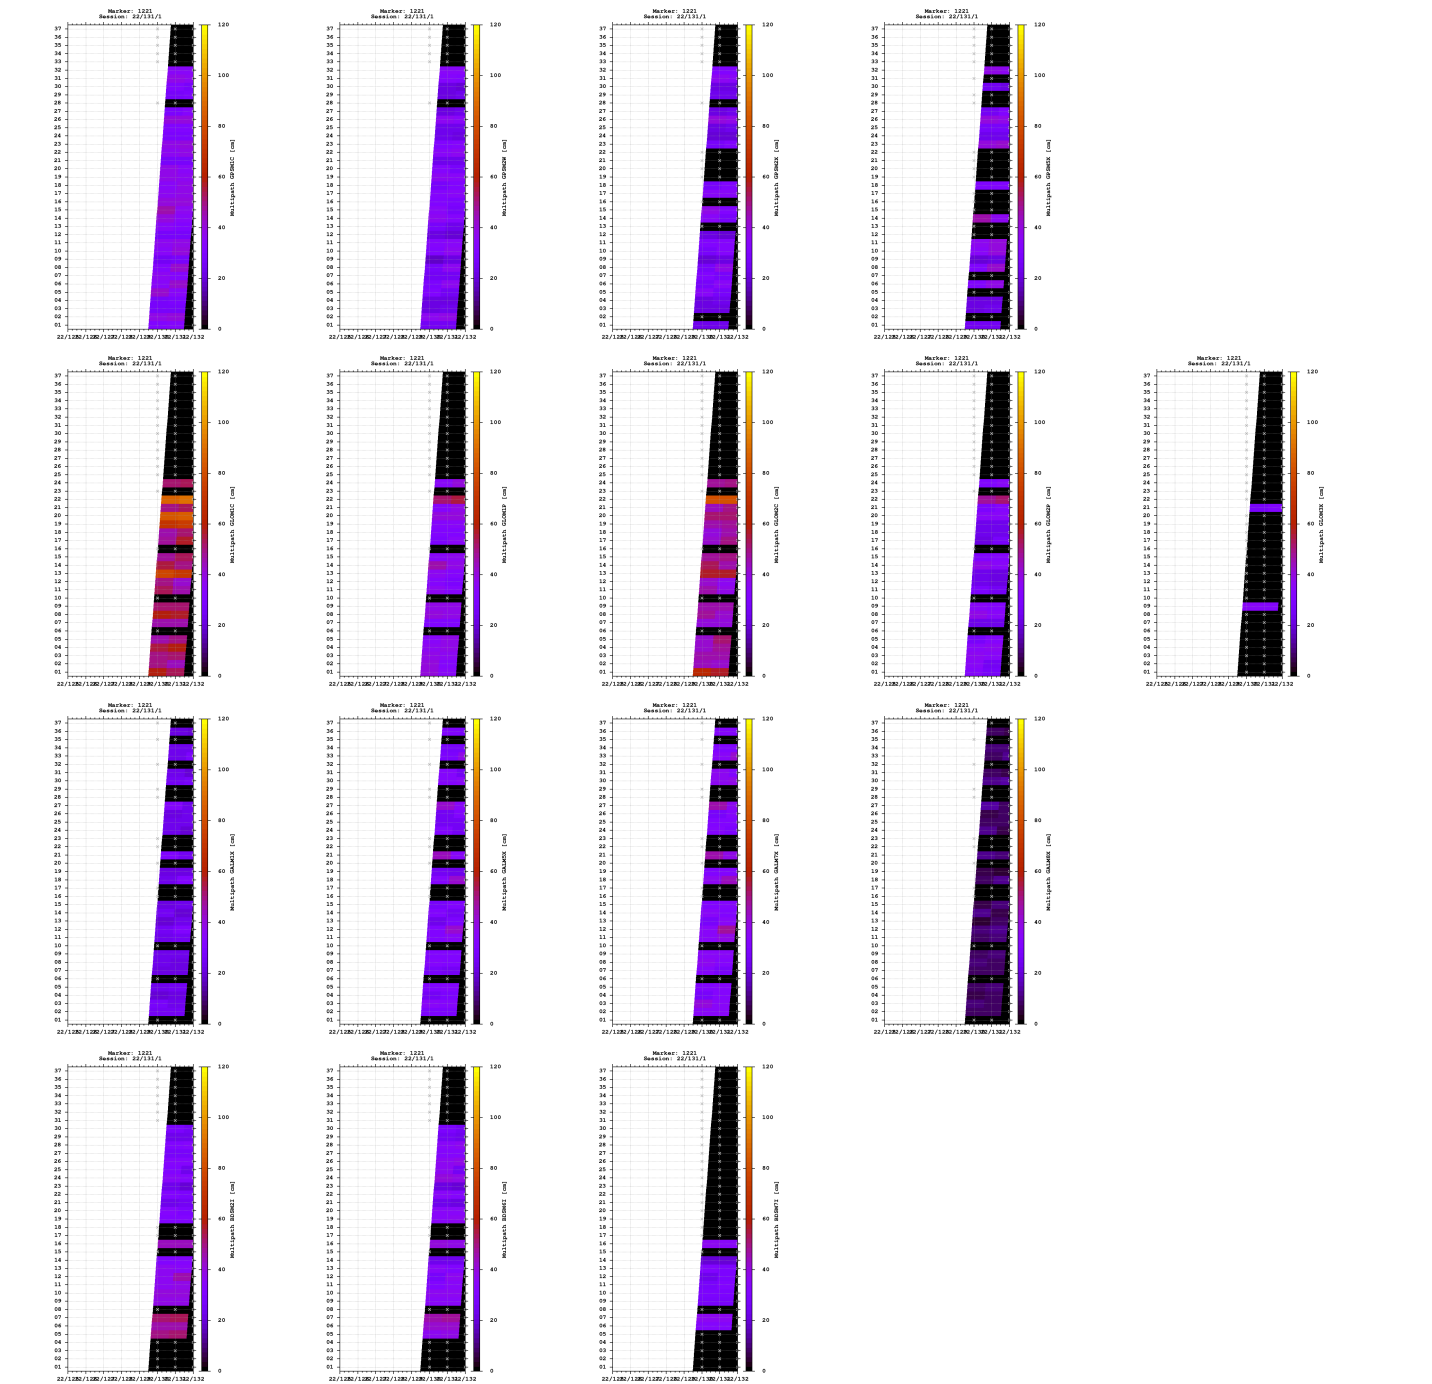

Signal-to-noise ratio

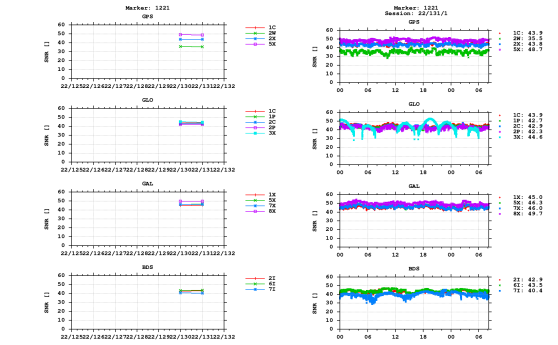


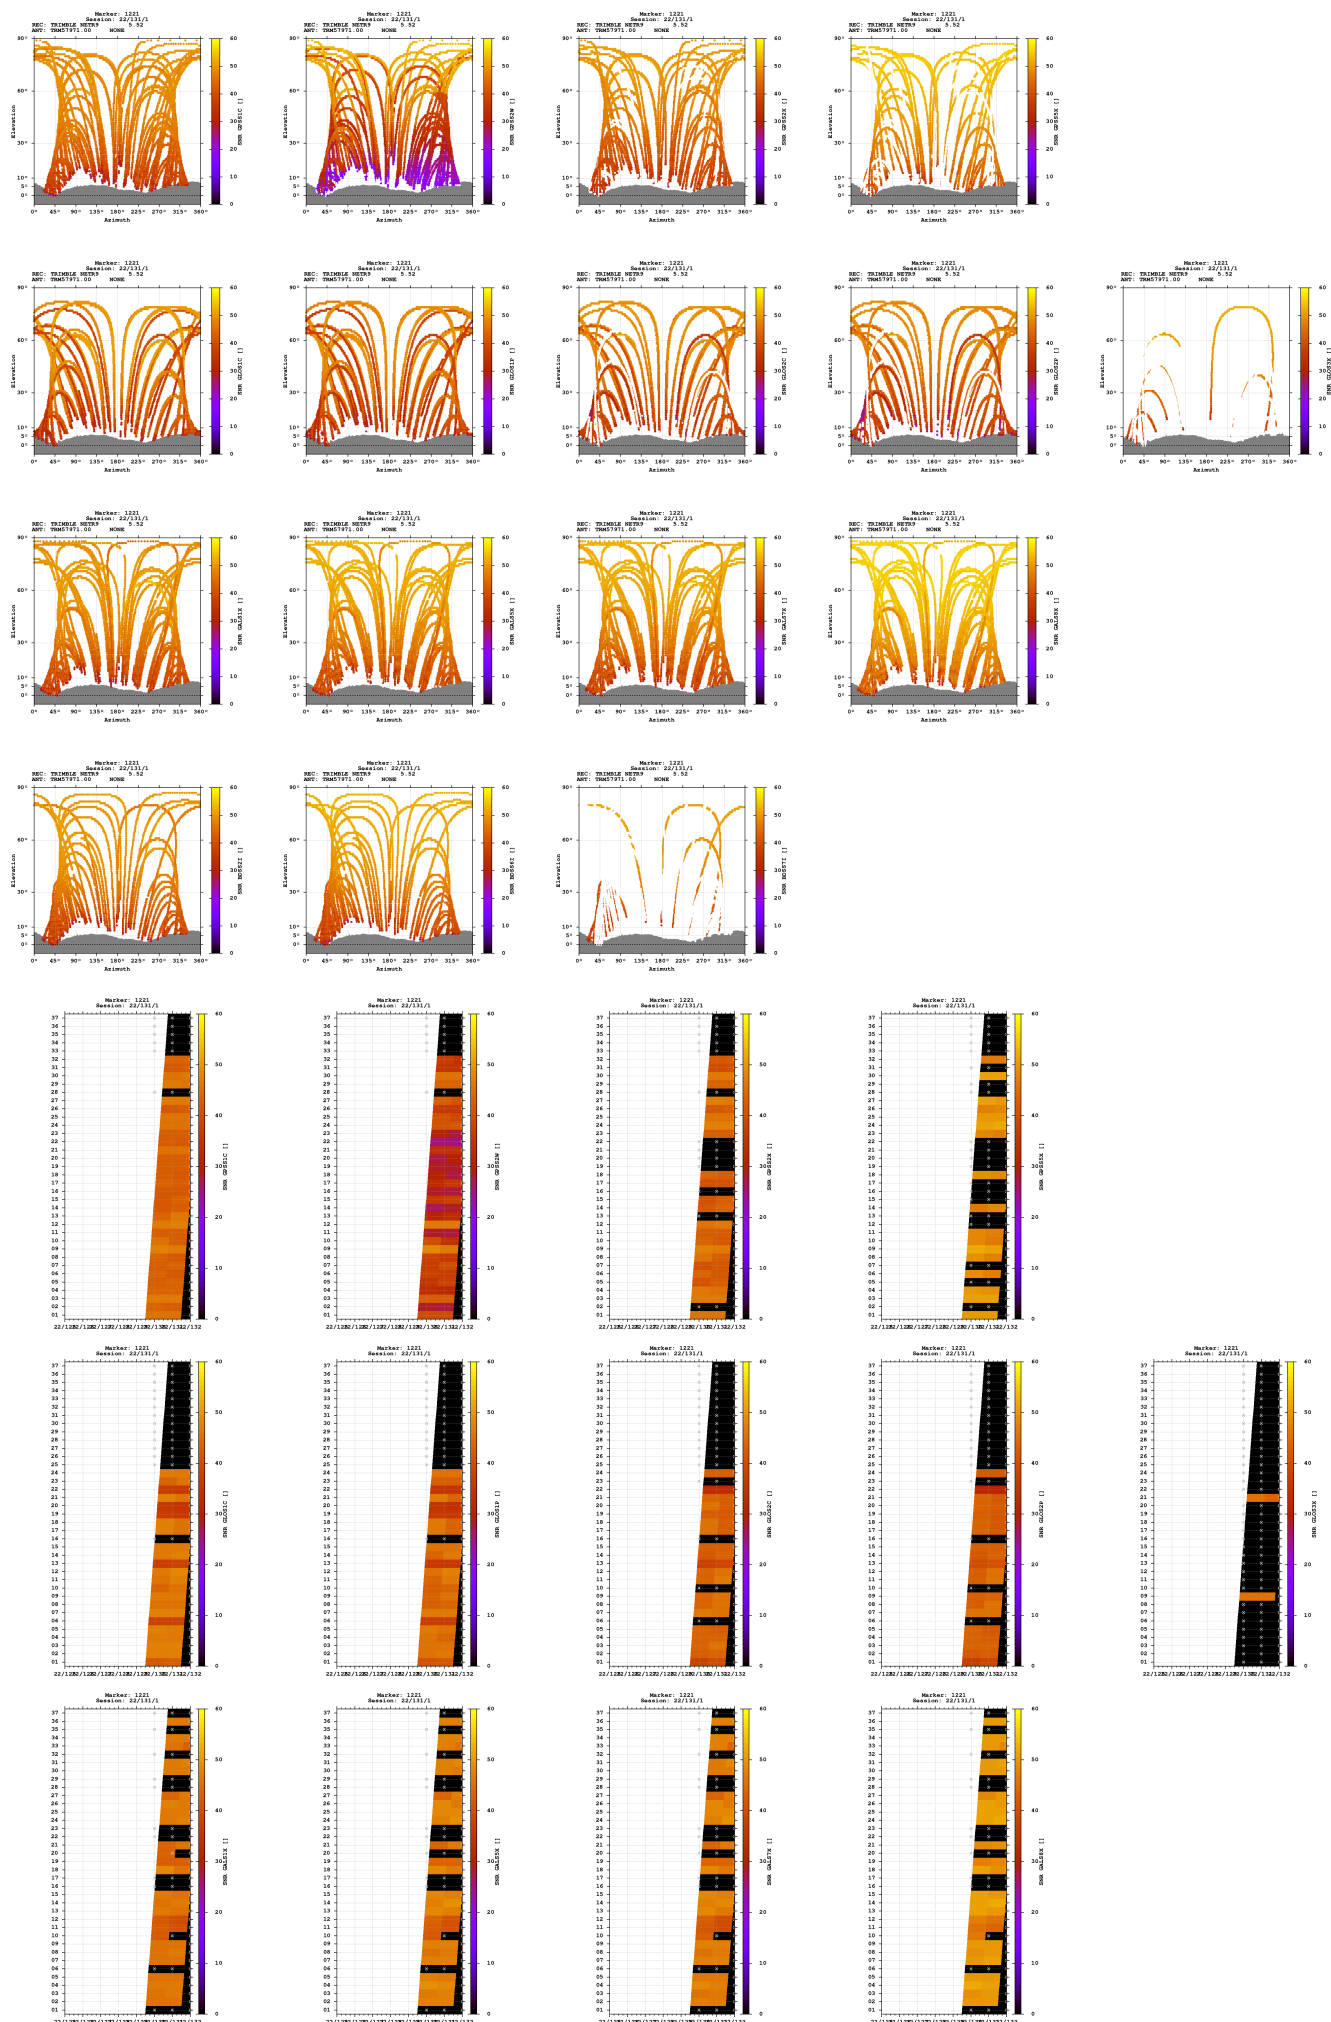

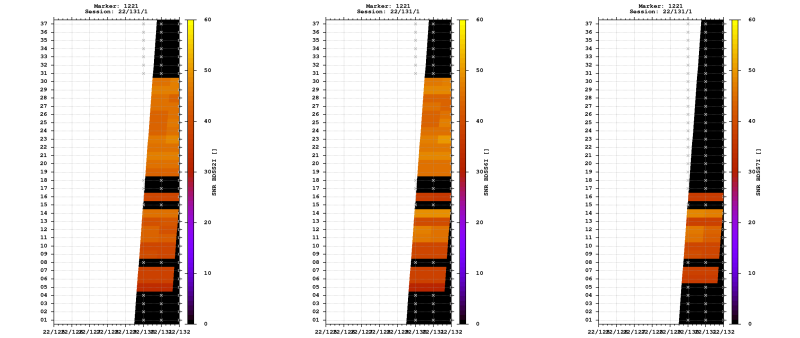


Estimates

2022-05-10 12:22:30	GPS	4361370.0555	479301.3633	4615183.2519	46.640013340	6.271465933	1104.3912
2022-05-10 12:22:30	GLO	4361369.6917	479300.9729	4615182.2081	46.640009537	6.271461385	1103.3547
2022-05-10 12:22:30	GAL	4361369.9566	479301.2002	4615182.7676	46.640011108	6.271463958	1103.9593
2022-05-10 12:22:30	BDS	4361368.7219	479303.1126	4615186.5187	46.640040931	6.271490542	1105.9874

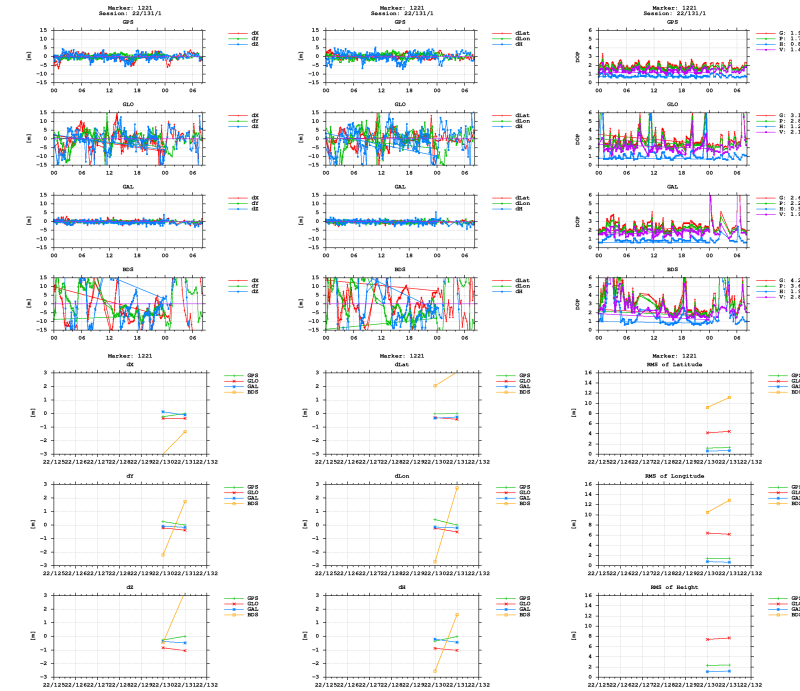

BNC



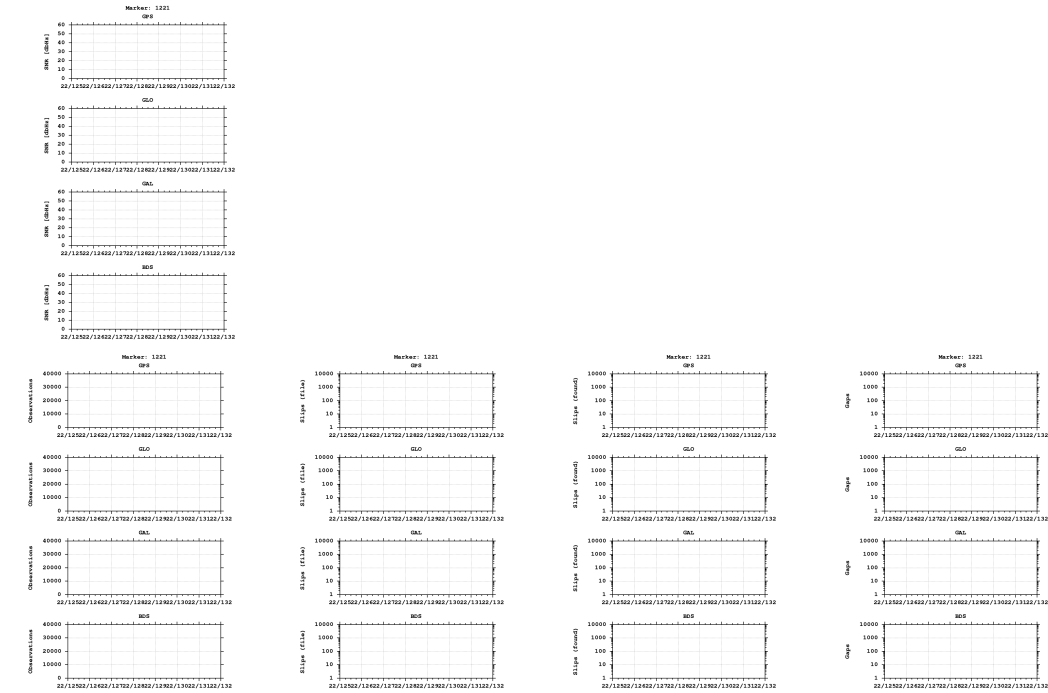

Equipment

2022-05-10 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)