

GNSS observation file monitoring for 0514

Last RINEX file: 05141321.220

RINEX version: 3.02

Marker: 1222

Receiver: 514

Antenna: 514


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

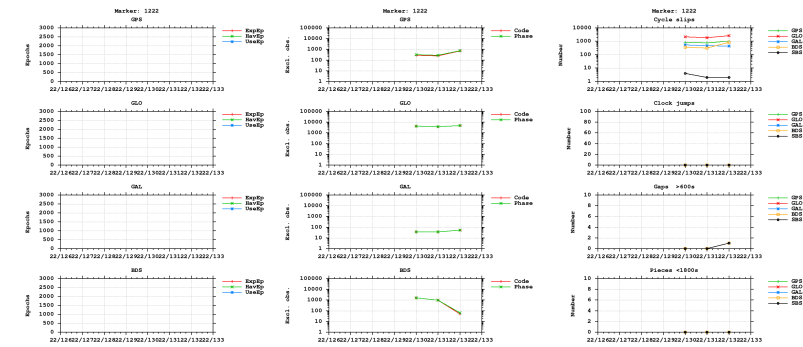



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

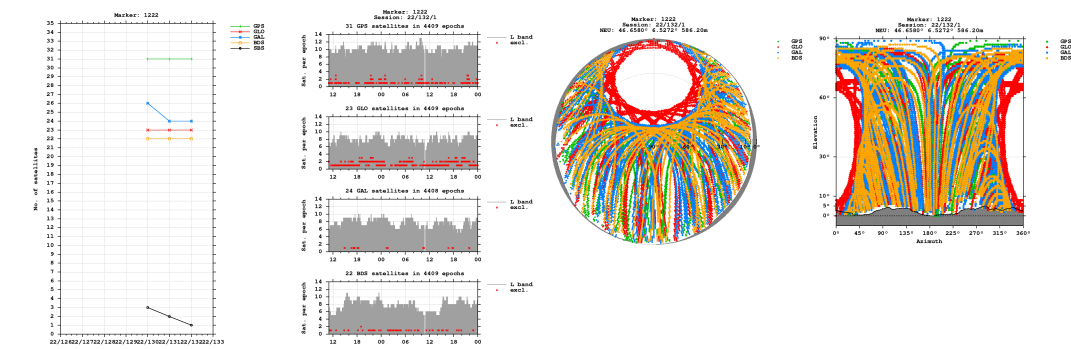


Bands

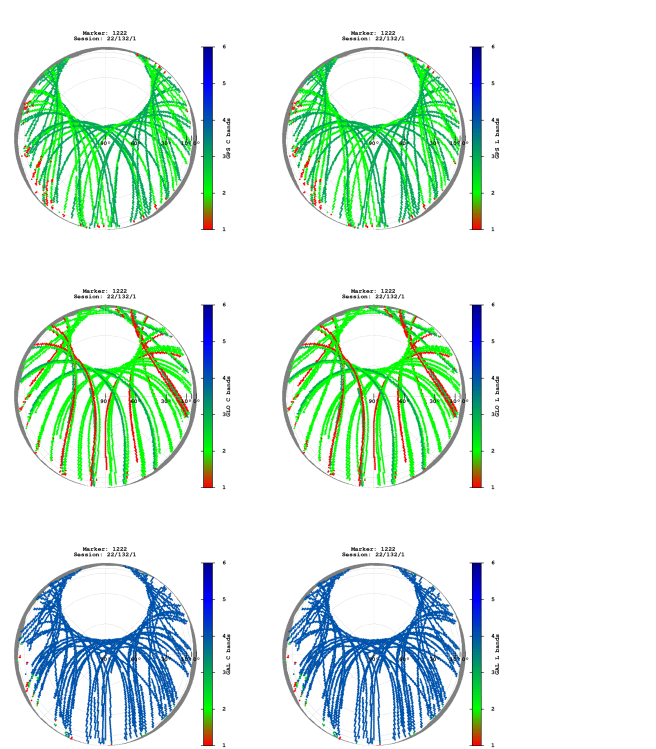


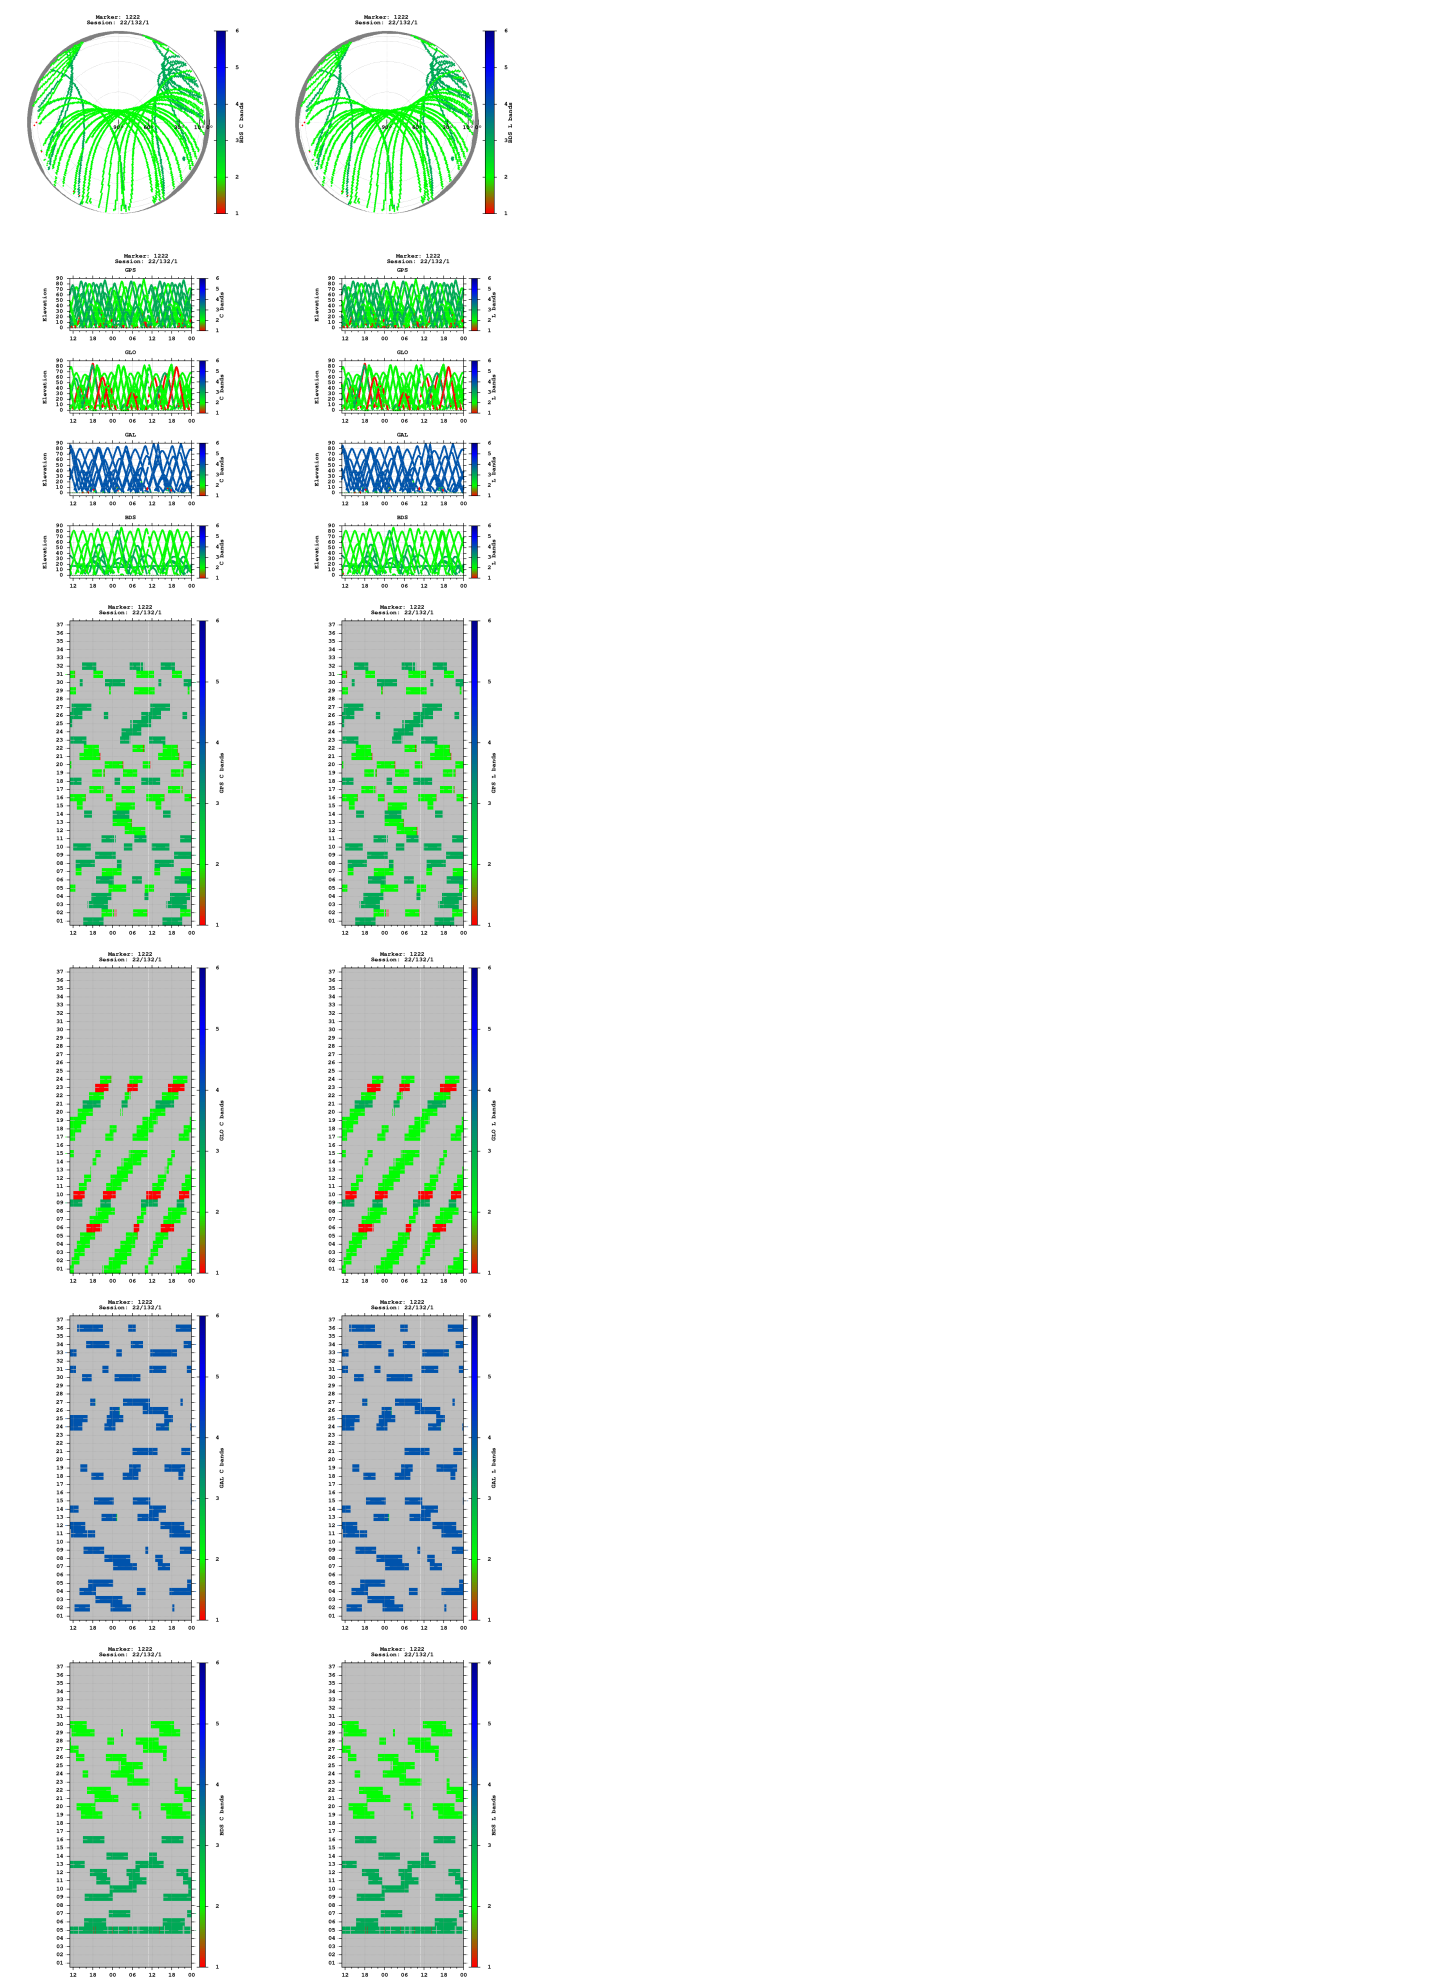


Observations

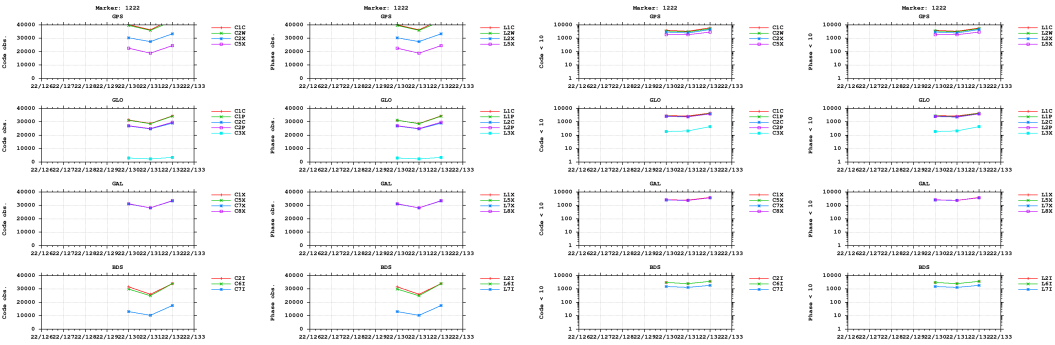



Multipath

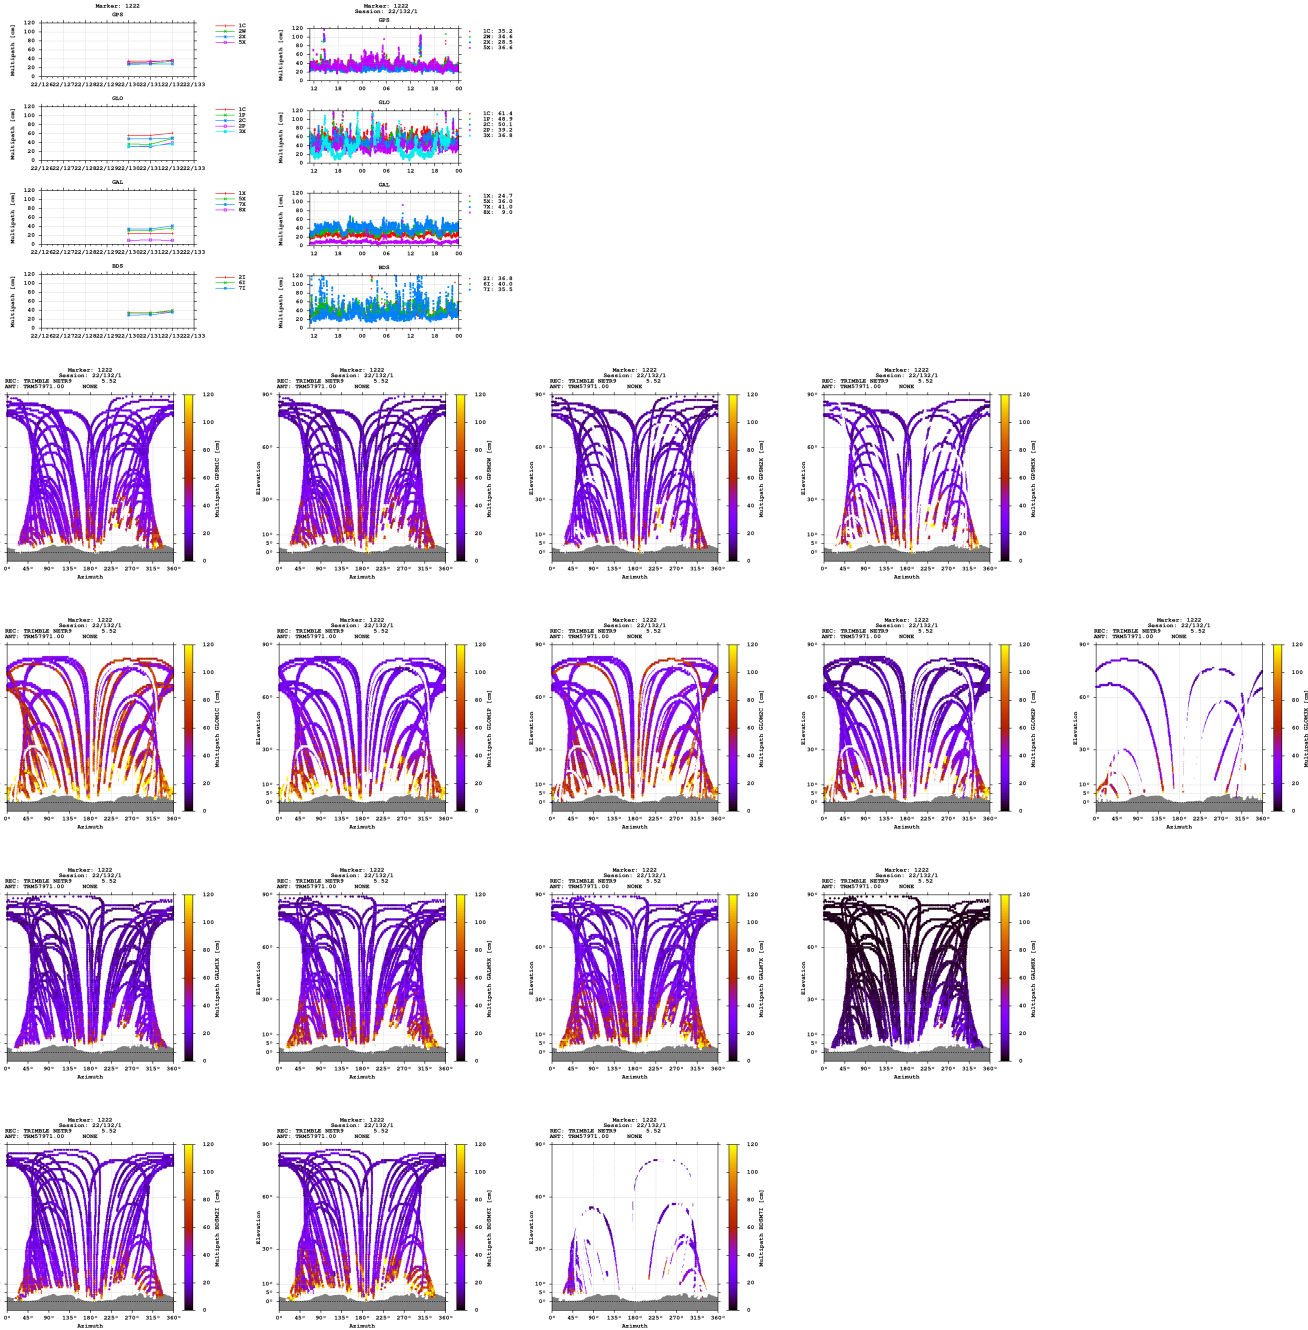


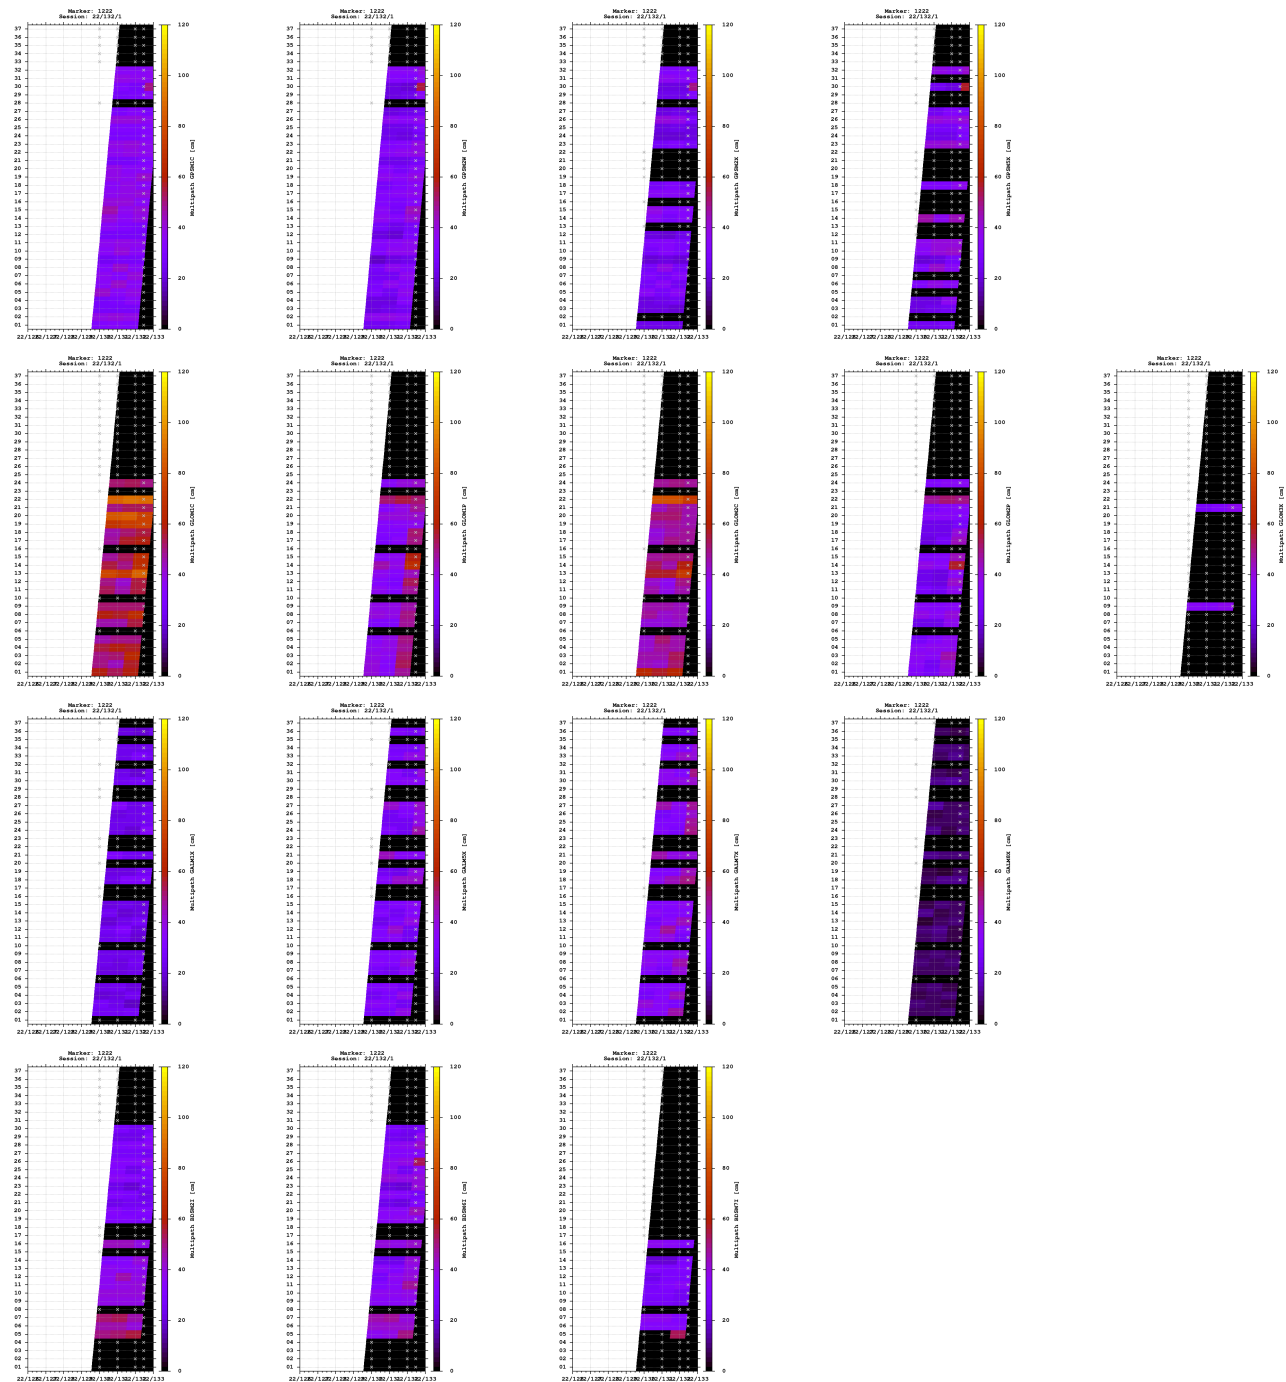


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

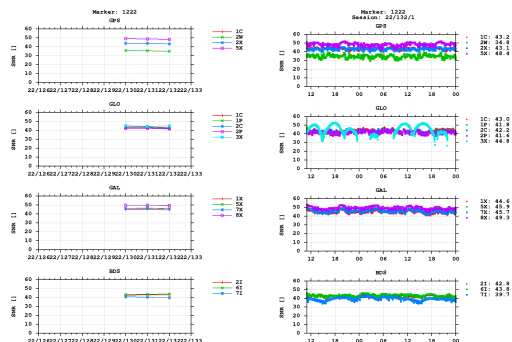


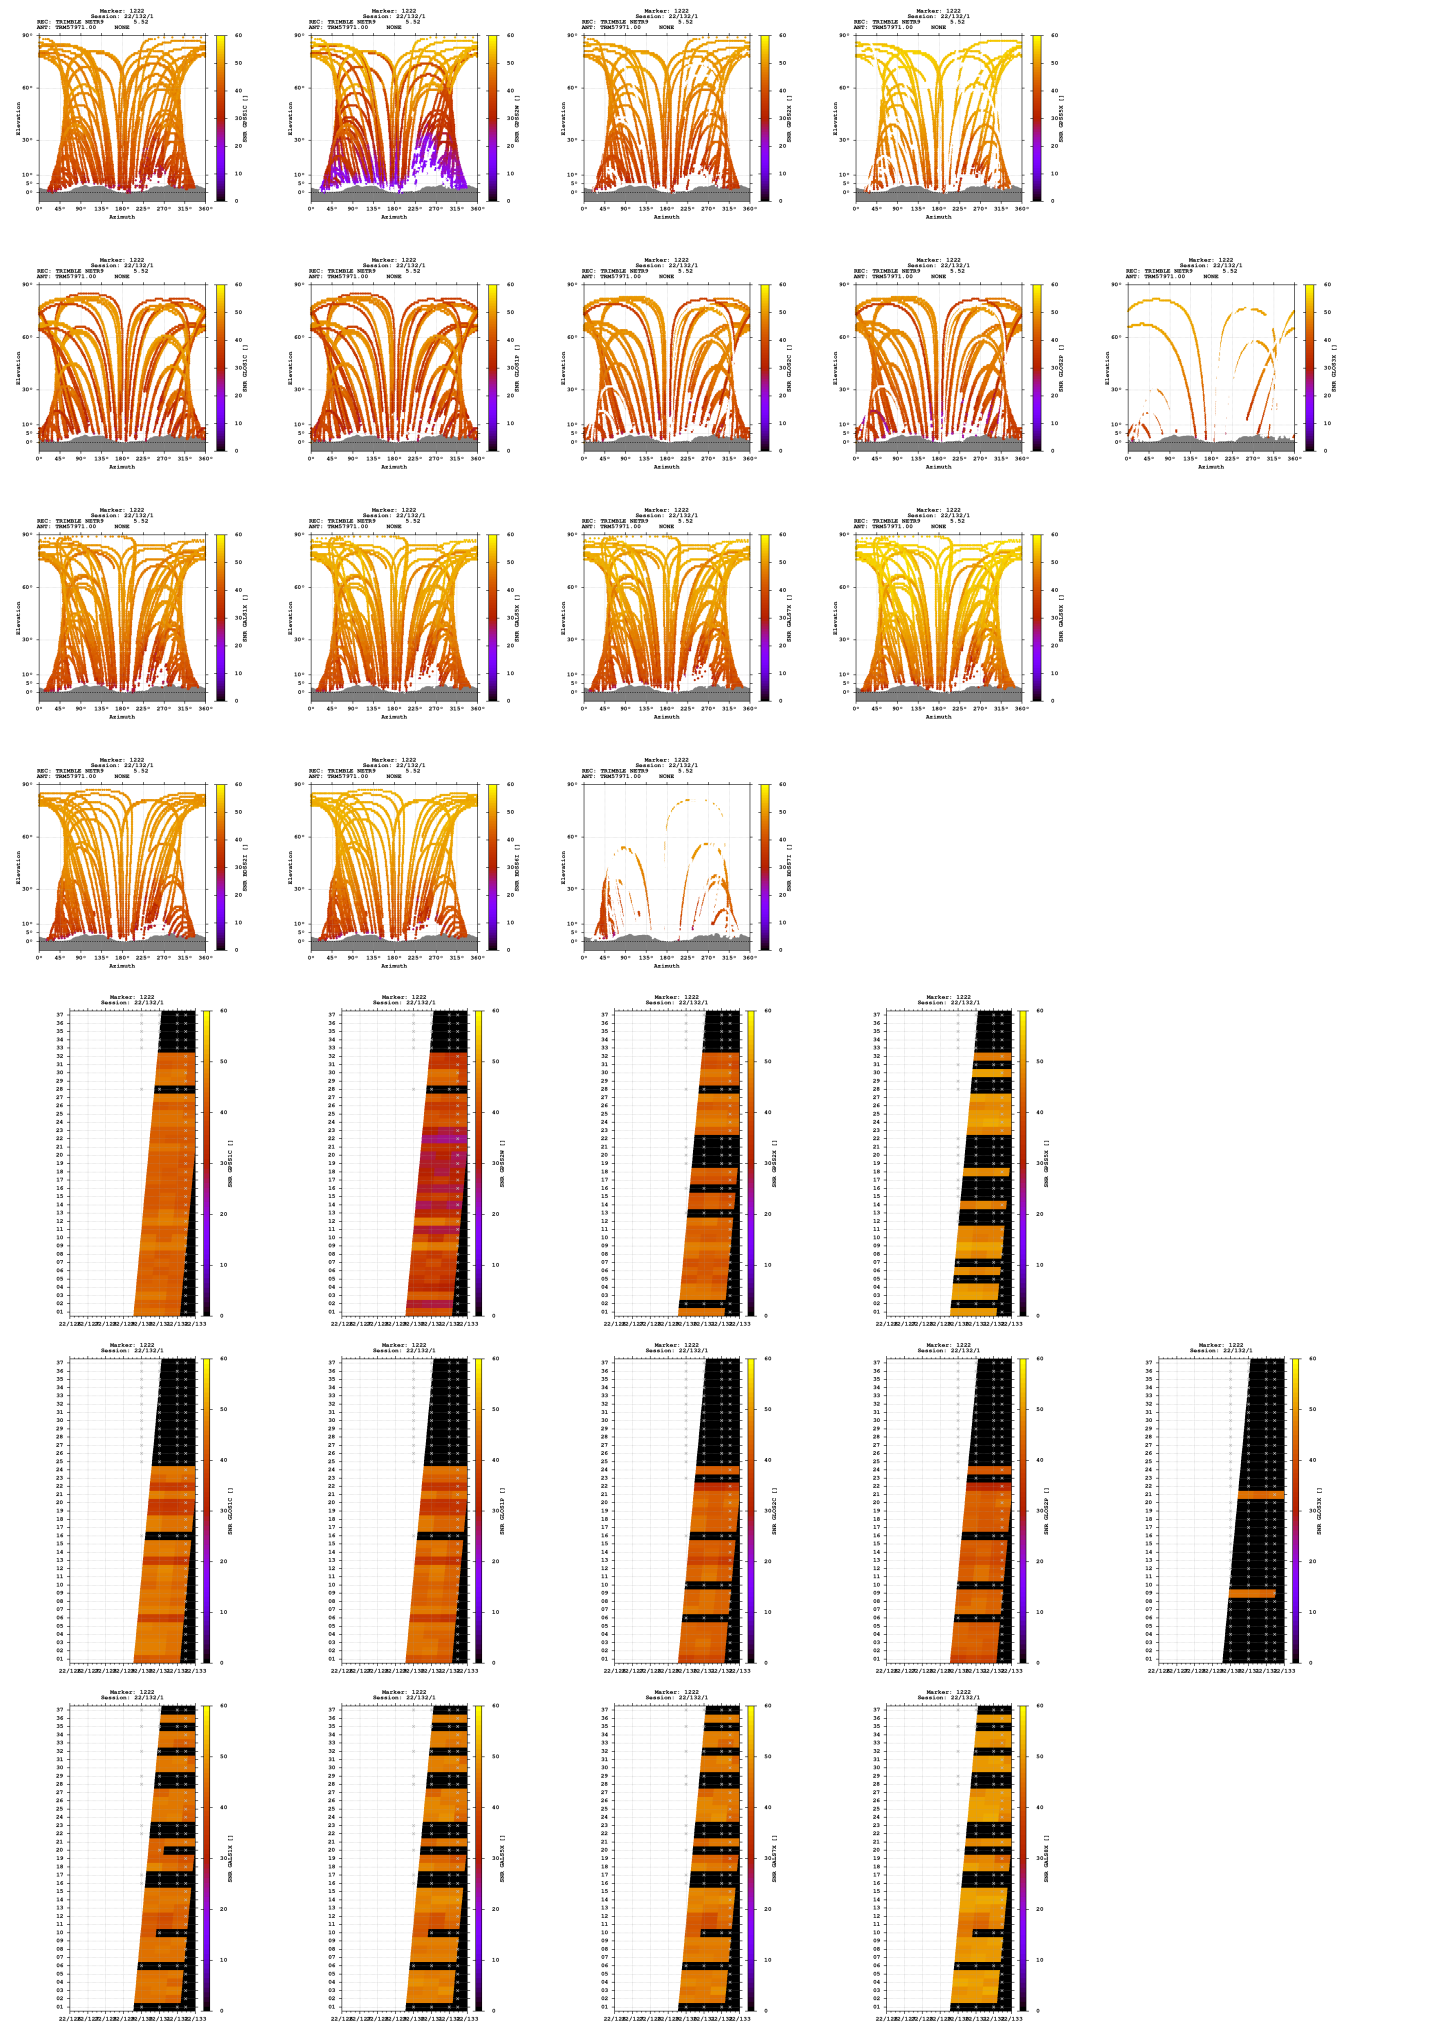

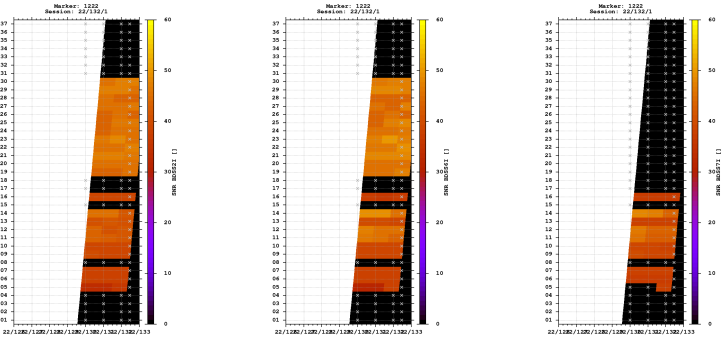



Estimates

2022-05-12 11:01:30	GPS	4357386.5965	498557.3071	4616181.6182	46.658031819	6.527203478	586.1973
2022-05-12 11:01:30	GLO	4357387.5837	498556.7104	4616182.4817	46.658031178	6.527194268	587.4519
2022-05-12 11:01:30	GAL	4357386.7734	498557.0115	4616181.4076	46.658029589	6.527199379	586.1417
2022-05-12 11:01:30	BDS	4357385.1610	498557.9659	4616183.2498	46.658050732	6.527214161	586.4565

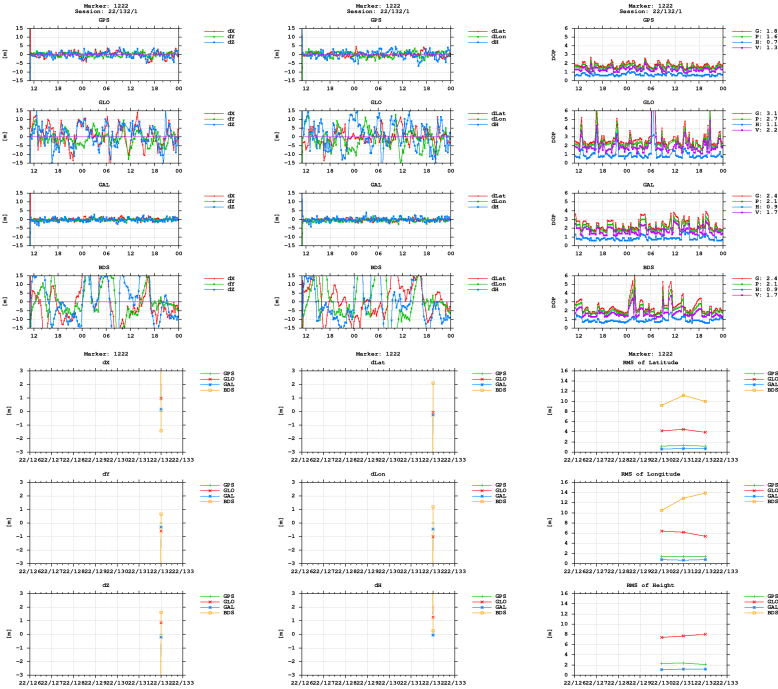

BNC

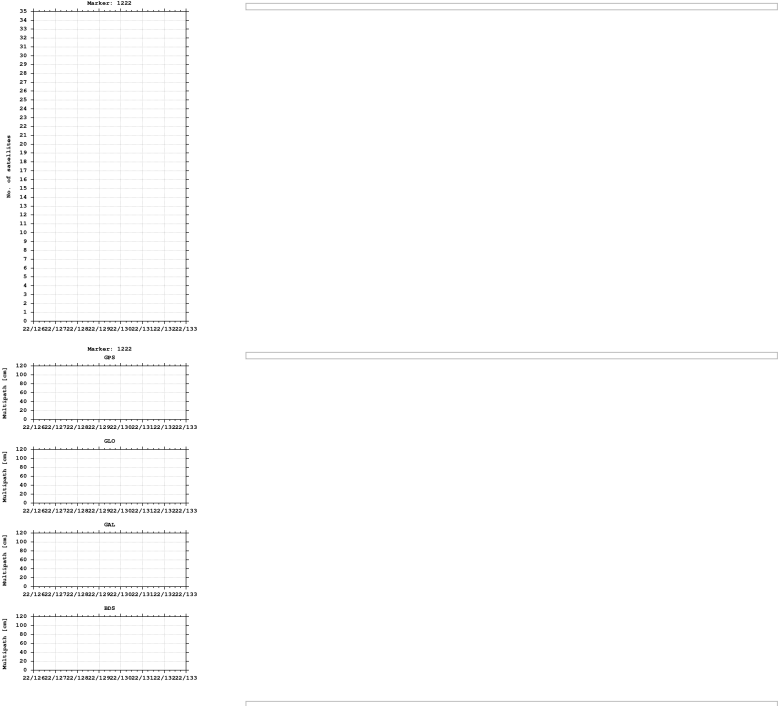

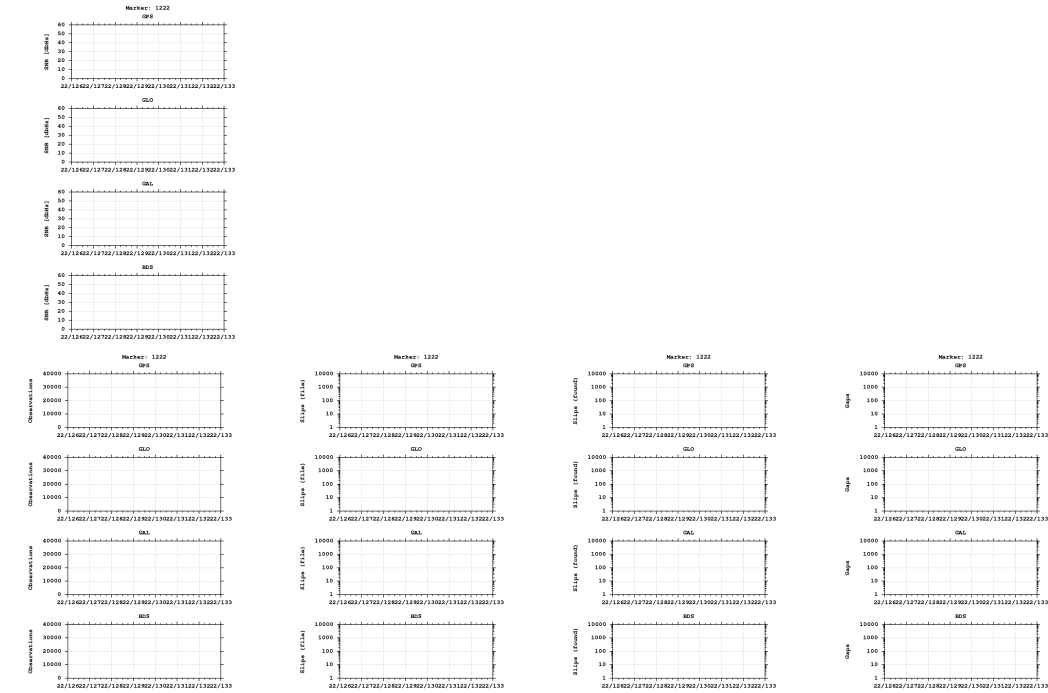

Equipment

2022-05-10 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)