


GNSS observation file monitoring for 0515


Last RINEX file: 05151291.22O
RINEX version: 3.02
Marker: 1144
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

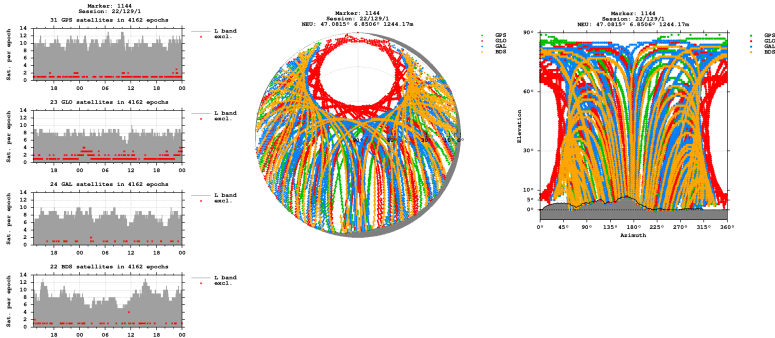


Bands

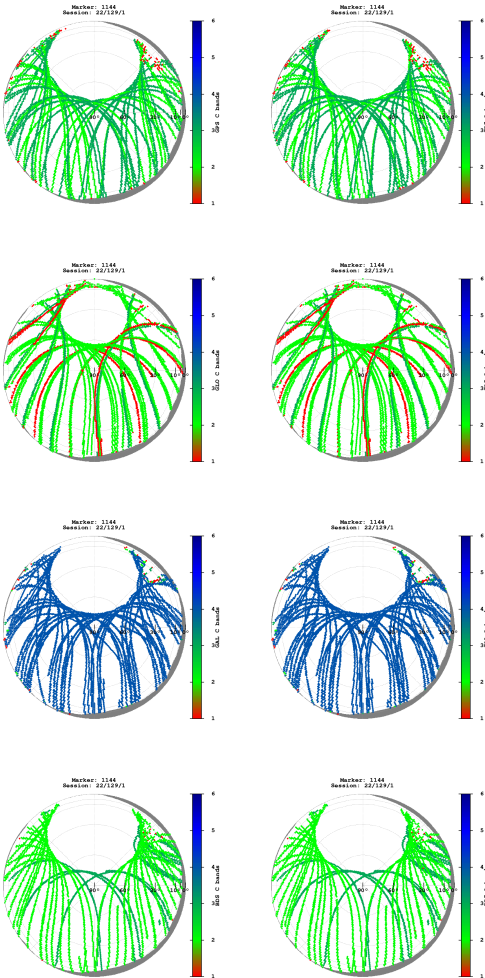

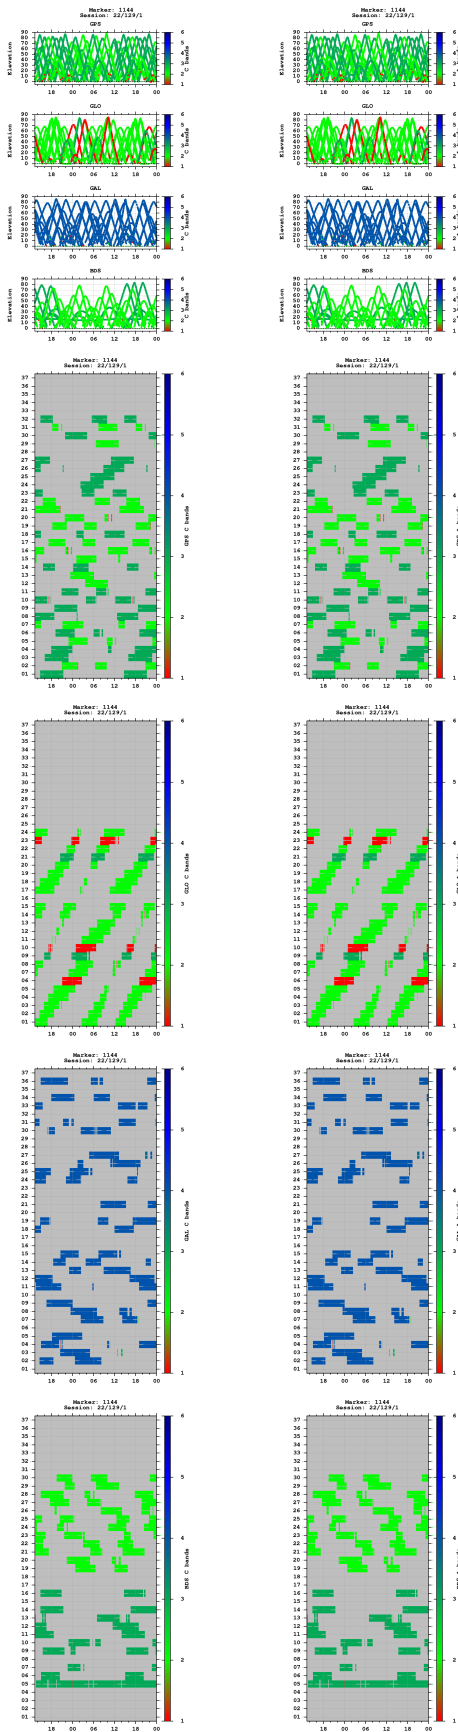



Multipath

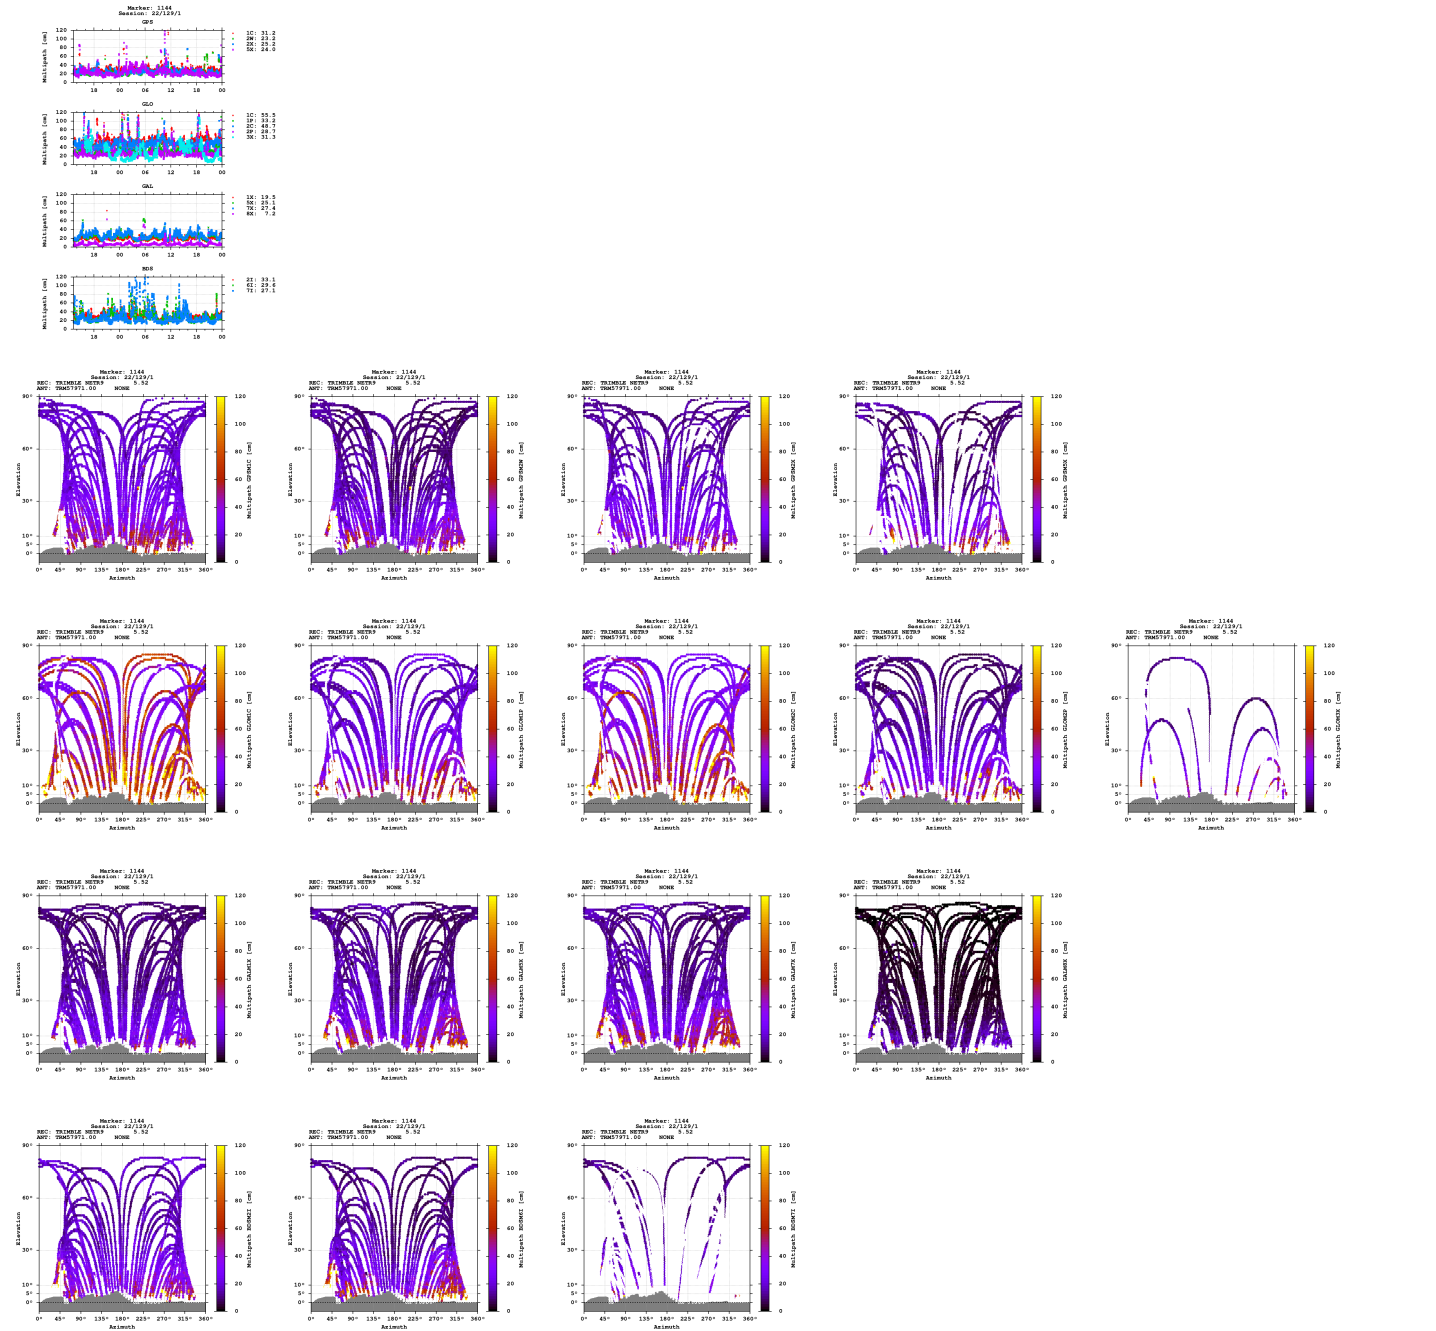

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

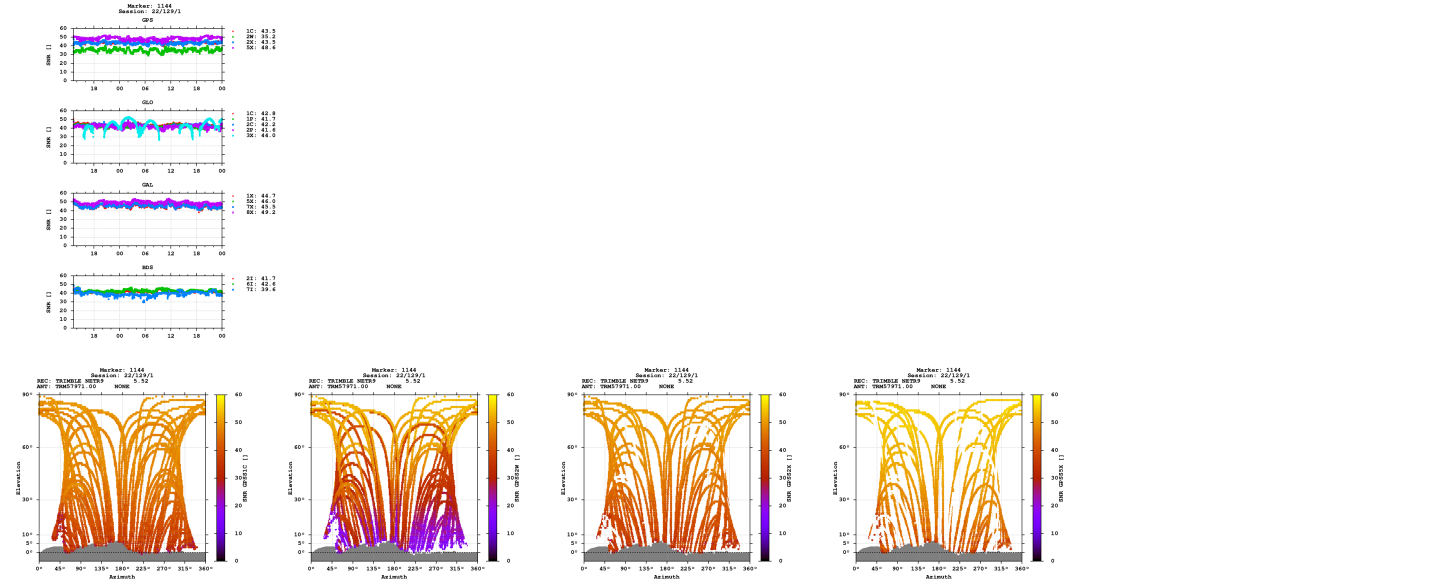

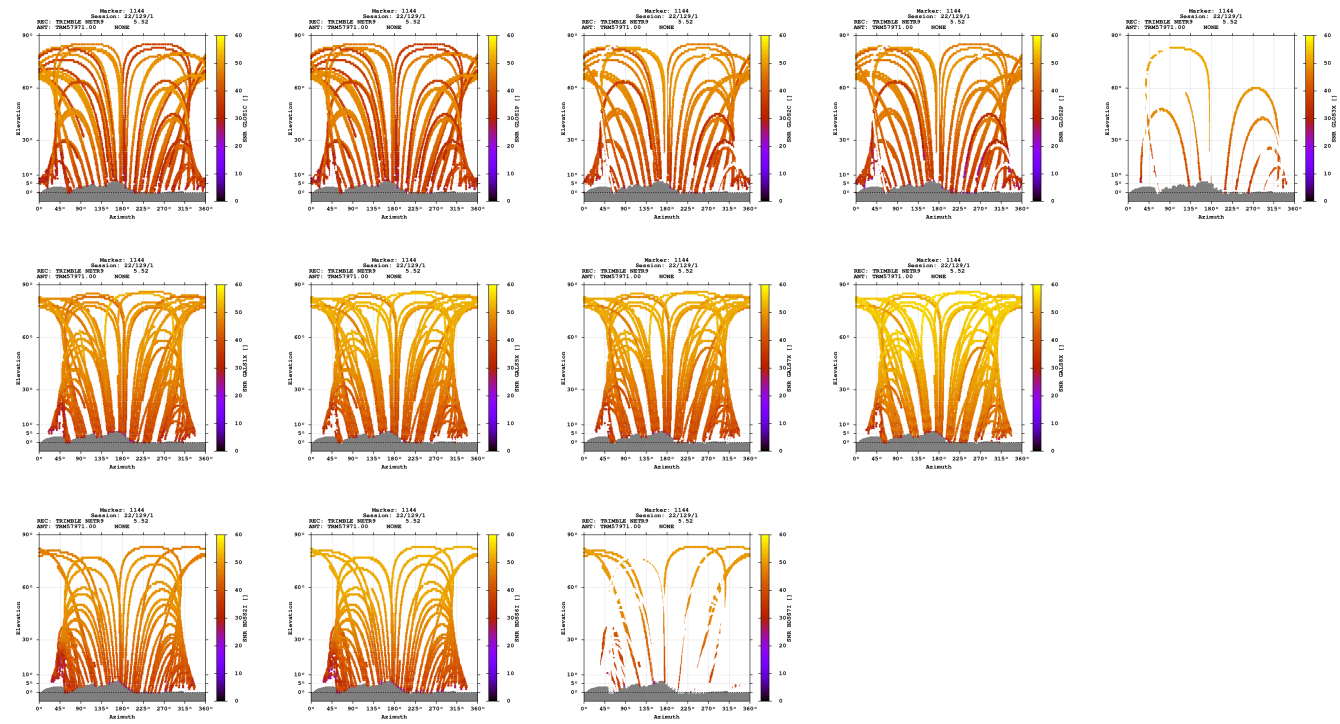

Estimates

2022-05-09 13:14:00	GPS	4320834.6783	519097.2326	4648849.9354	47.081493261	6.850578266	1244.1689
2022-05-09 13:14:00	GLO	4320835.2063	519097.0264	4648850.4269	47.081492980	6.850574742	1244.8690
2022-05-09 13:14:00	GAL	4320834.9648	519097.0404	4648849.9604	47.081491692	6.850575304	1244.3652
2022-05-09 13:14:00	BDS	4320834.4567	519094.7582	4648850.5748	47.081500570	6.850546270	1244.2863

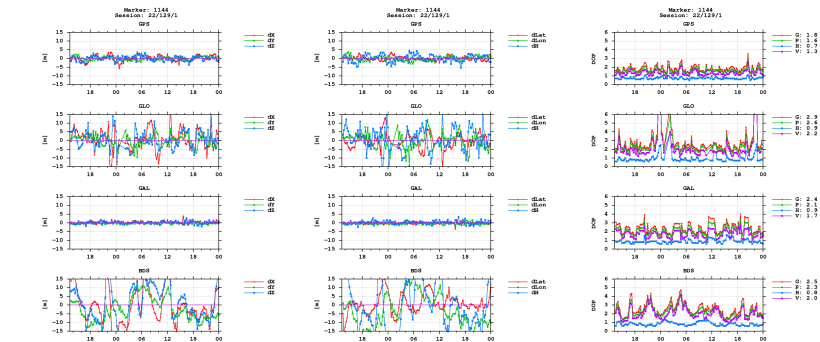

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)