


GNSS observation file monitoring for 0516


Last RINEX file: 05161291.22O
RINEX version: 3.02
Marker: 1125
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

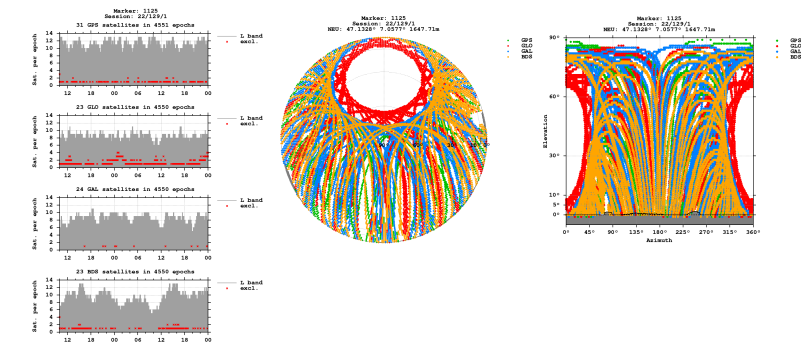


Bands

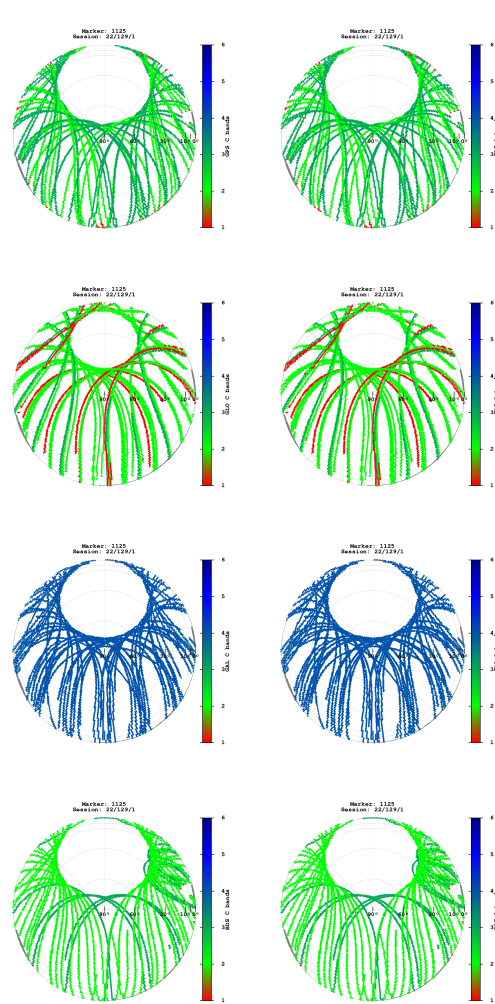

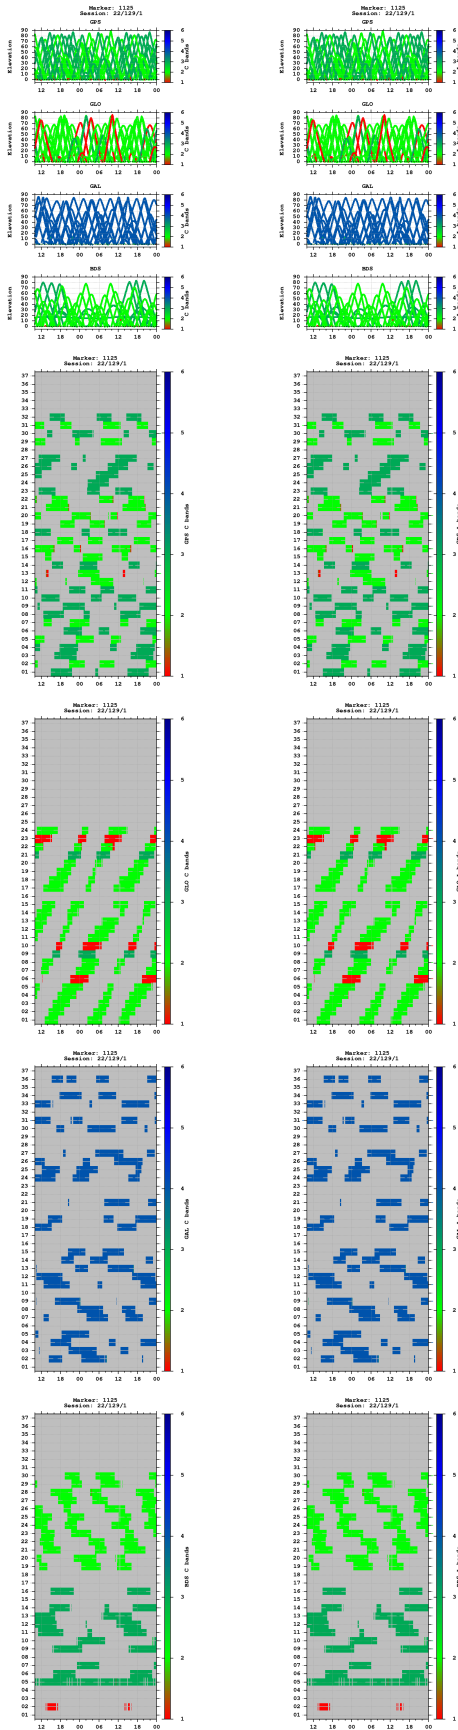



Multipath

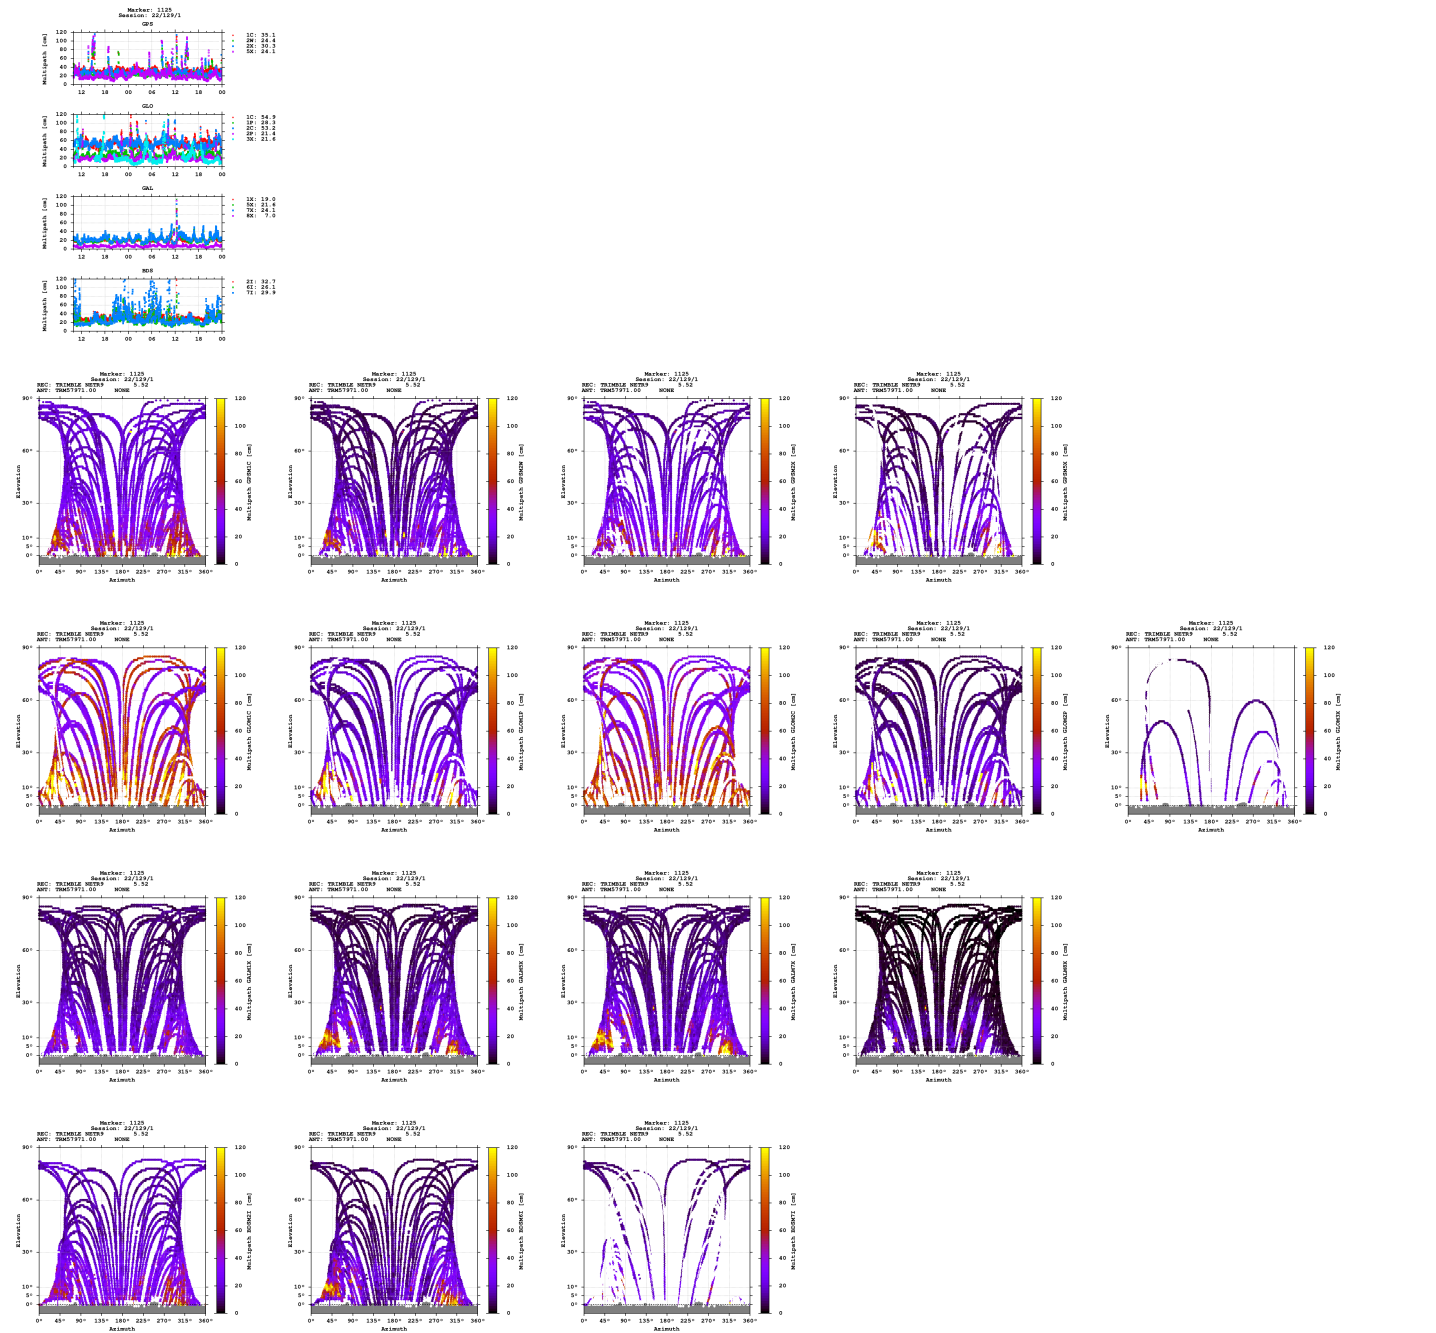

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

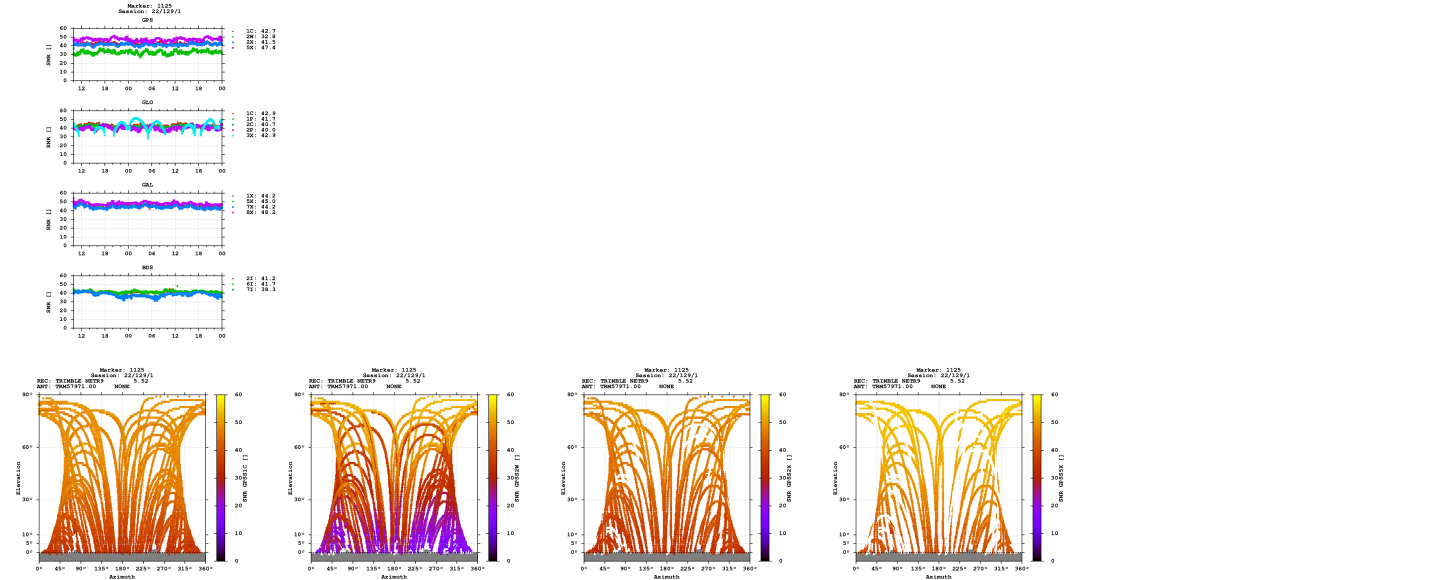

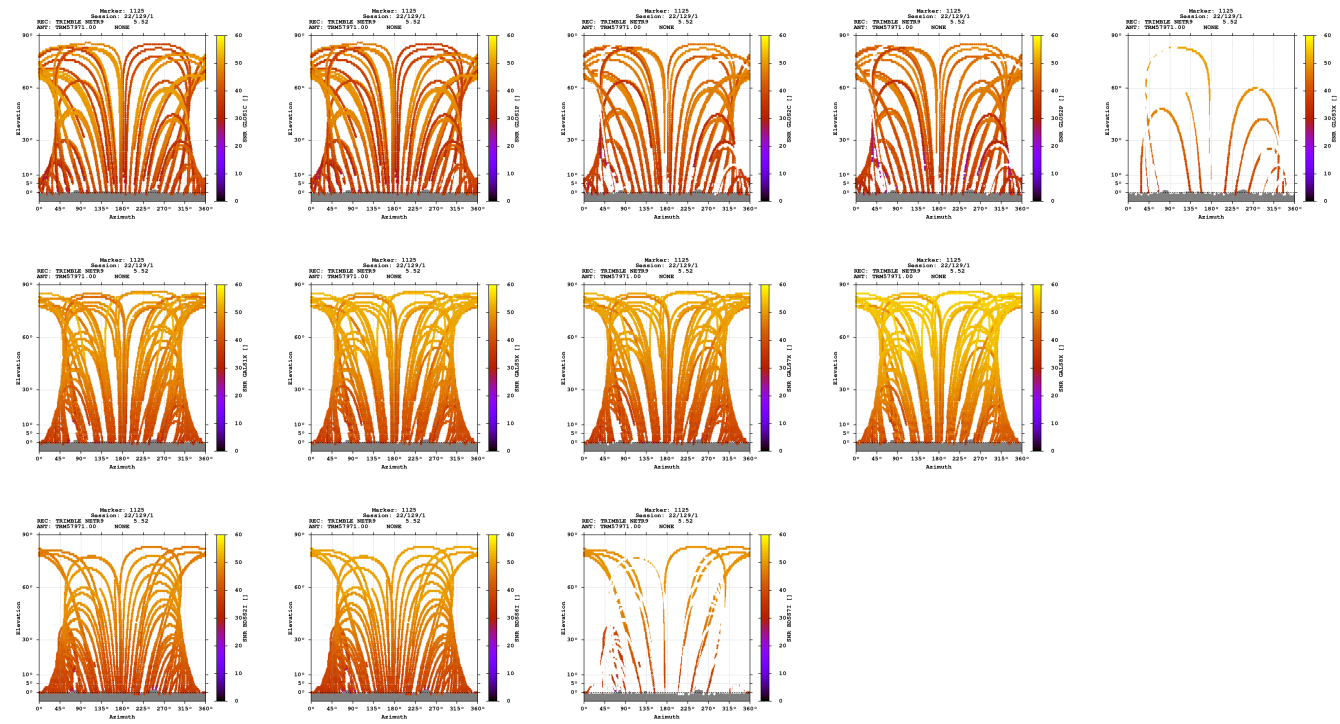

Estimates

2022-05-09 10:00:00	GPS	4315057.1564	534232.2815	4653026.3230	47.132768322	7.057678076	1647.7113
2022-05-09 10:00:00	GLO	4315057.1117	534232.1174	4653026.8883	47.132772206	7.057676002	1648.0818
2022-05-09 10:00:00	GAL	4315057.0048	534232.0141	4653026.3808	47.132769884	7.057674824	1647.6290
2022-05-09 10:00:00	BDS	4315056.0592	534230.0526	4653026.9802	47.132781324	7.057650703	1647.2659

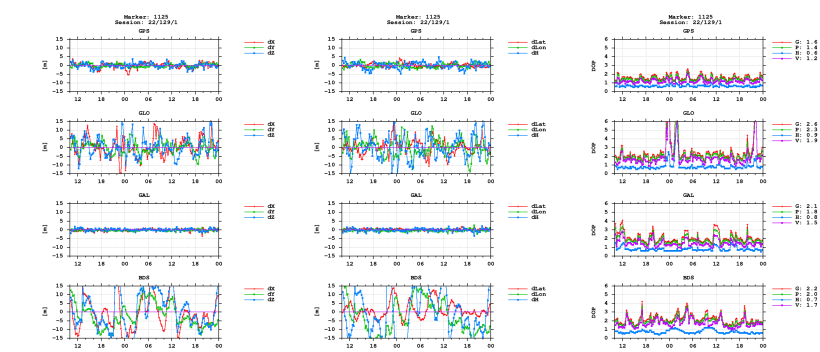

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)