

GNSS observation file monitoring for 0516

Last RINEX file: 05161301.220

RINEX version: 3.02

Marker: 1125

Receiver: 516

Antenna: 516


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

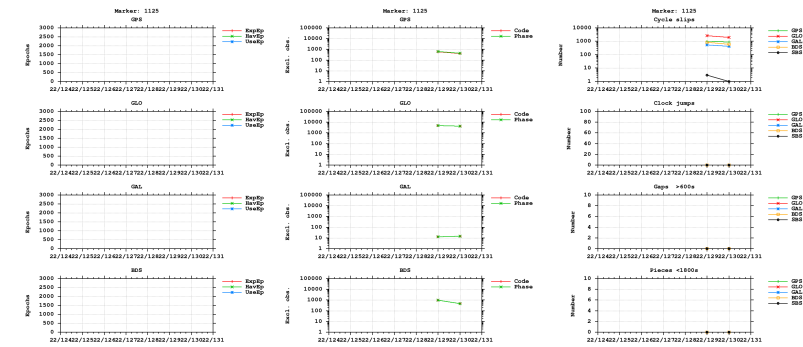



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

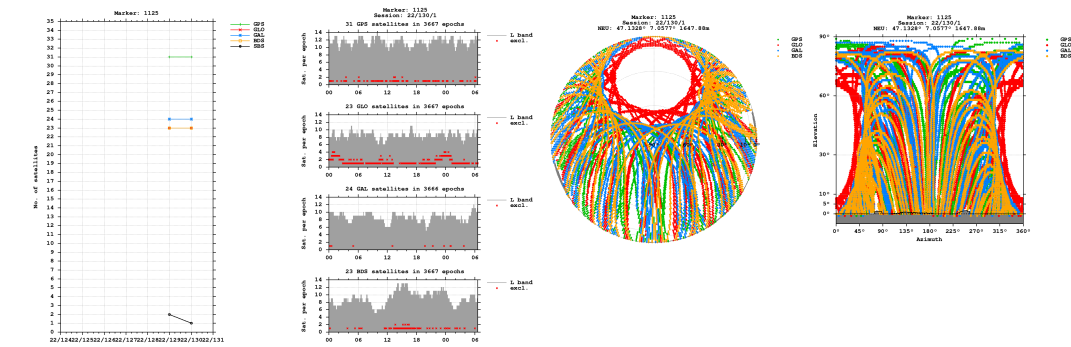


Bands

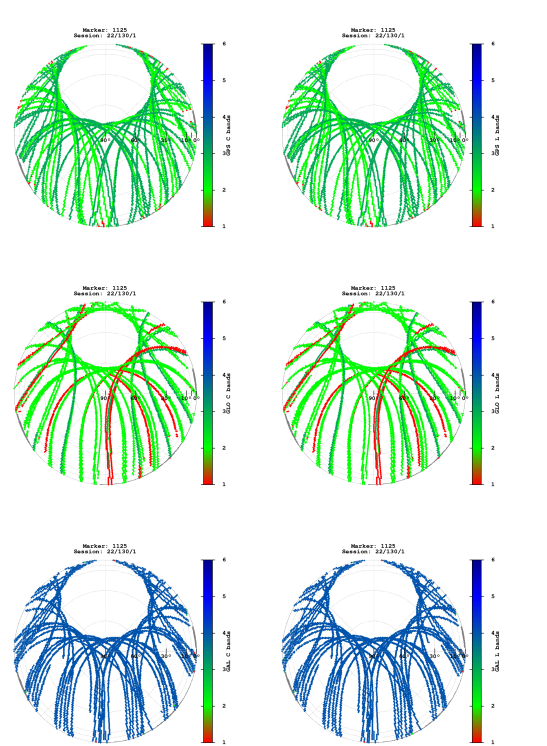


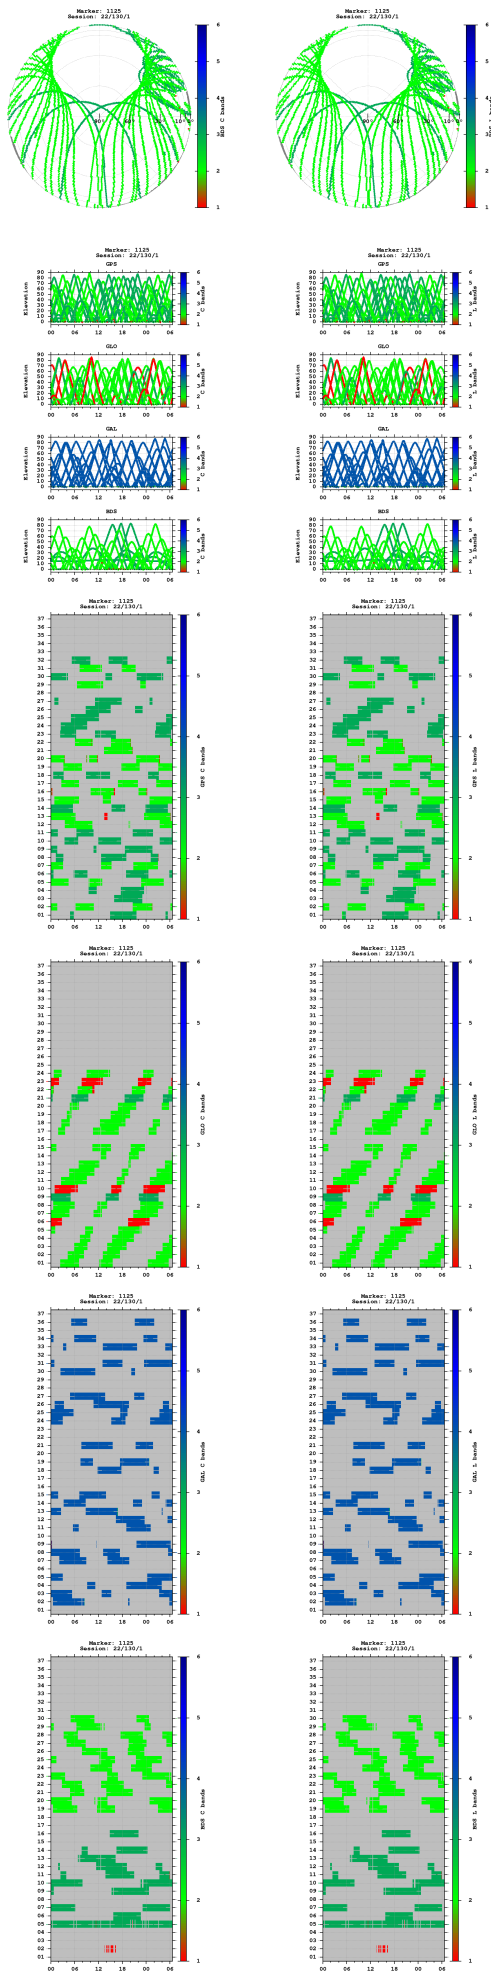


Observations

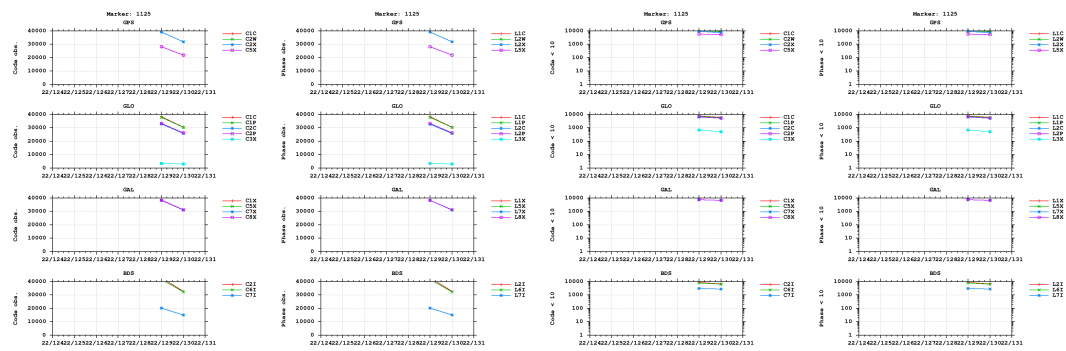


Multipath

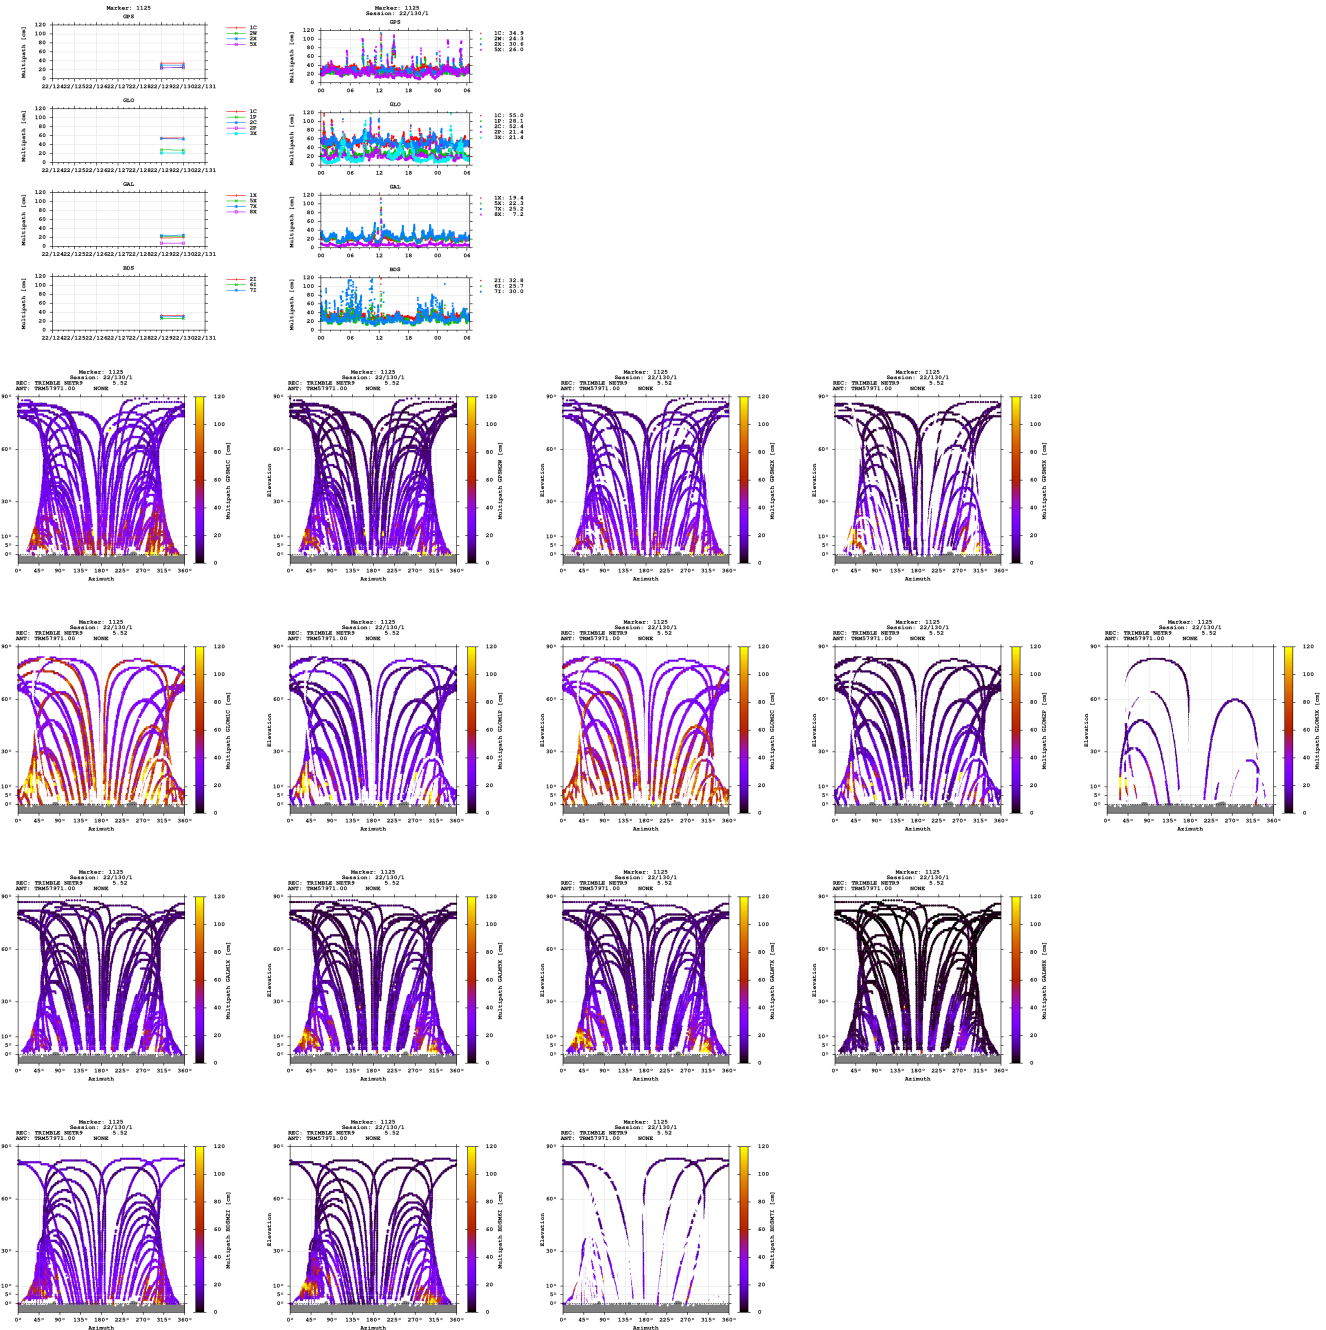


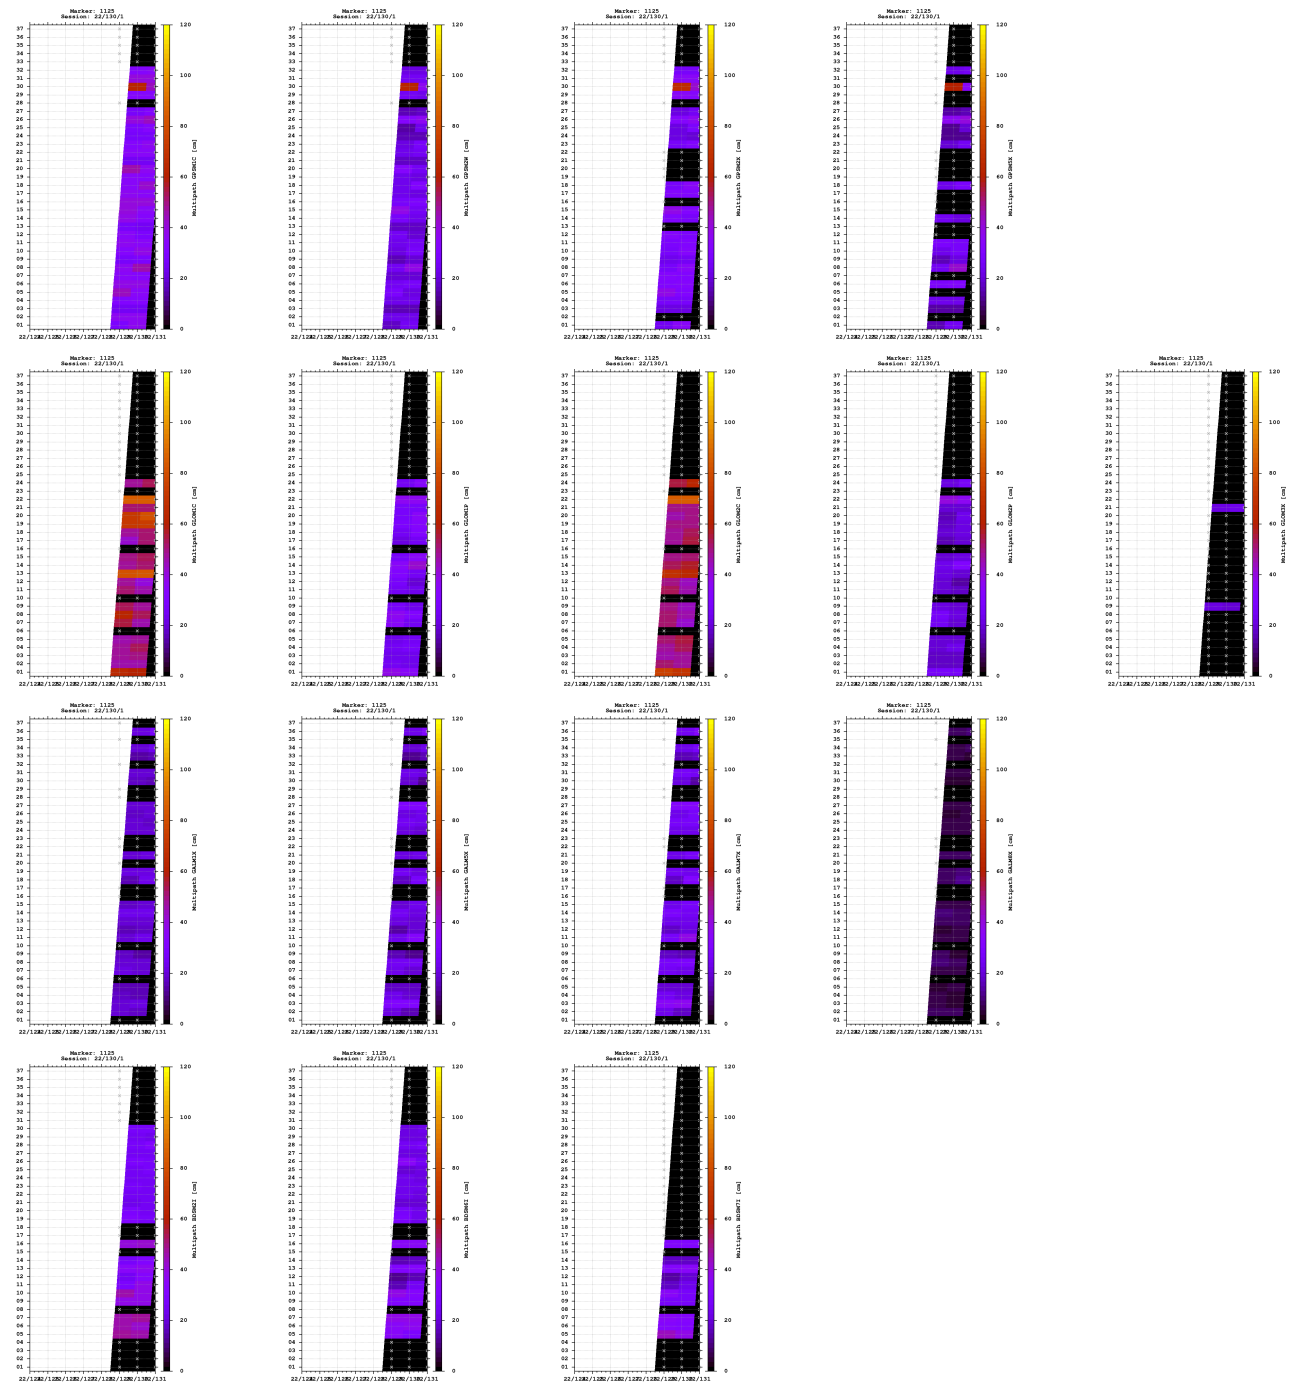


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

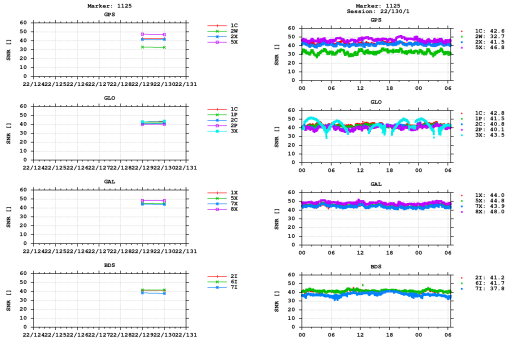


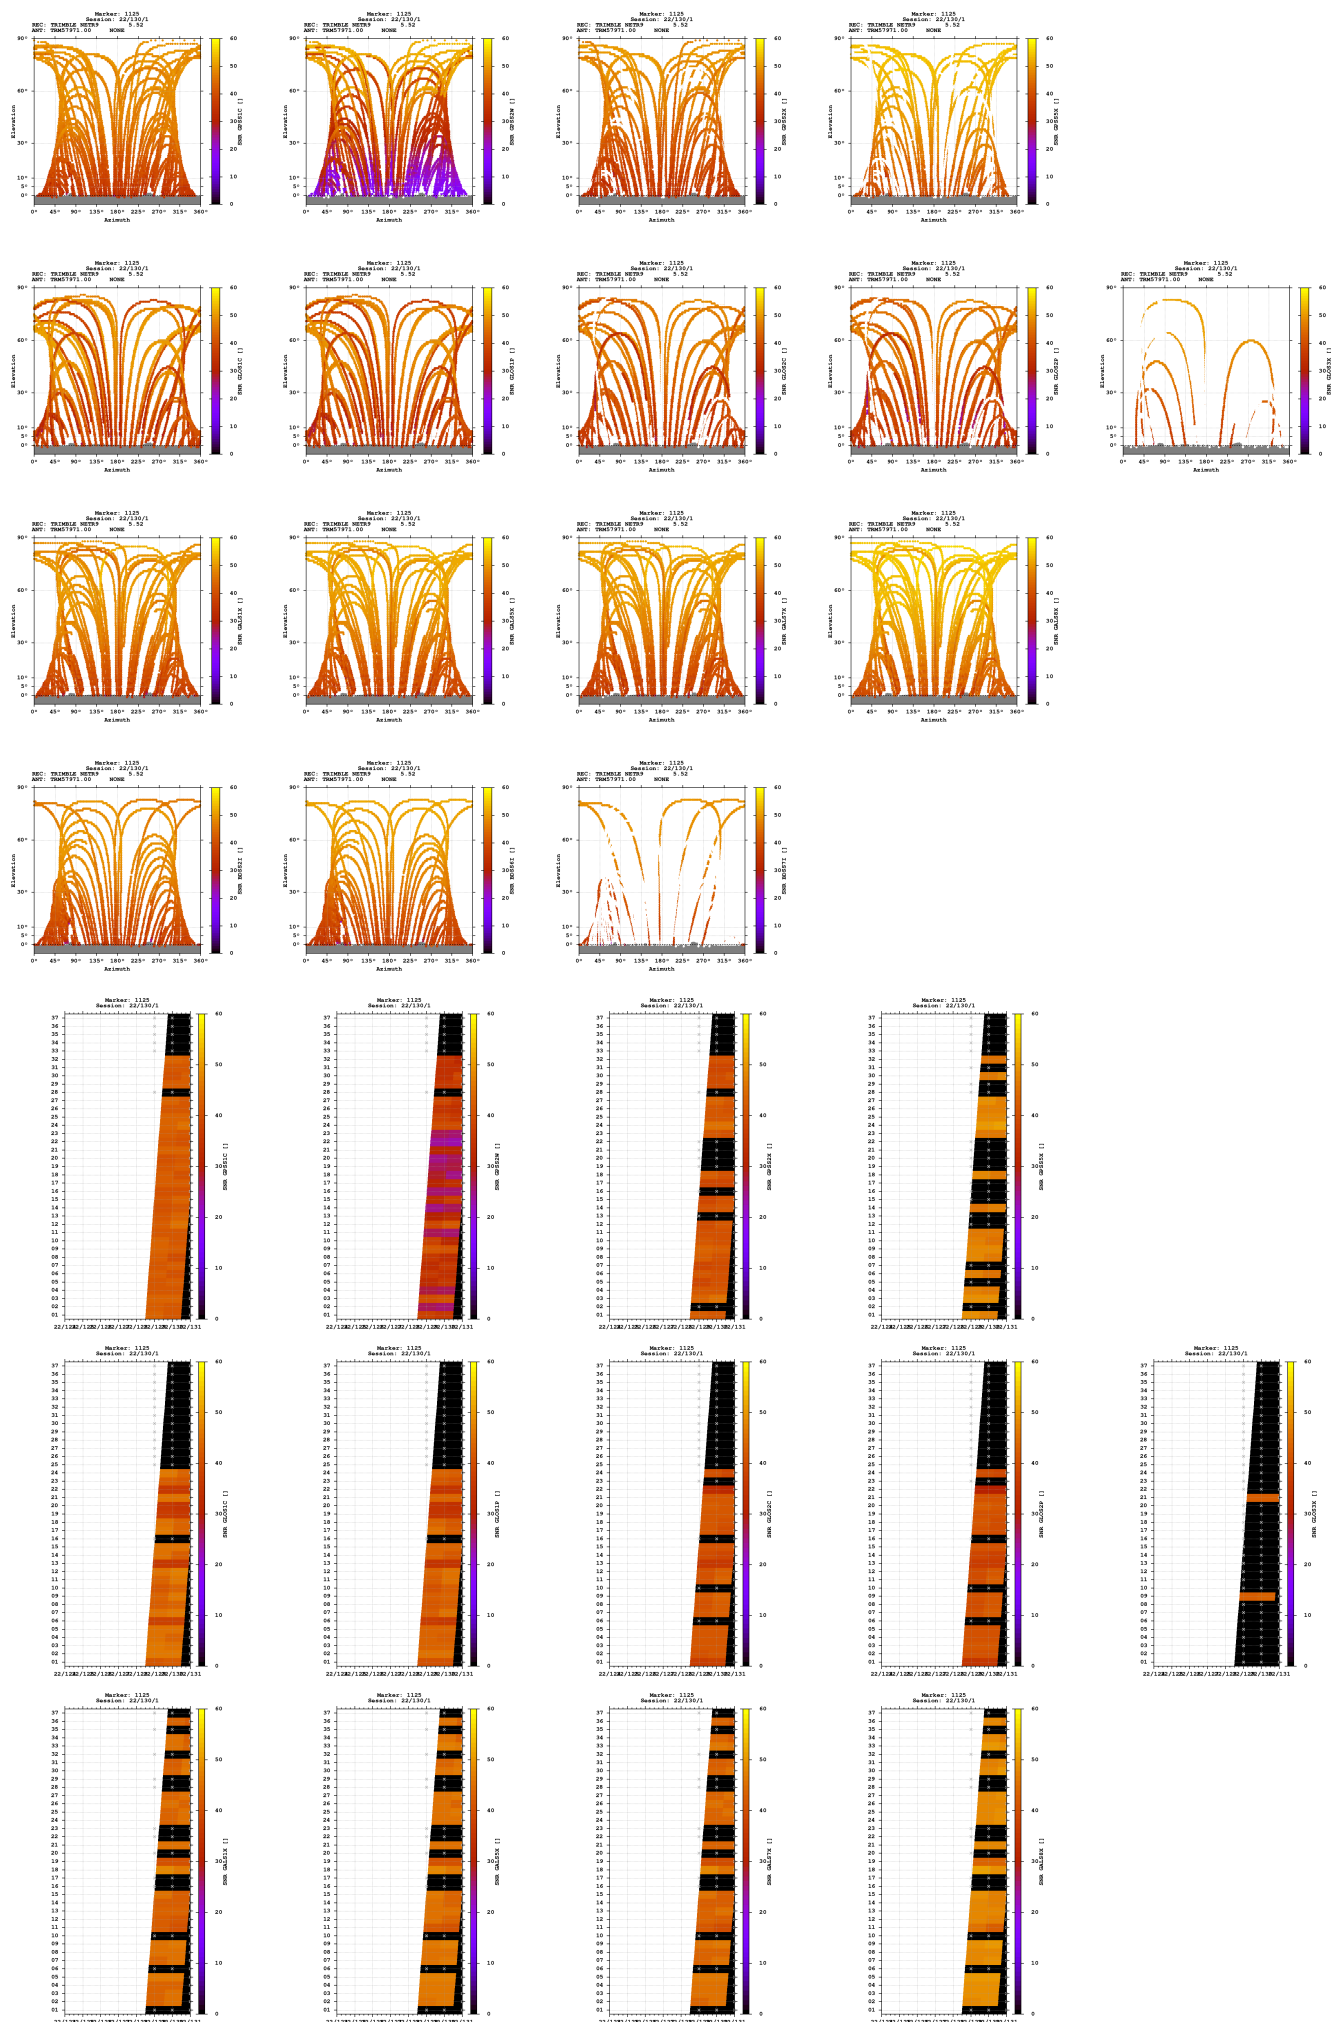

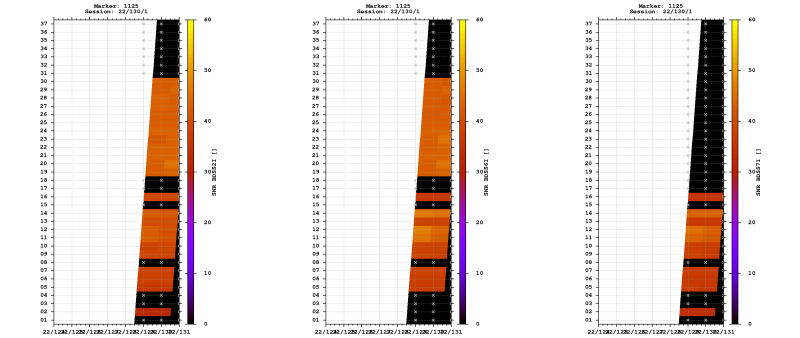


Estimates

2022-05-09 10:00:00	GPS	4315057.1026	534232.0267	4653026.6262	47.132770735	7.057674831	1647.8759
2022-05-09 10:00:00	GLO	4315056.9559	534231.5088	4653026.3324	47.132770317	7.057668295	1647.5183
2022-05-09 10:00:00	GAL	4315057.1035	534232.0171	4653026.3665	47.132769148	7.057674704	1647.6853
2022-05-09 10:00:00	BDS	4315055.7155	534232.5519	4653027.5946	47.132785307	7.057683945	1647.6930

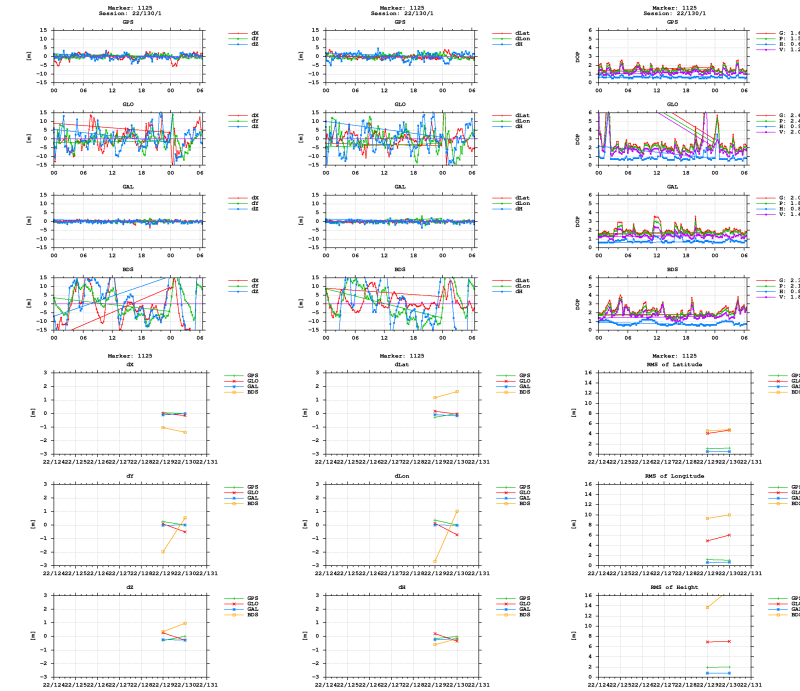

BNC



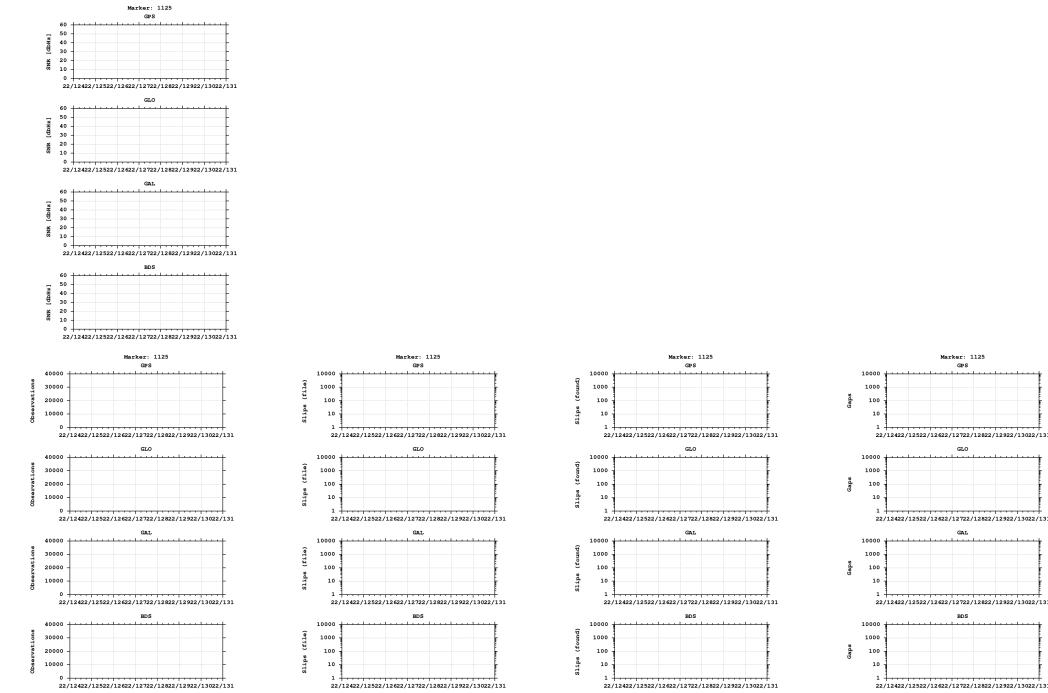

Equipment

2022-05-09 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)