


GNSS observation file monitoring for 0516


Last RINEX file: 05161311.220
RINEX version: 3.02
Marker: 1163
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

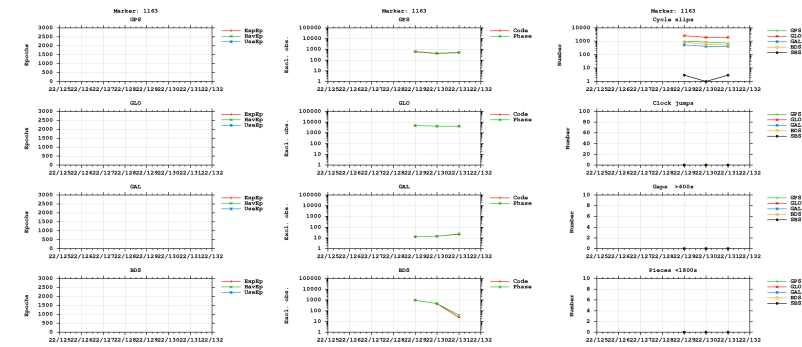



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

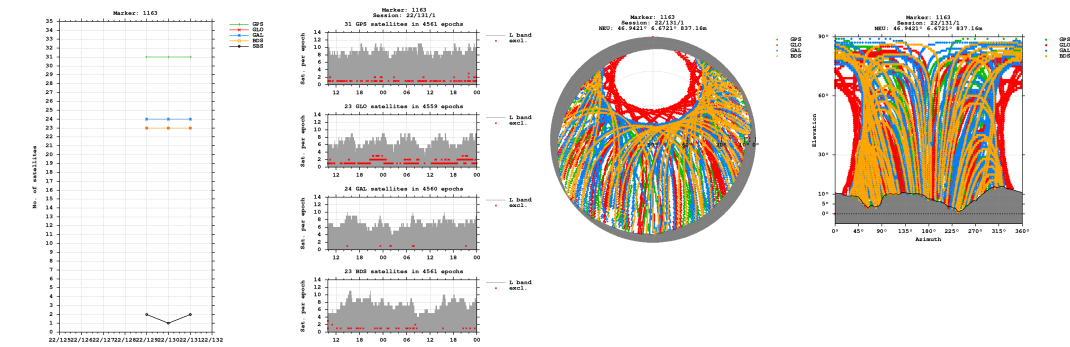


Bands

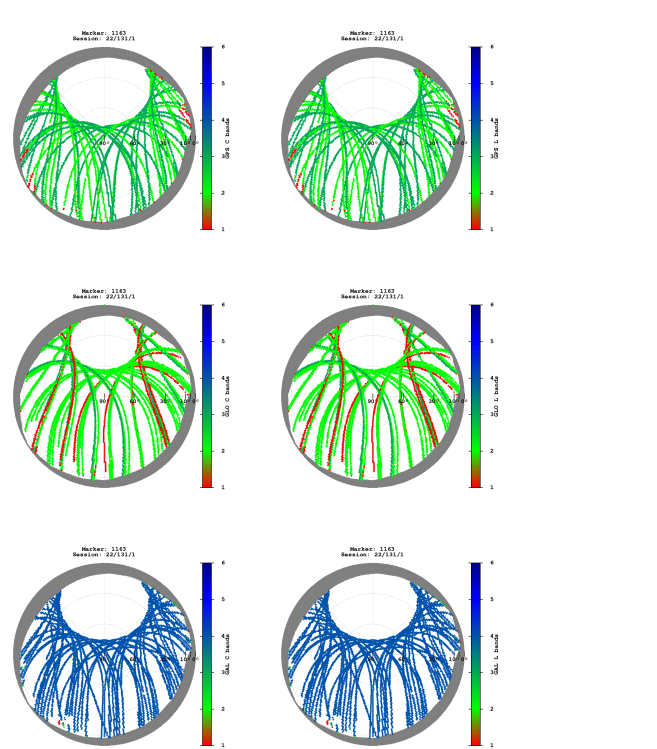


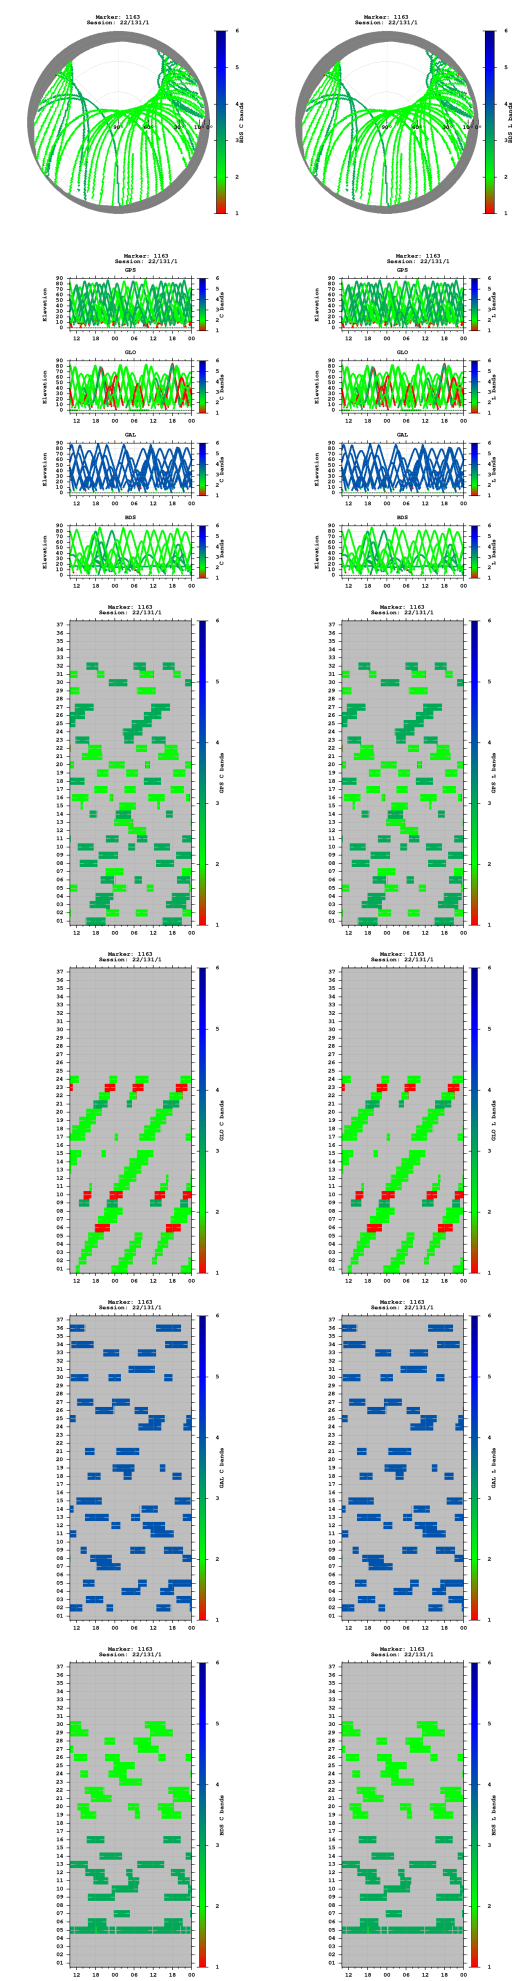


Observations

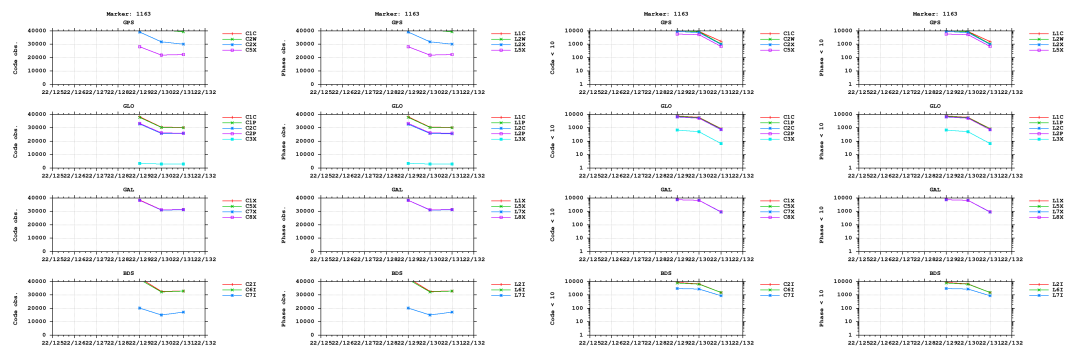


Multipath

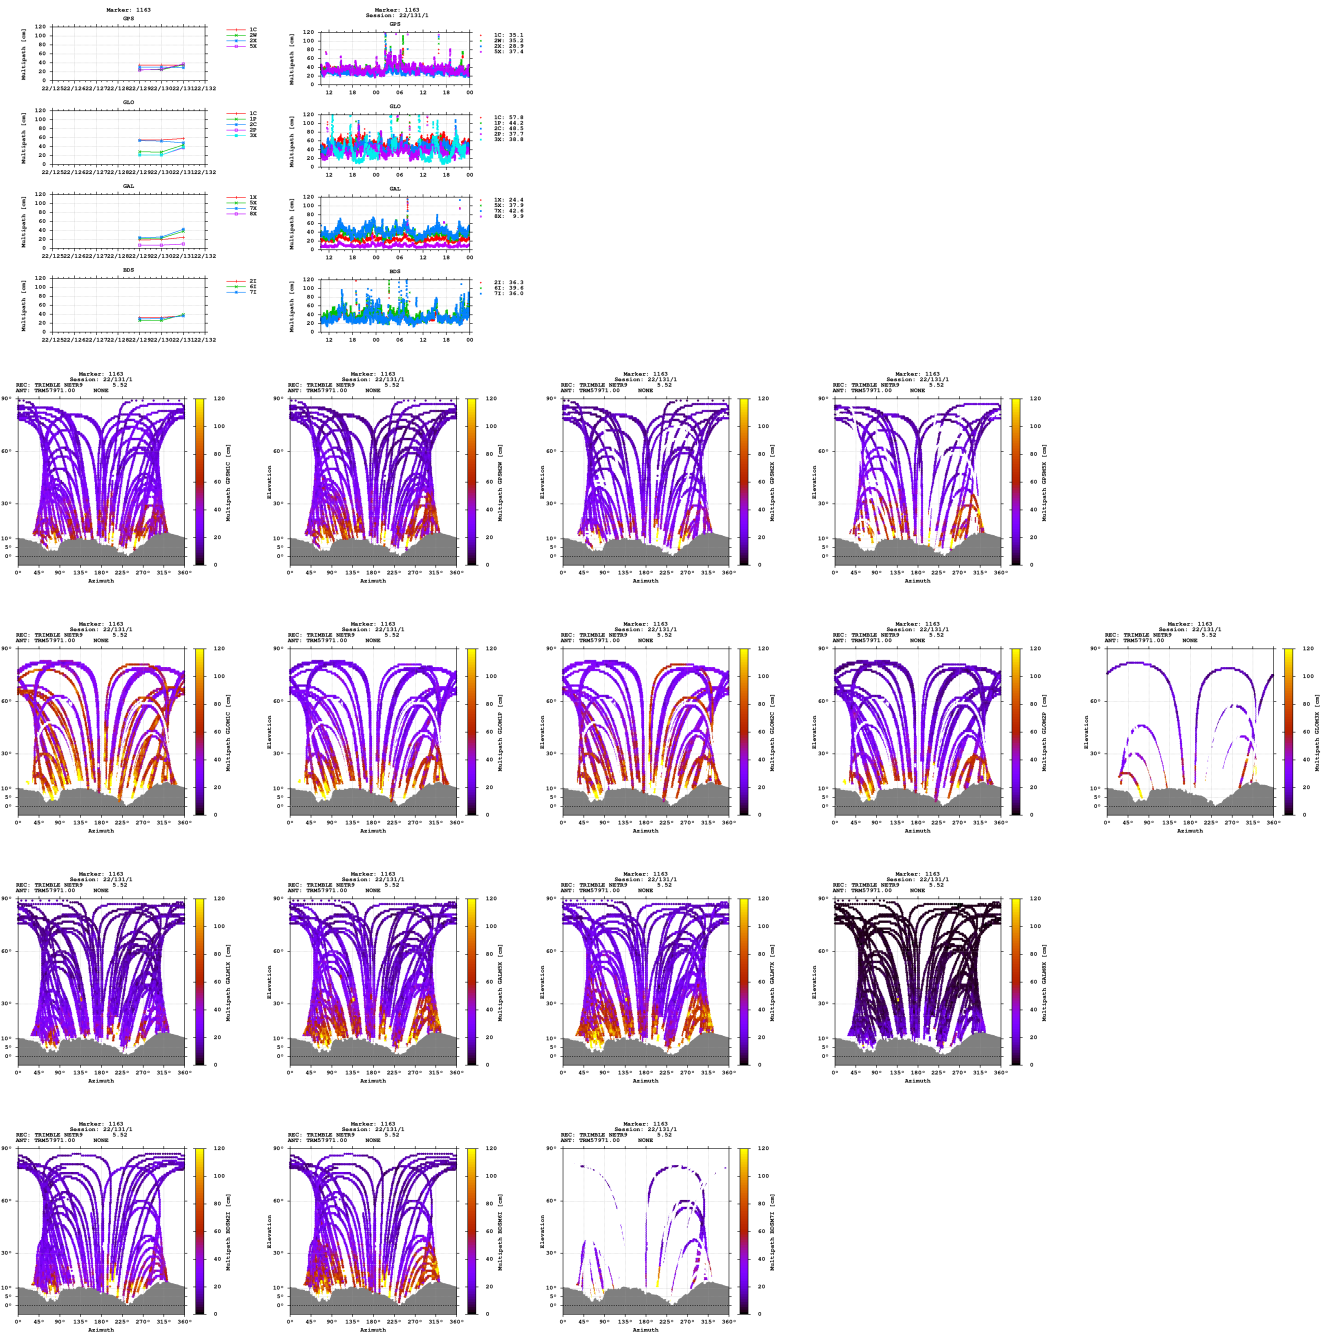


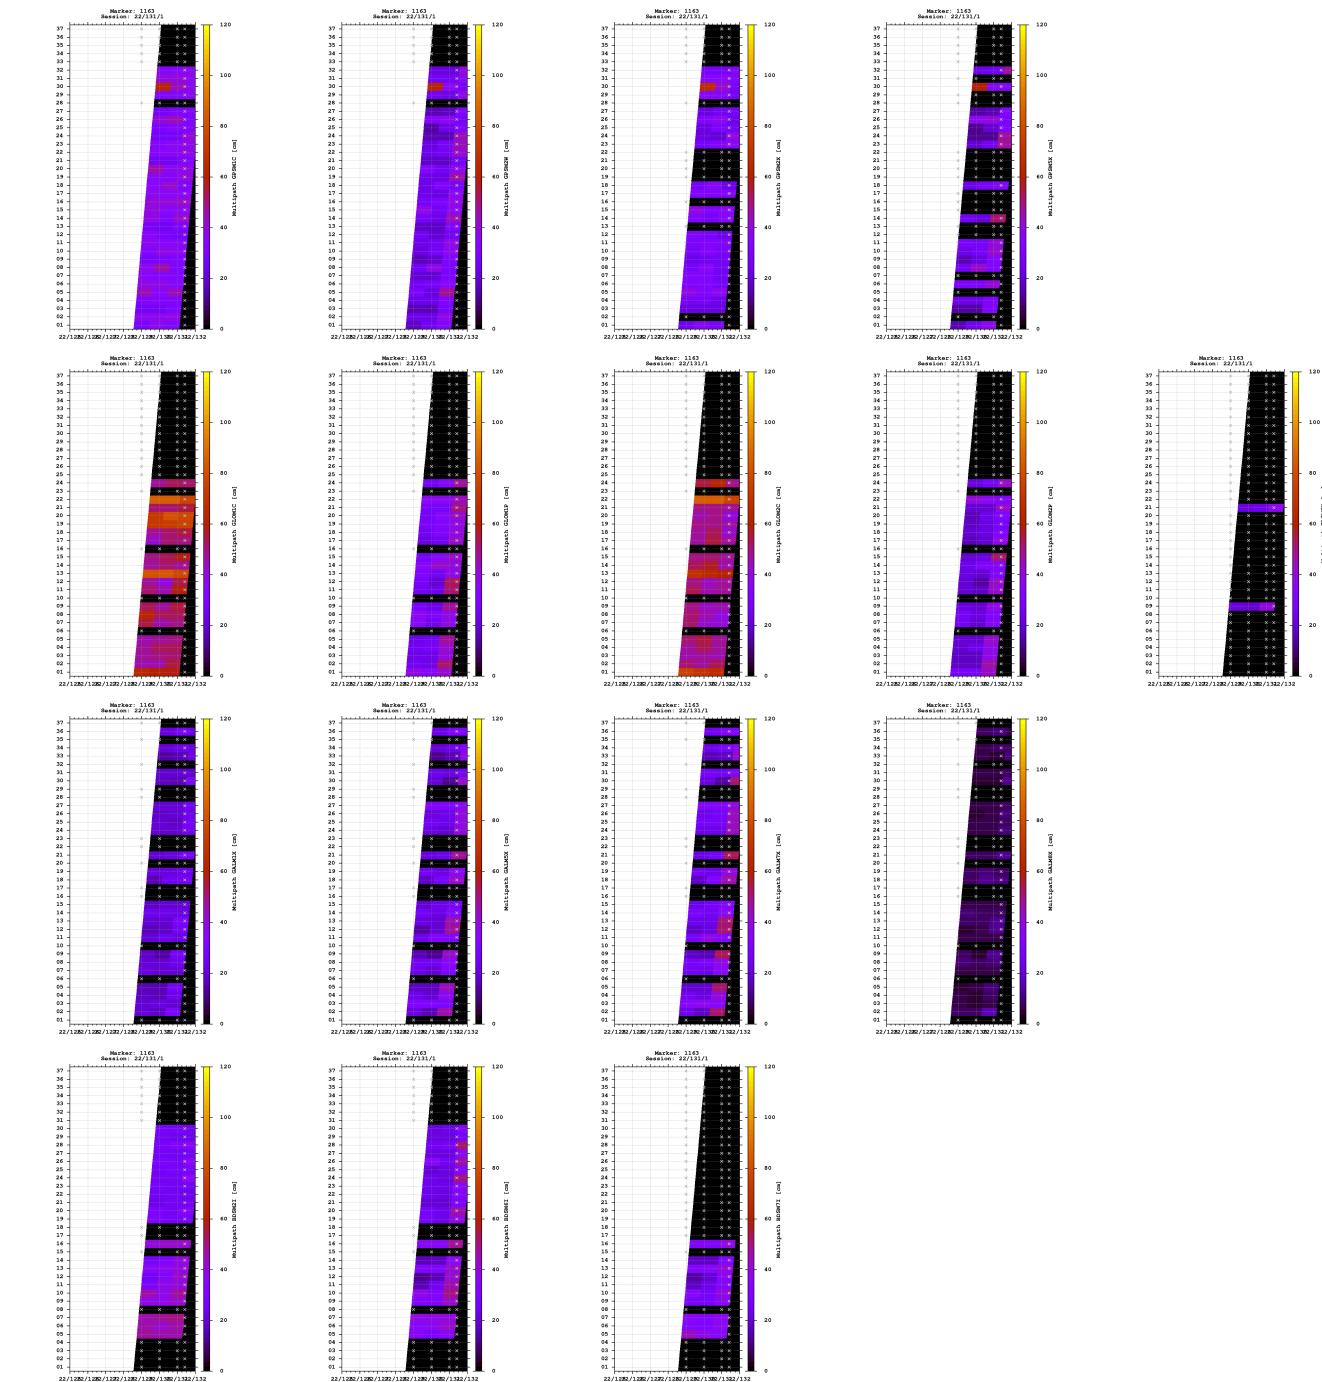


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

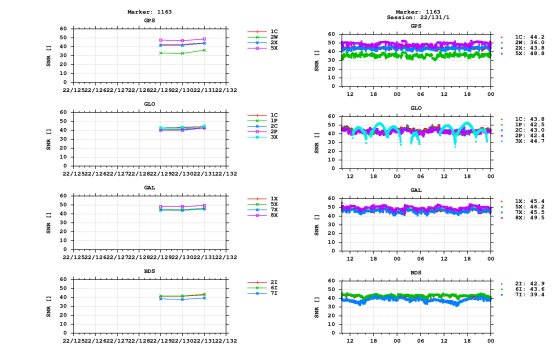


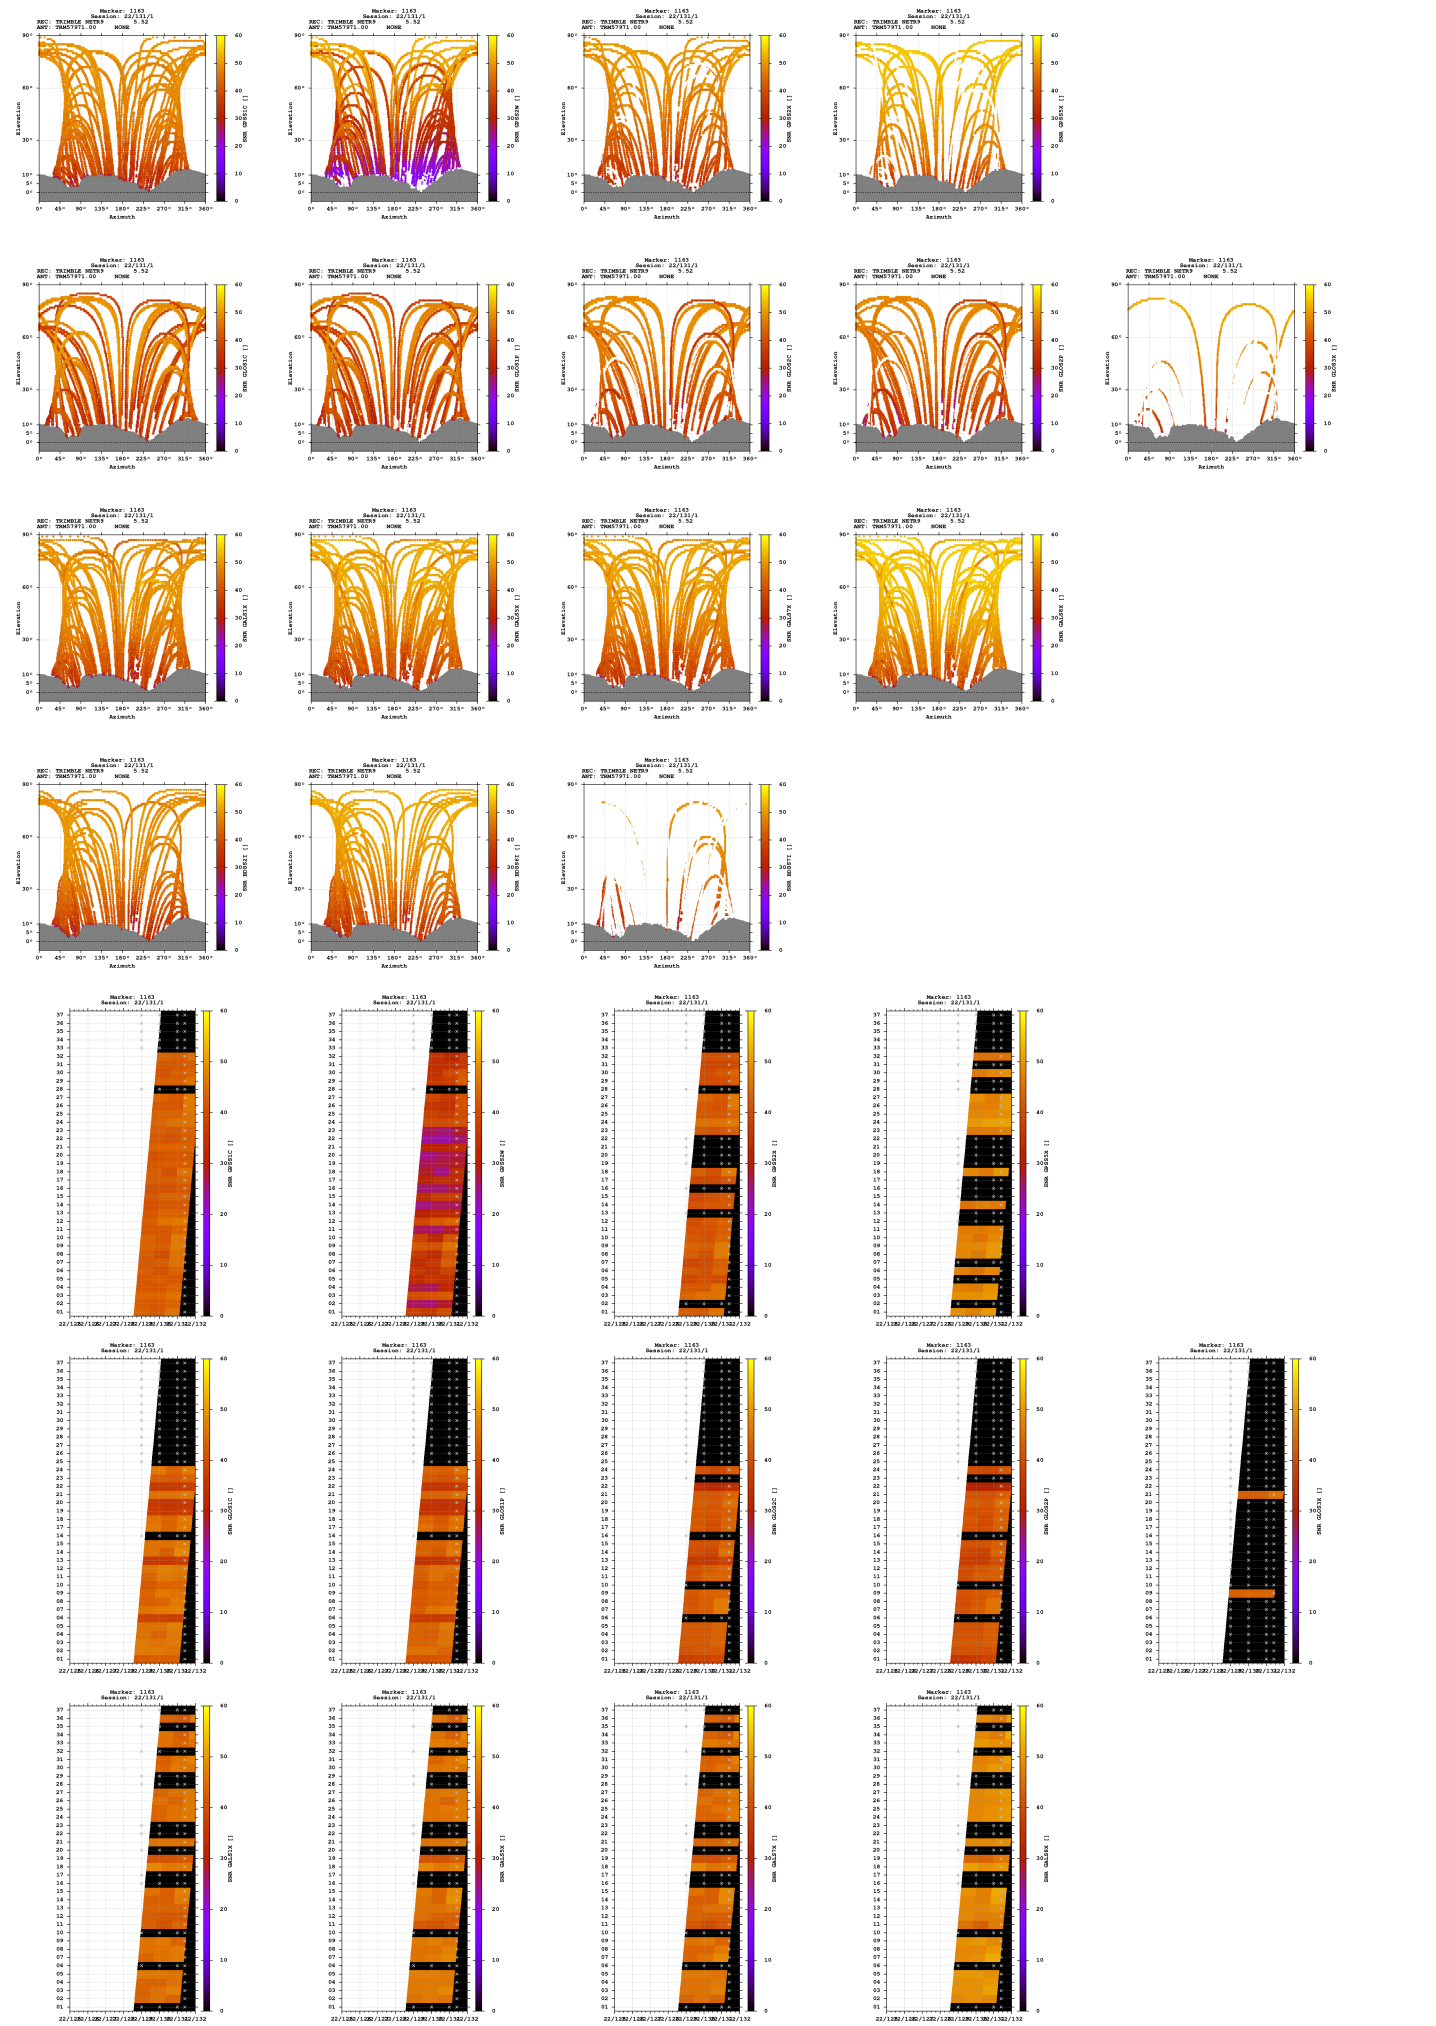

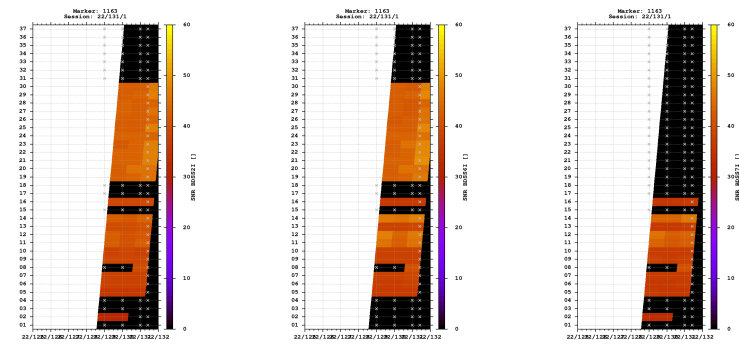



Estimates

2022-05-11 09:53:00	GPS	4333415.8912	506919.5100	4637984.1736	46.942099179	6.672090606	837.1616
2022-05-11 09:53:00	GLO	4333417.2757	506919.2302	4637985.1620	46.942096425	6.672084844	838.8005
2022-05-11 09:53:00	GAL	4333416.1301	506919.1597	4637984.0085	46.942096874	6.672085673	837.1752
2022-05-11 09:53:00	BDS	4333413.1060	506918.7001	4637985.2227	46.942124420	6.672084292	835.9752

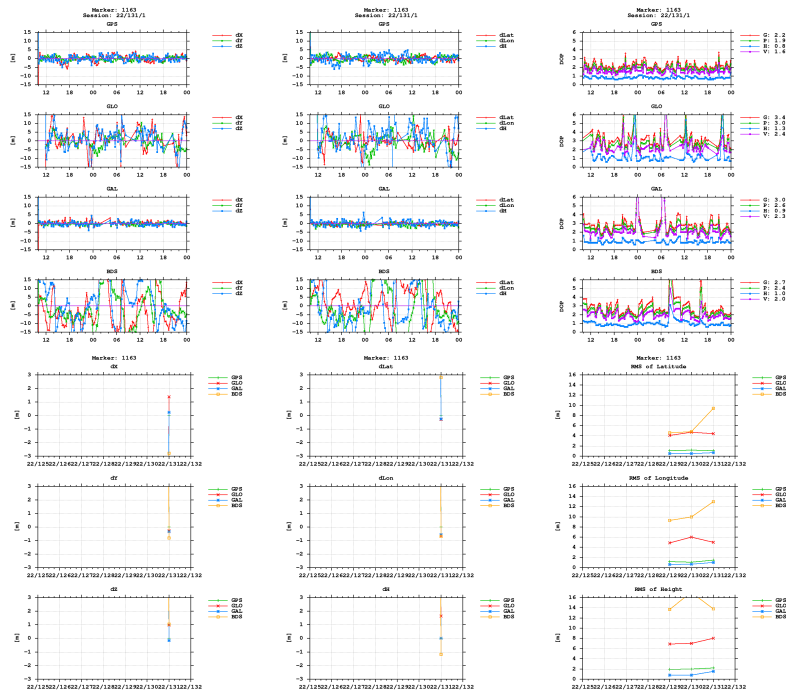

BNC

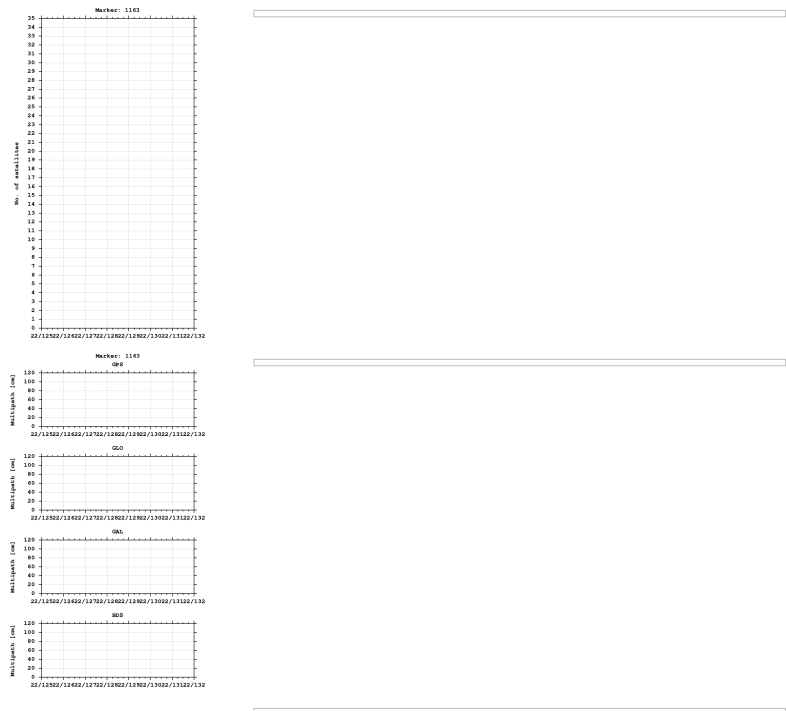

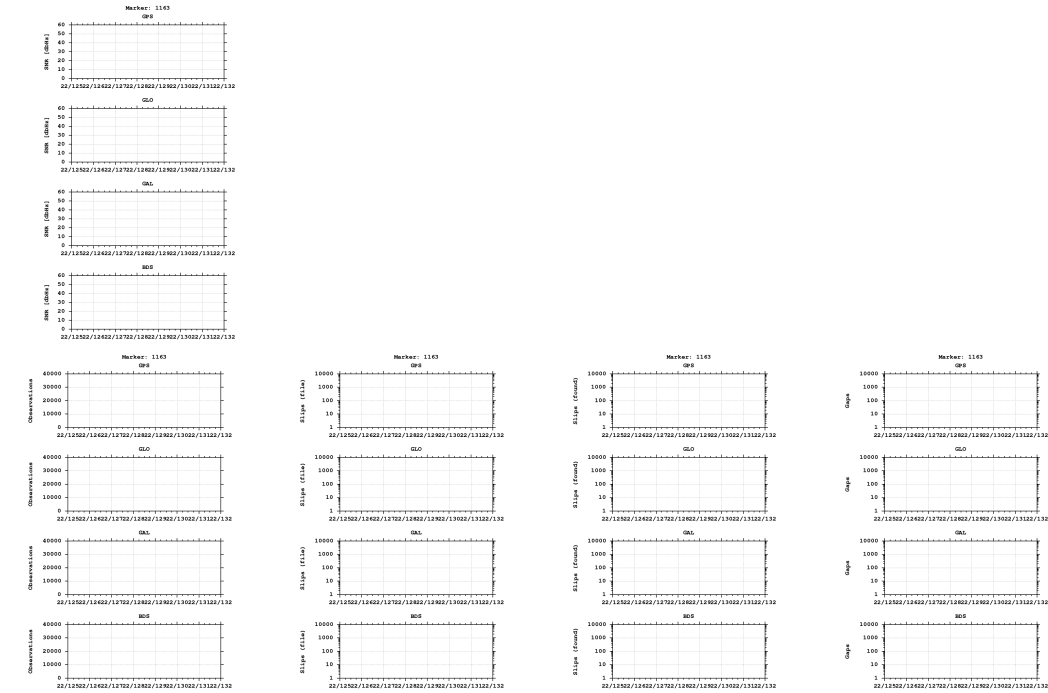

Equipment

2022-05-09 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)