


GNSS observation file monitoring for 0516


Last RINEX file: 05161321.220
RINEX version: 3.02
Marker: 1163
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

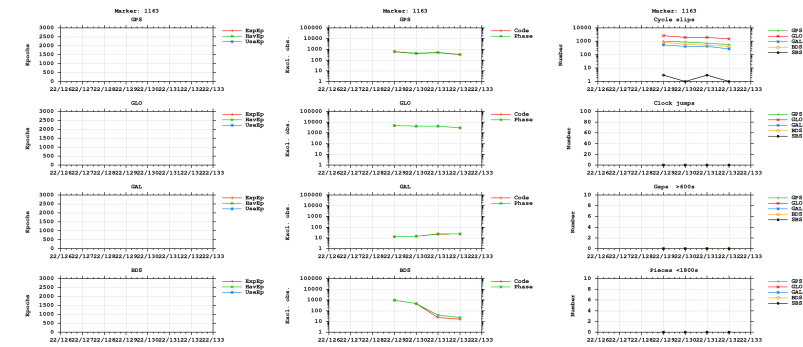



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

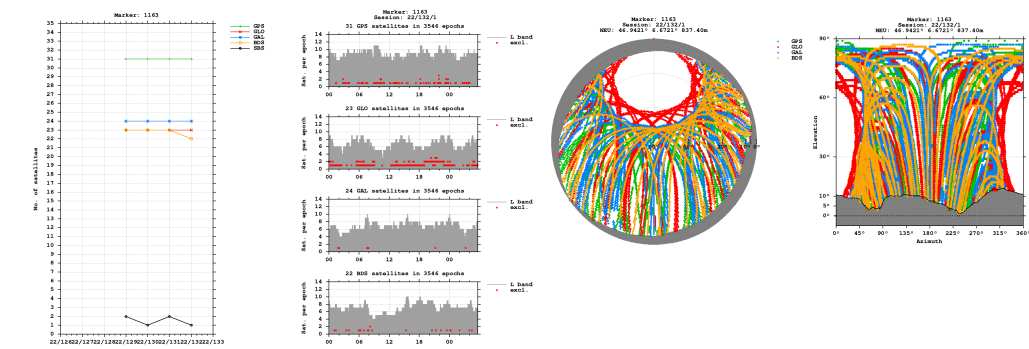


Bands

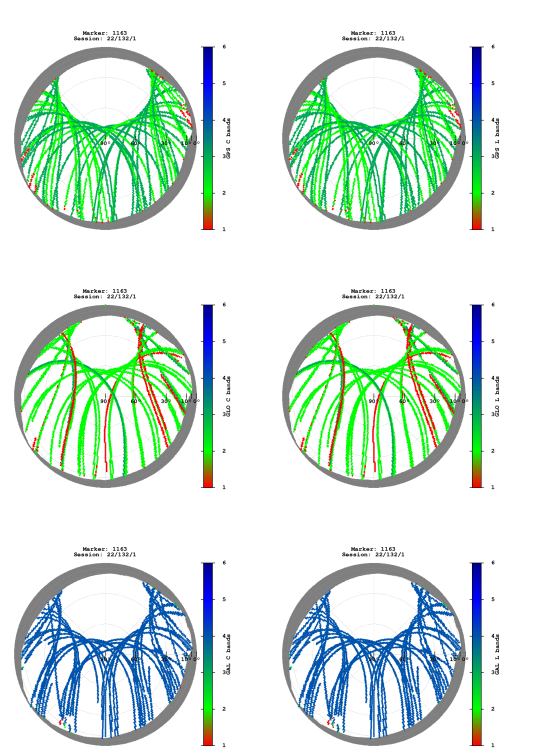


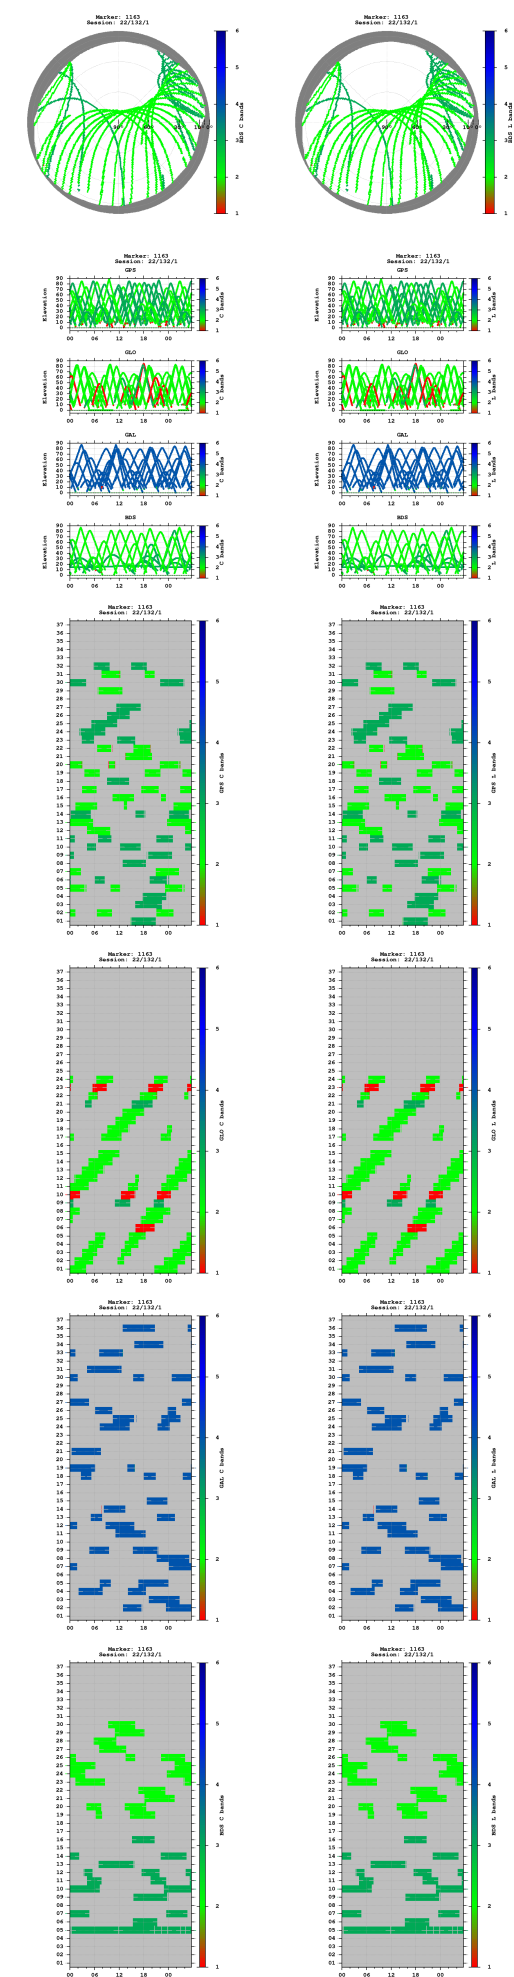


Observations

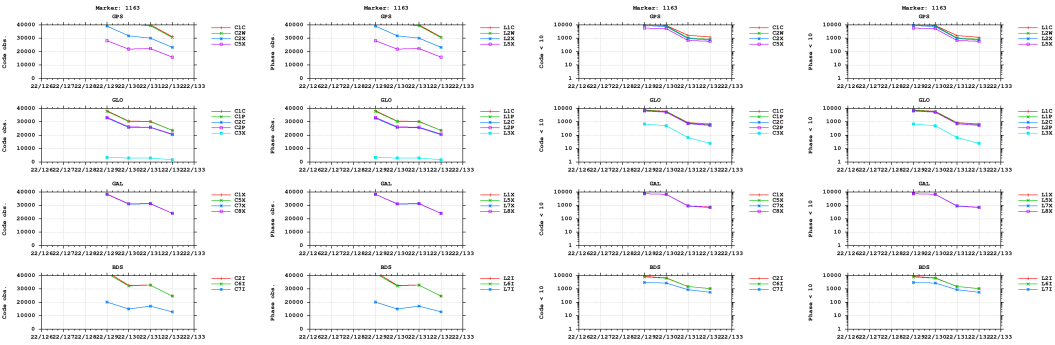



Multipath

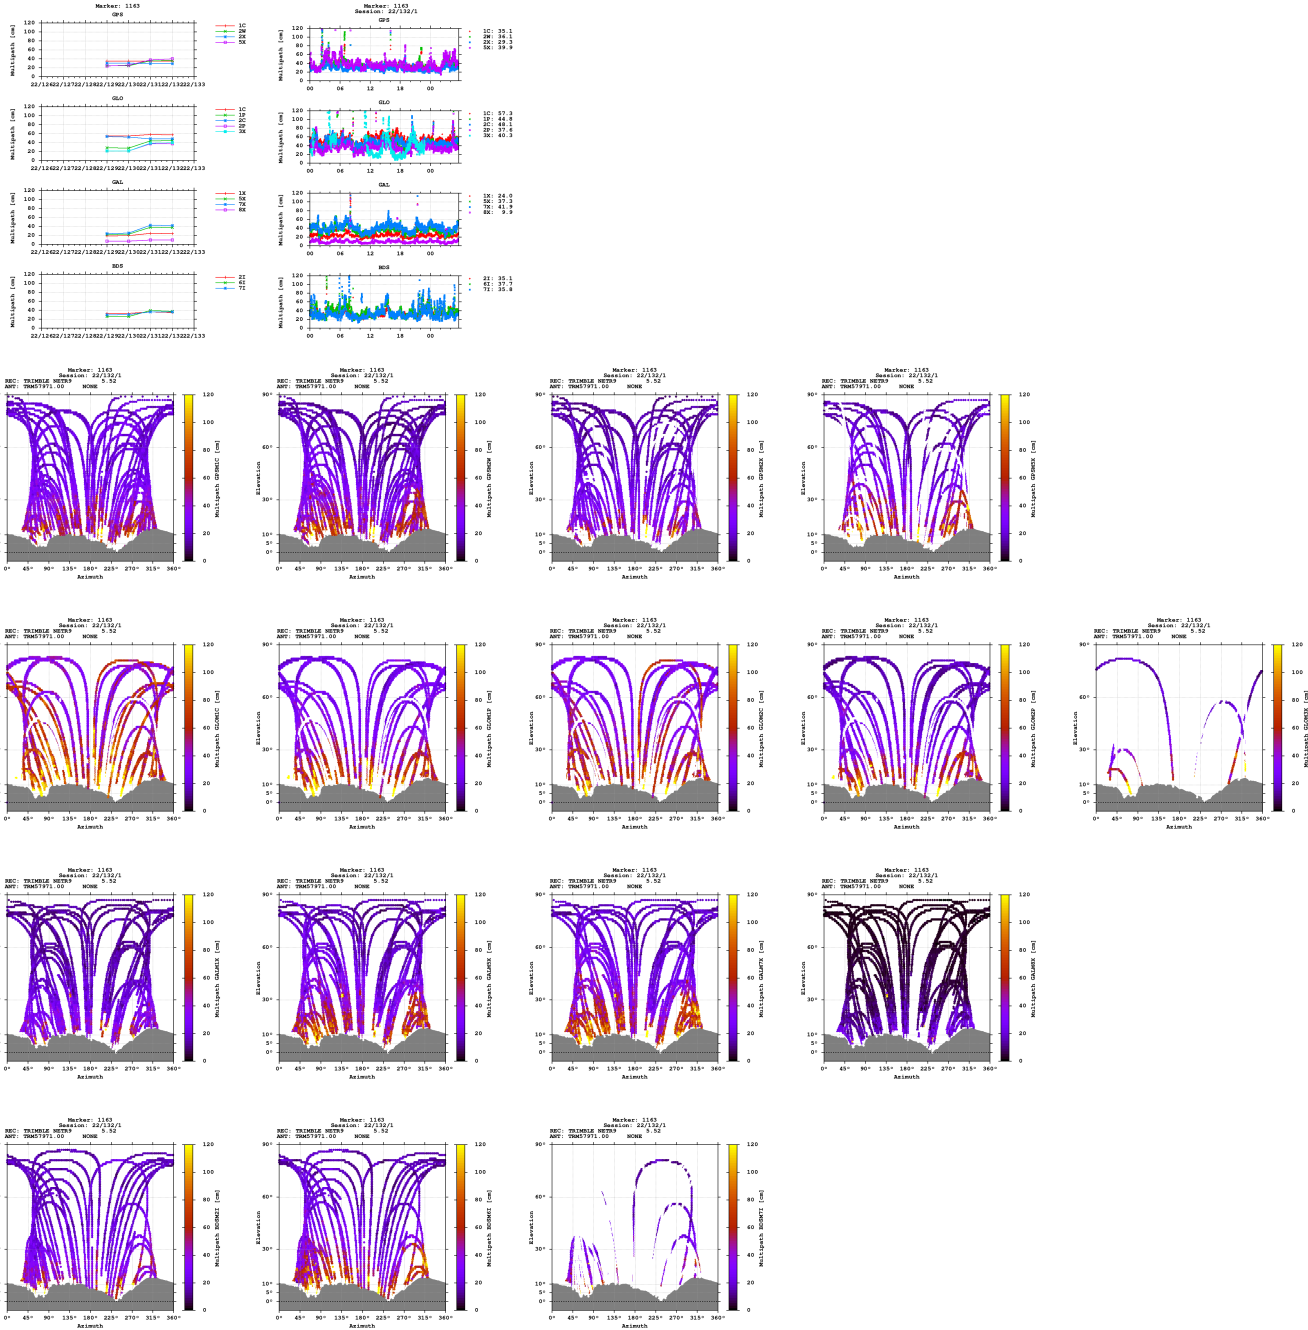


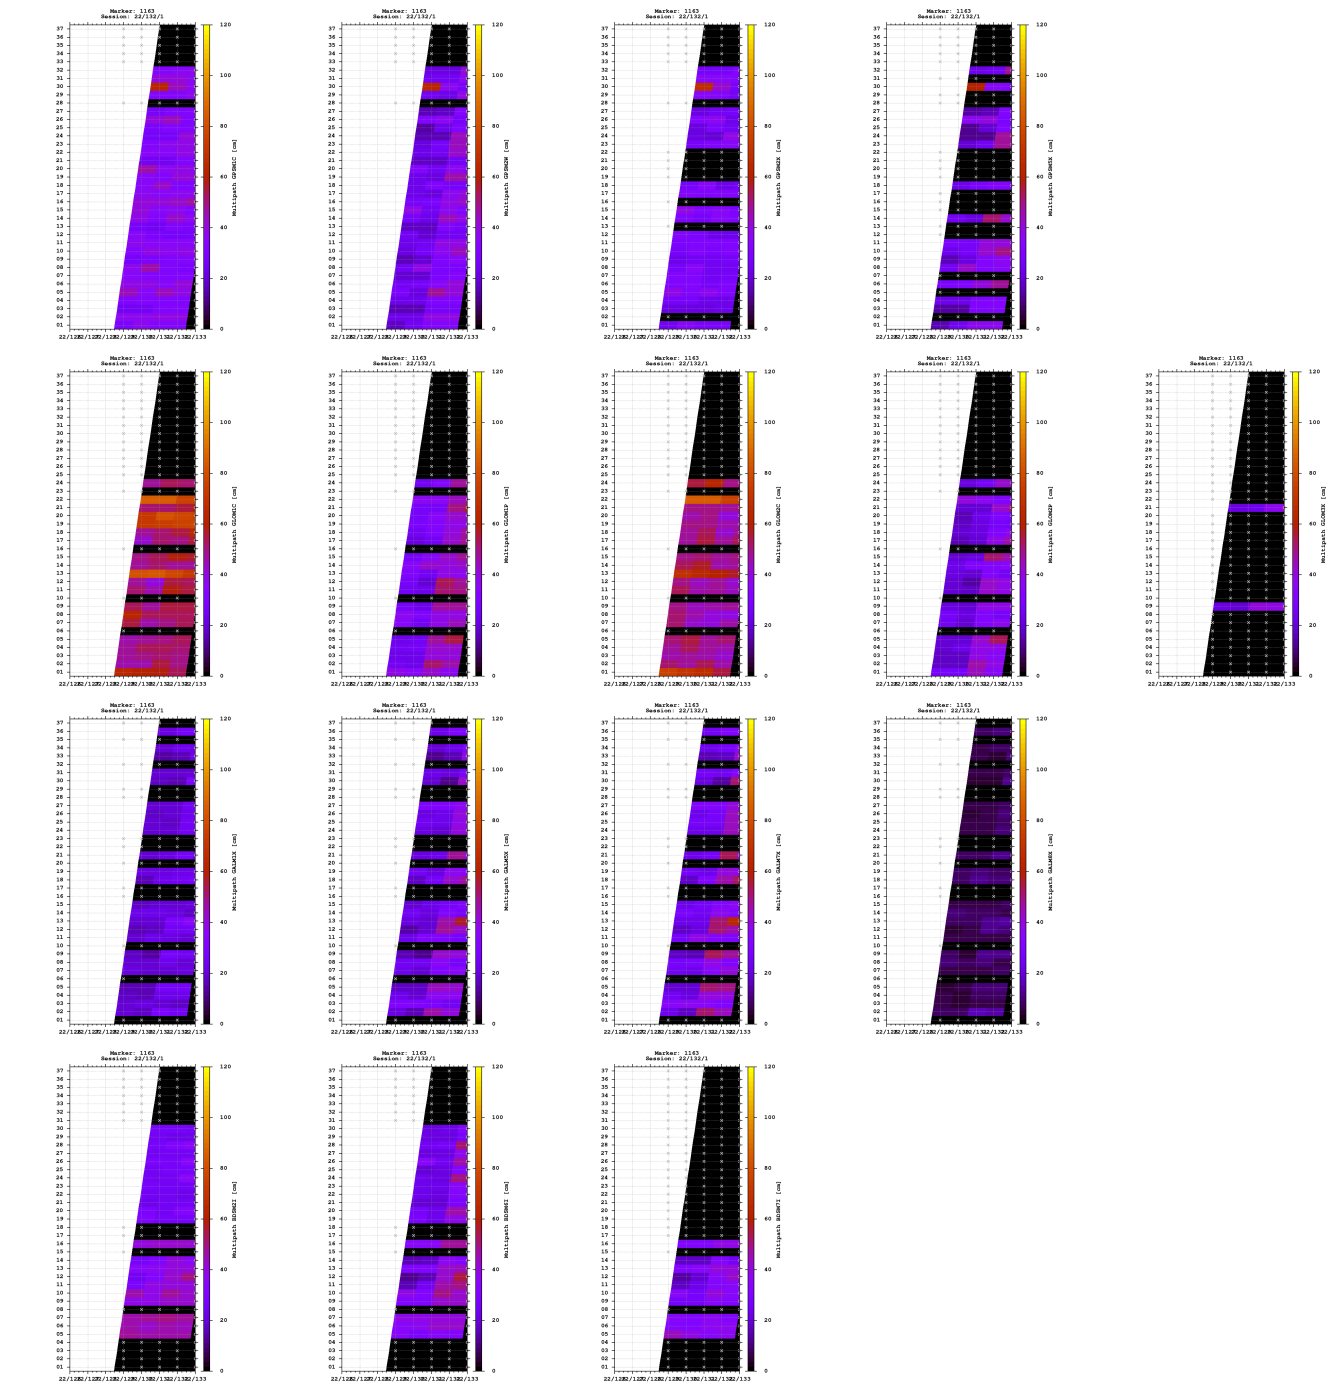

Signal-to-noise ratio

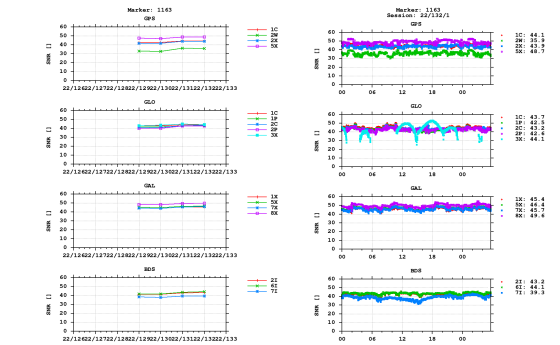


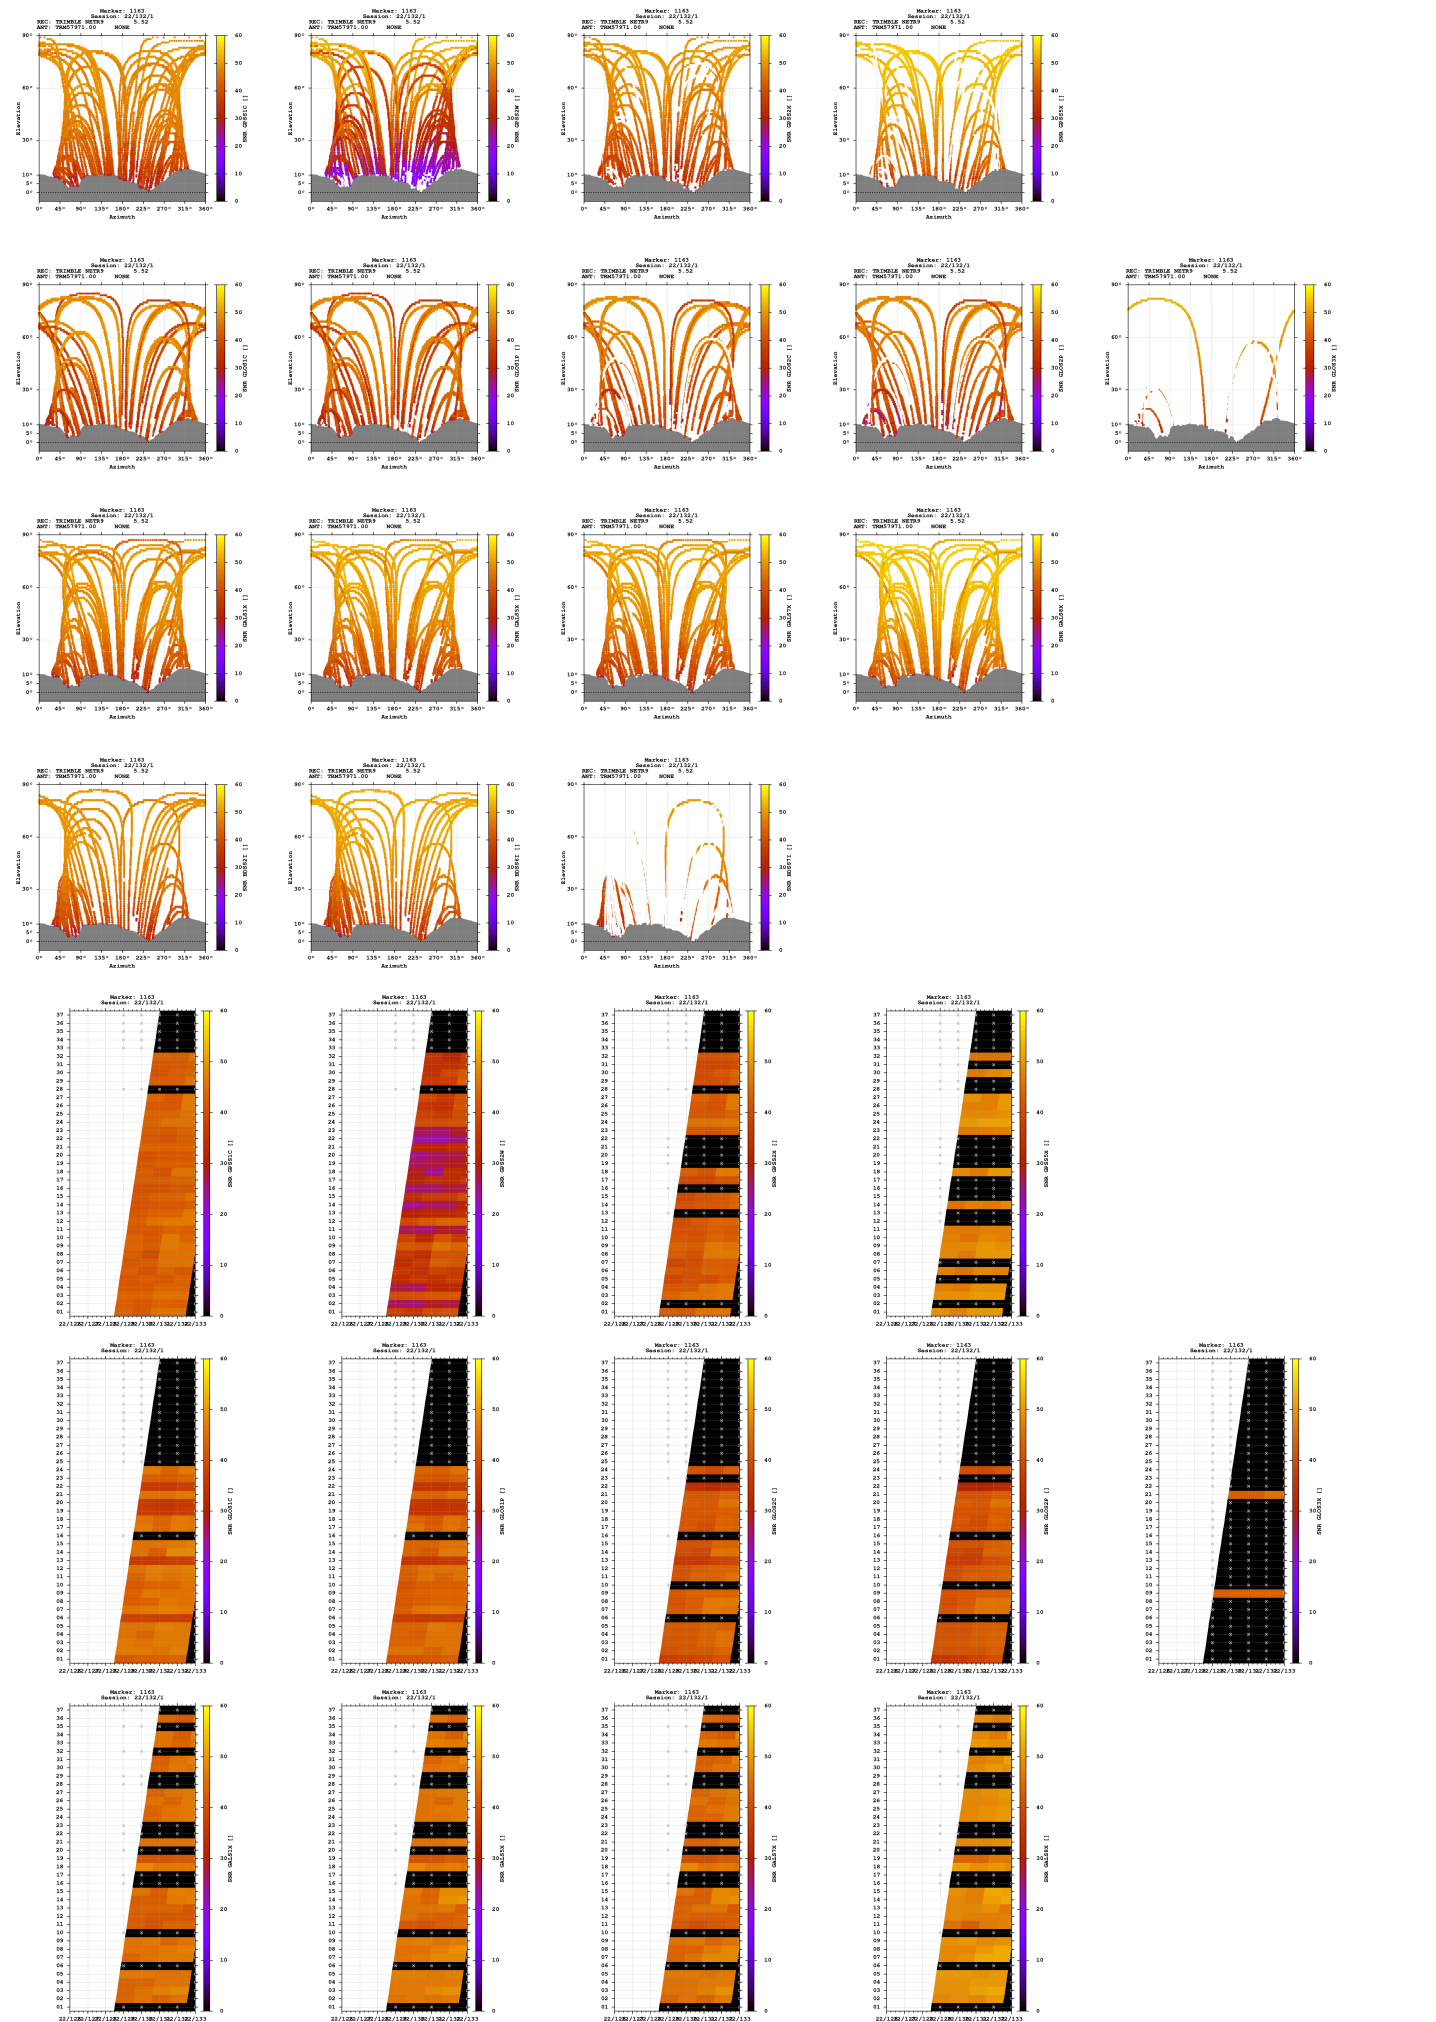

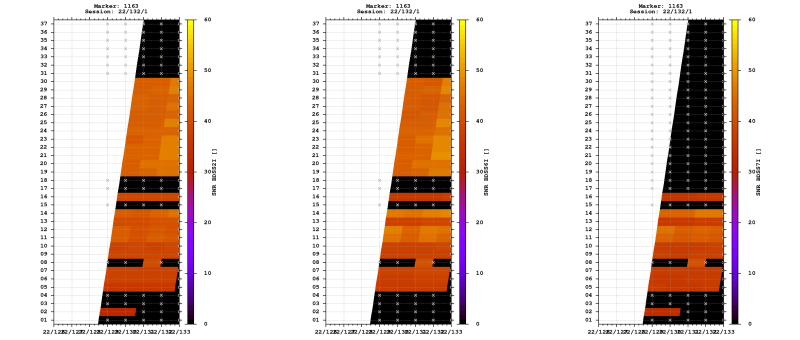


Estimates

2022-05-11 09:53:00	GPS	4333416.1666	506919.3424	4637984.2622	46.942098054	6.672088001	837.3998
2022-05-11 09:53:00	GLO	4333417.3706	506919.1763	4637985.3790	46.942097180	6.672083996	839.0191
2022-05-11 09:53:00	GAL	4333416.2455	506919.2707	4637984.0326	46.942096184	6.672086944	837.2799
2022-05-11 09:53:00	BDS	4333415.9284	506920.7542	4637987.5702	46.942118844	6.672106778	839.7673

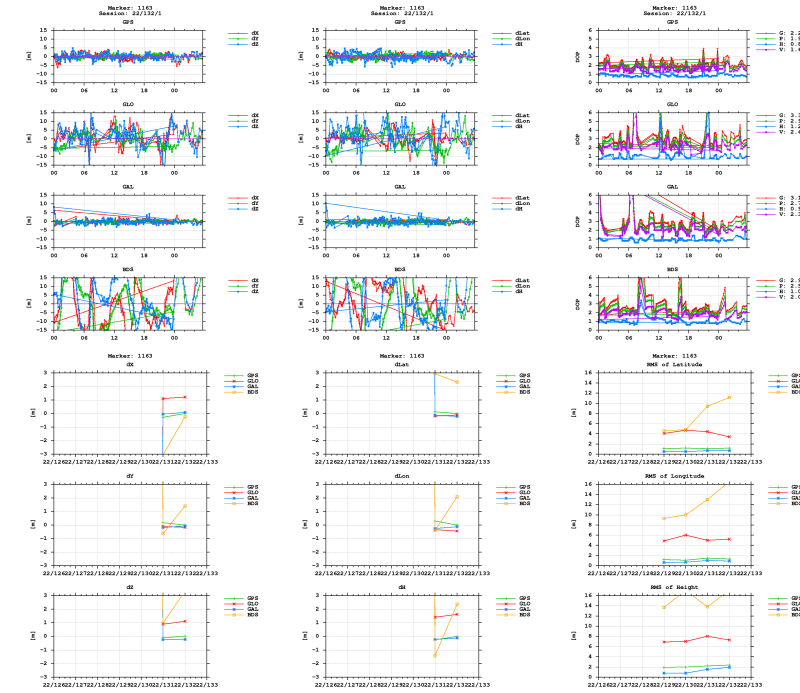

BNC



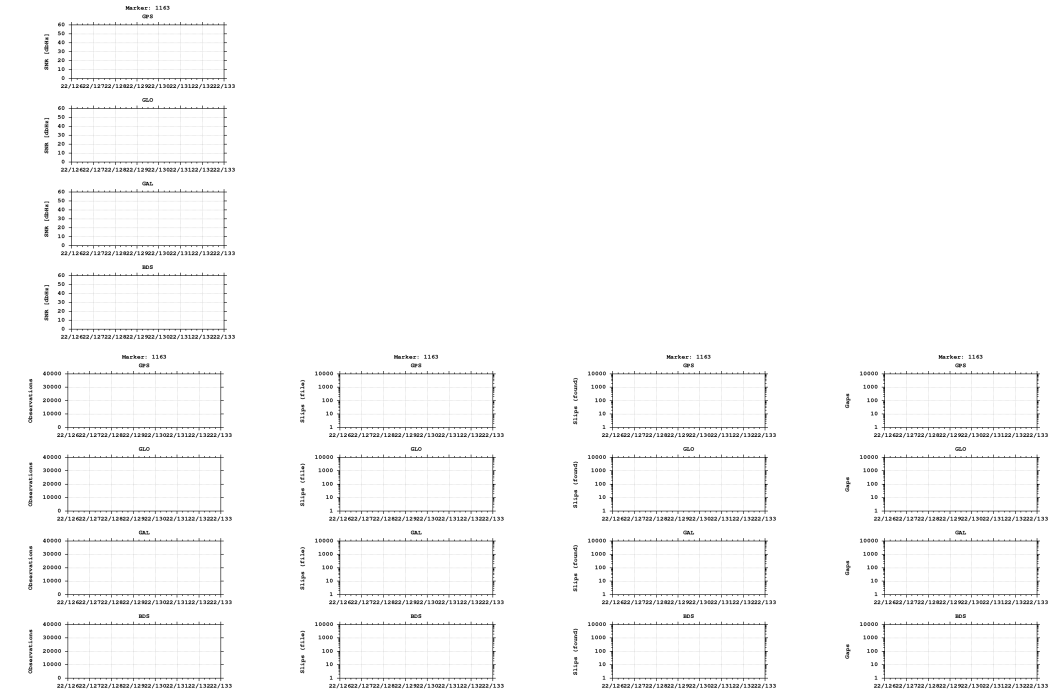

Equipment

2022-05-09 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)