


GNSS observation file monitoring for 0517


Last RINEX file: 05171311.220
RINEX version: 3.02
Marker: 1164
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

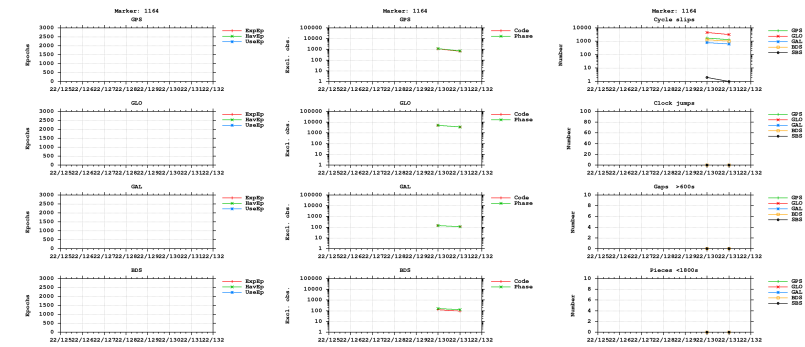



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

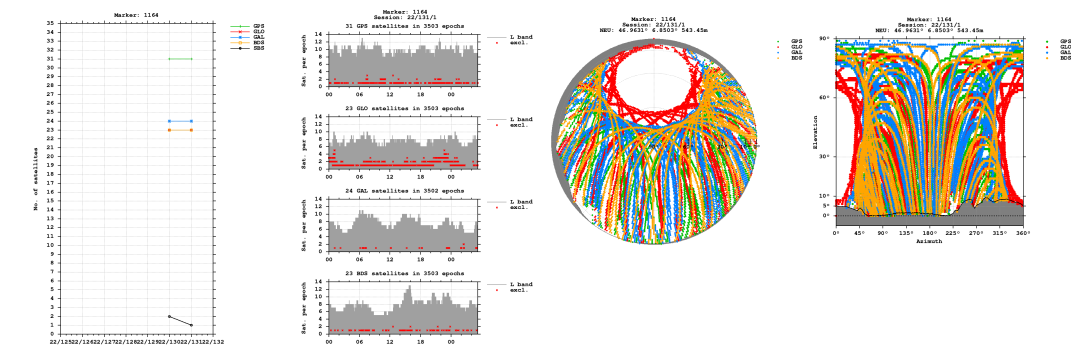


Bands

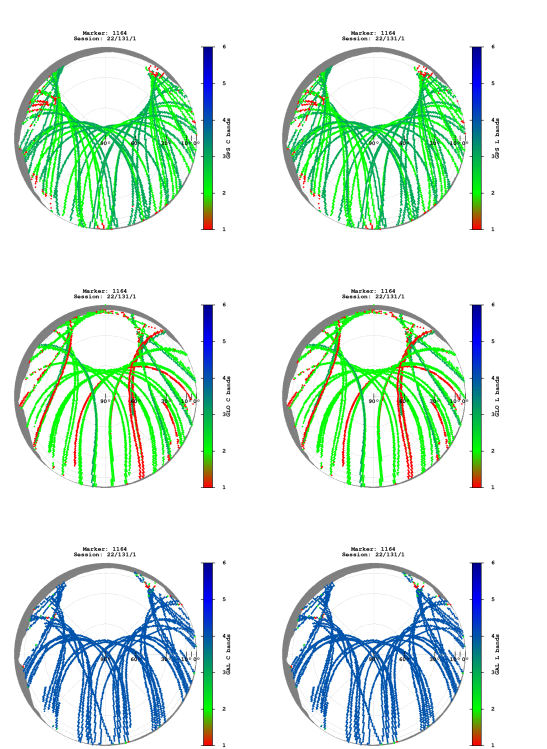


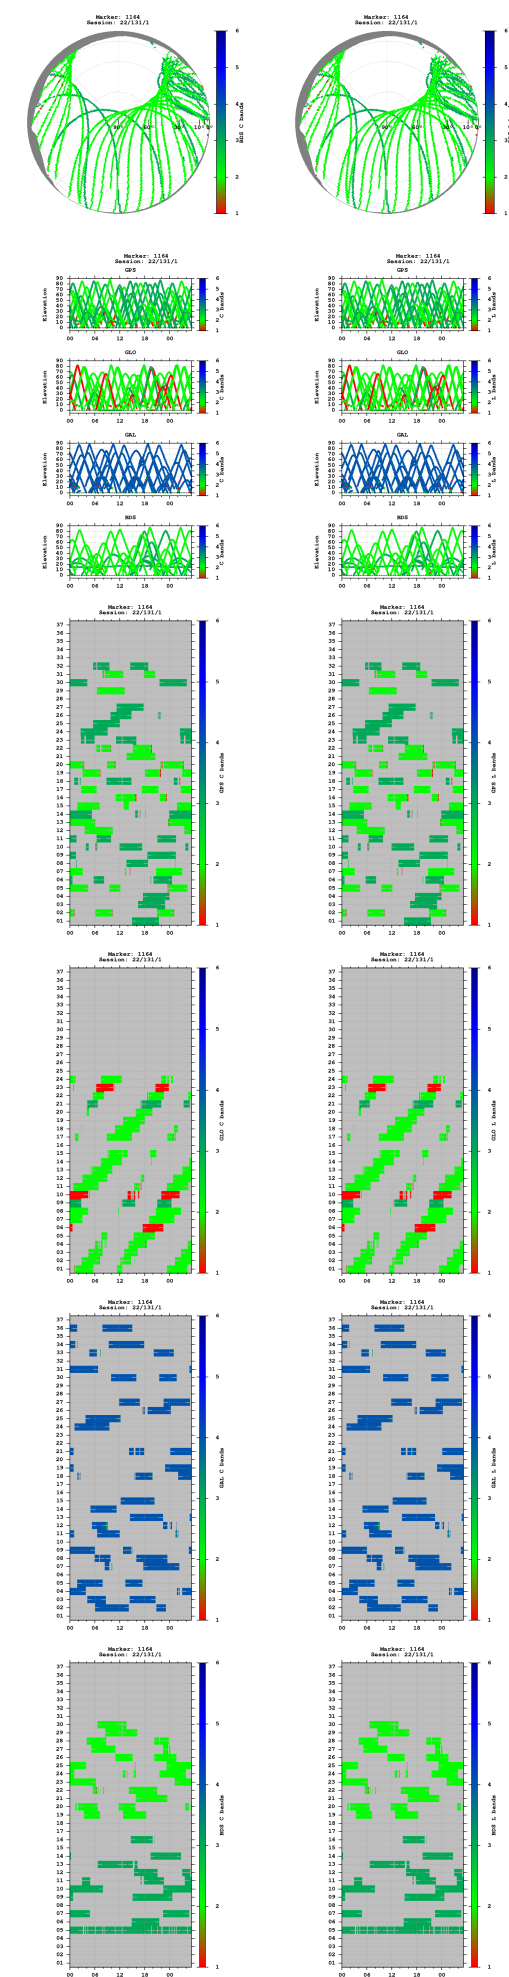


Observations

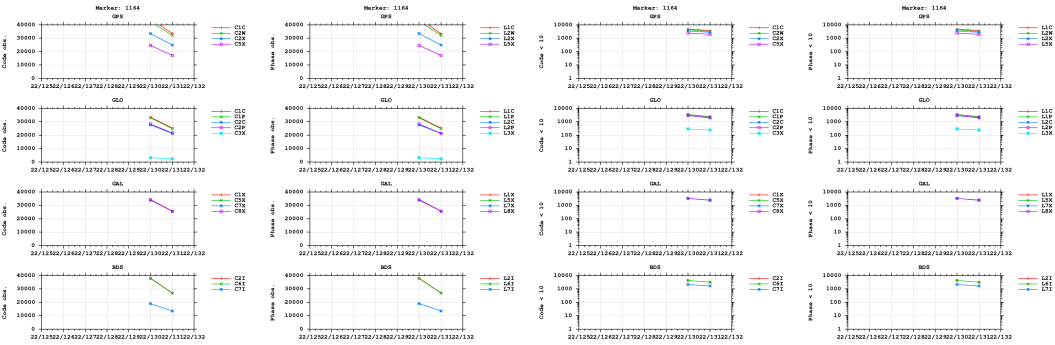


Multipath

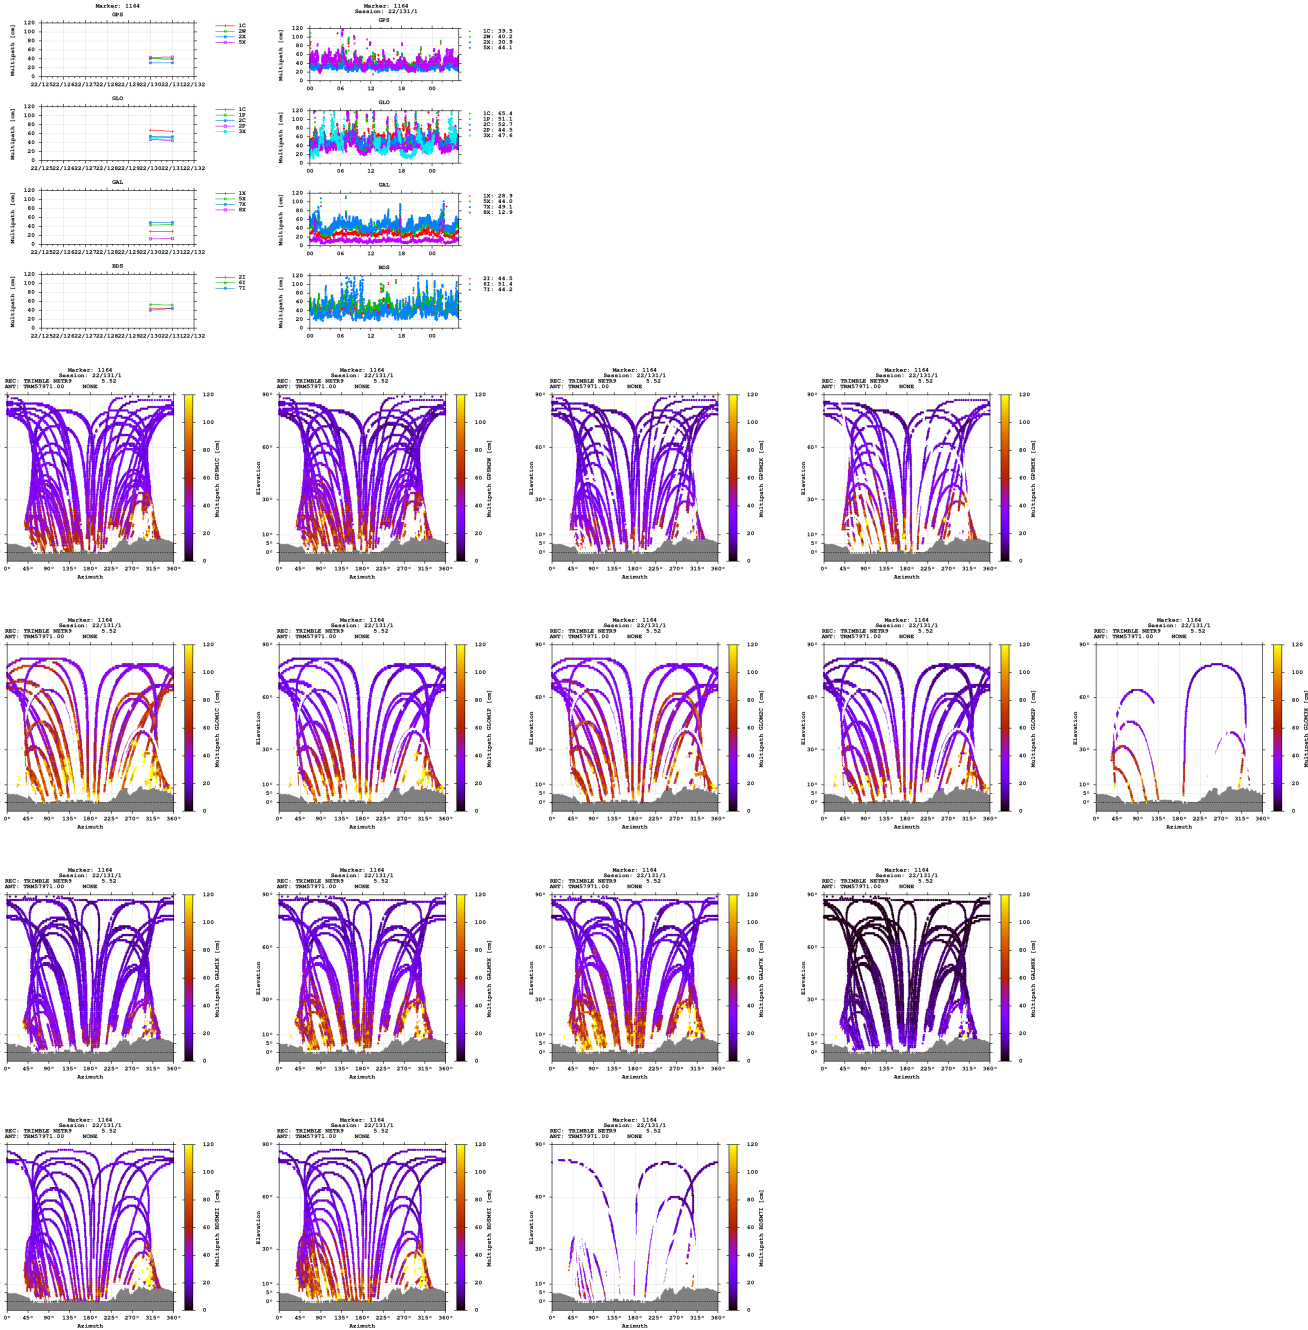


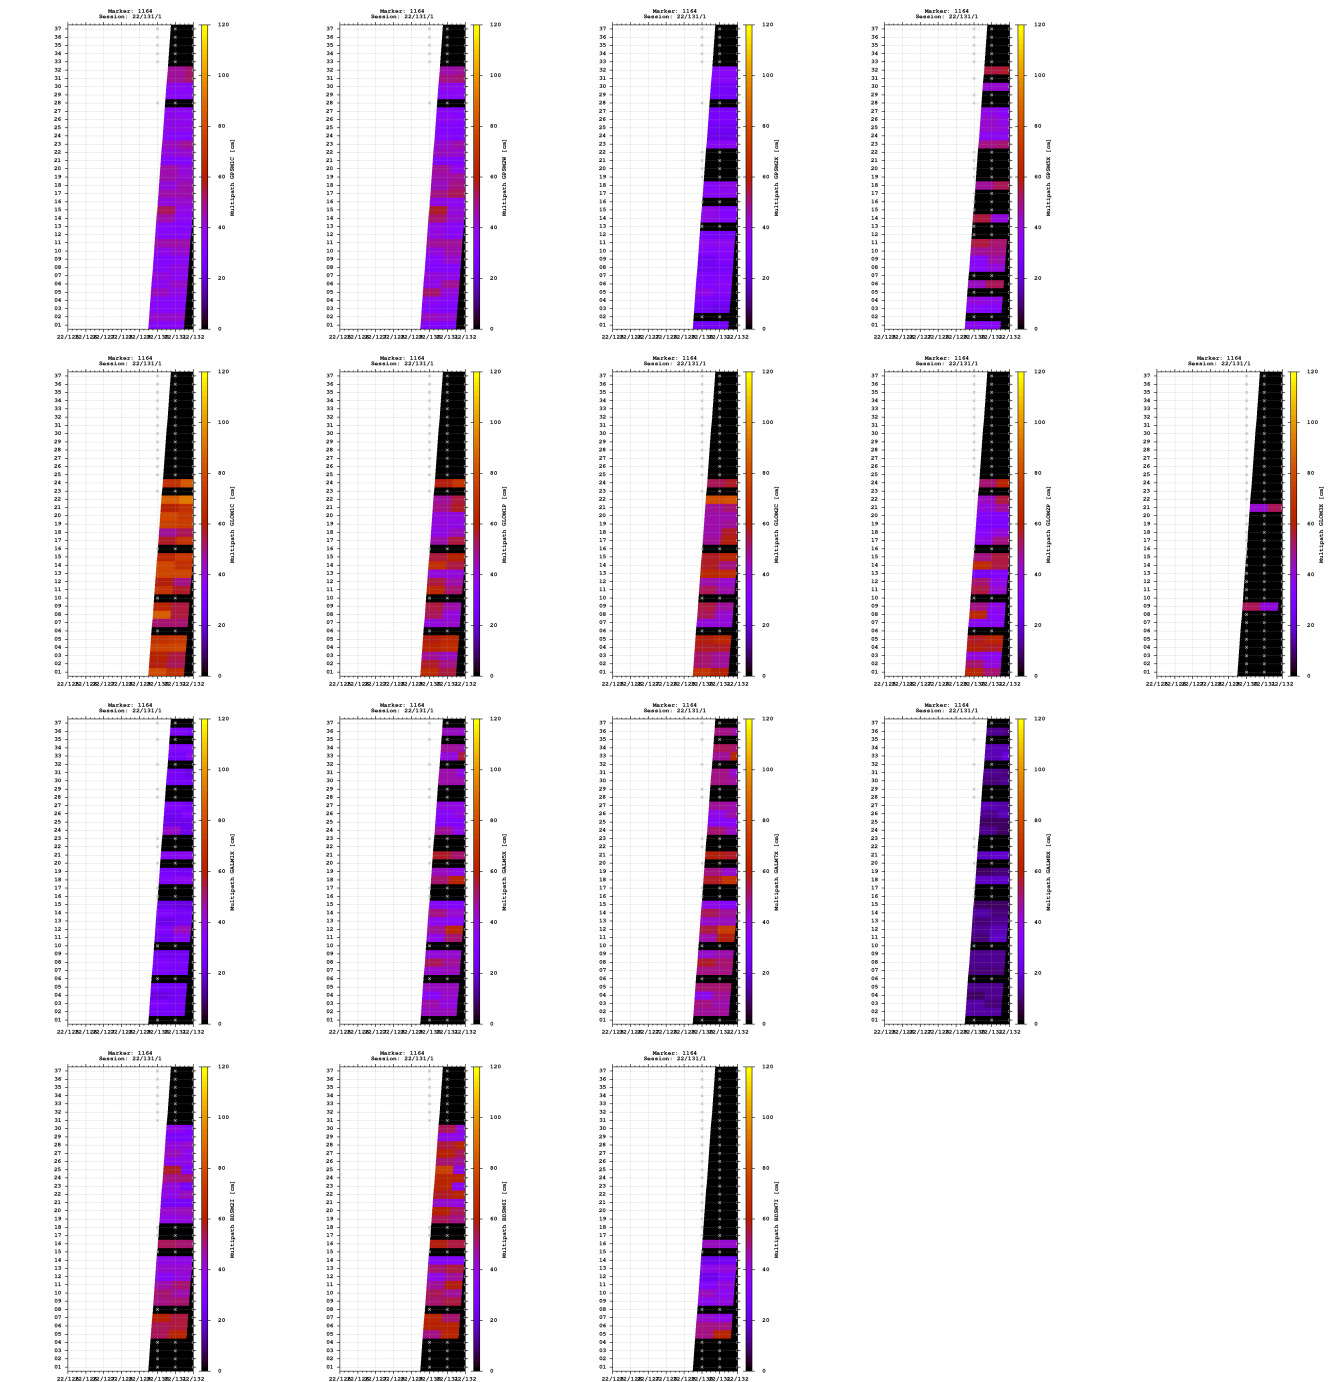

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

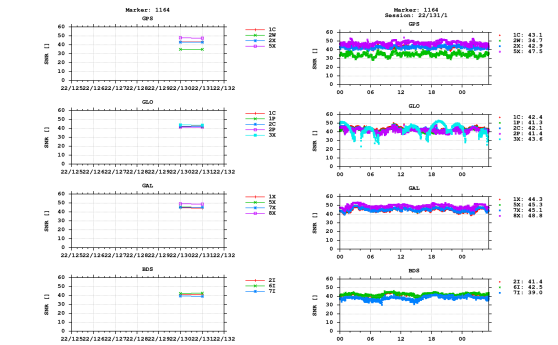


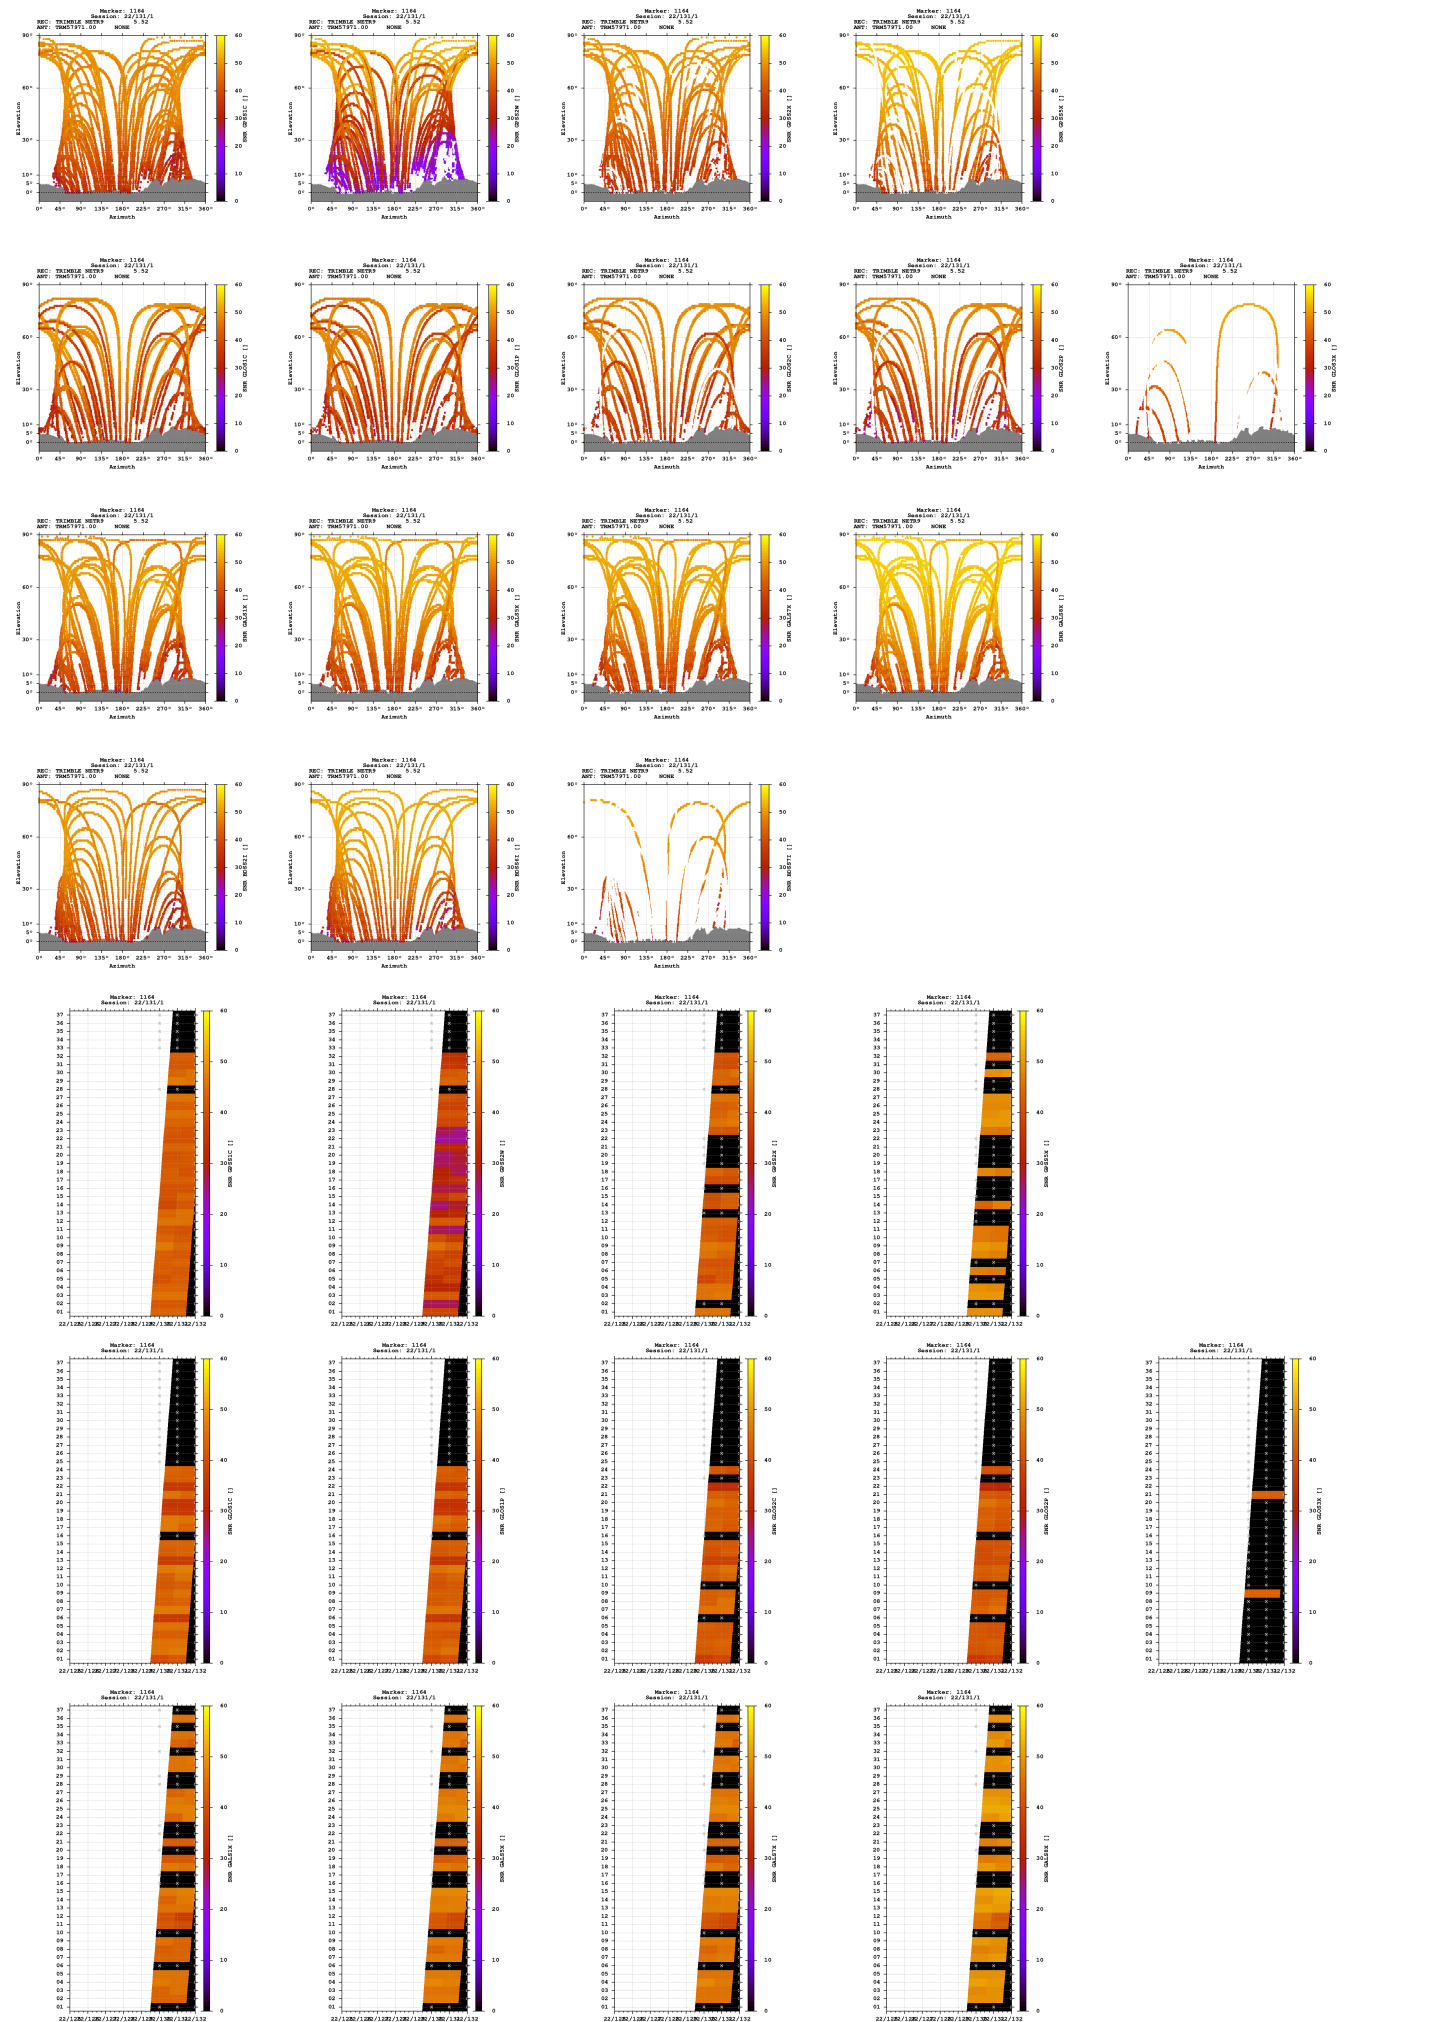



BNC



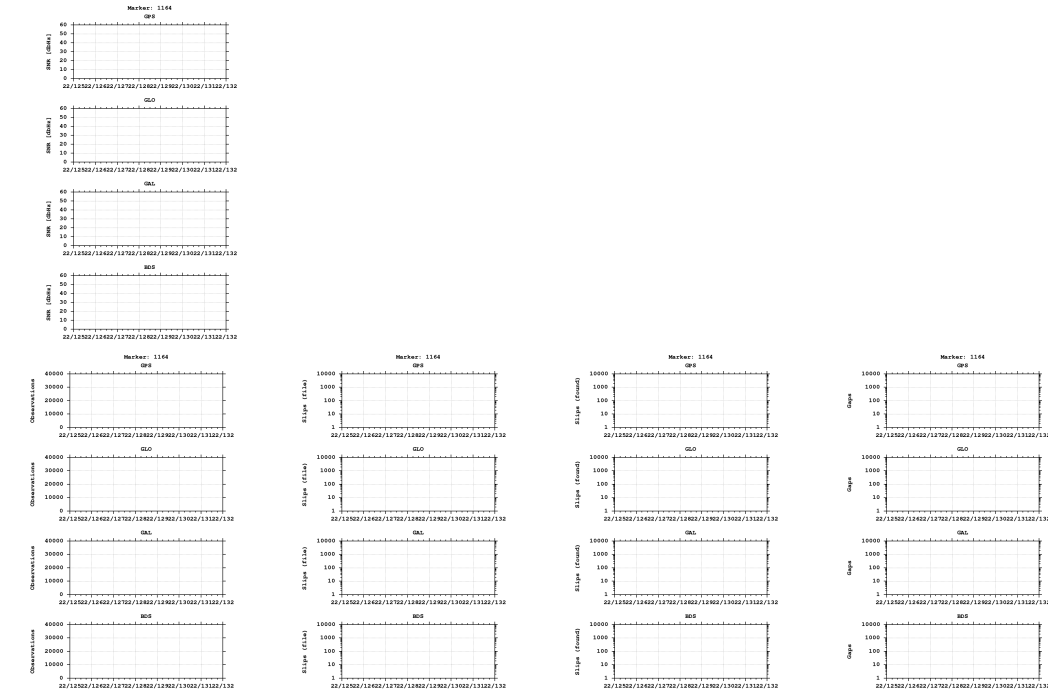

Equipment

2022-05-10 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)