


GNSS observation file monitoring for 0518


Last RINEX file: 05181301.22O
RINEX version: 3.02
Marker: NE_347
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

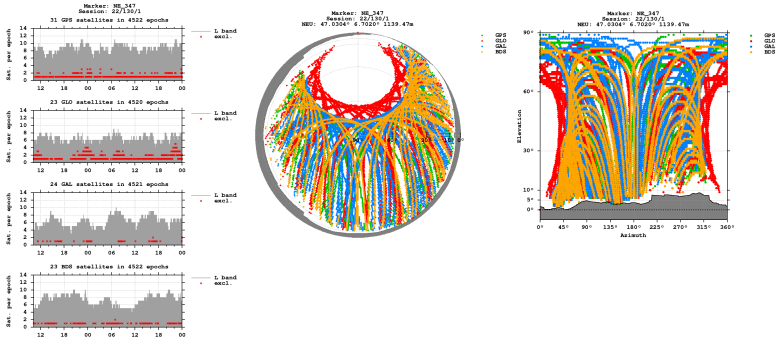


Bands

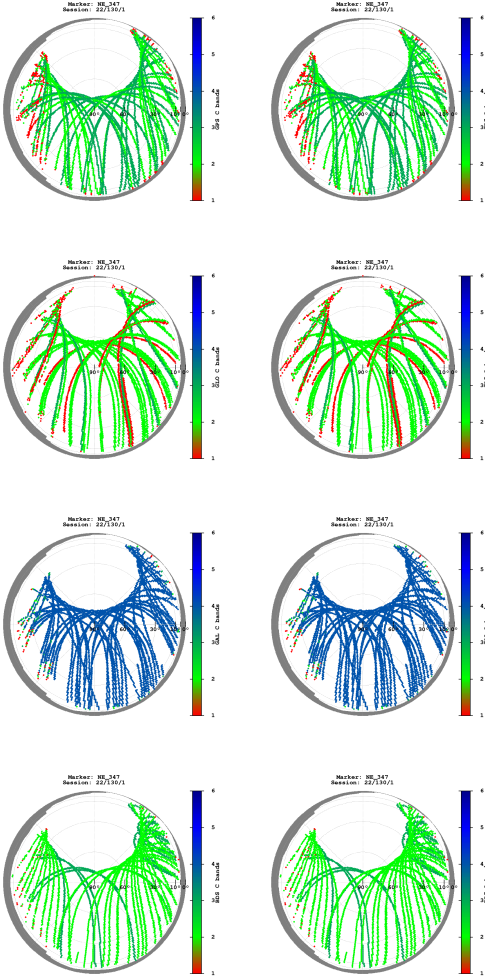


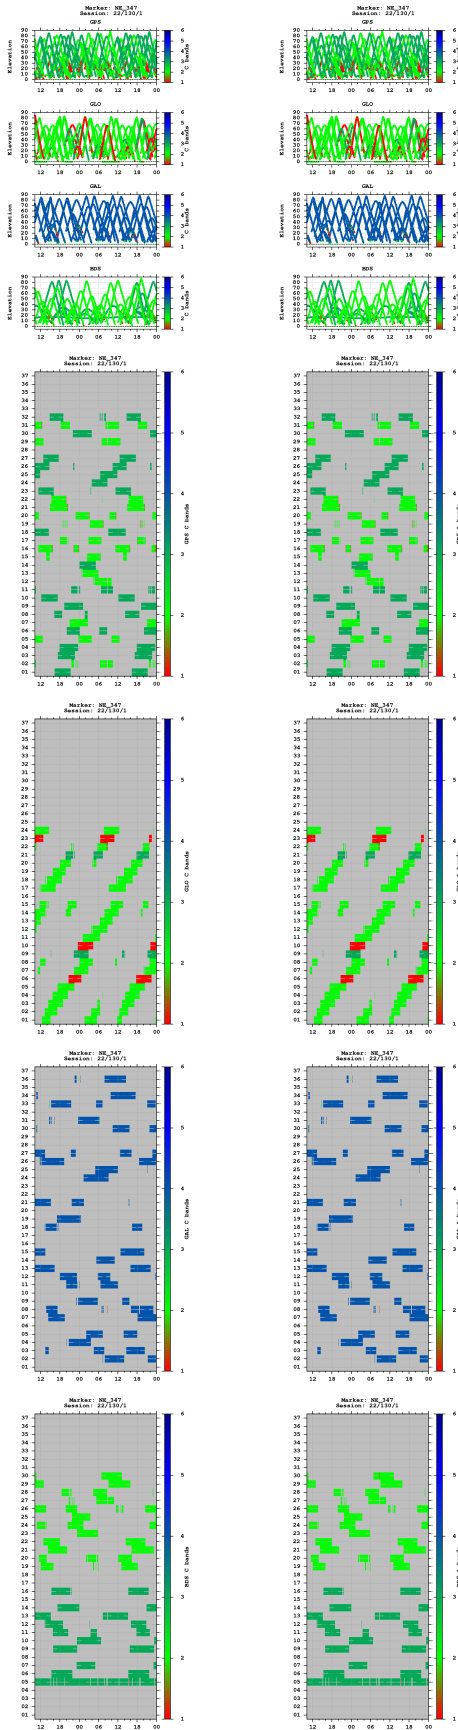


Multipath

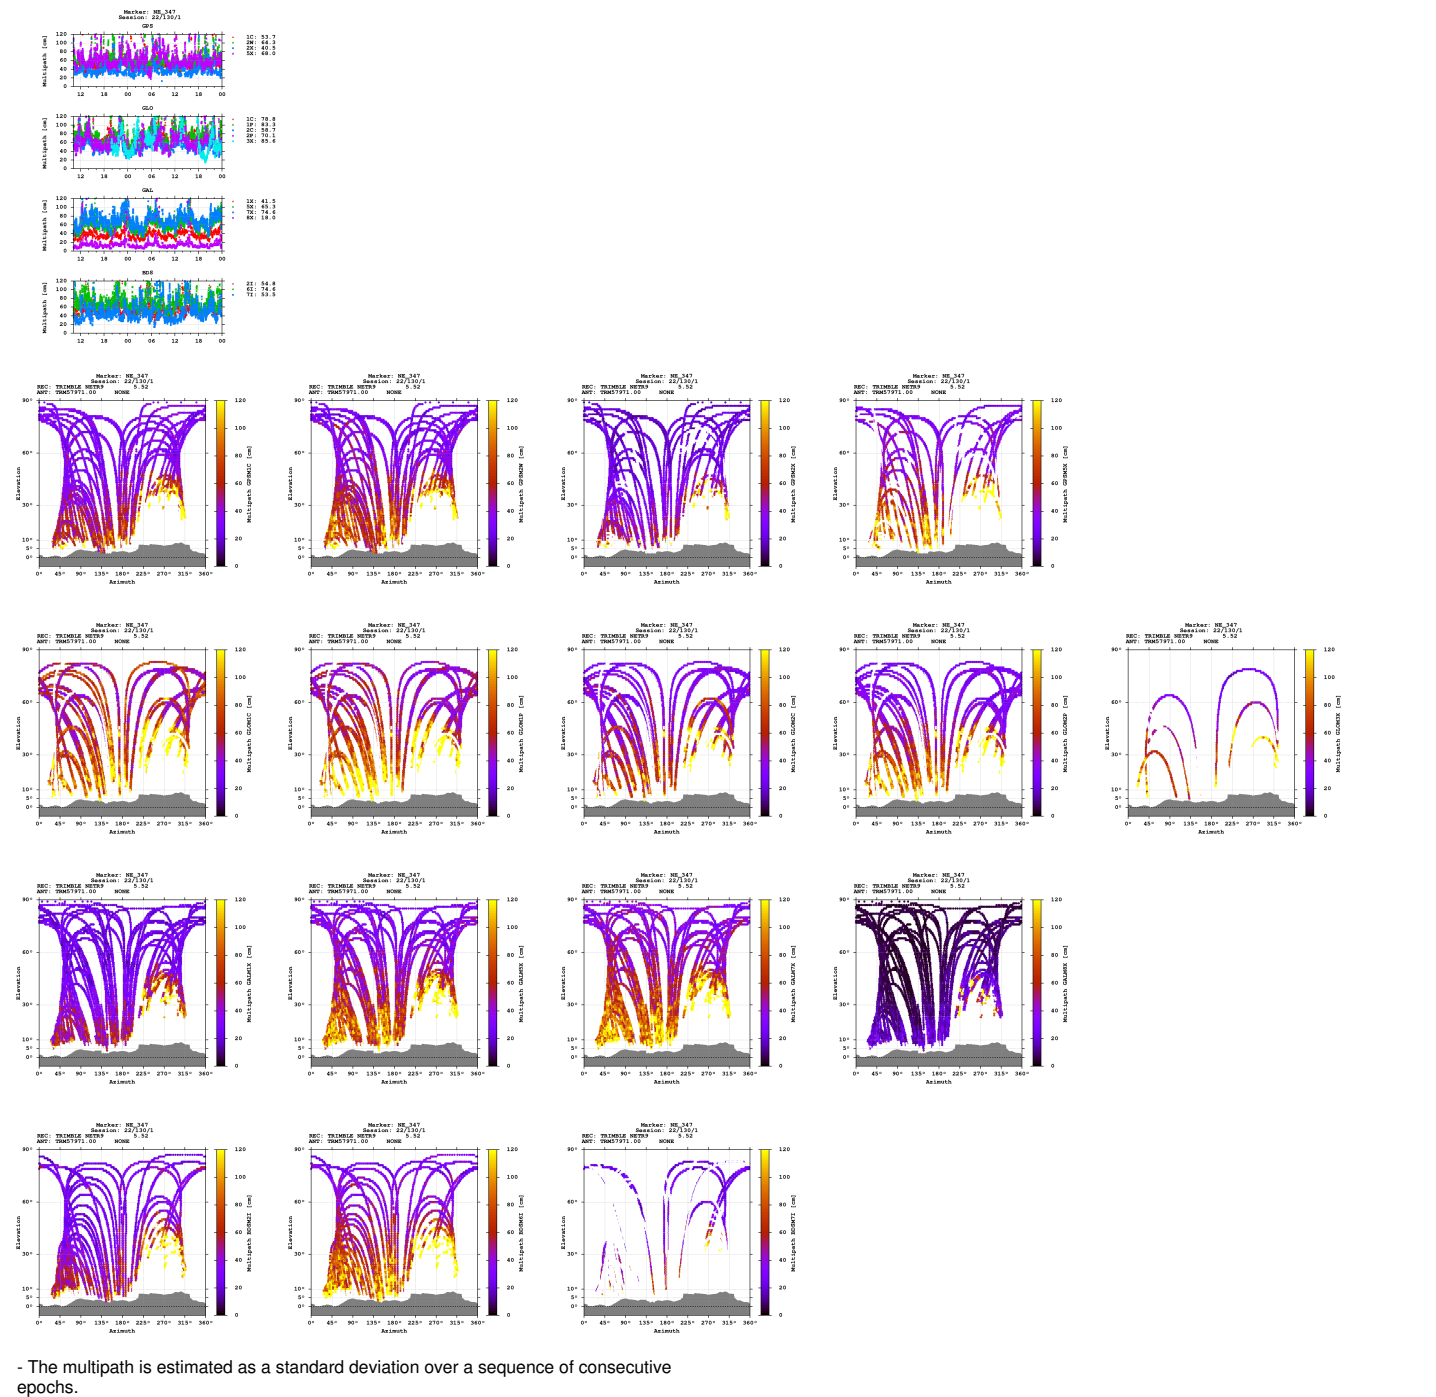


Signal-to-noise ratio

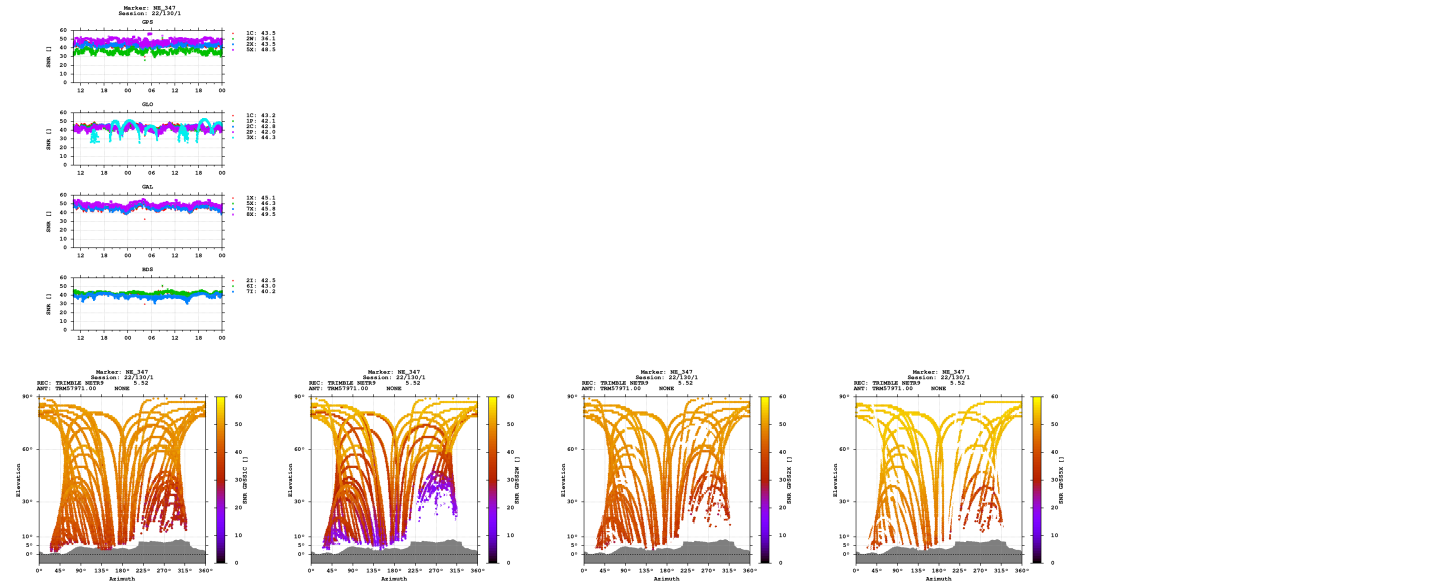

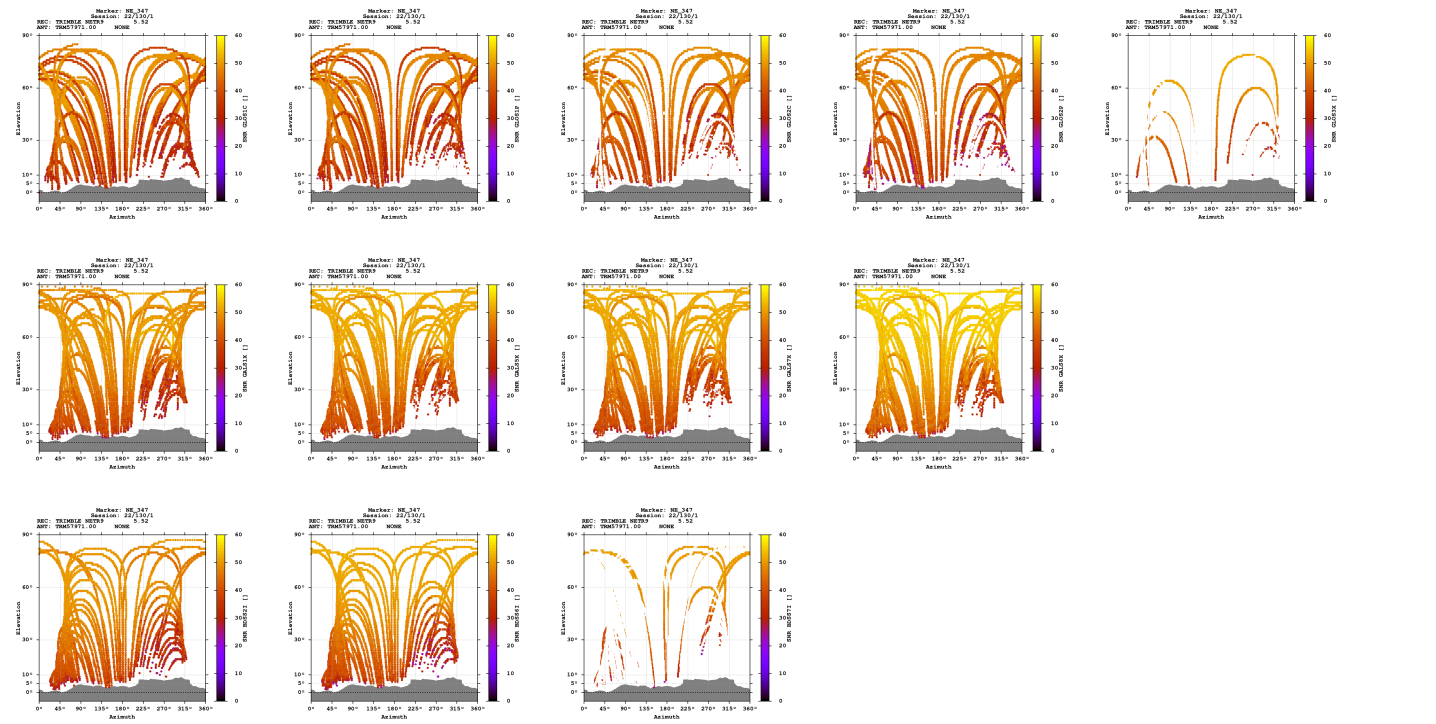

Estimates

2022-05-10 10:14:30	GPS	4326228.9808	508367.6147	4644899.8186	47.030360852	6.701992334	1139.4719
2022-05-10 10:14:30	GLO	4326230.7487	508367.8364	4644900.1066	47.030350892	6.701992515	1140.8971
2022-05-10 10:14:30	GAL	4326229.9642	508367.6878	4644900.2833	47.030357217	6.701991778	1140.4835
2022-05-10 10:14:30	BDS	4326229.5262	508368.1458	4644901.5719	47.030367627	6.701998433	1141.1663

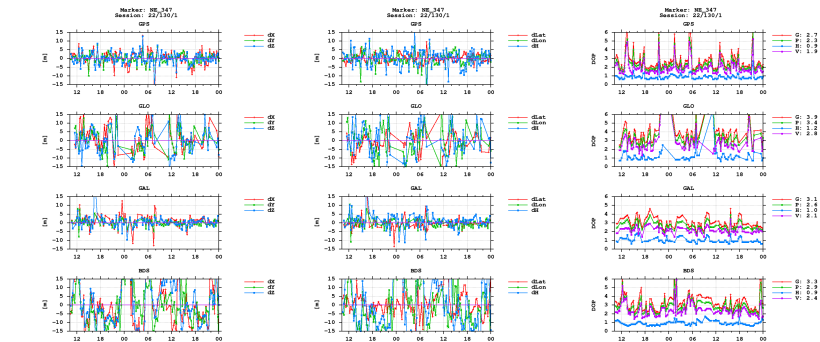

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)