

GNSS observation file monitoring for 0518

Last RINEX file: 05181311.220


RINEX version: 3.02

Marker: NE_347

Receiver: 518 TRIMBLE NETR9 5.52

Antenna: 518 TRM57971.00 NONE


Epochs

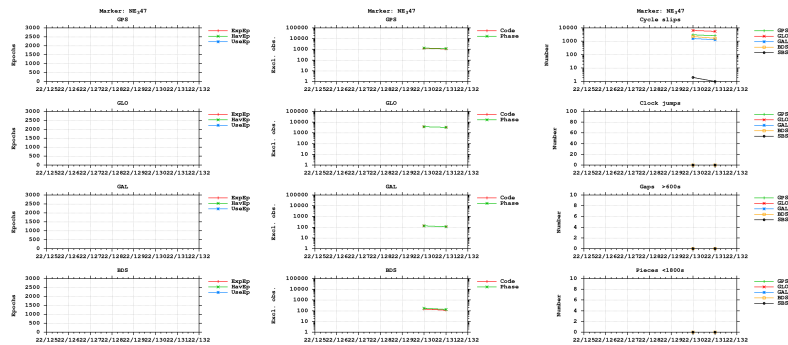


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

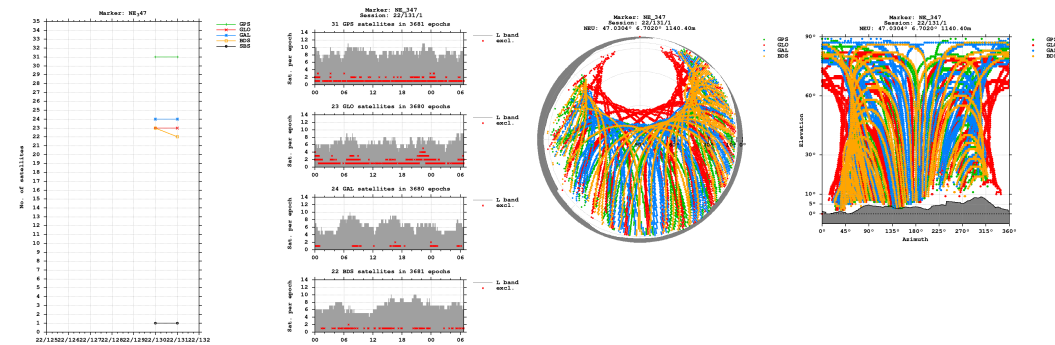


Bands

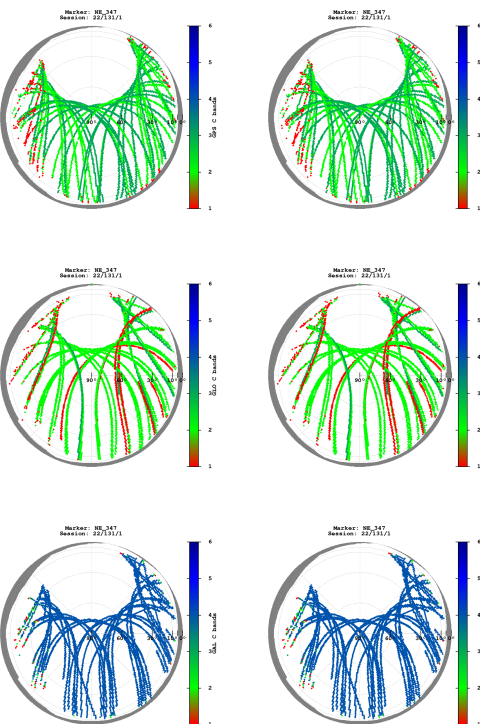


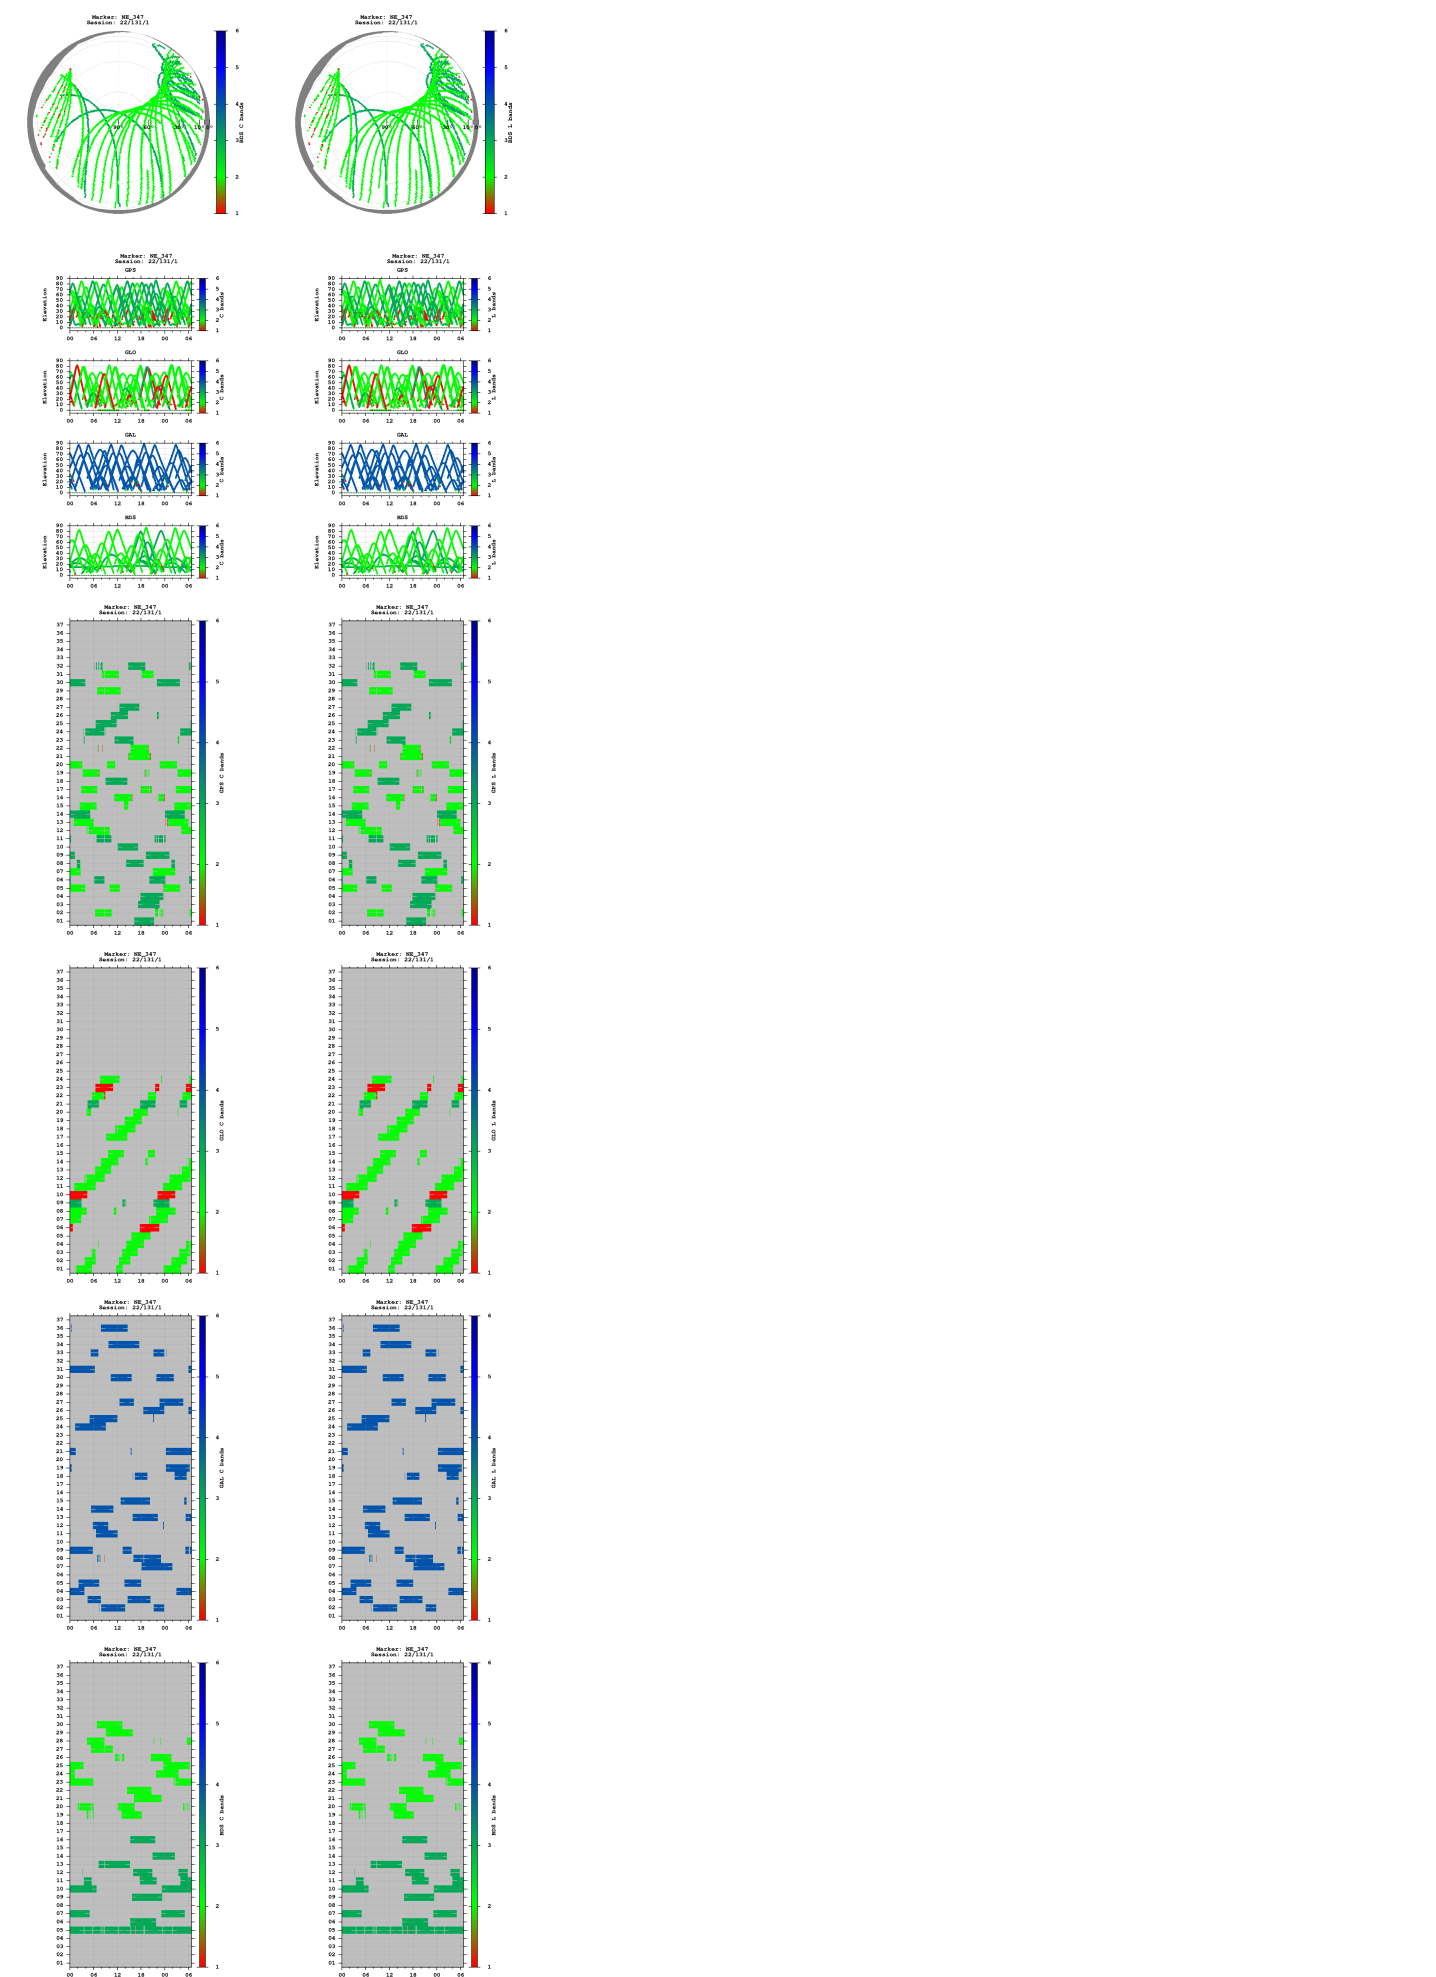


Observations

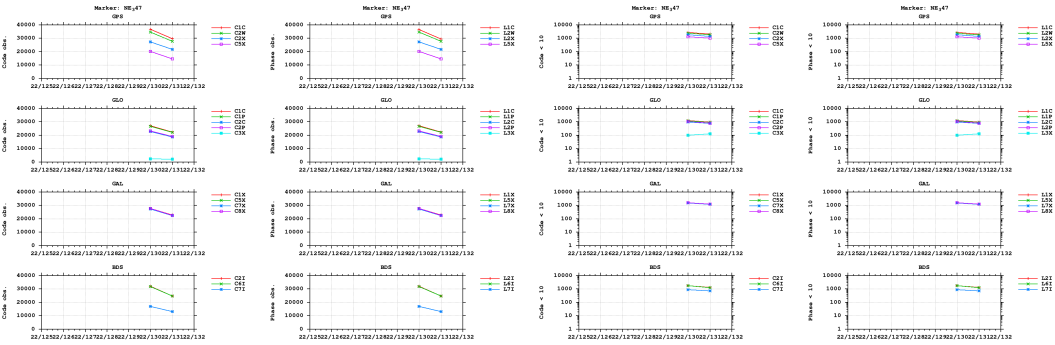


Multipath

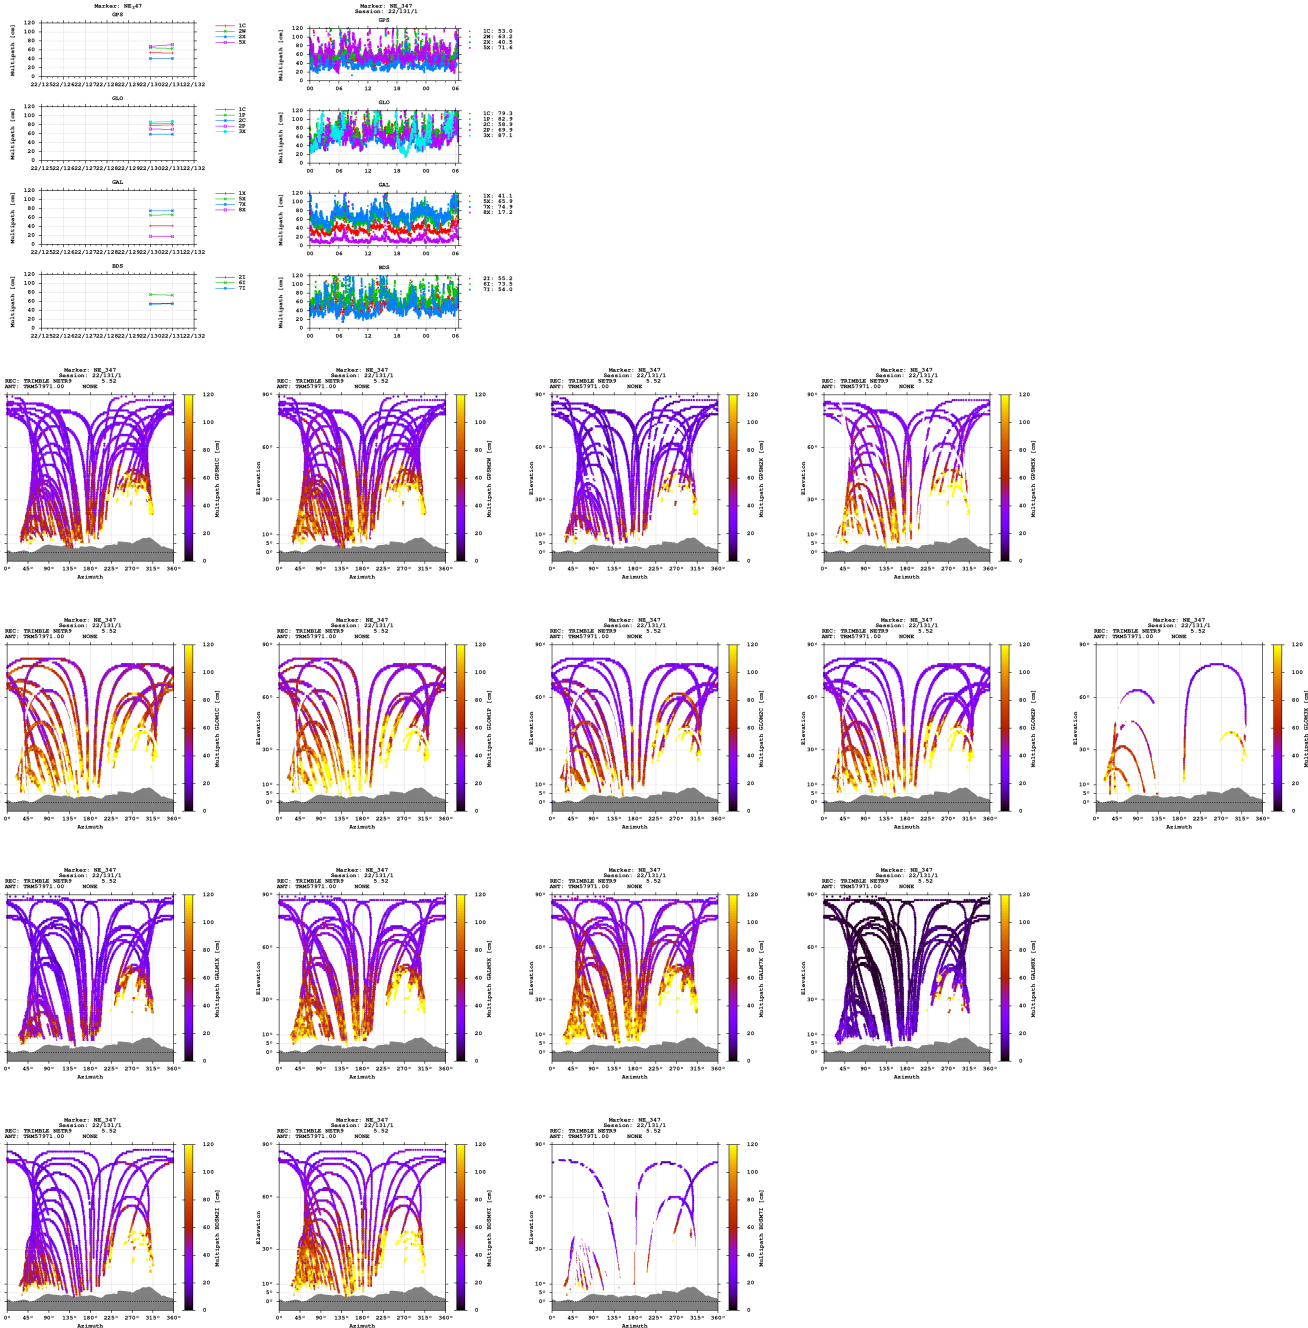


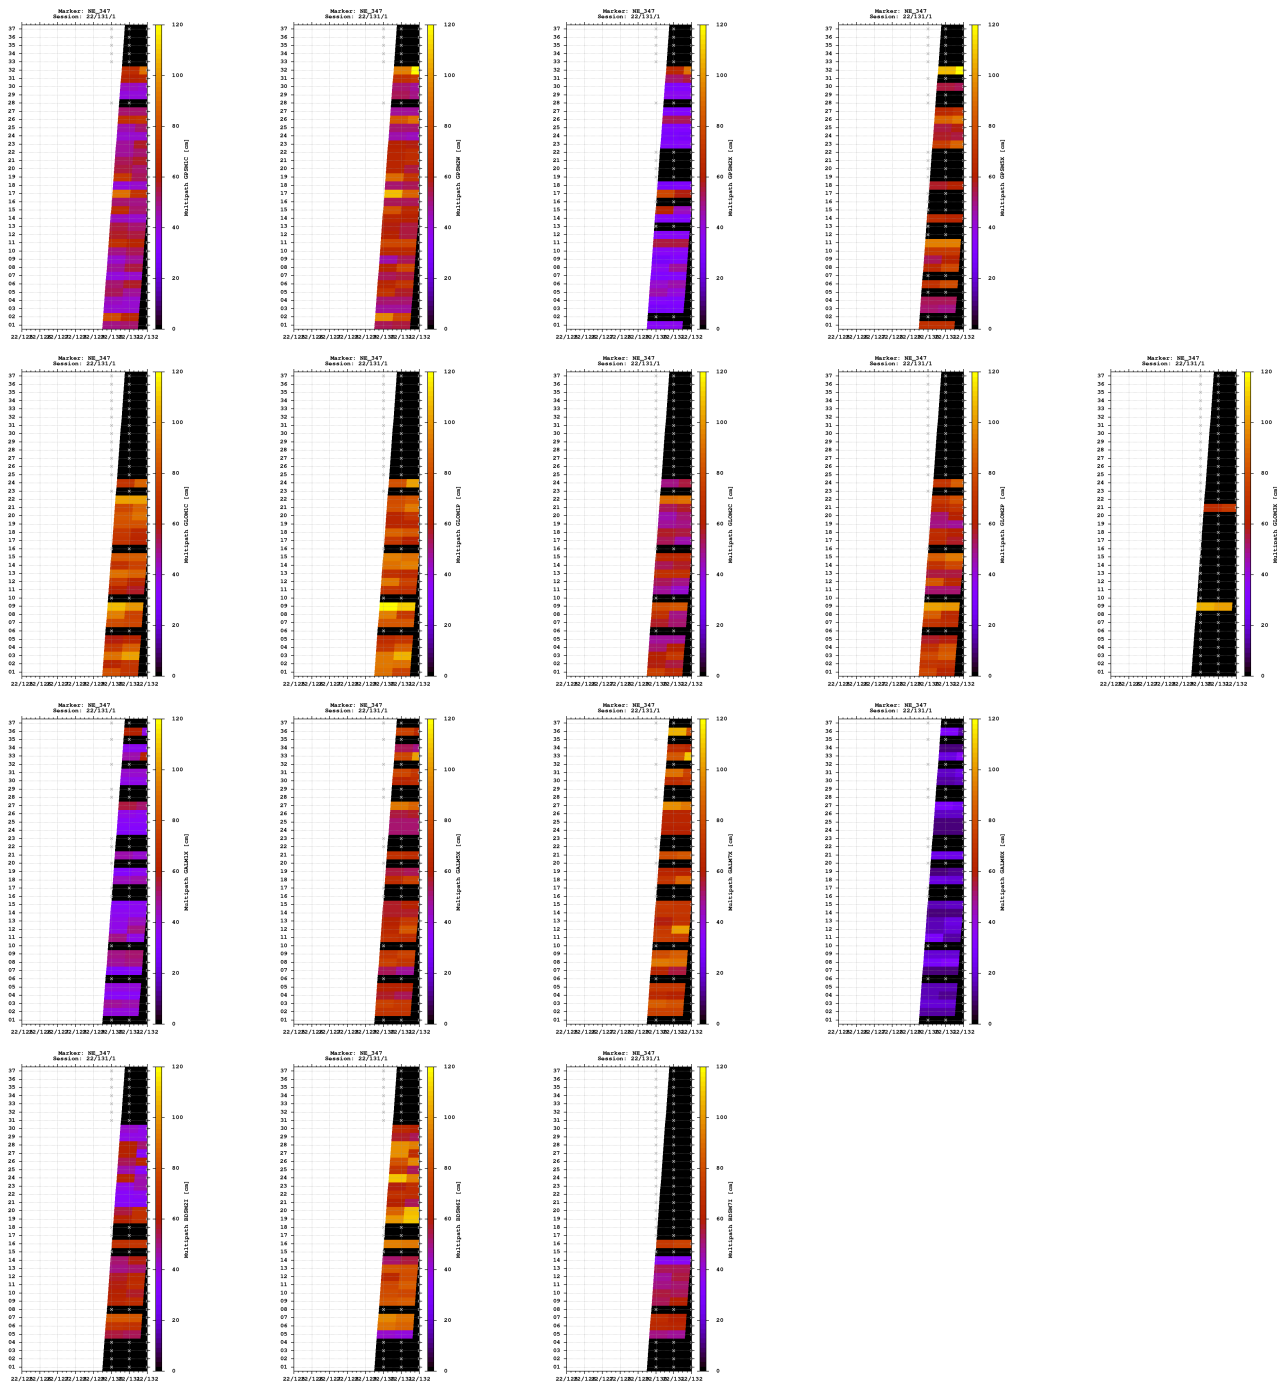


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

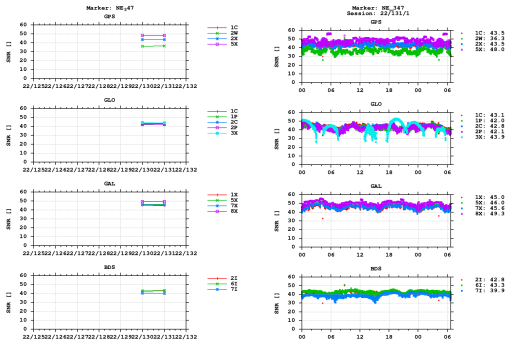


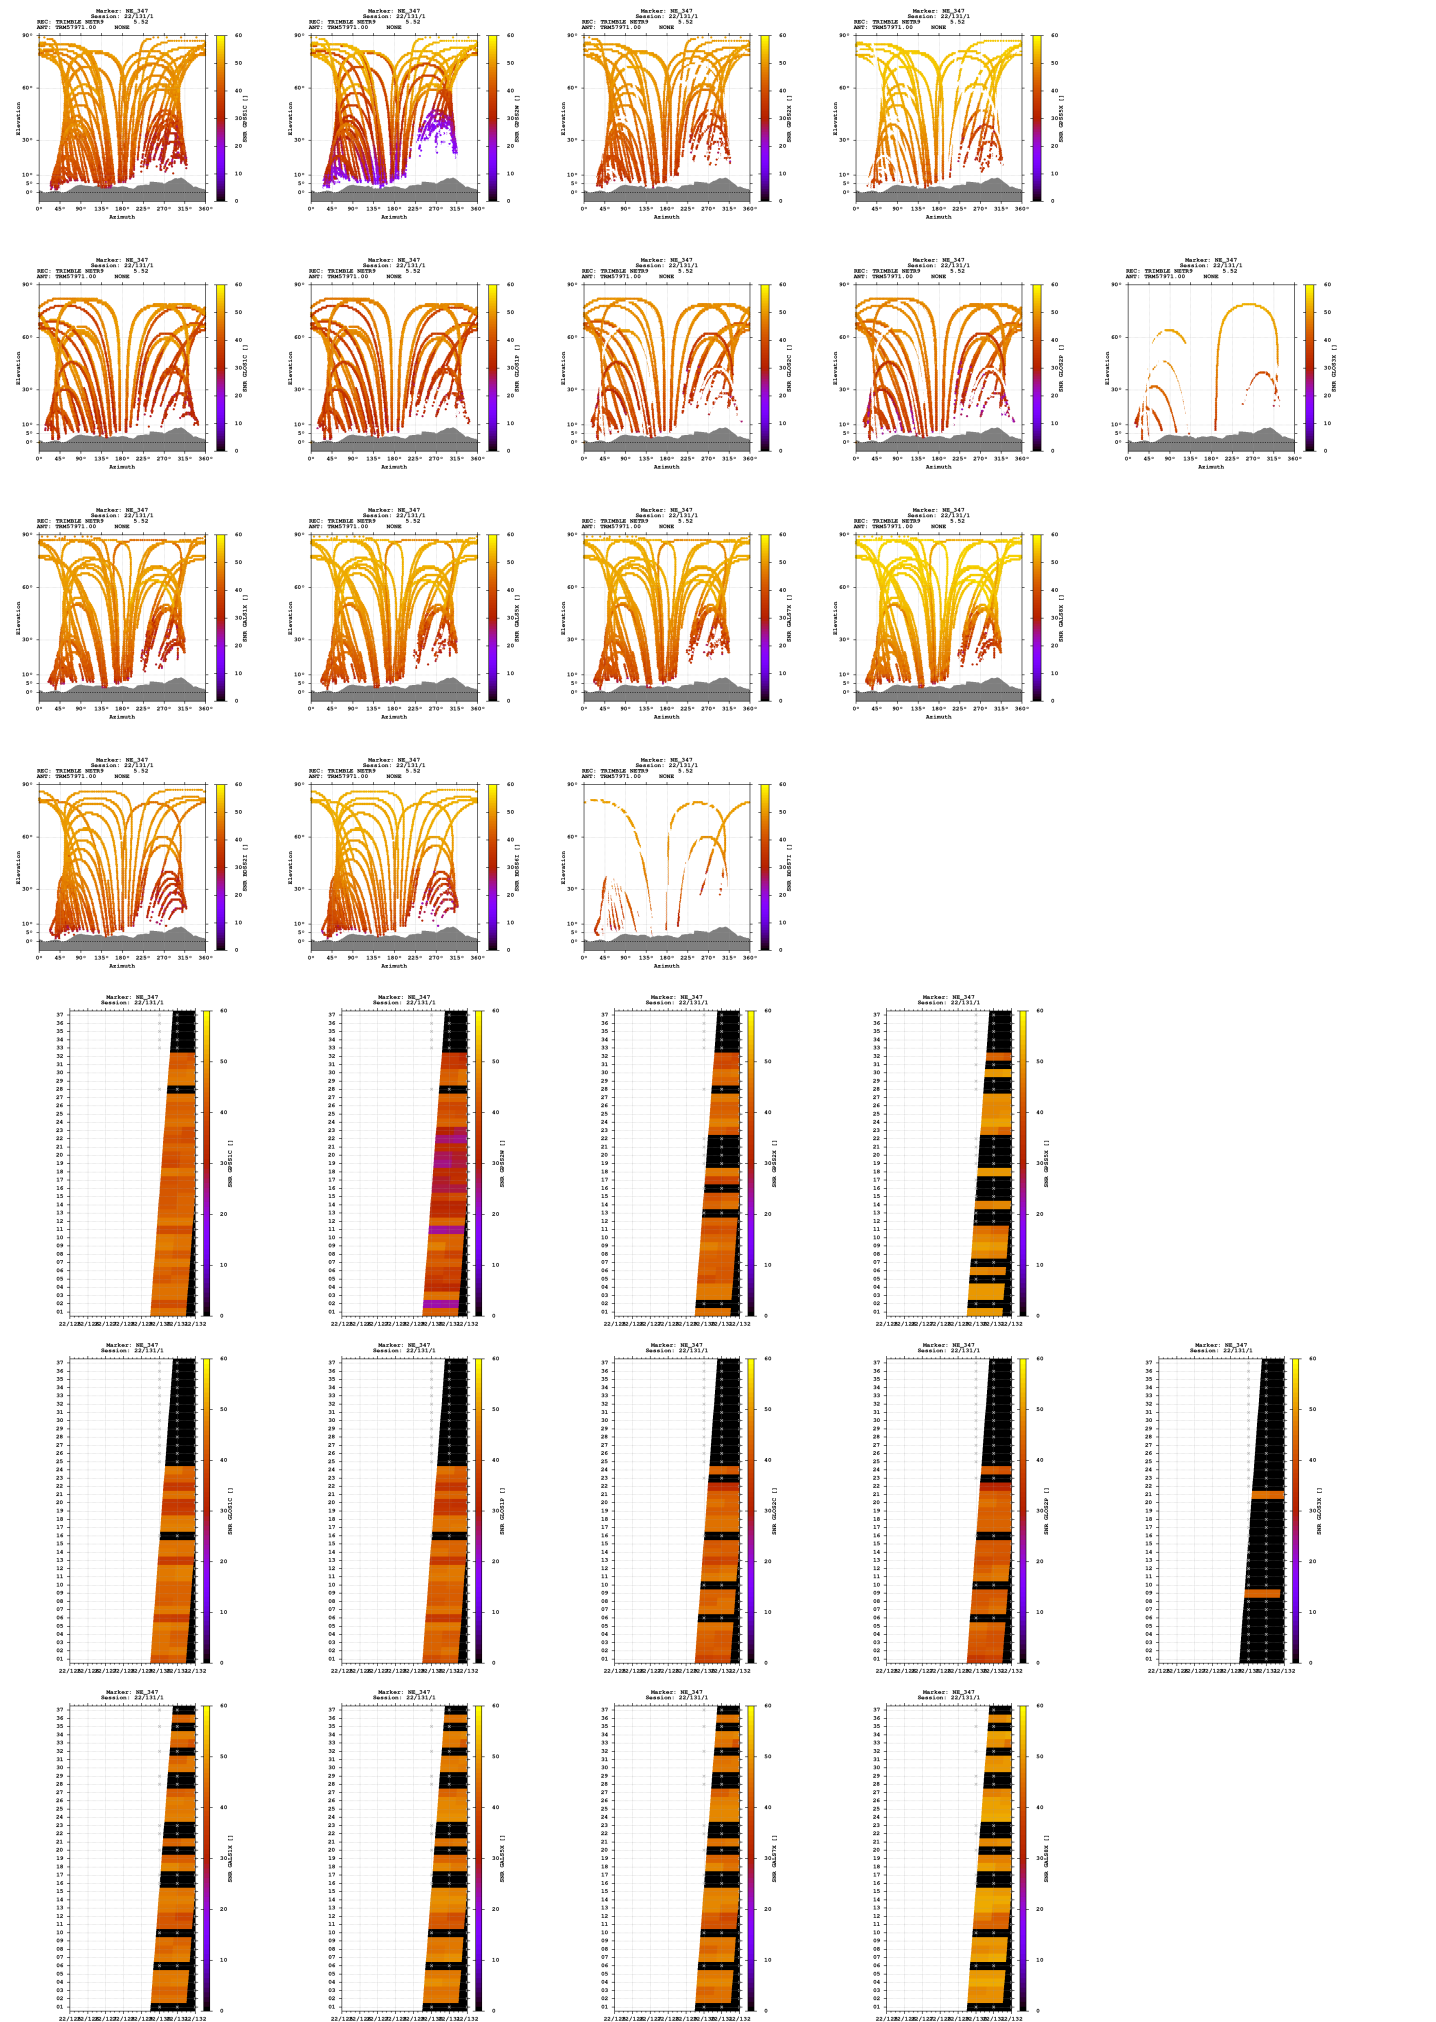

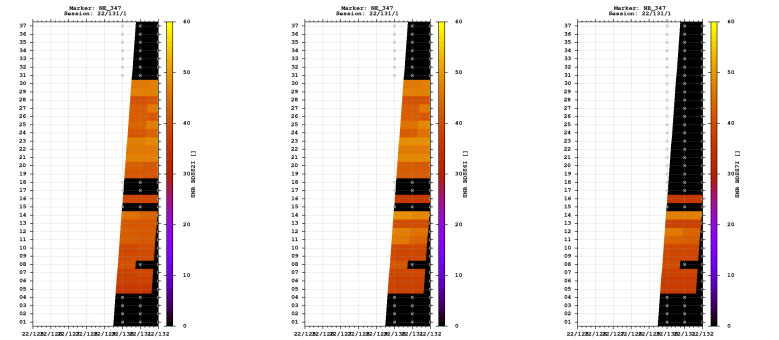



Estimates

2022-05-10 10:14:30	GPS	4326229.6629	508367.7412	4644900.4484	47.030360157	6.701992939	1140.4045
2022-05-10 10:14:30	GLO	4326231.1529	508368.1133	4644899.7456	47.030345825	6.701995513	1140.9285
2022-05-10 10:14:30	GAL	4326229.4048	508367.4439	4644899.7436	47.030357752	6.701989450	1139.6905
2022-05-10 10:14:30	BDS	4326229.8824	508371.0257	4644902.6450	47.030369666	6.702035509	1142.4217

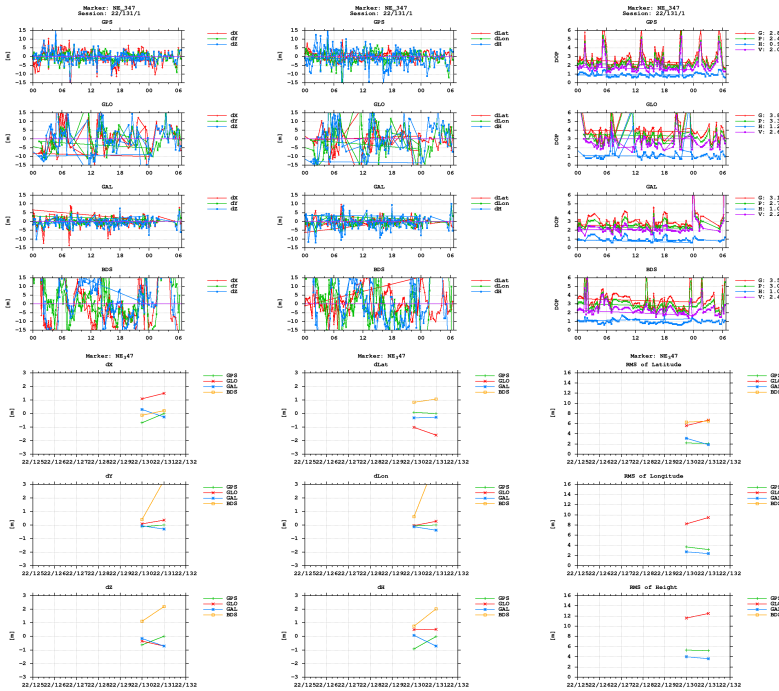

BNC

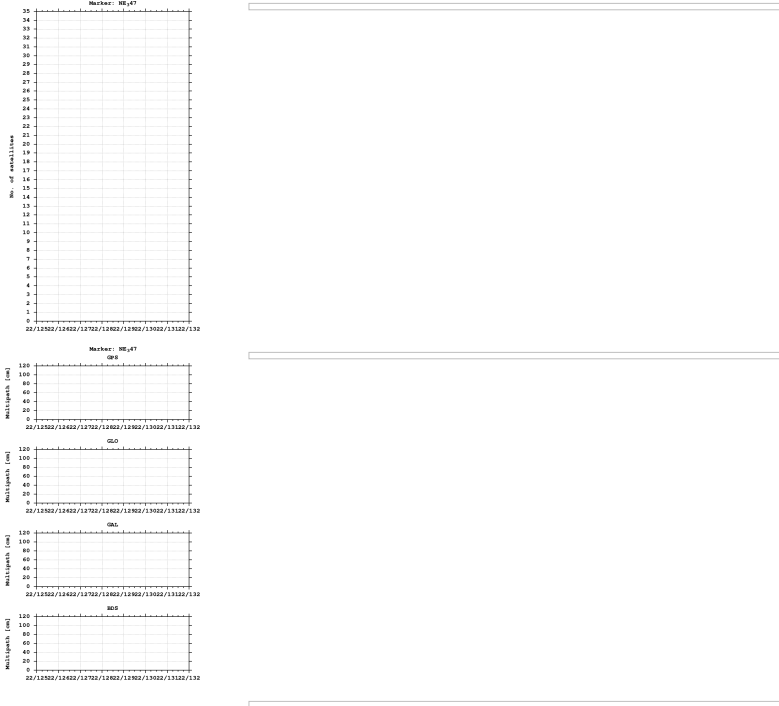

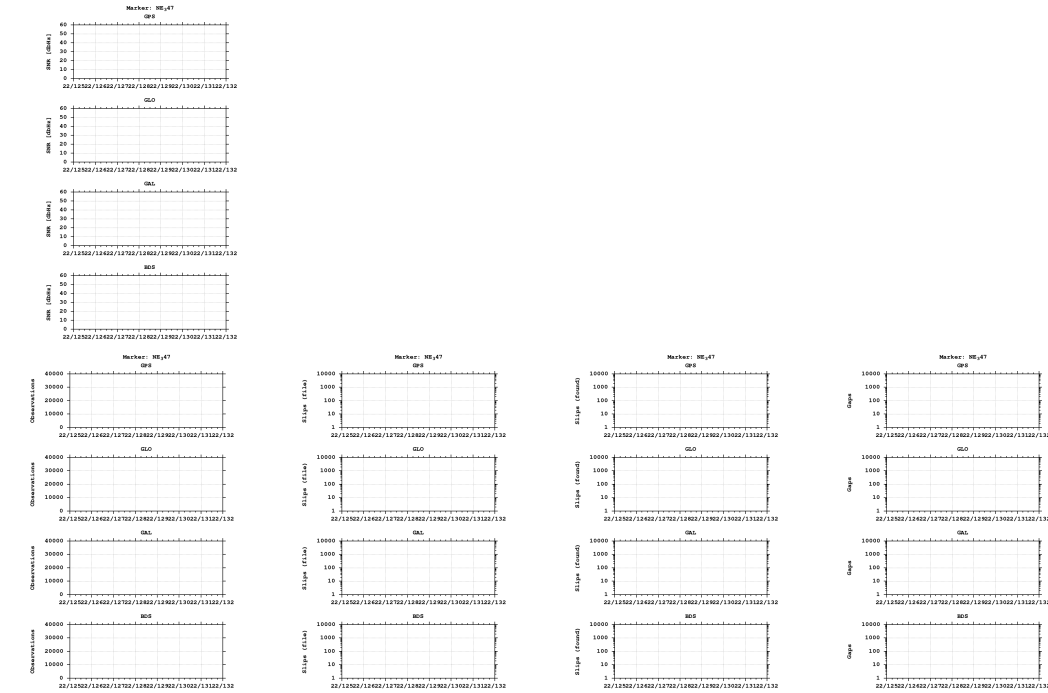

Equipment

2022-05-10 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)