


GNSS observation file monitoring for 0511


Last RINEX file: 05111361.22O
RINEX version: 3.02
Marker: 1110
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

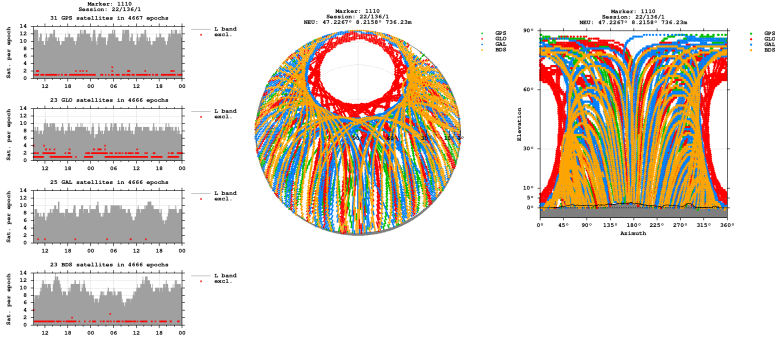


Bands

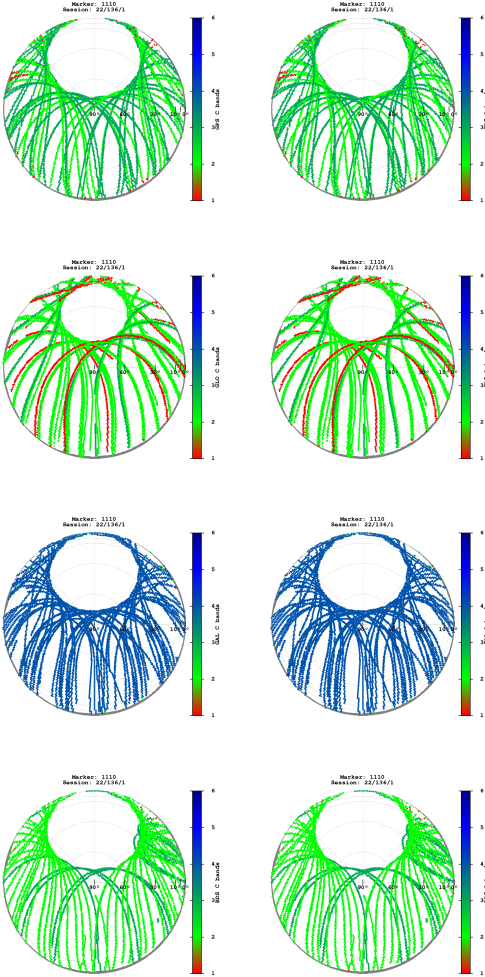

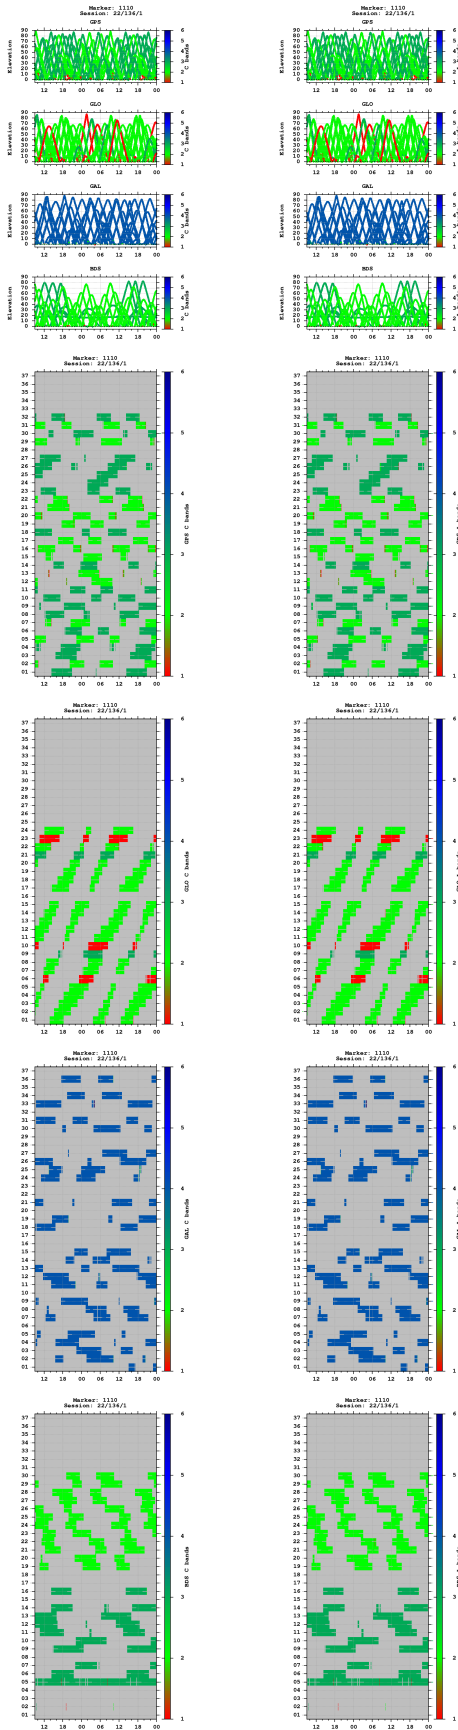



Multipath

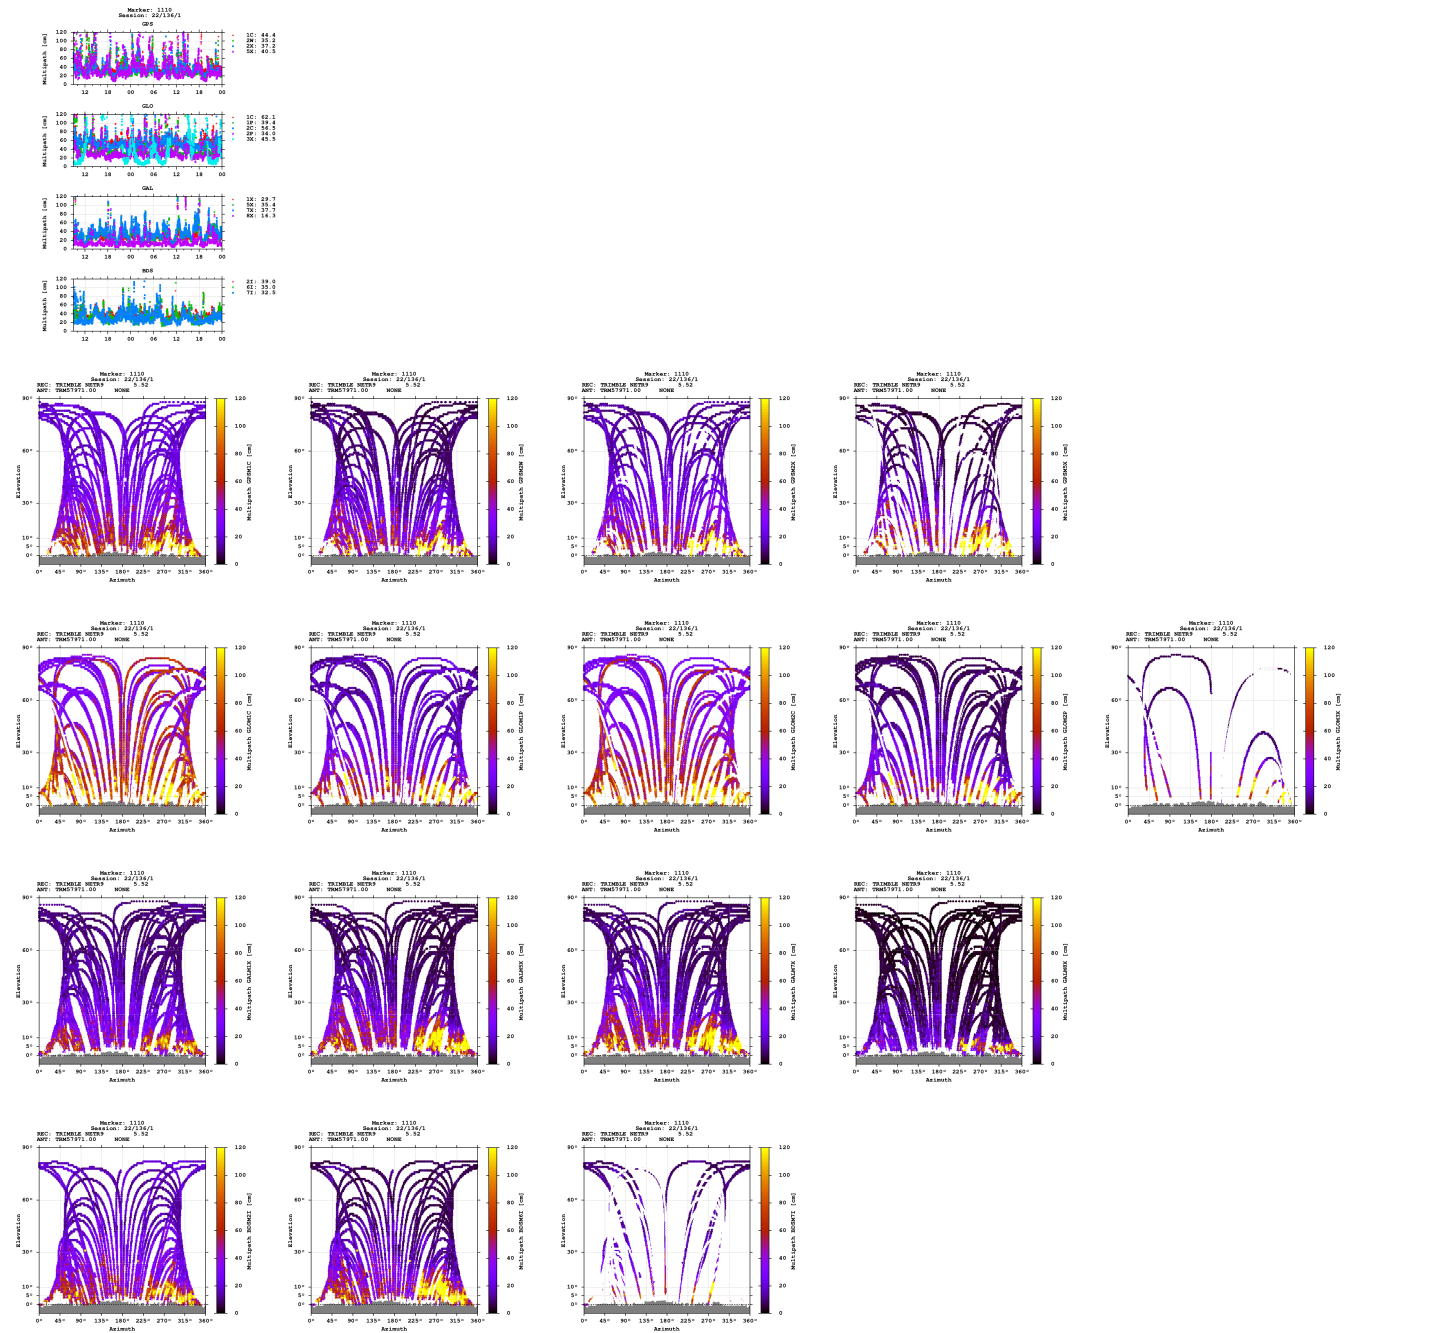

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

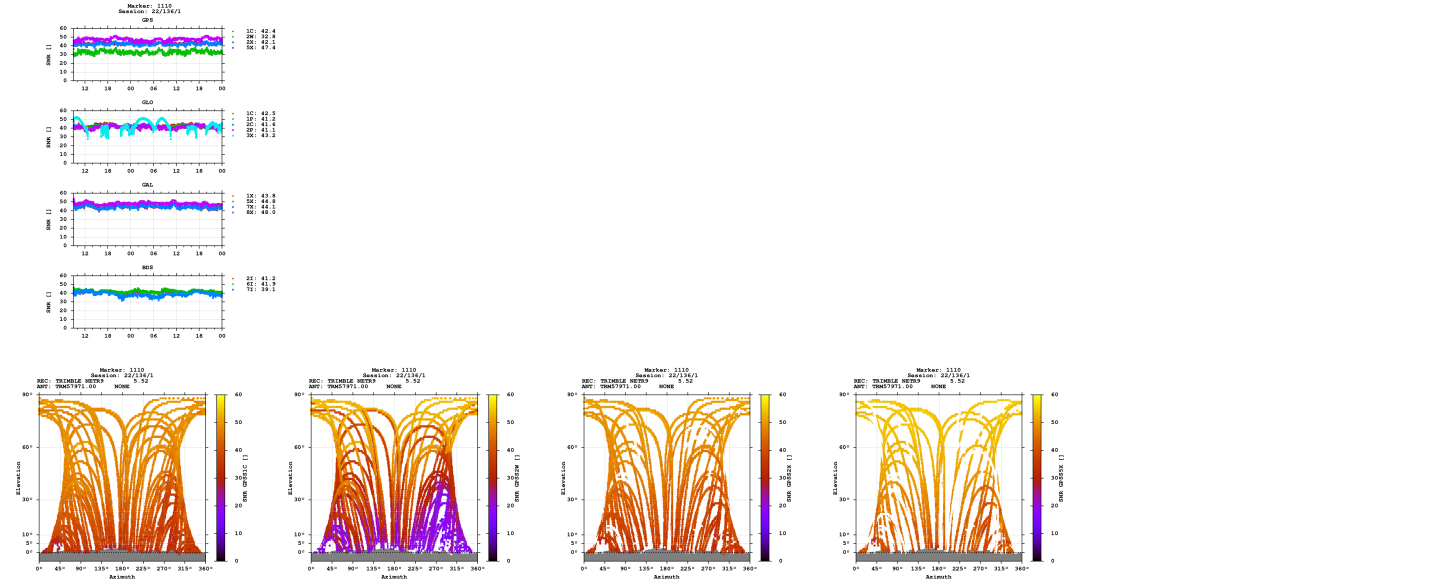

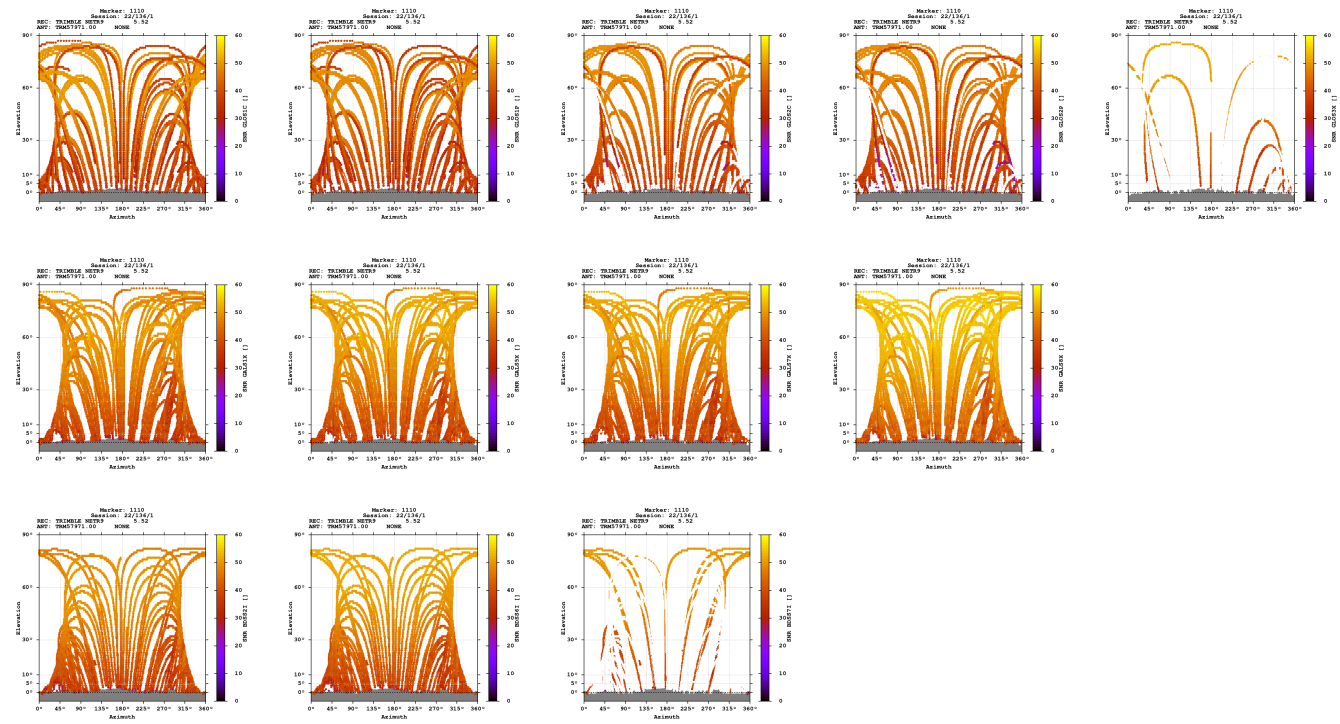

Estimates

2022-05-16 09:02:00	GPS	4295182.0649	620155.2240	4659457.1692	47.226701377	8.215812303	736.2327
2022-05-16 09:02:00	GLO	4295183.0123	620155.2341	4659458.0389	47.226700489	8.215810648	737.5089
2022-05-16 09:02:00	GAL	4295182.1954	620155.1353	4659457.1060	47.226700222	8.215810898	736.2654
2022-05-16 09:02:00	BDS	4295181.9372	620153.5522	4659459.2964	47.226716781	8.215790699	737.5462

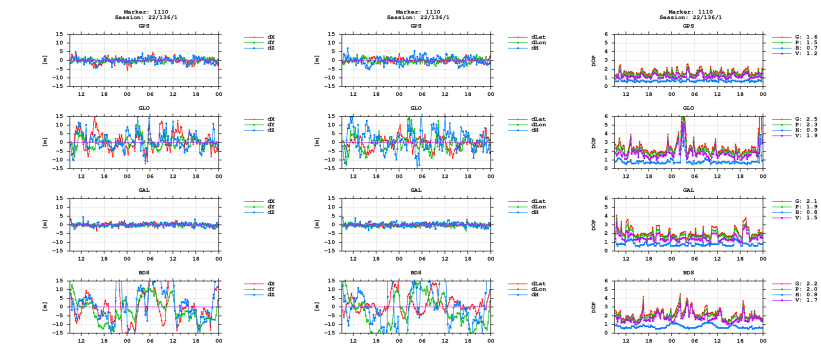

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)