

GNSS observation file monitoring for 0511

Last RINEX file: 05111371.220

RINEX version: 3.02

Marker: 1110

Receiver: 511

Antenna: 511


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

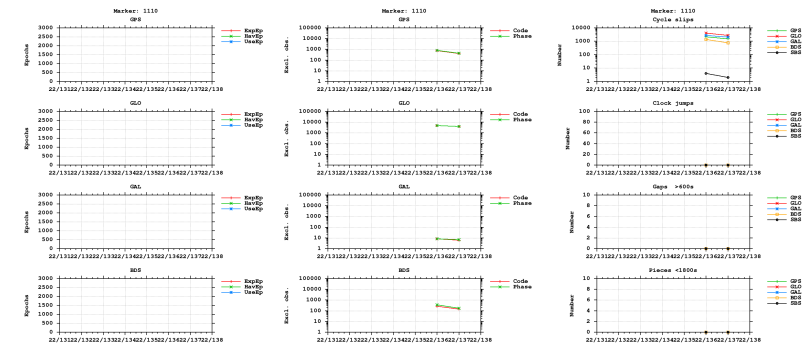



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

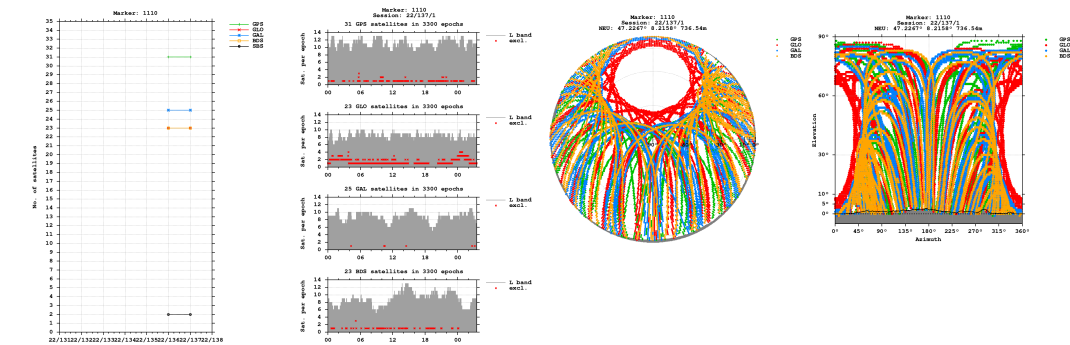


Bands

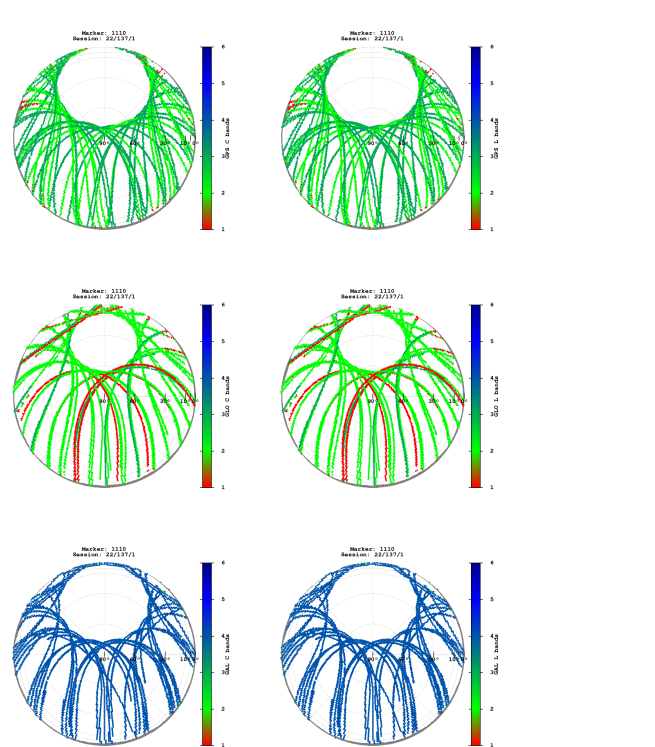


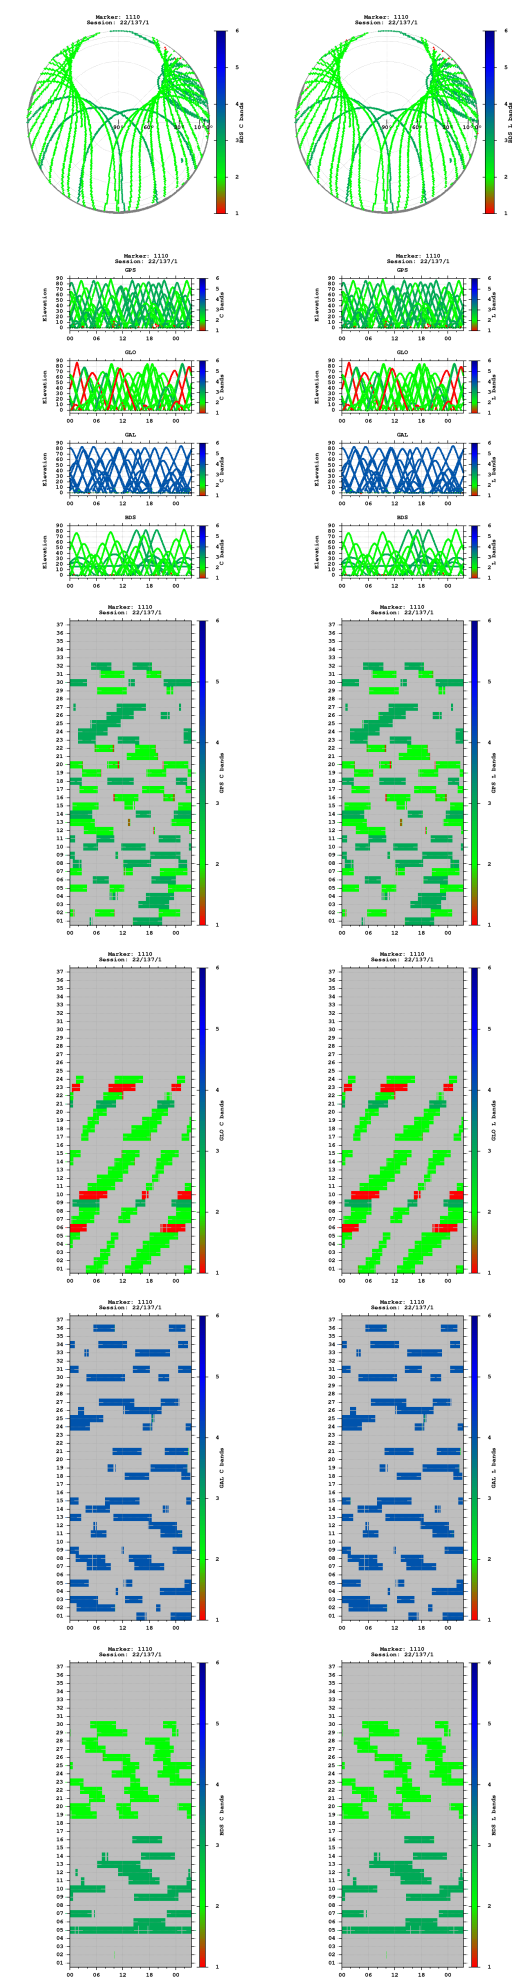


Observations

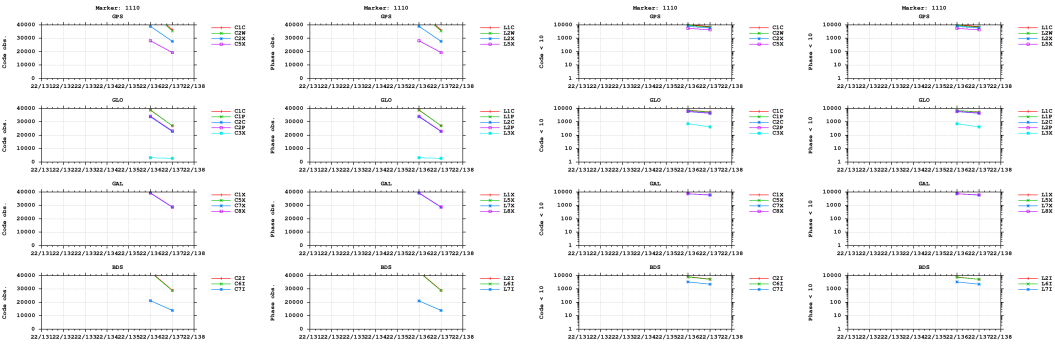


Multipath

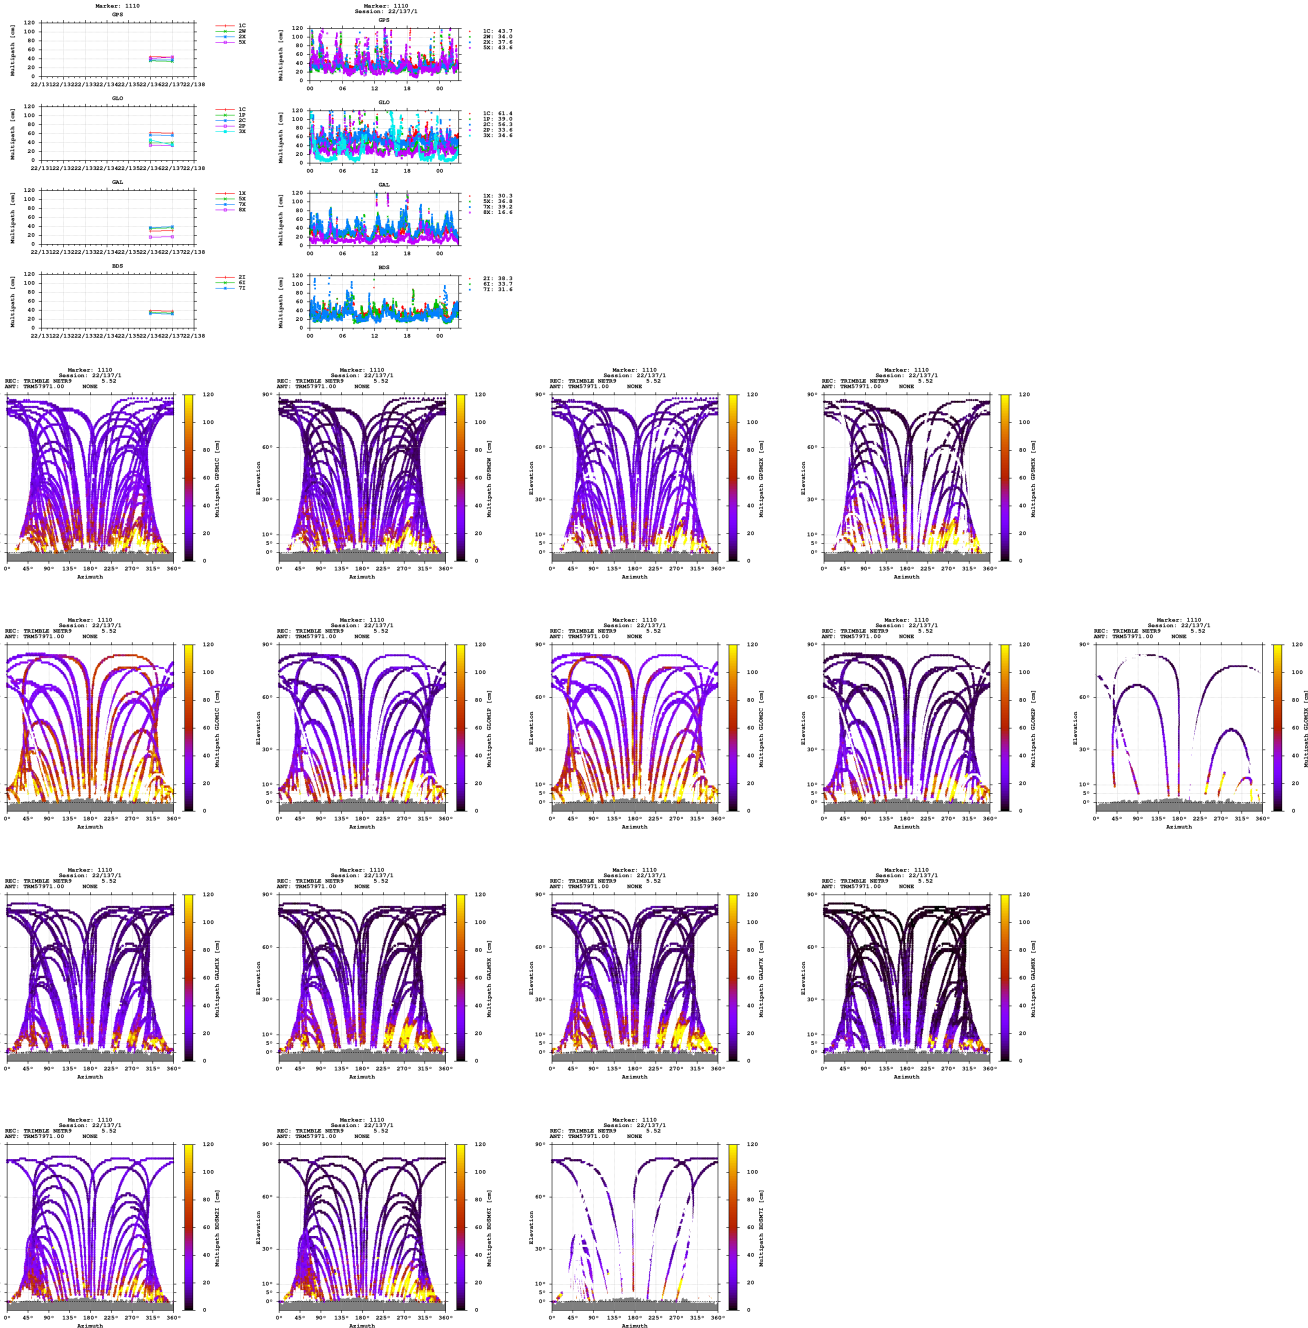


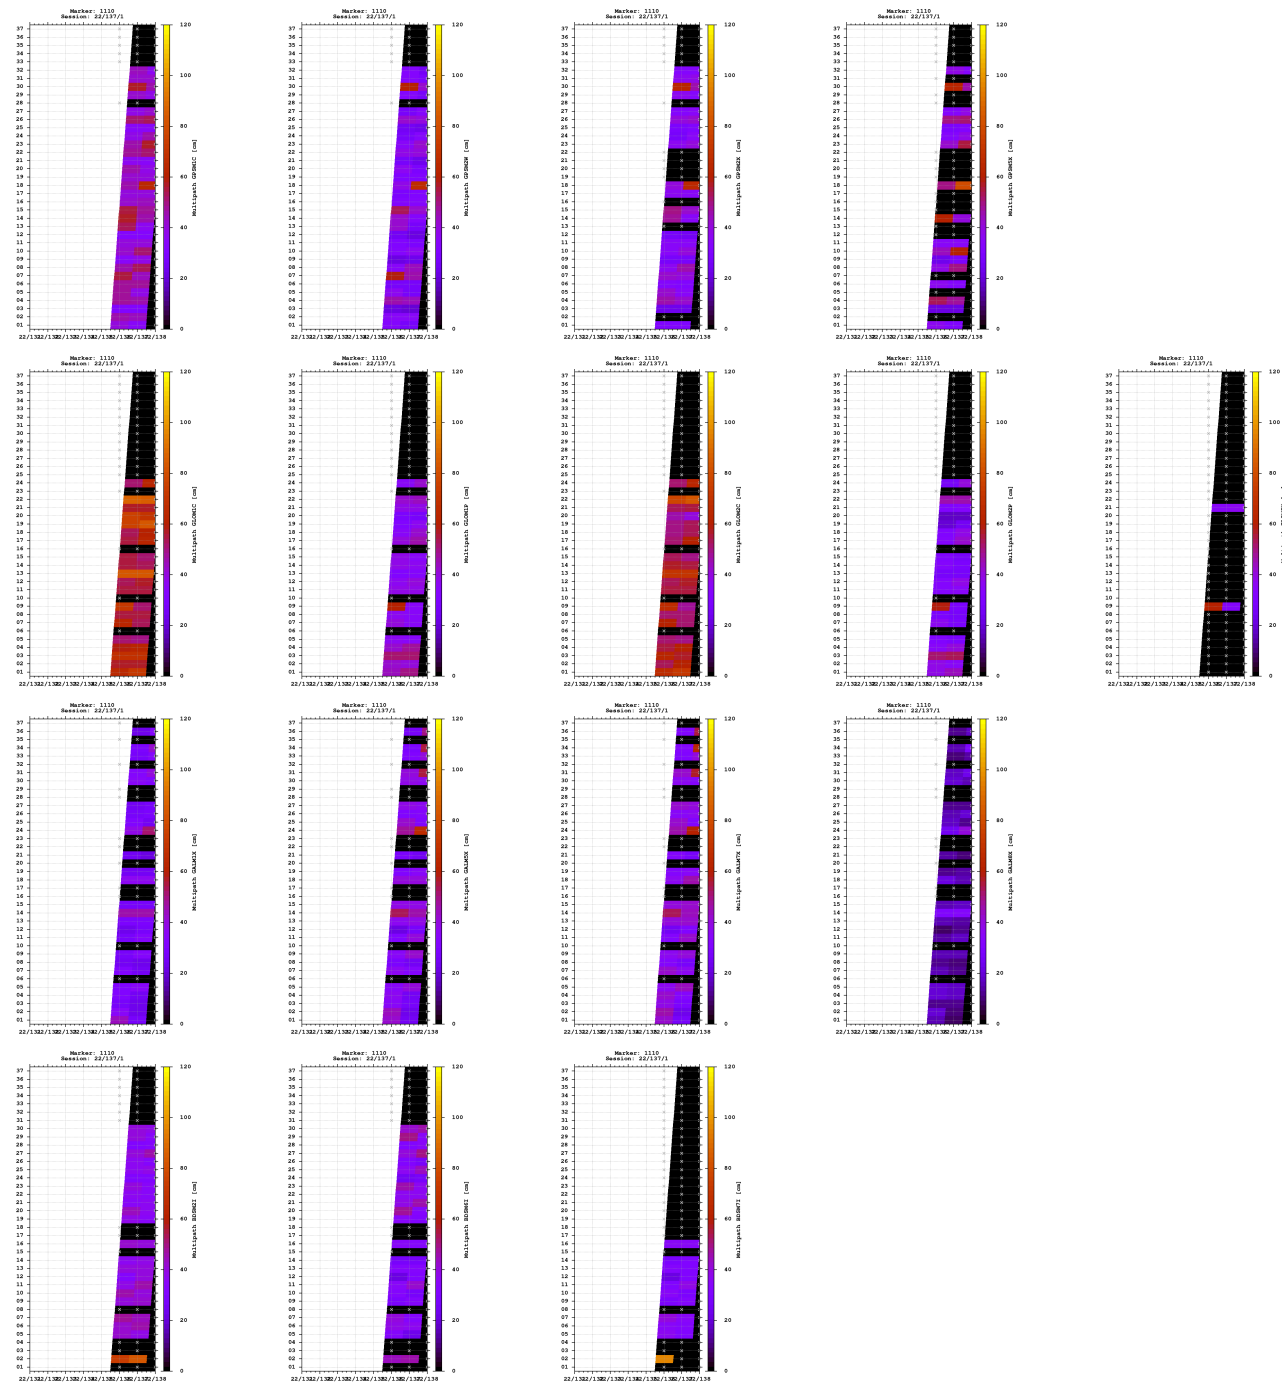


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

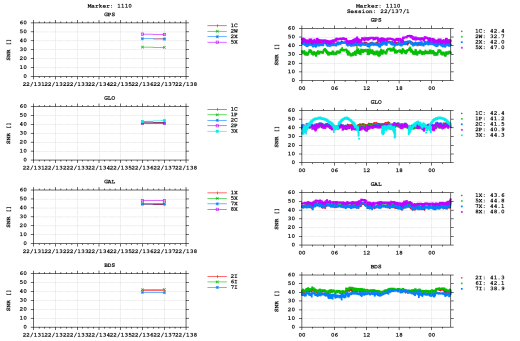


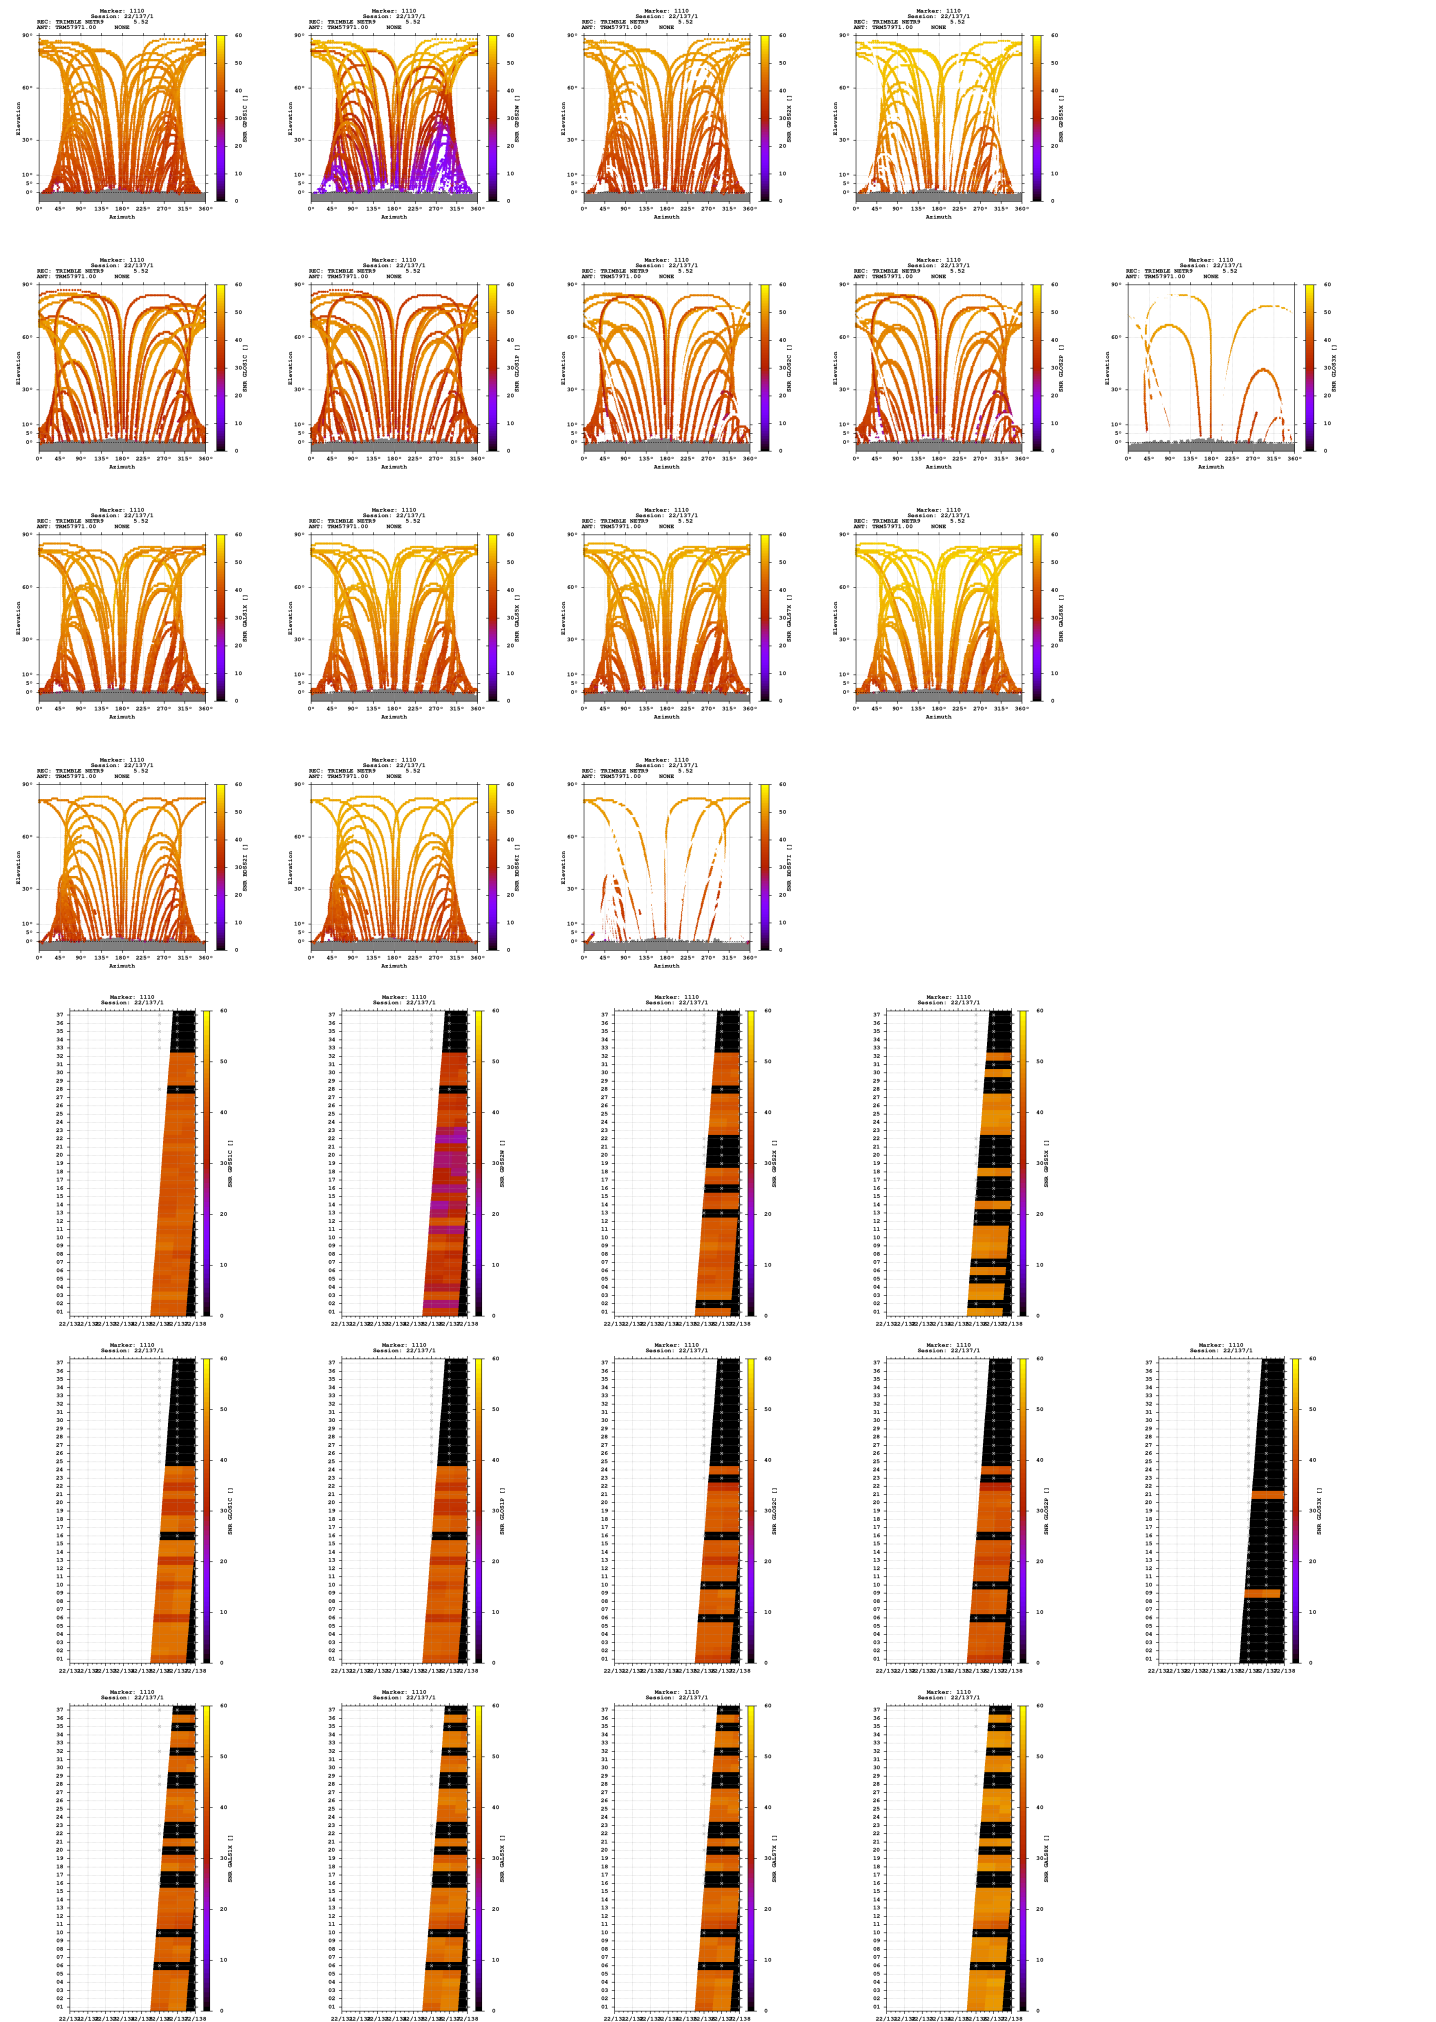

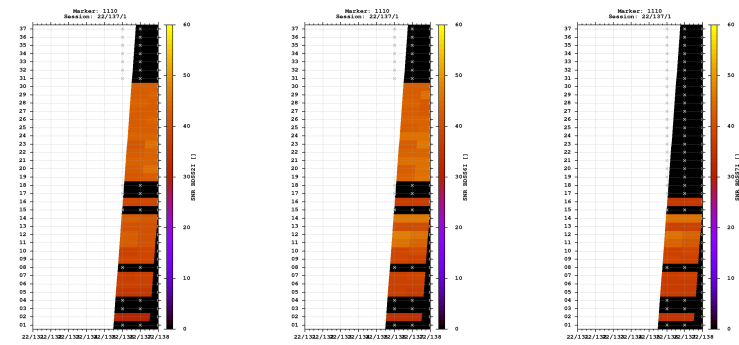


Estimates

2022-05-16 09:02:00	GPS	4295182.1845	620155.0941	4659457.4906	47.226702682	8.215810381	736.5364
2022-05-16 09:02:00	GLO	4295182.2873	620155.3488	4659457.4402	47.226701461	8.215813514	736.5932
2022-05-16 09:02:00	GAL	4295182.2806	620154.9710	4659457.2225	47.226700532	8.215808591	736.3923
2022-05-16 09:02:00	BDS	4295181.3285	620155.5298	4659460.0157	47.226723286	8.215817688	737.8569

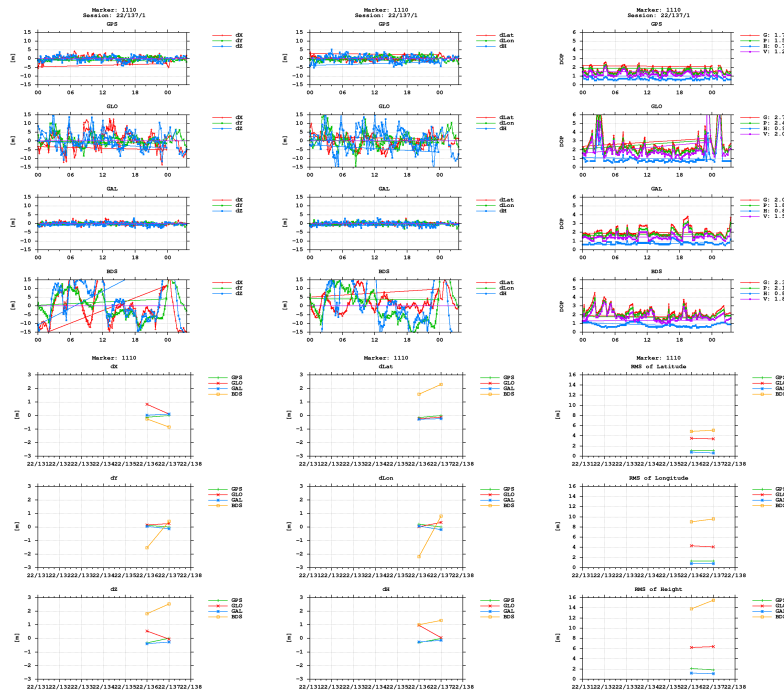

BNC



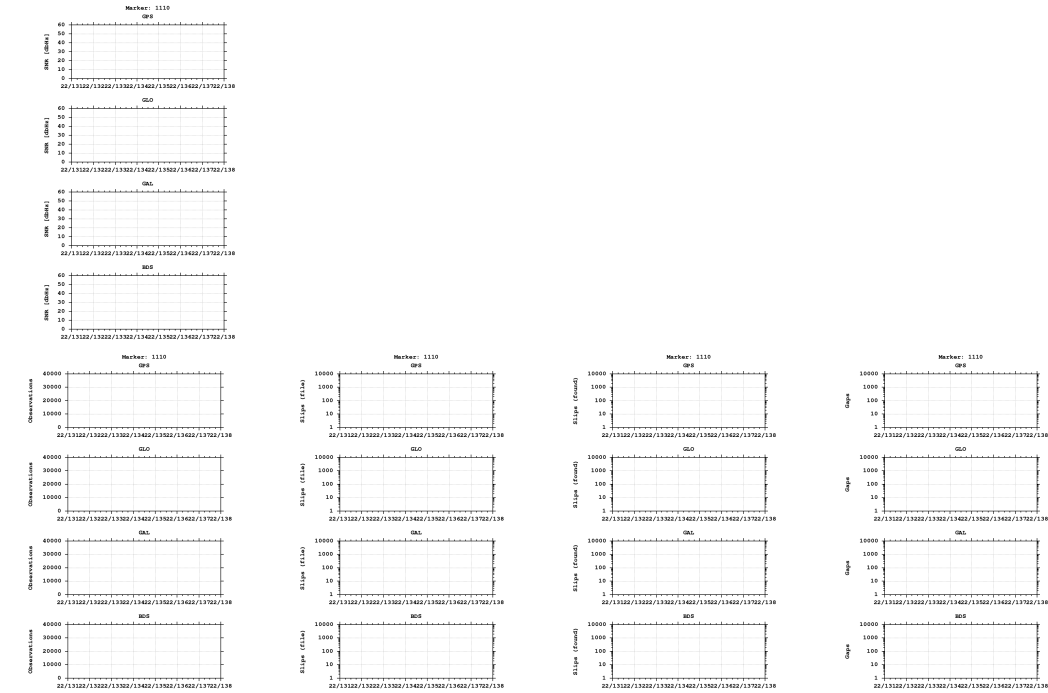

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)