


GNSS observation file monitoring for 0512


Last RINEX file: 05121381.220
RINEX version: 3.02
Marker: 1131
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

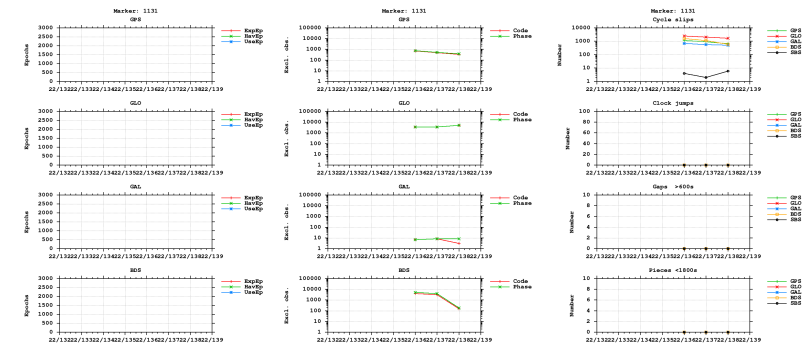



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

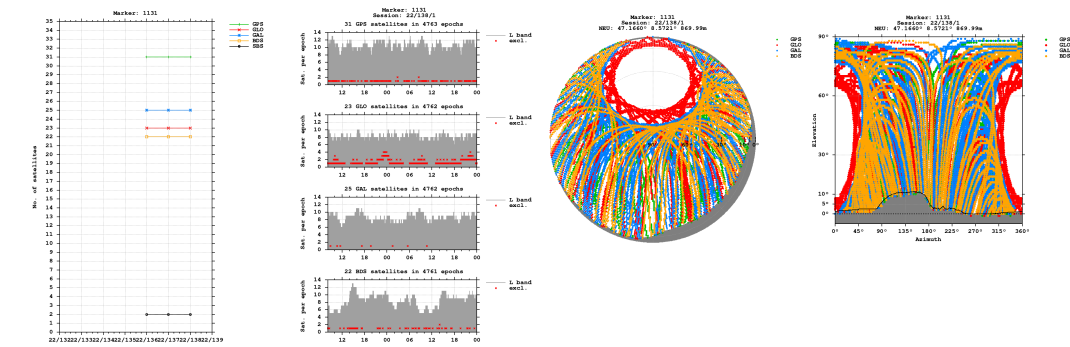


Bands

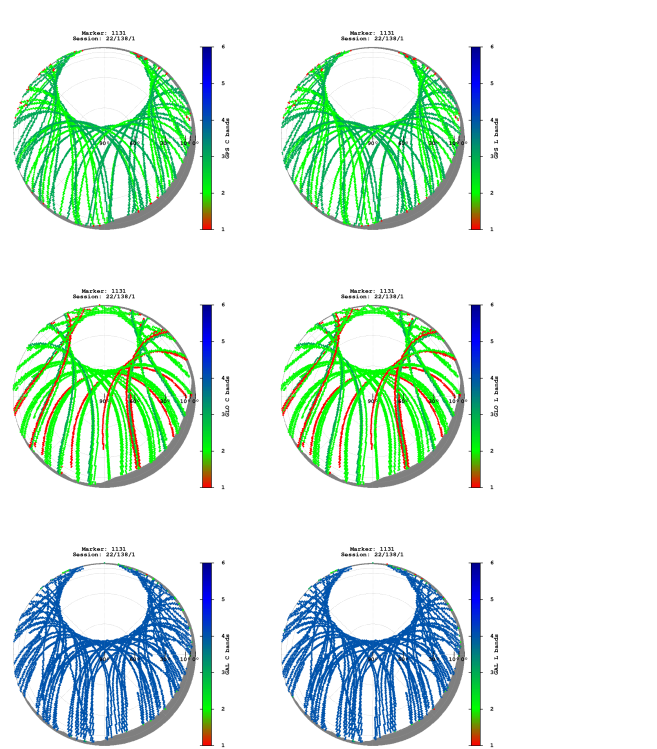


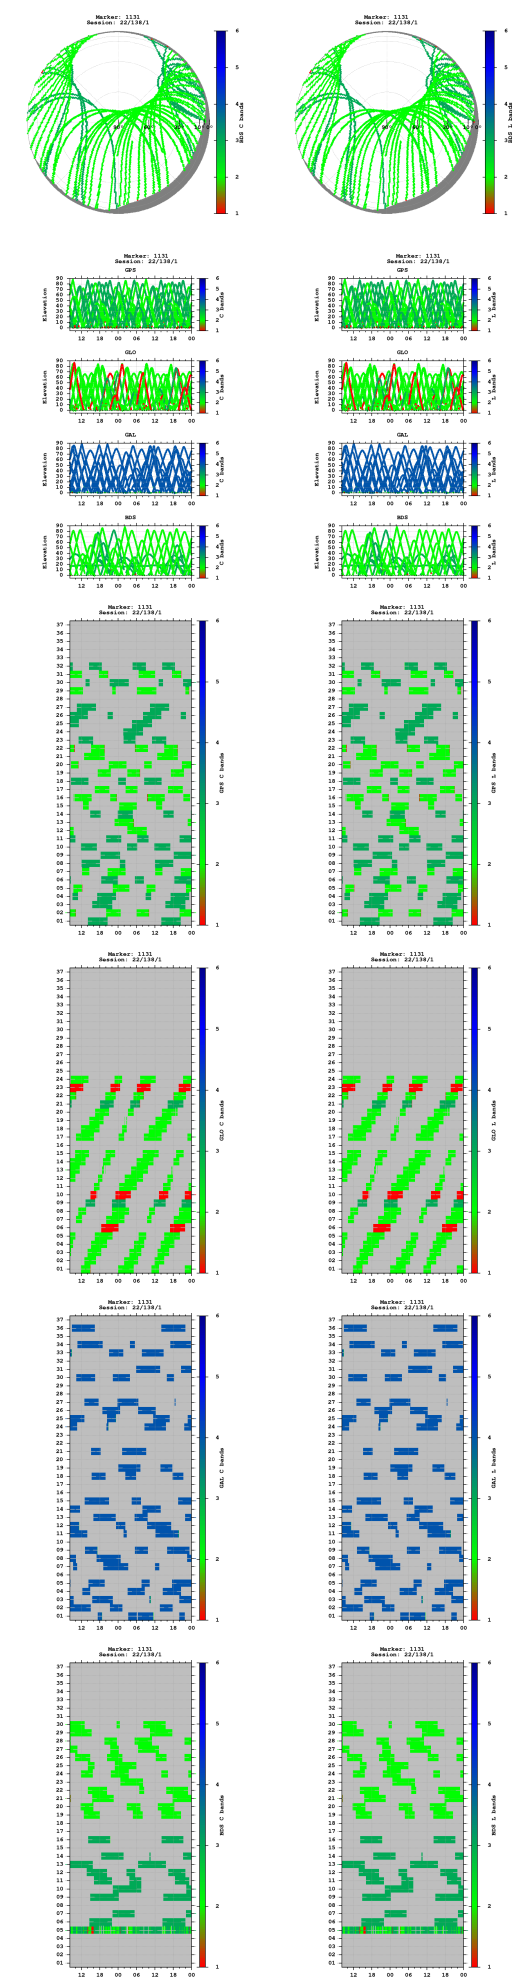


Observations

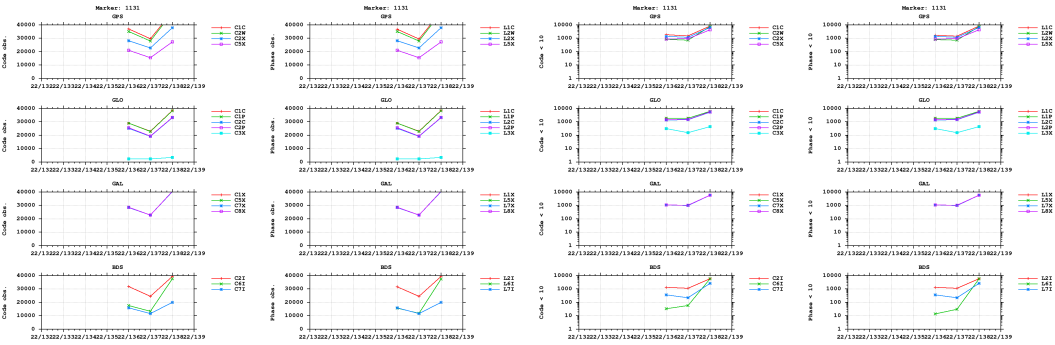


Multipath

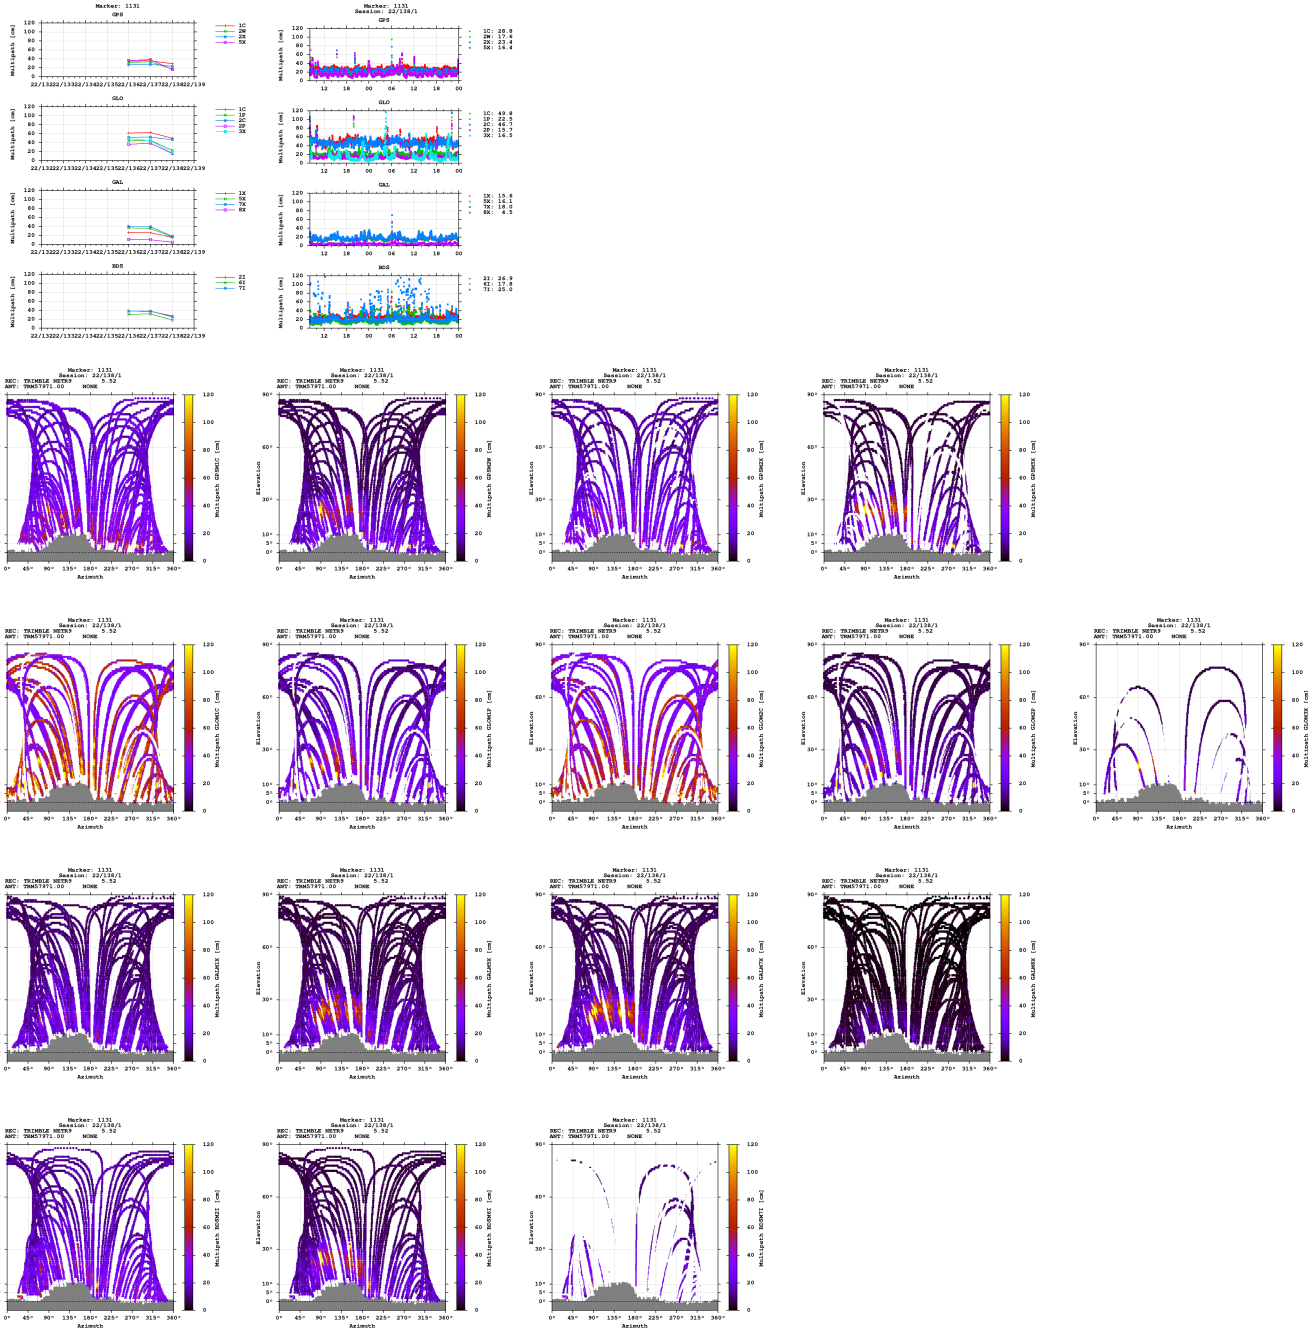


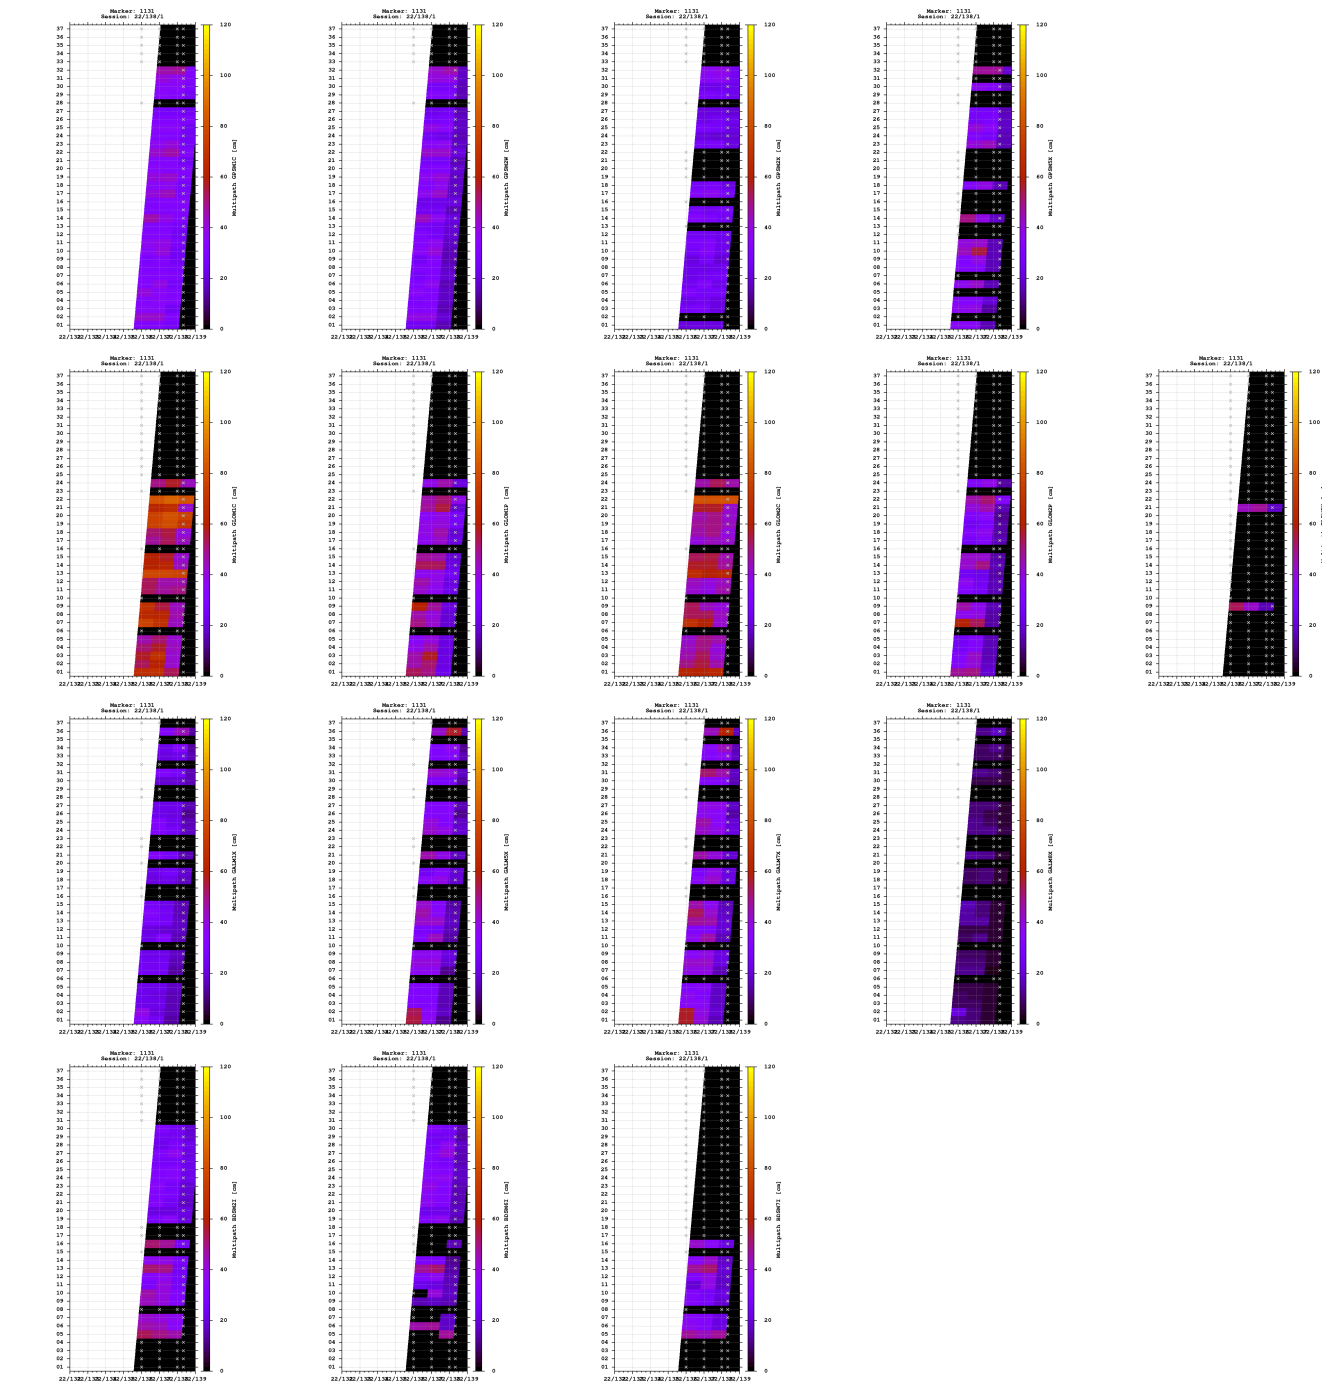


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

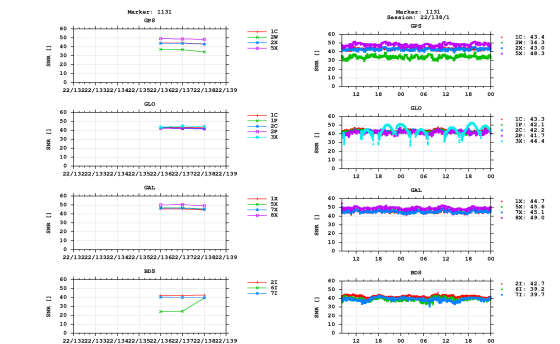


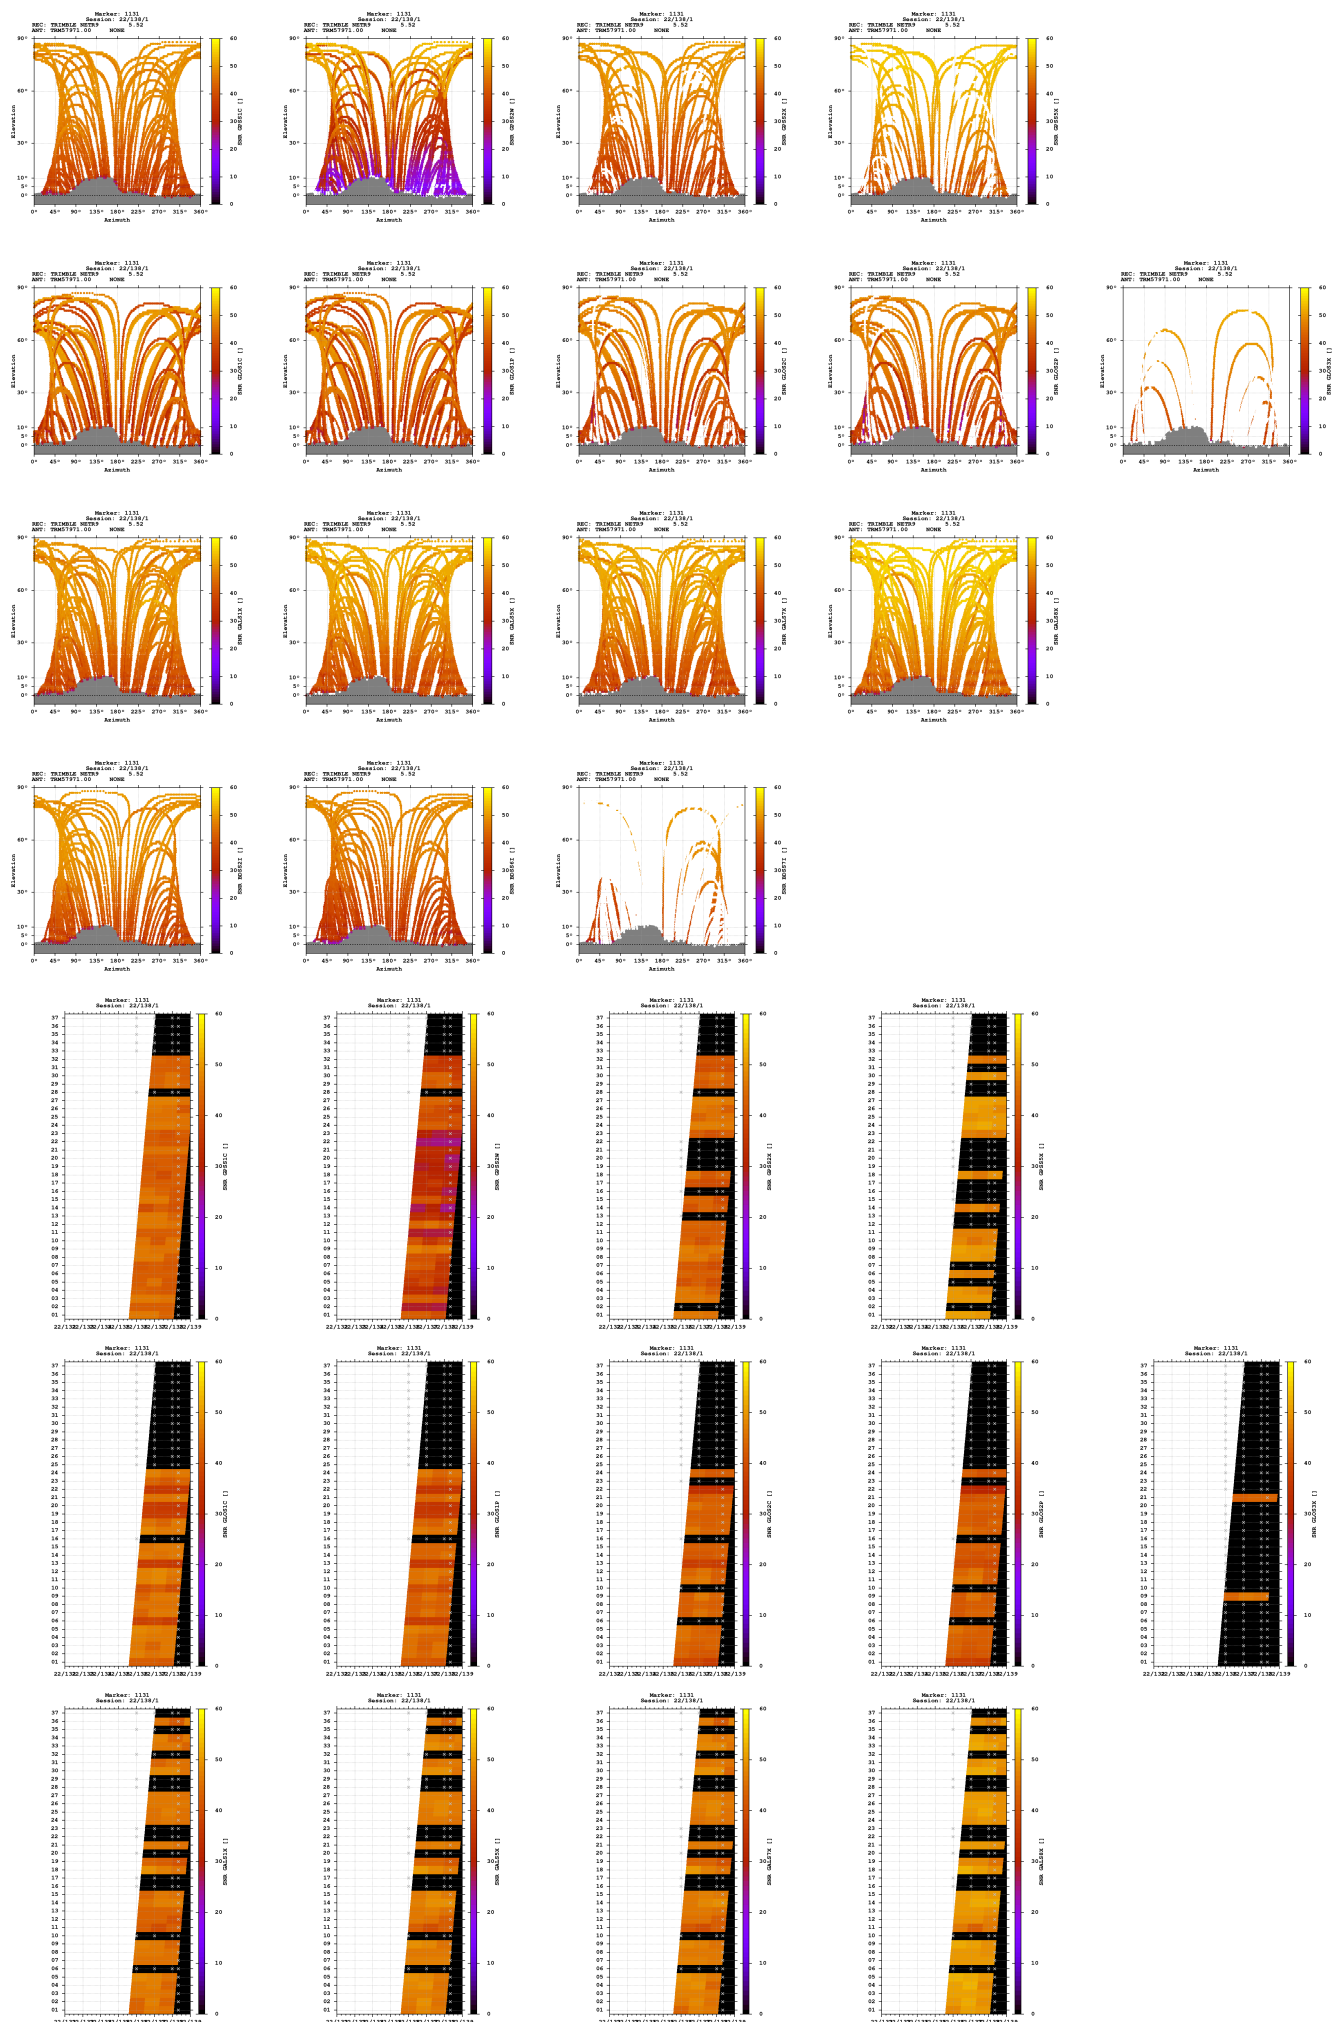

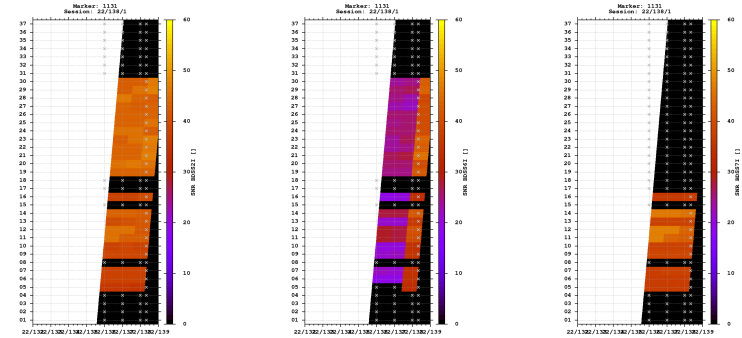



Estimates

2022-05-18 08:14:30	GPS	4296229.8001	647606.1473	4654968.2782	47.165987371	8.572128768	869.9908
2022-05-18 08:14:30	GLO	4296230.5680	647605.9519	4654968.9082	47.165986407	8.572124711	870.9493
2022-05-18 08:14:30	GAL	4296229.9518	647605.8145	4654968.2337	47.165986437	8.572124131	870.0264
2022-05-18 08:14:30	BDS	4296227.7068	647606.0161	4654967.8709	47.165998661	8.572131172	868.2715

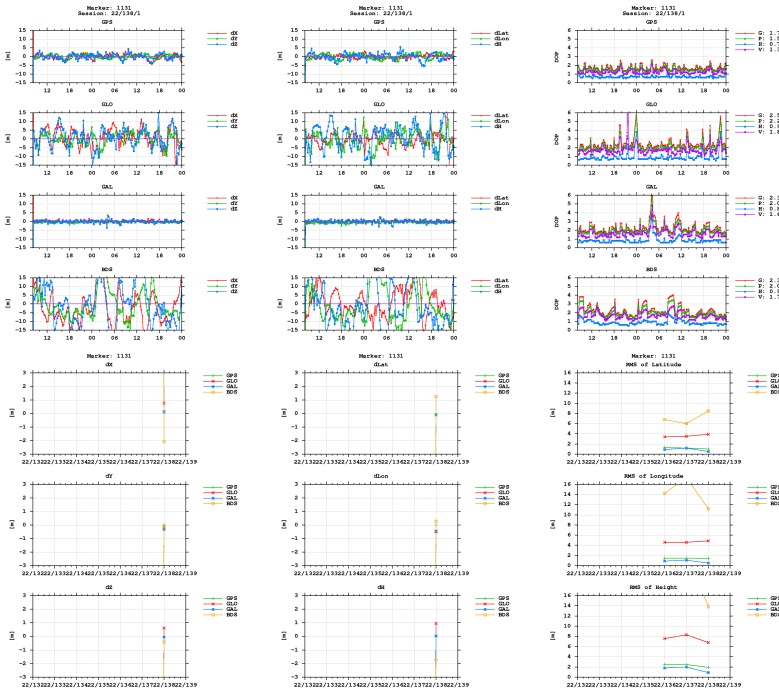

BNC

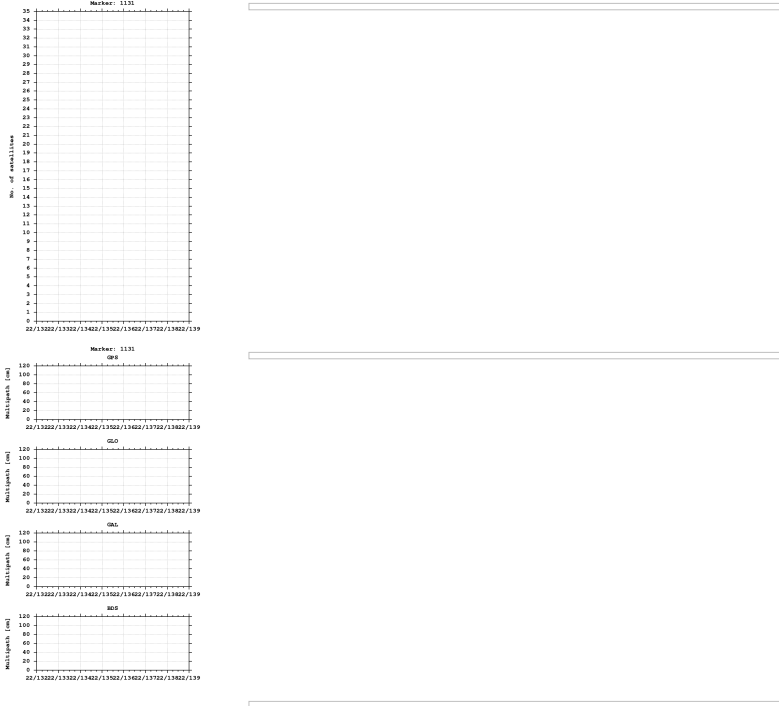

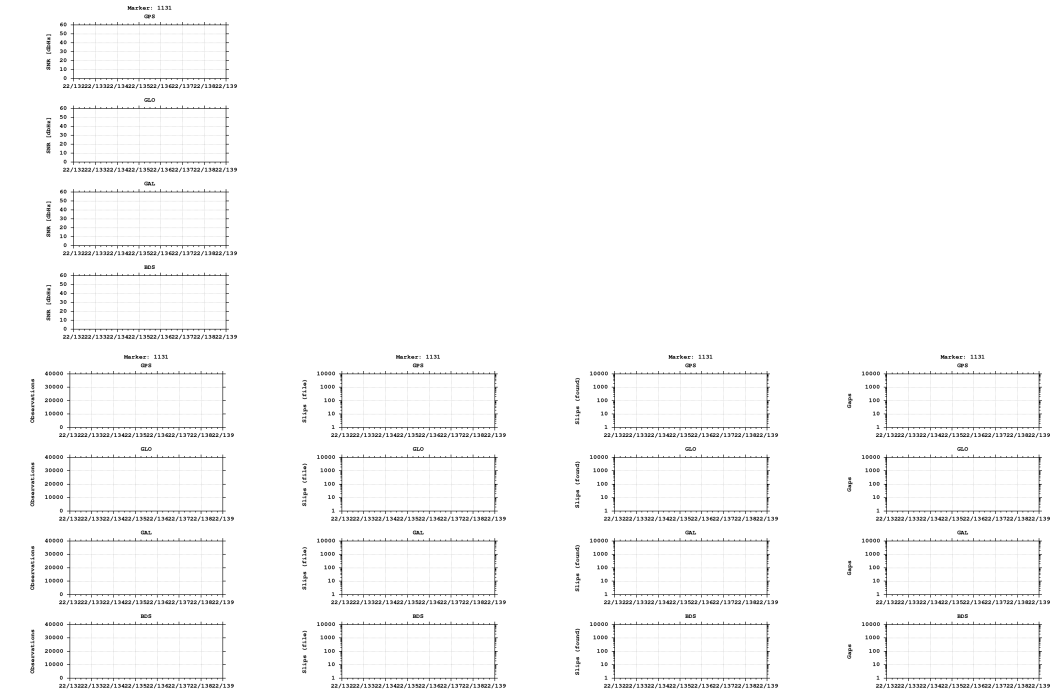

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)