


GNSS observation file monitoring for 0512


Last RINEX file: 05121391.220
RINEX version: 3.02
Marker: 1131
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

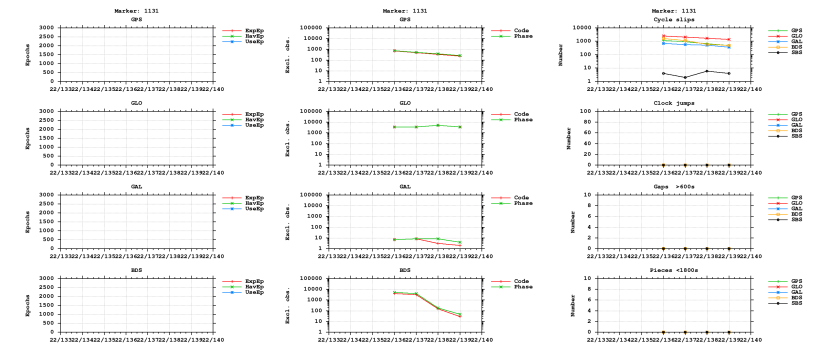



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

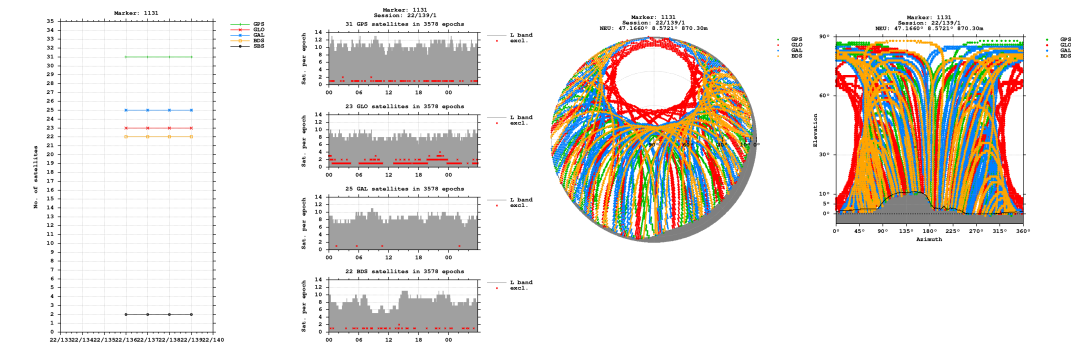


Bands

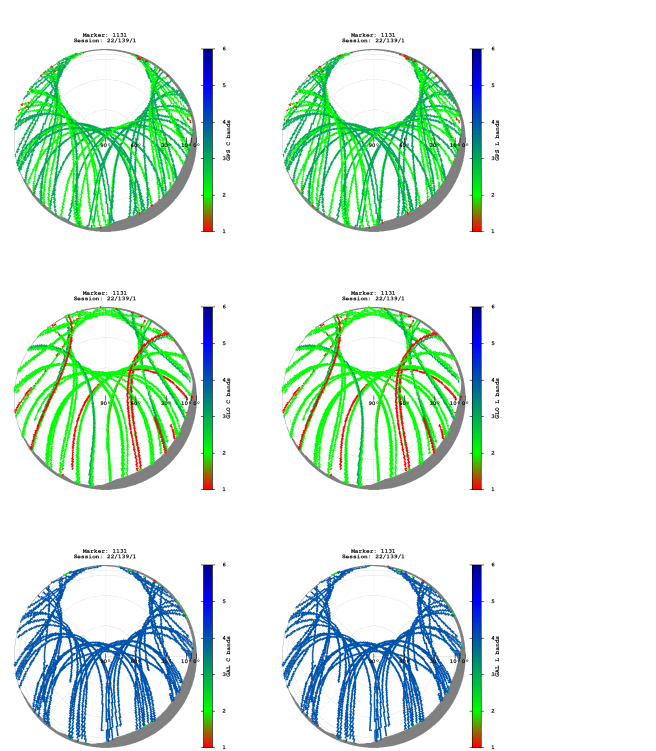


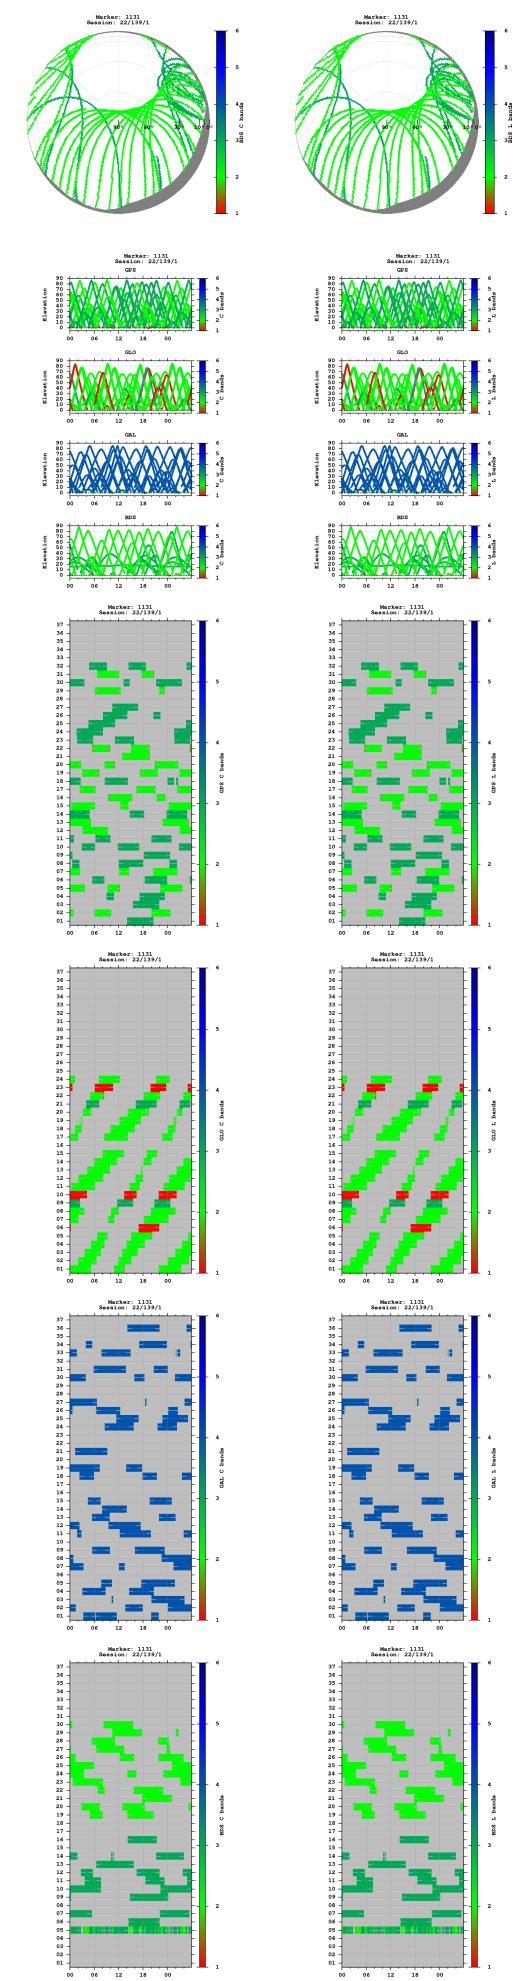


Observations

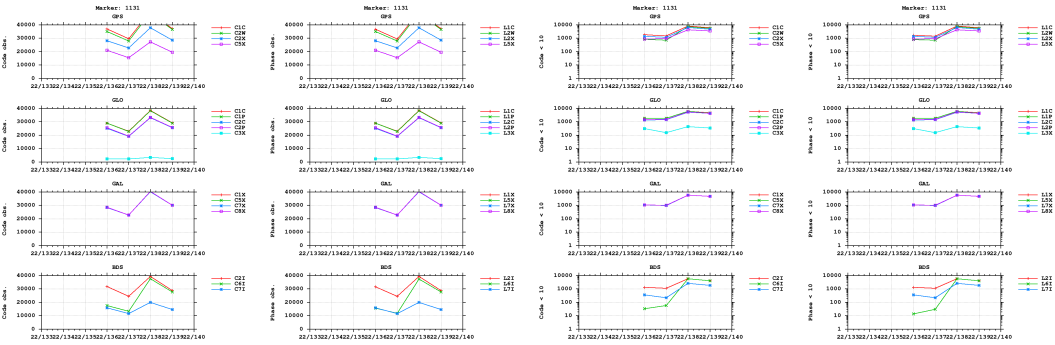


Multipath

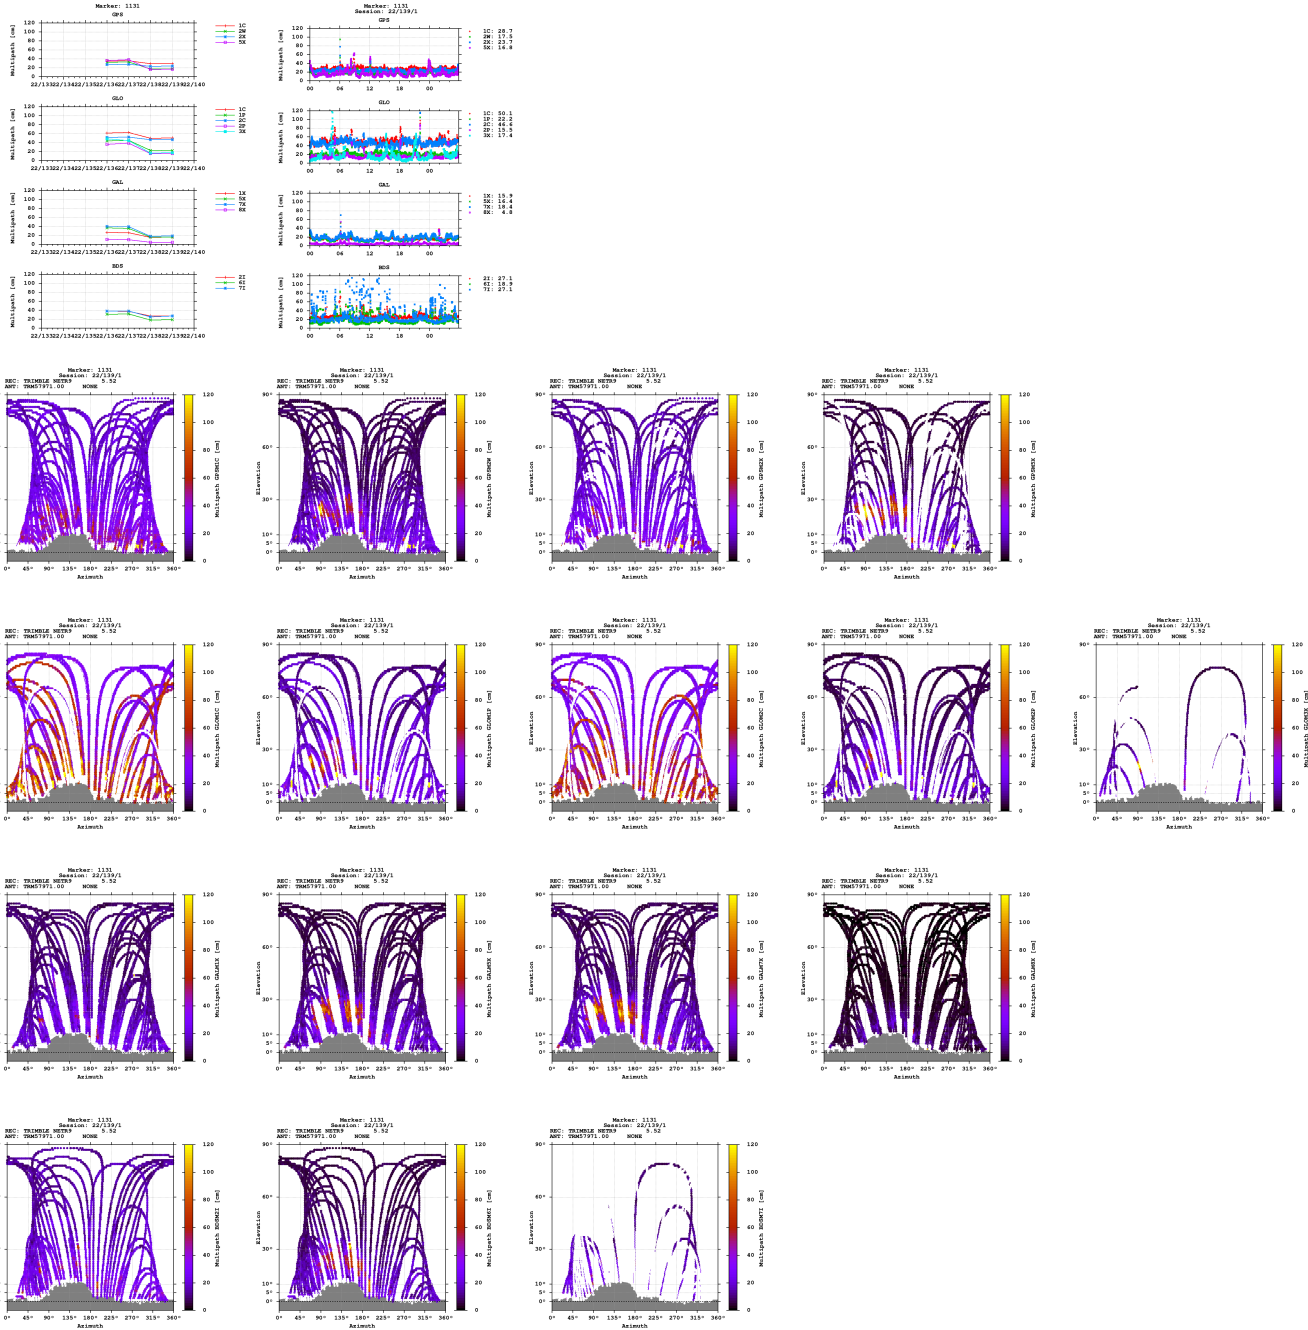


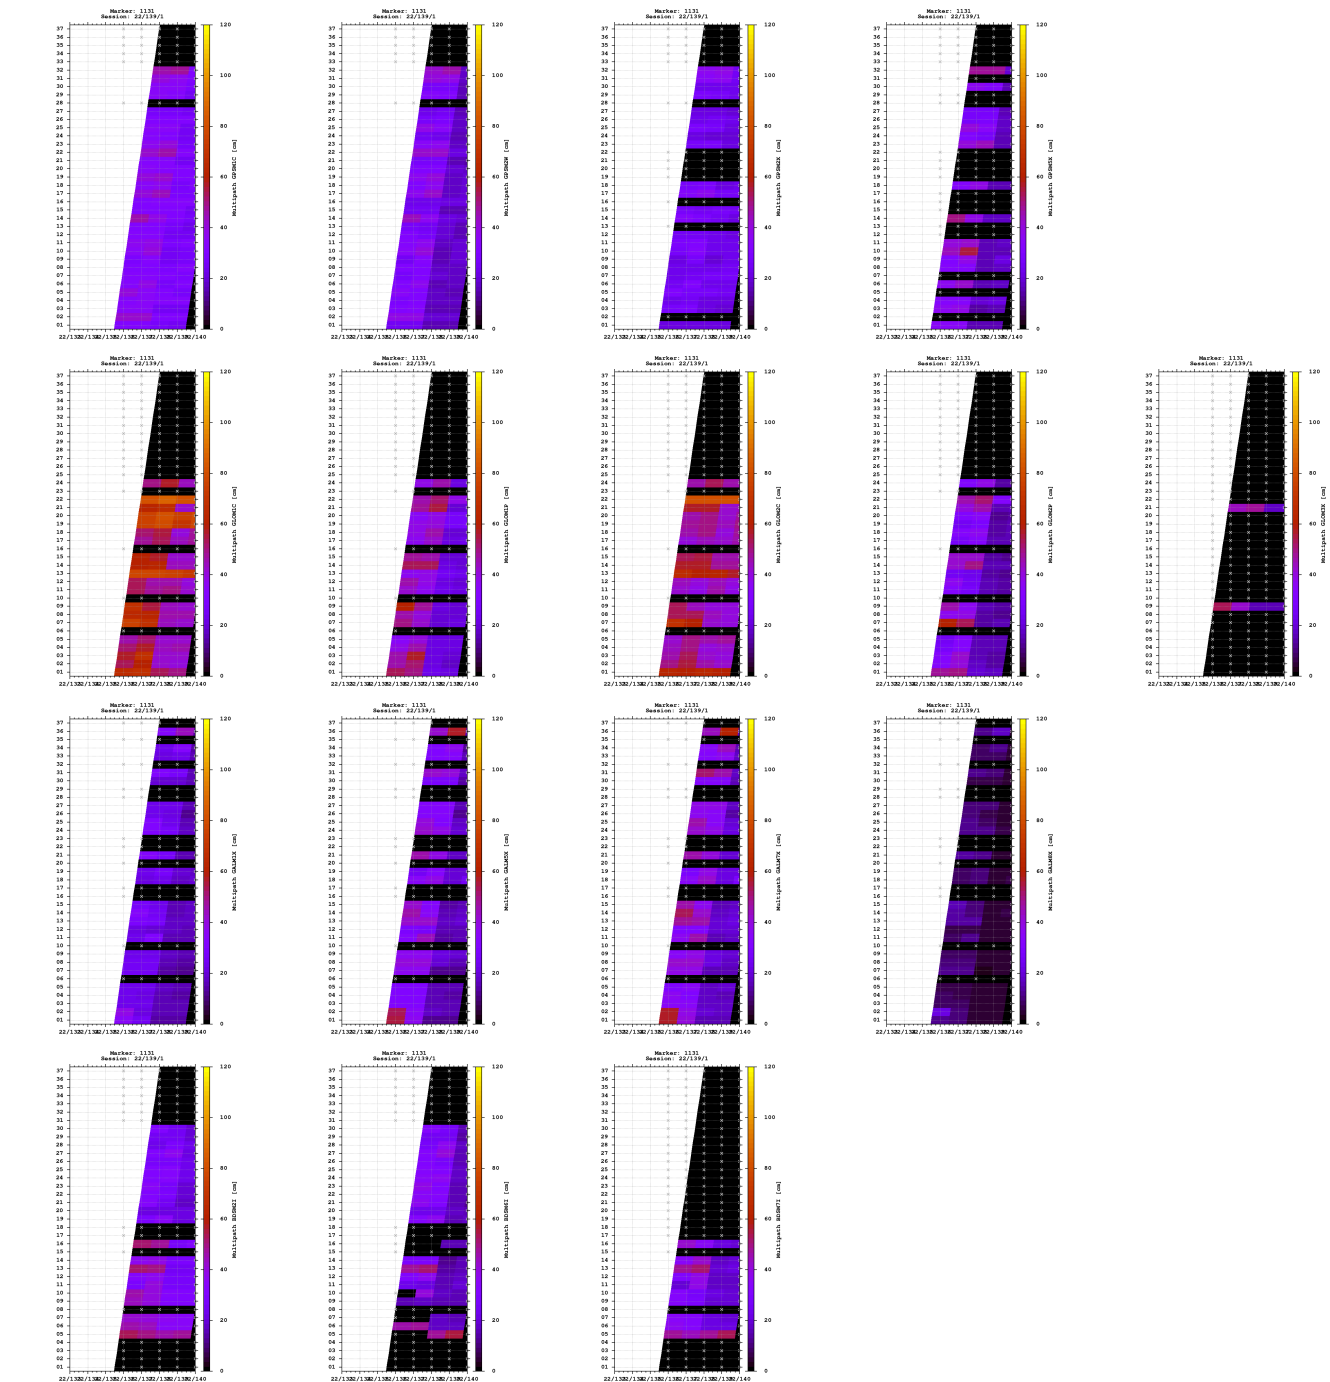


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

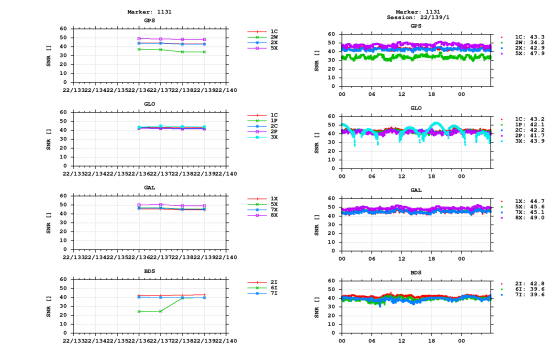


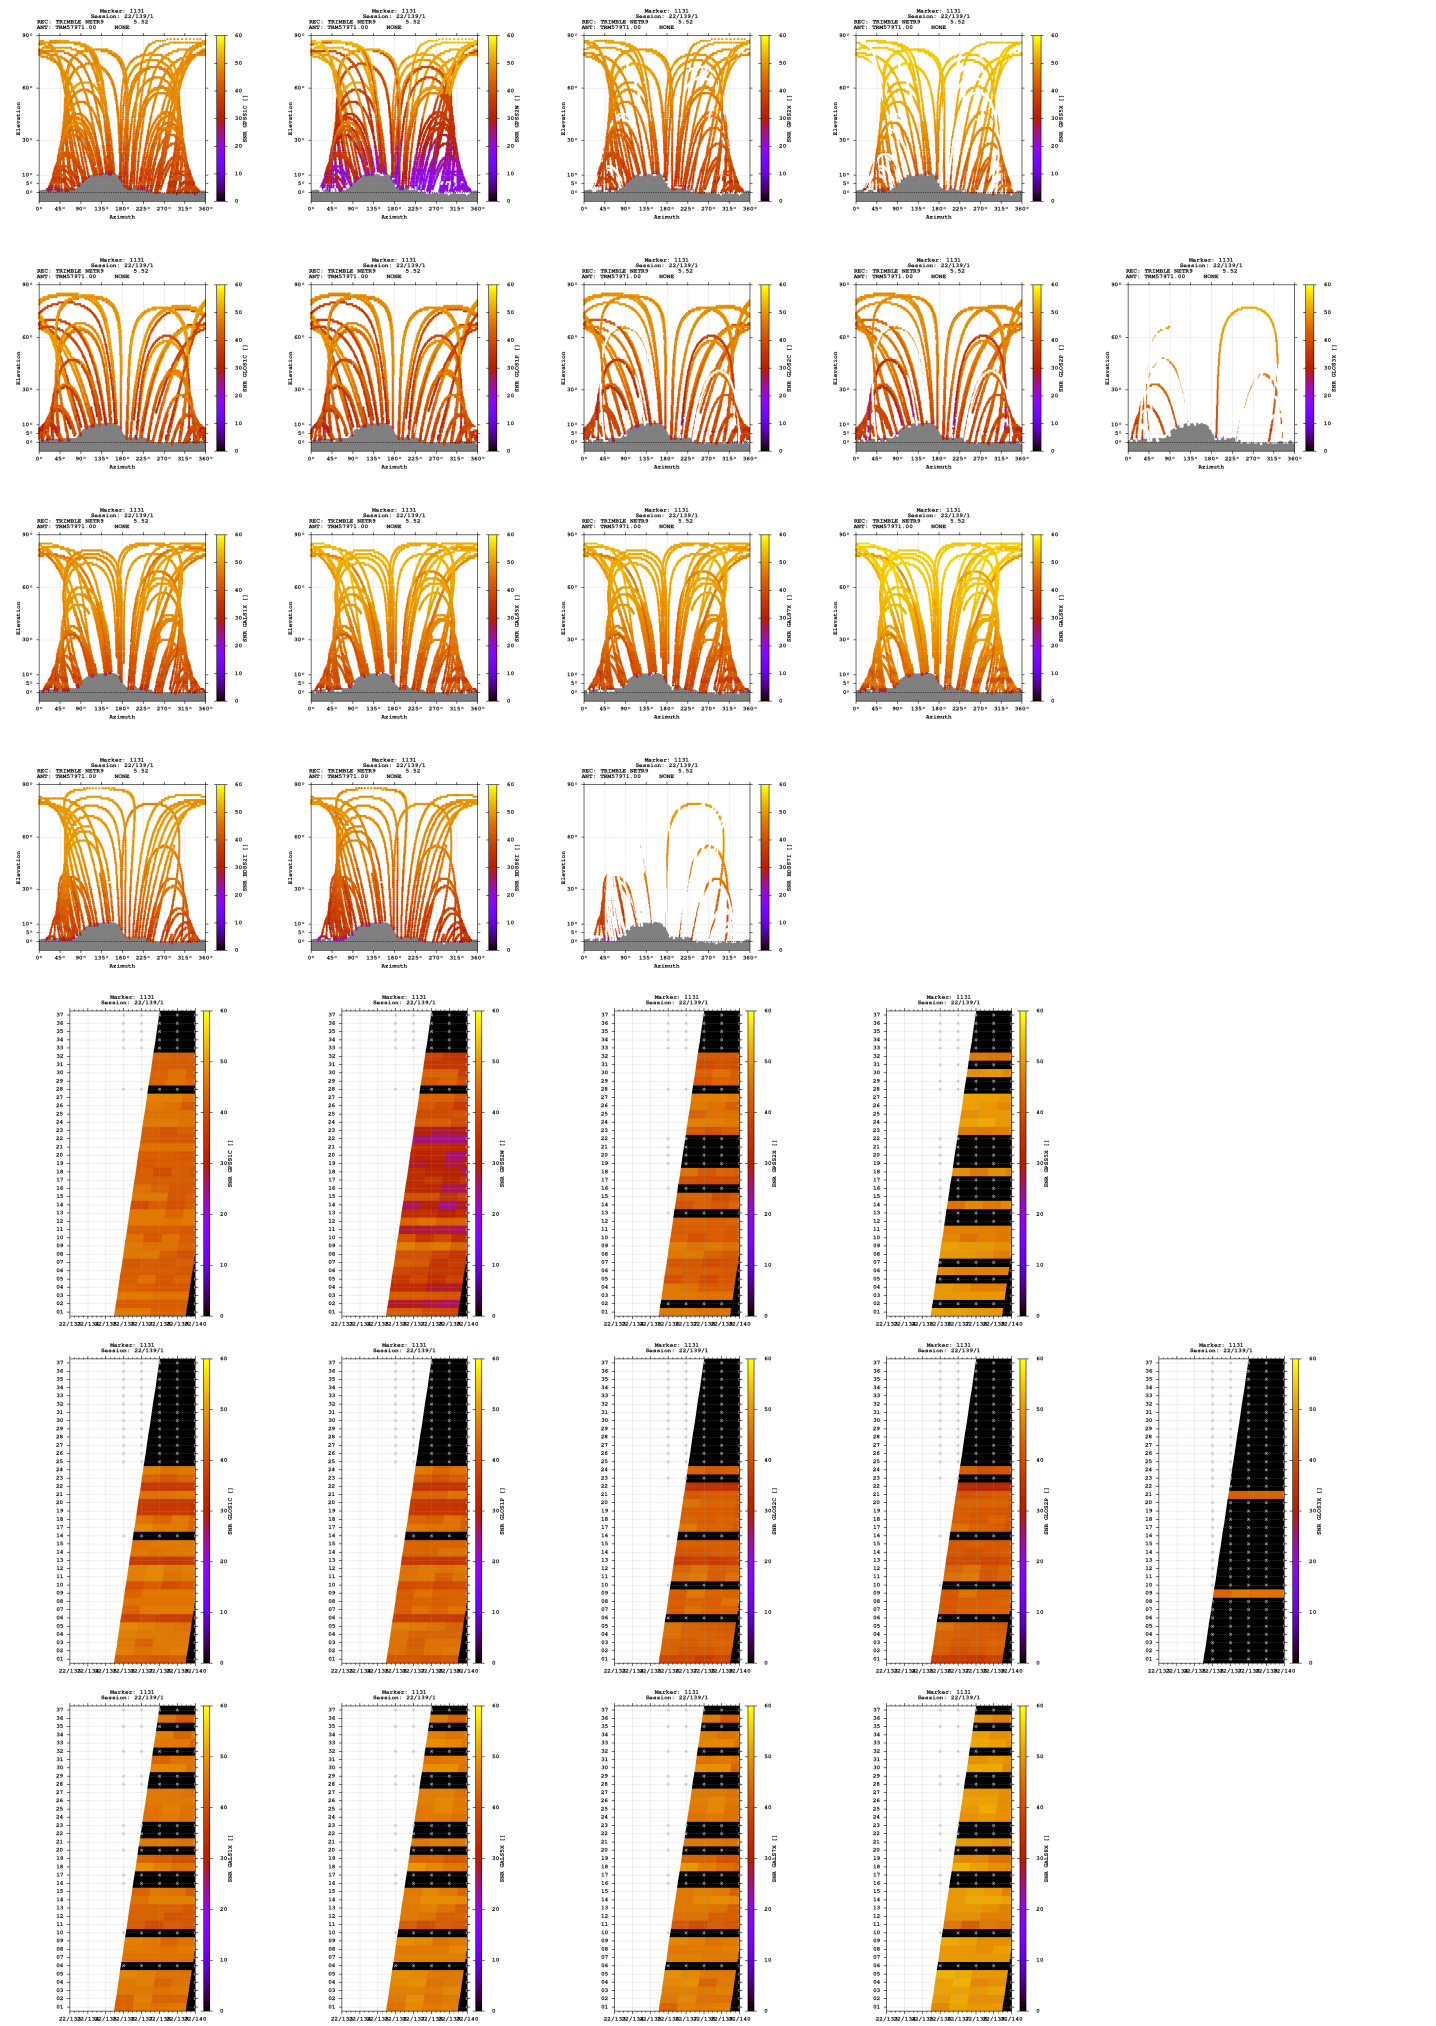

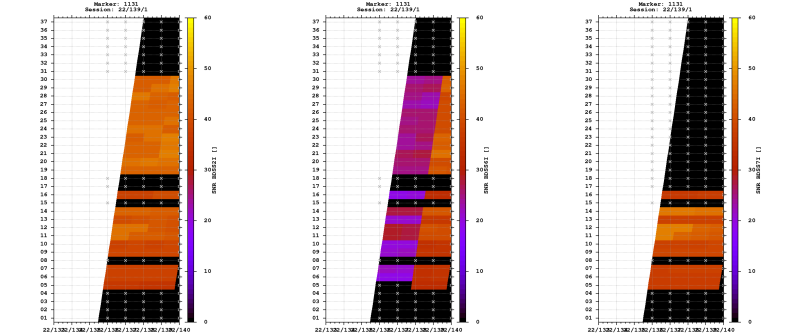


Estimates

2022-05-18 08:14:30	GPS	4296229.9461	647605.9473	4654968.5995	47.165988580	8.572125874	870.3043
2022-05-18 08:14:30	GLO	4296230.6110	647605.7438	4654968.6215	47.165984578	8.572121914	870.7467
2022-05-18 08:14:30	GAL	4296229.9216	647605.9494	4654968.2190	47.165986410	8.572125950	870.0090
2022-05-18 08:14:30	BDS	4296231.1271	647608.7441	4654969.8946	47.165986047	8.572160022	872.3314

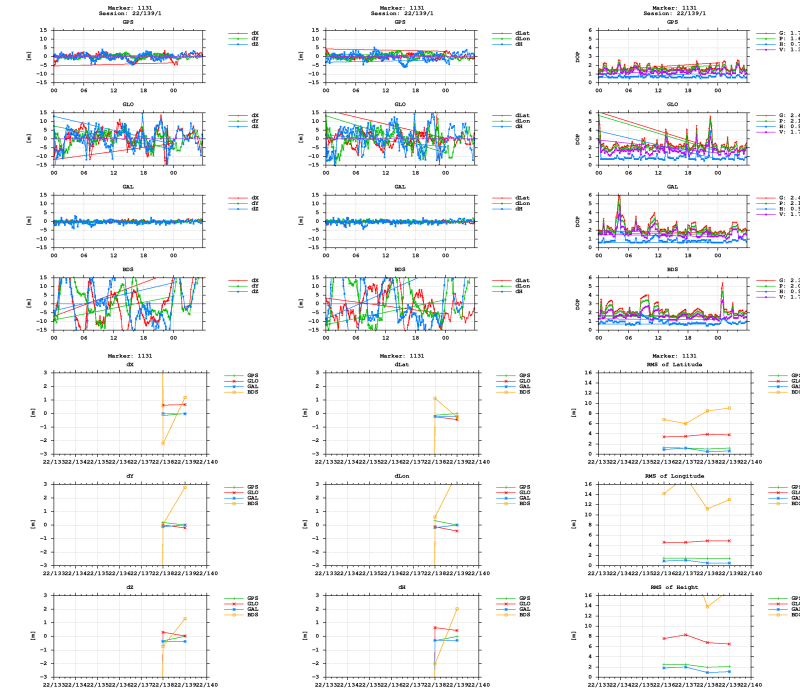

BNC



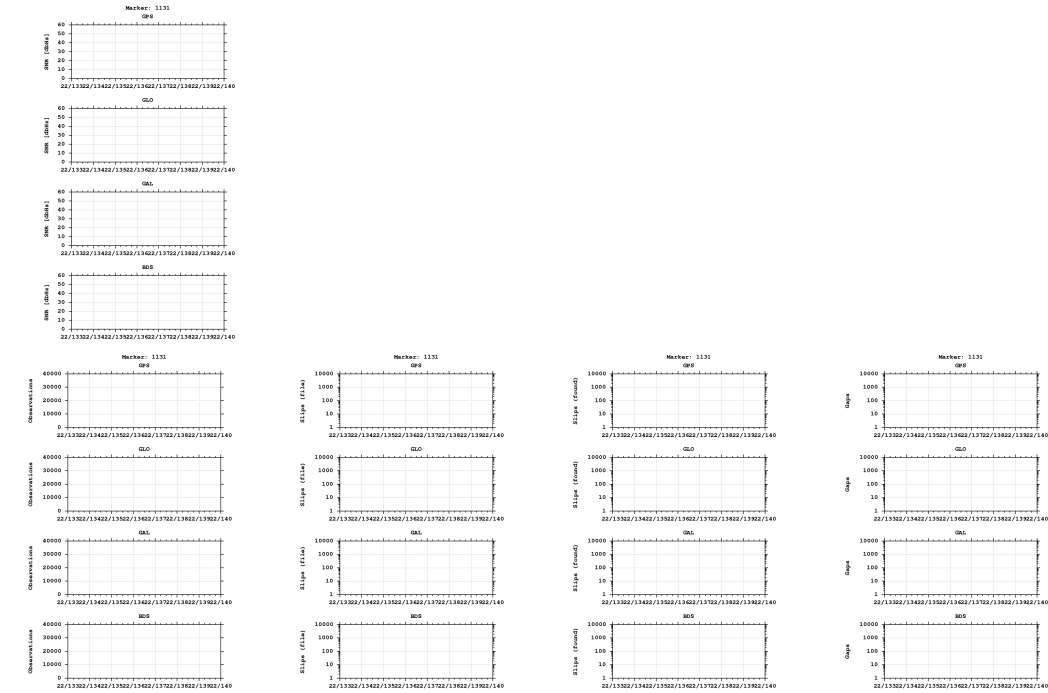

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)