


GNSS observation file monitoring for 0513


Last RINEX file: 05131361.22O
RINEX version: 3.02
Marker: 1130
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

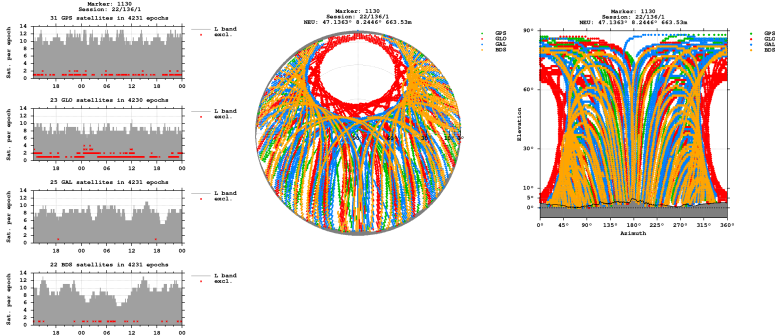


Bands

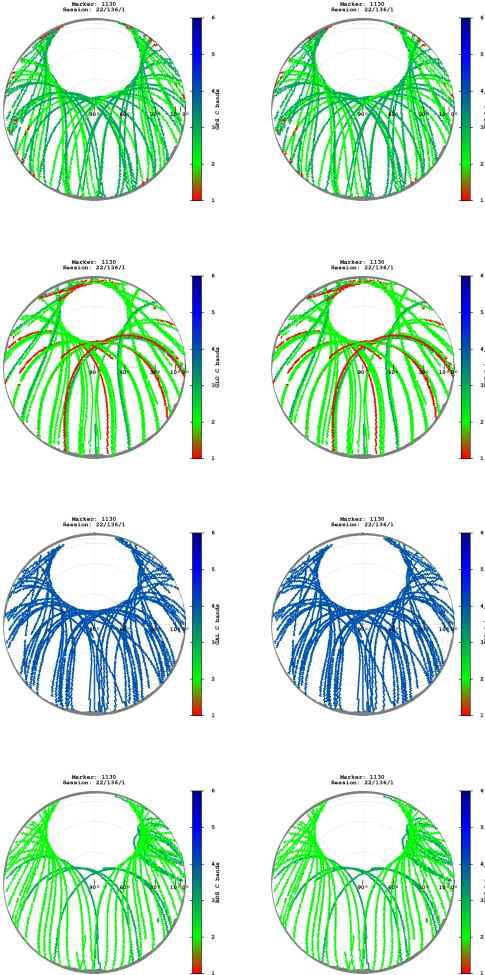

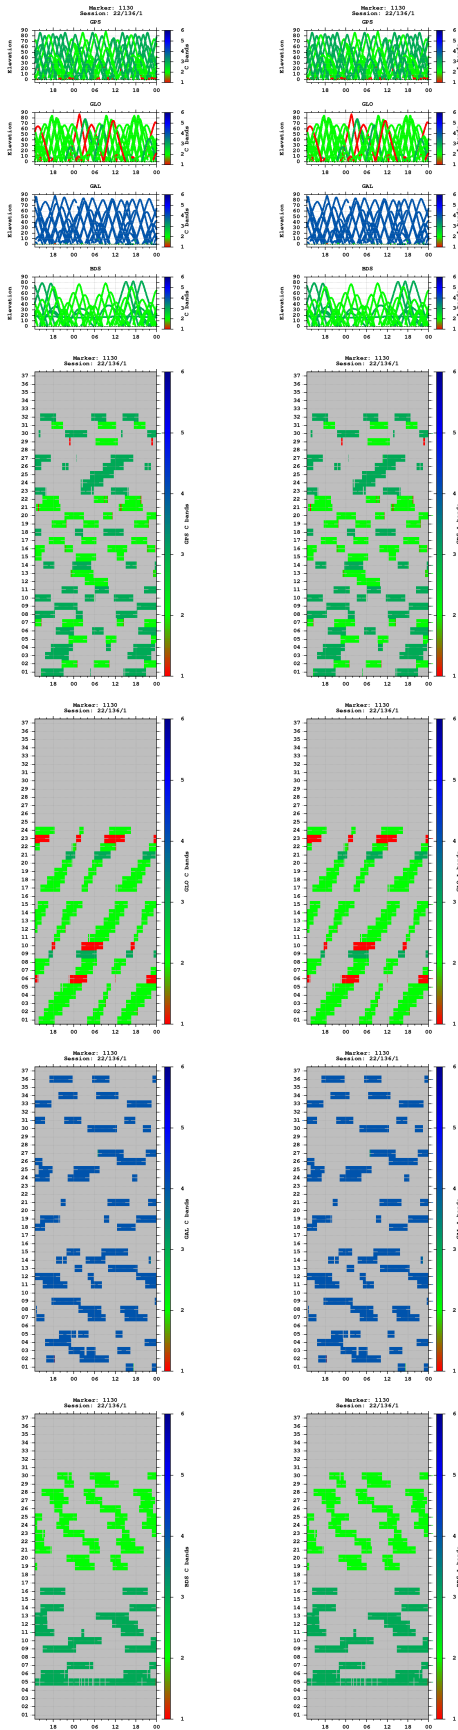



Multipath

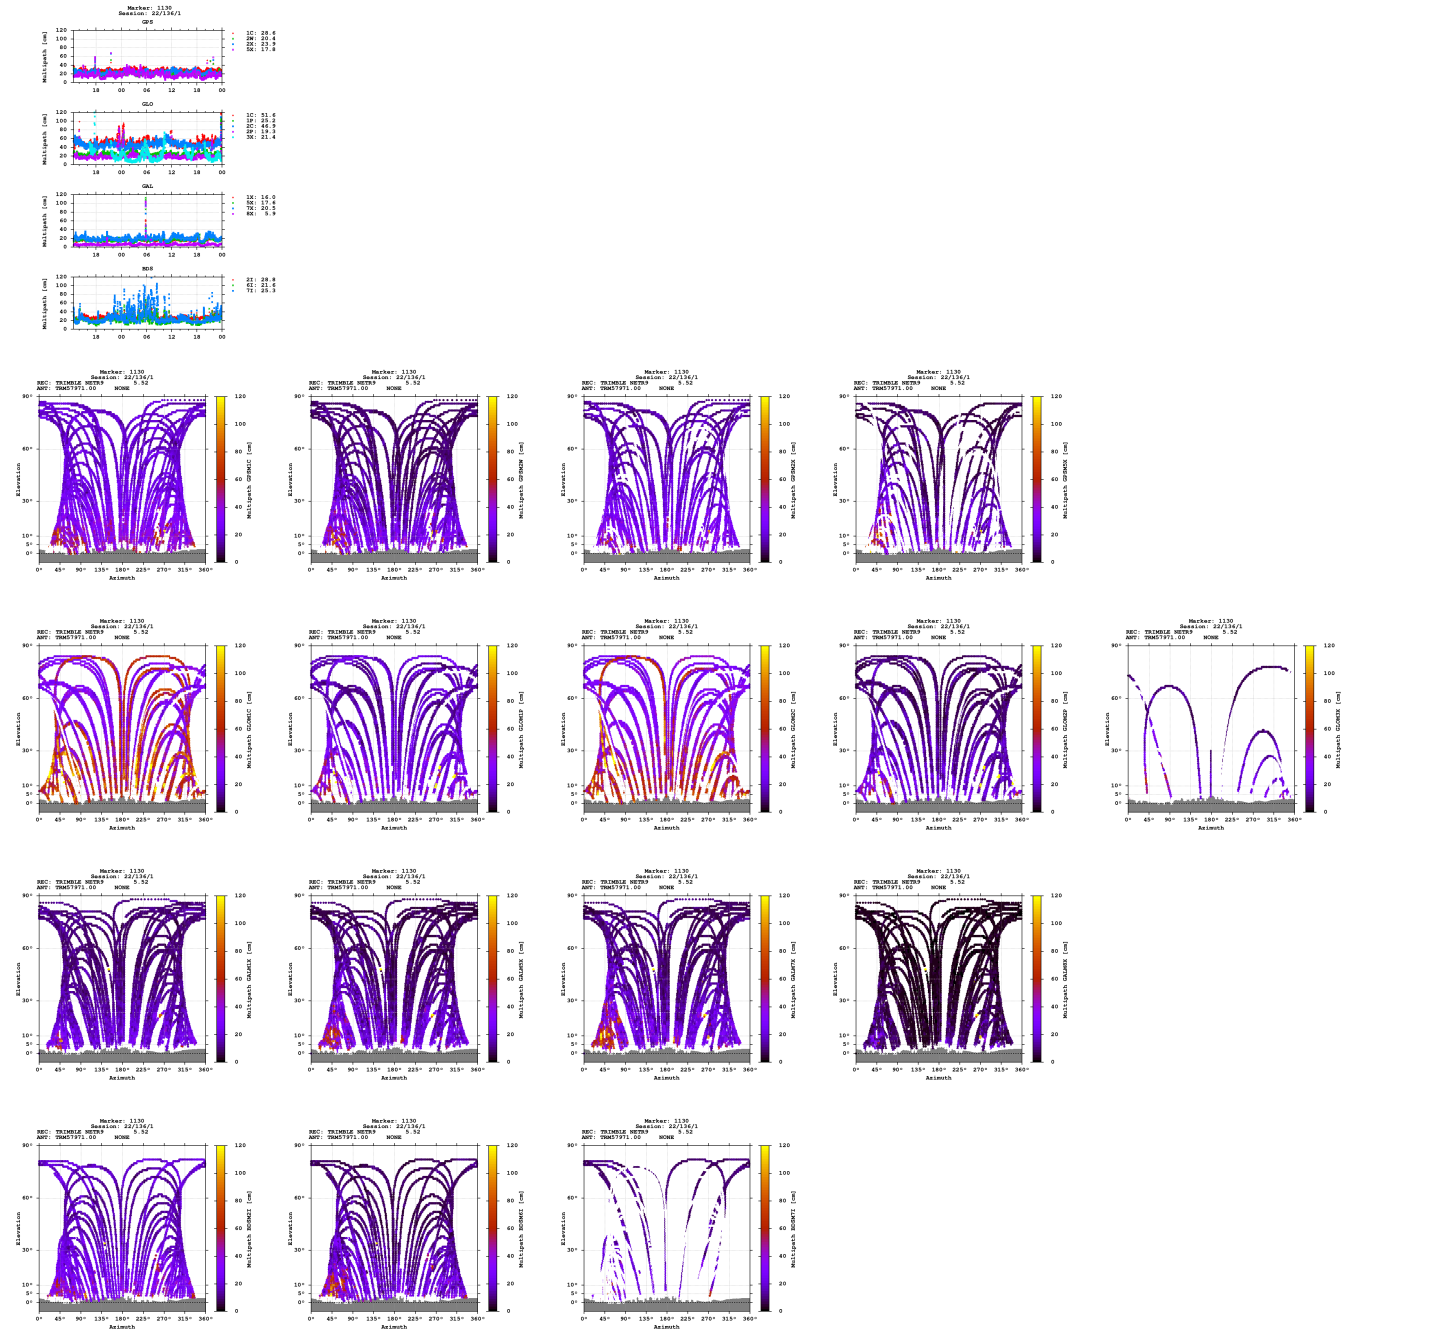

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

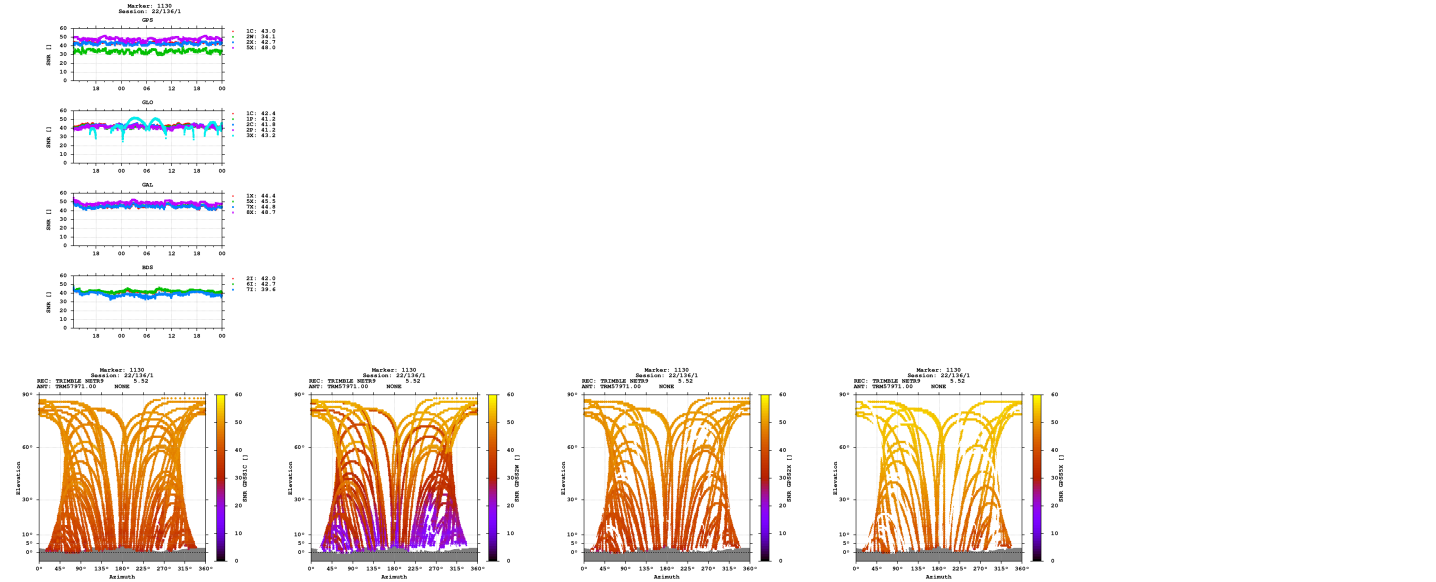

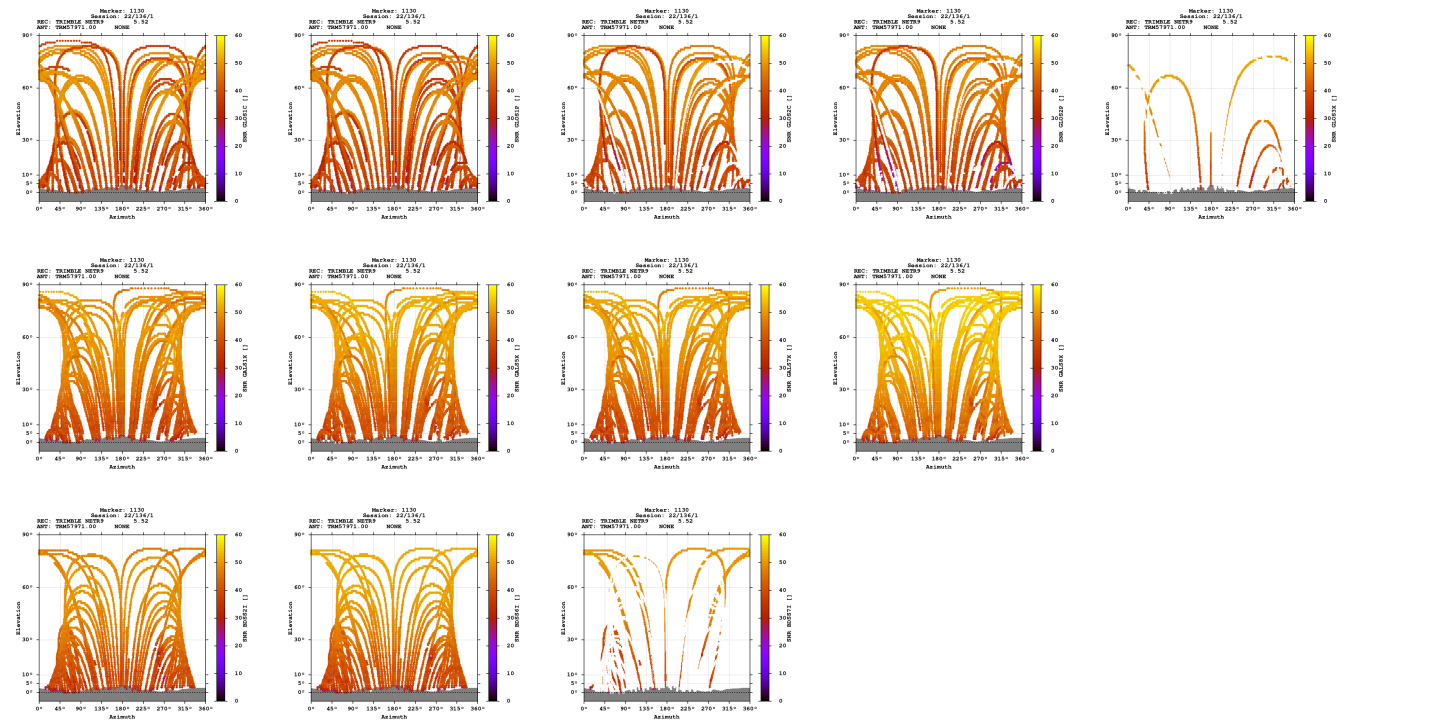

Estimates

2022-05-16 12:40:00	GPS	4302115.9500	623359.5491	4652574.1902	47.136327457	8.244553125	663.5348
2022-05-16 12:40:00	GLO	4302116.0035	623359.4514	4652574.4682	47.136328901	8.244551749	663.7650
2022-05-16 12:40:00	GAL	4302116.1193	623359.3612	4652574.3076	47.136327249	8.244550354	663.7164
2022-05-16 12:40:00	BDS	4302115.9364	623357.2266	4652576.7546	47.136345431	8.244522856	665.1787

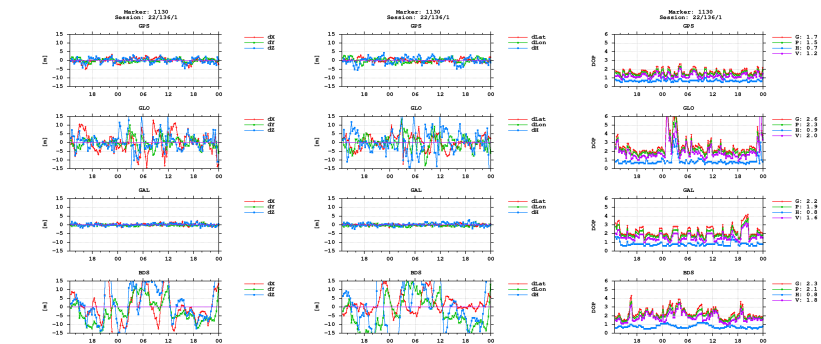

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)