


GNSS observation file monitoring for 0514


Last RINEX file: 05141361.22O
RINEX version: 3.02
Marker: 1150
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

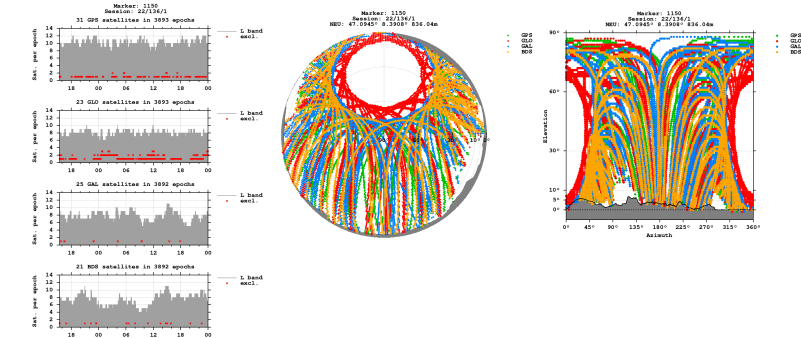


Bands

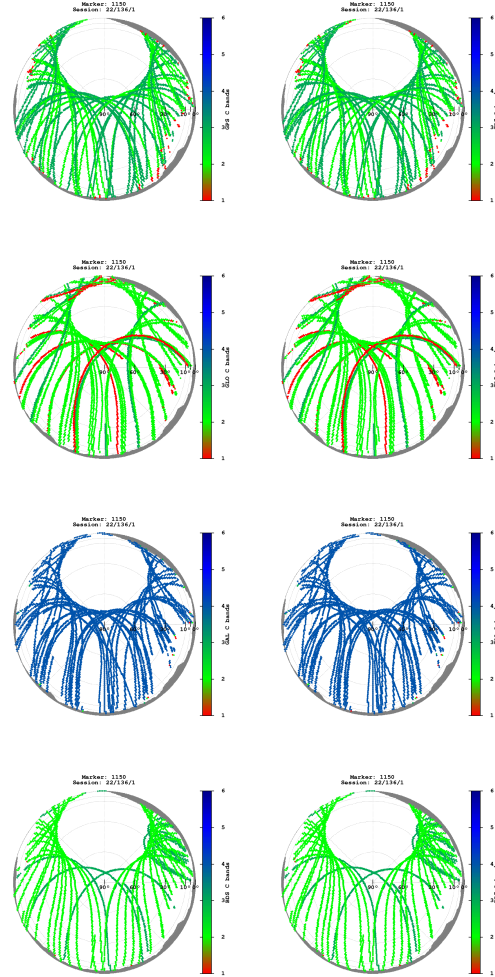

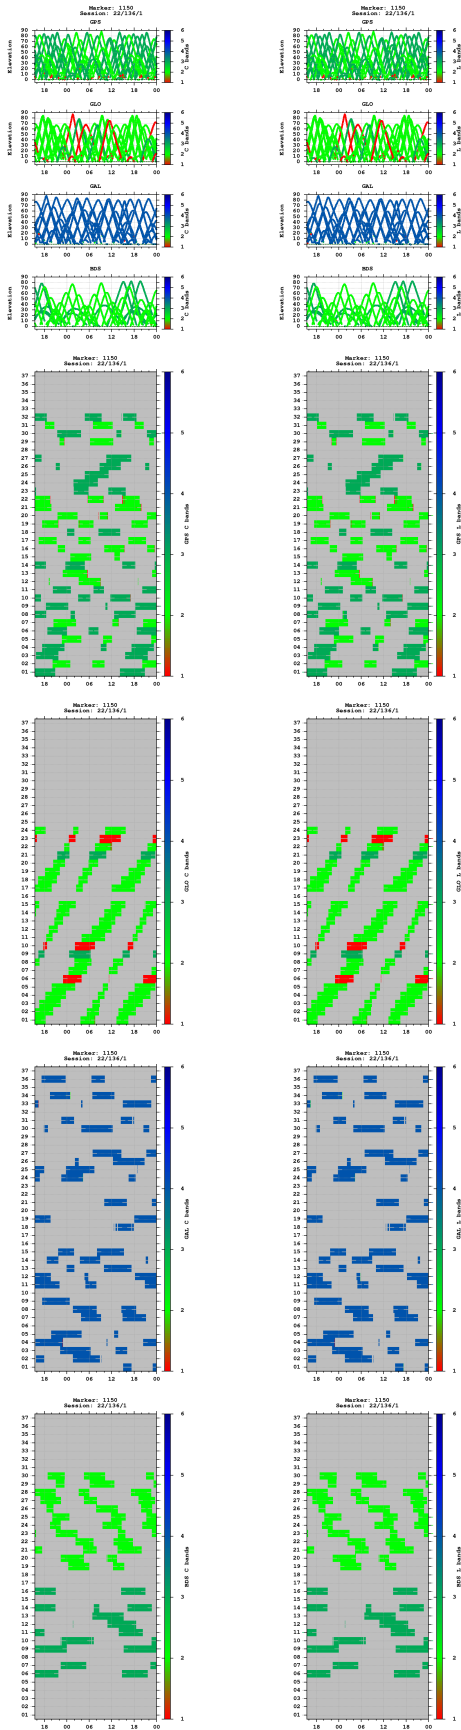



Multipath

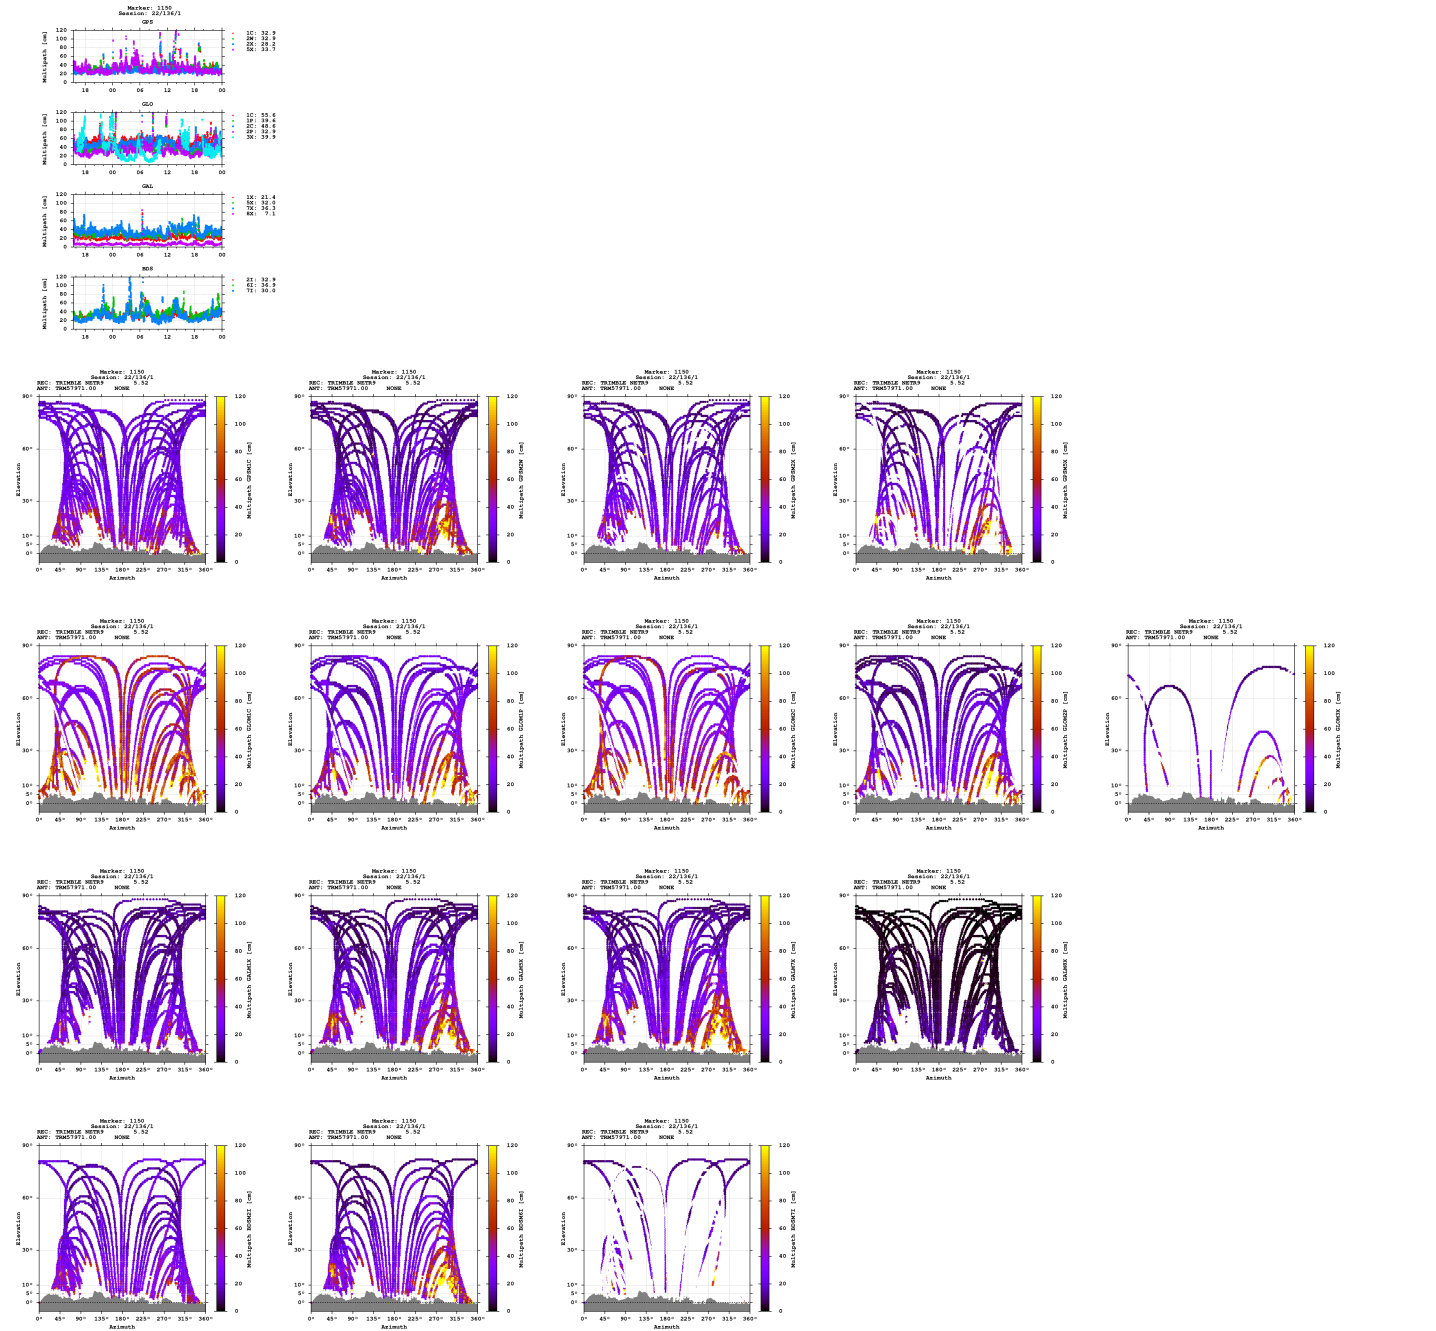

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

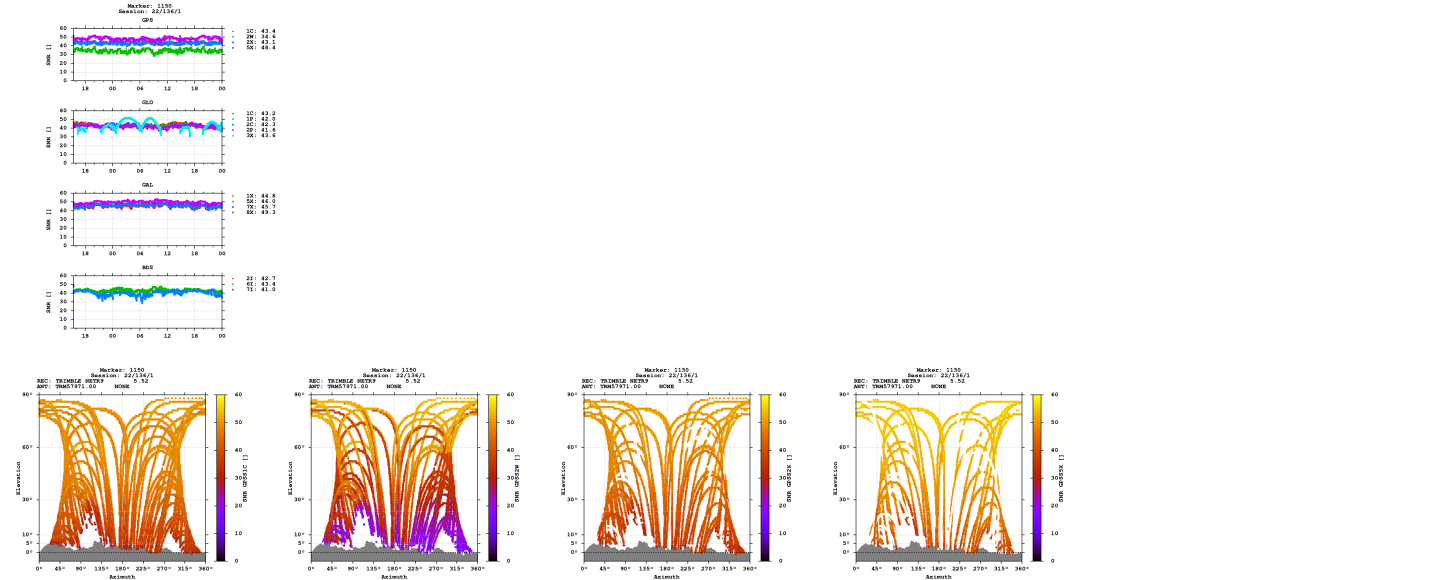

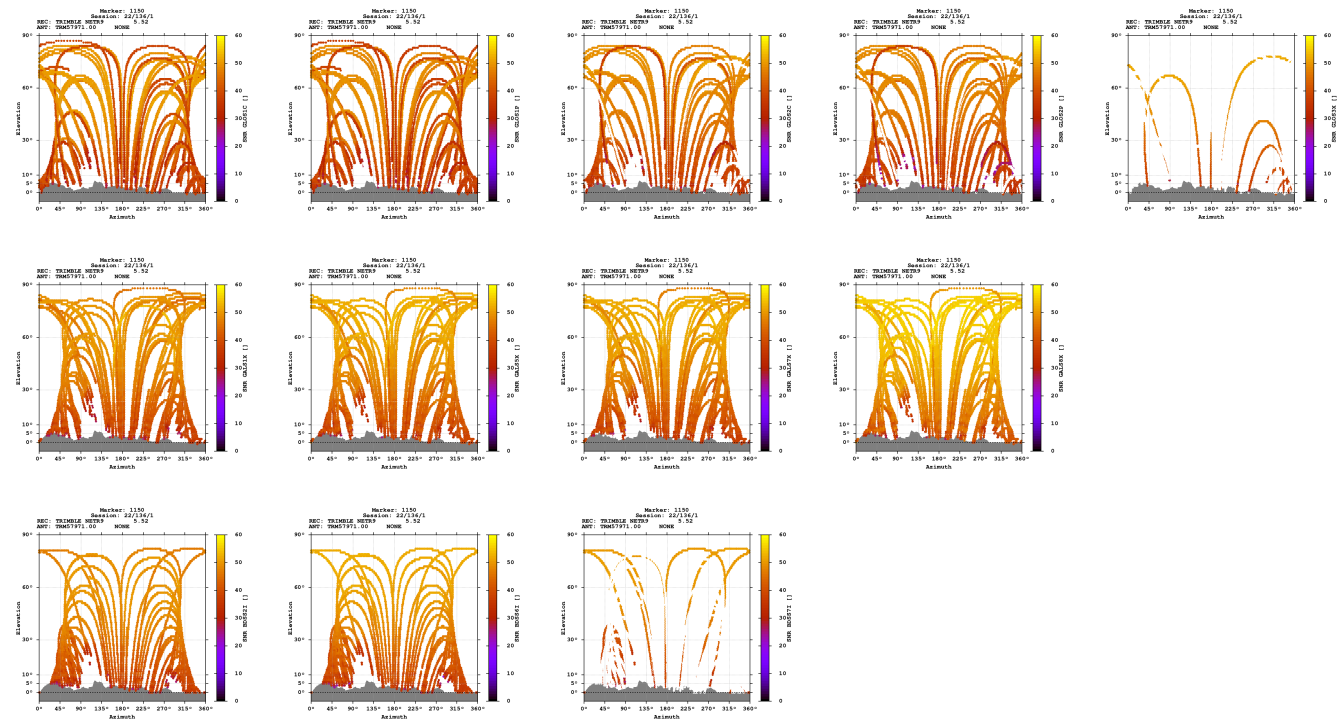

Estimates

2022-05-16 15:28:30	GPS	4303994.8366	634855.2102	4649538.4406	47.094535928	8.390835106	836.0393
2022-05-16 15:28:30	GLO	4303995.2467	634855.4069	4649538.8573	47.094535617	8.390836881	836.6403
2022-05-16 15:28:30	GAL	4303994.9400	634855.1140	4649538.4252	47.094535252	8.390833654	836.0881
2022-05-16 15:28:30	BDS	4303995.1342	634853.1593	4649540.5351	47.094548784	8.390807813	837.5702

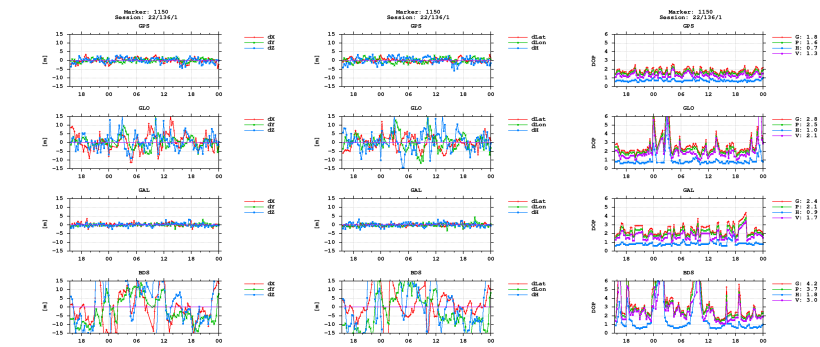

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)