


GNSS observation file monitoring for 0514


Last RINEX file: 05141371.220
RINEX version: 3.02
Marker: 1150
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

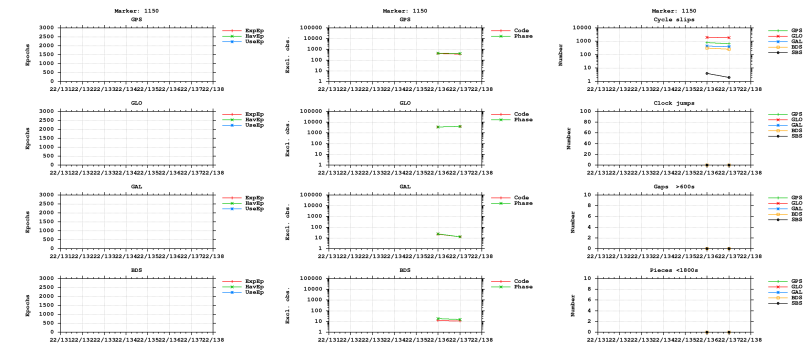



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

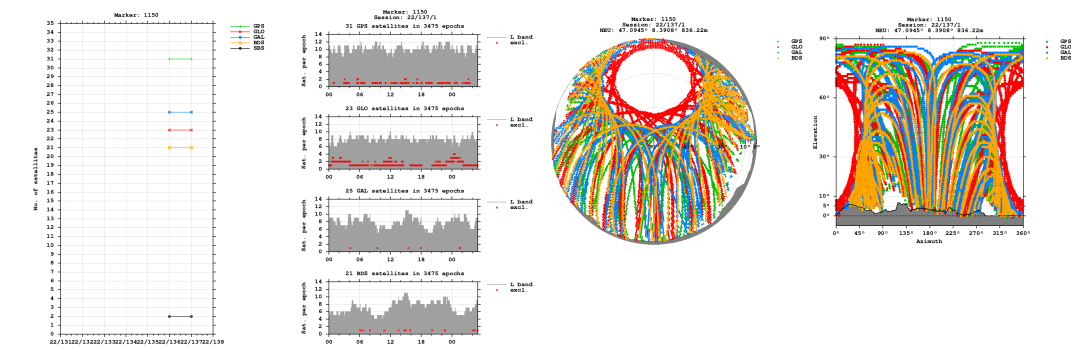


Bands

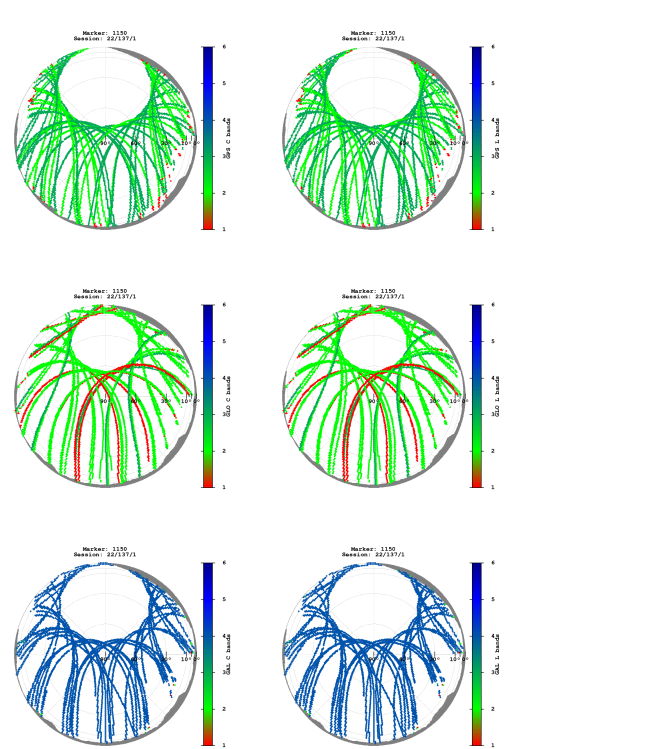


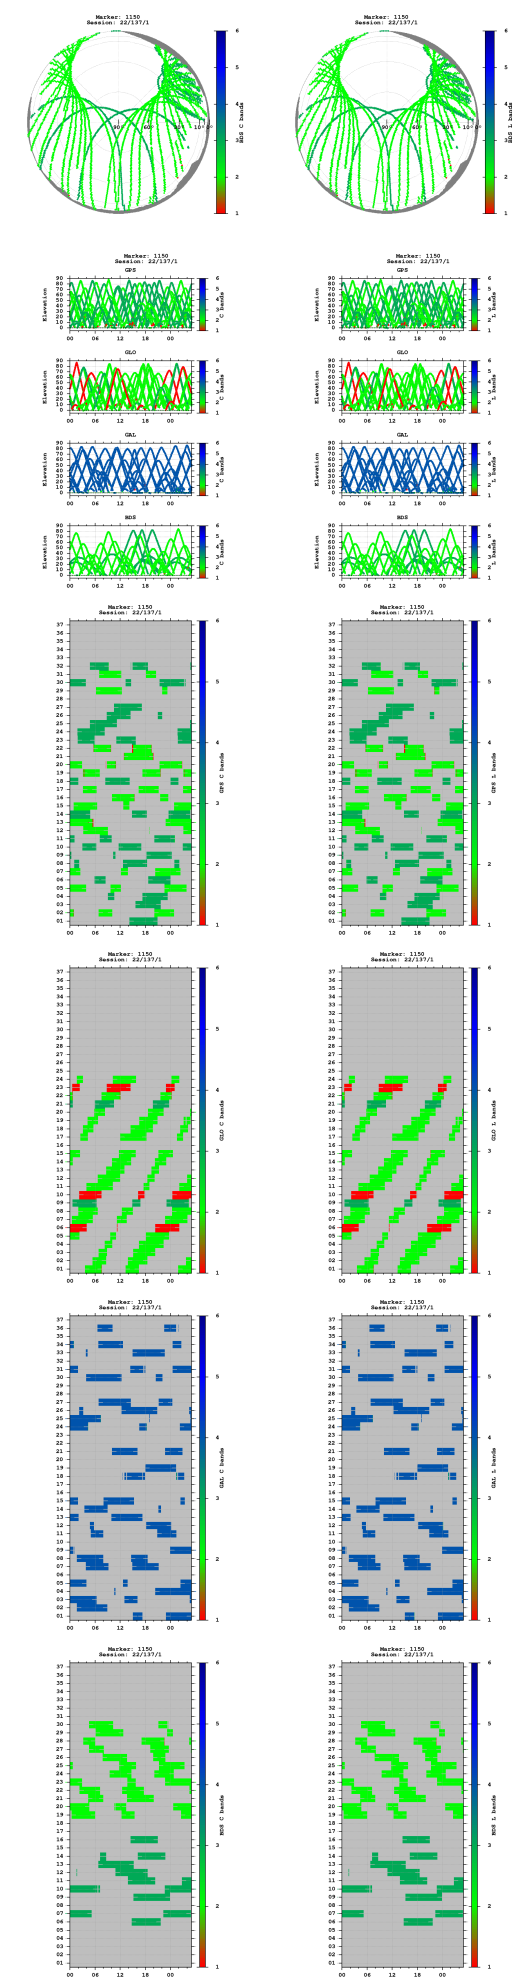


Observations

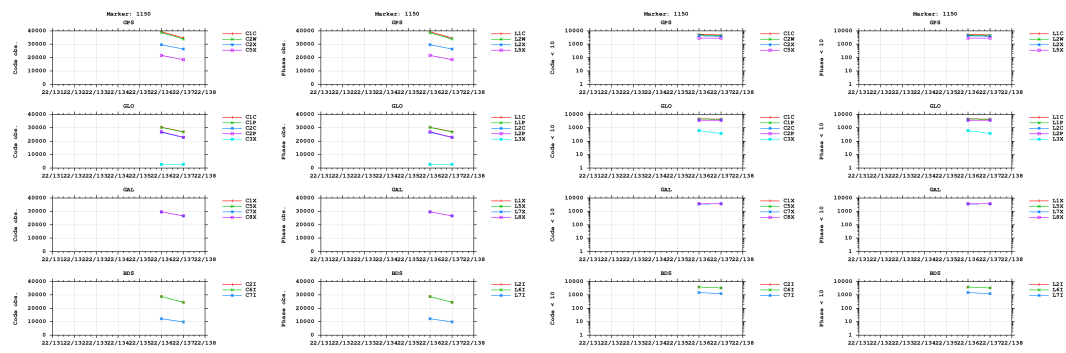


Multipath

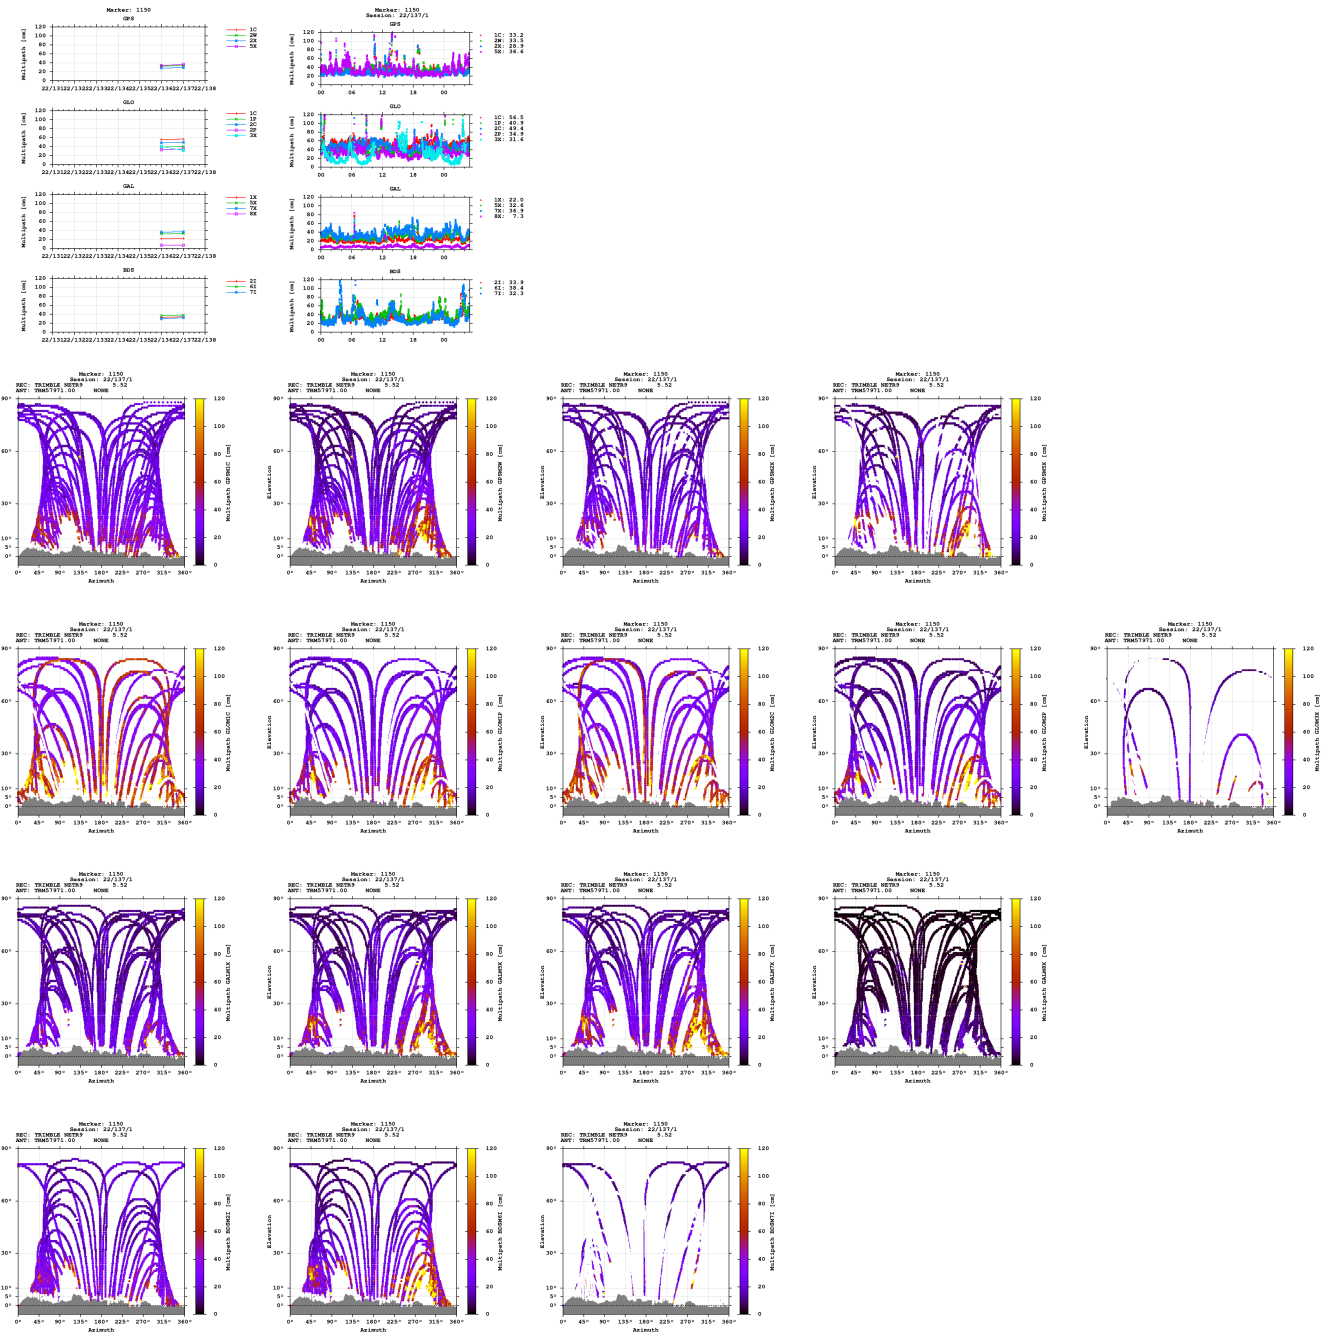


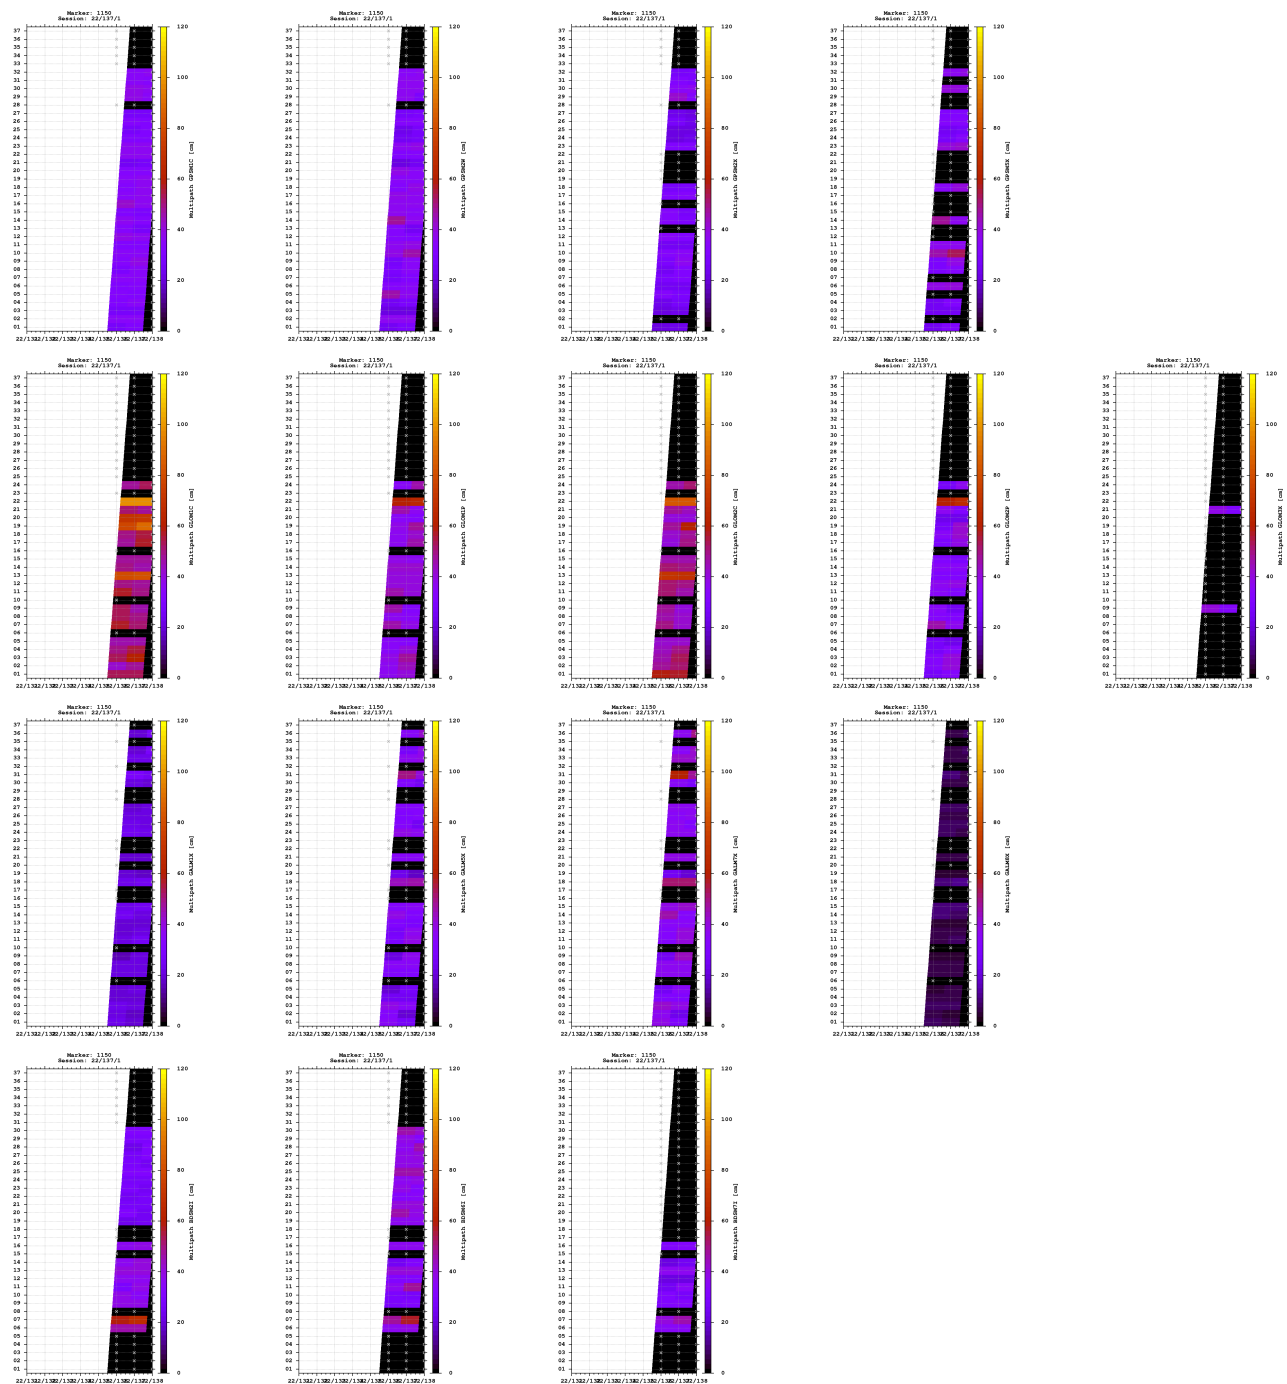


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

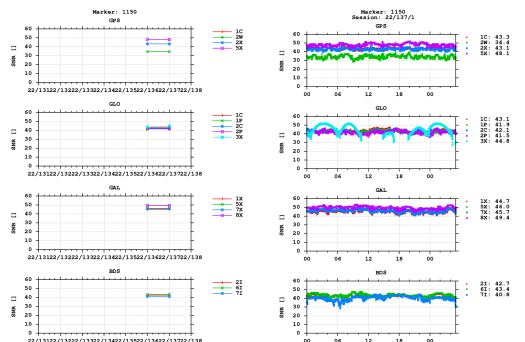


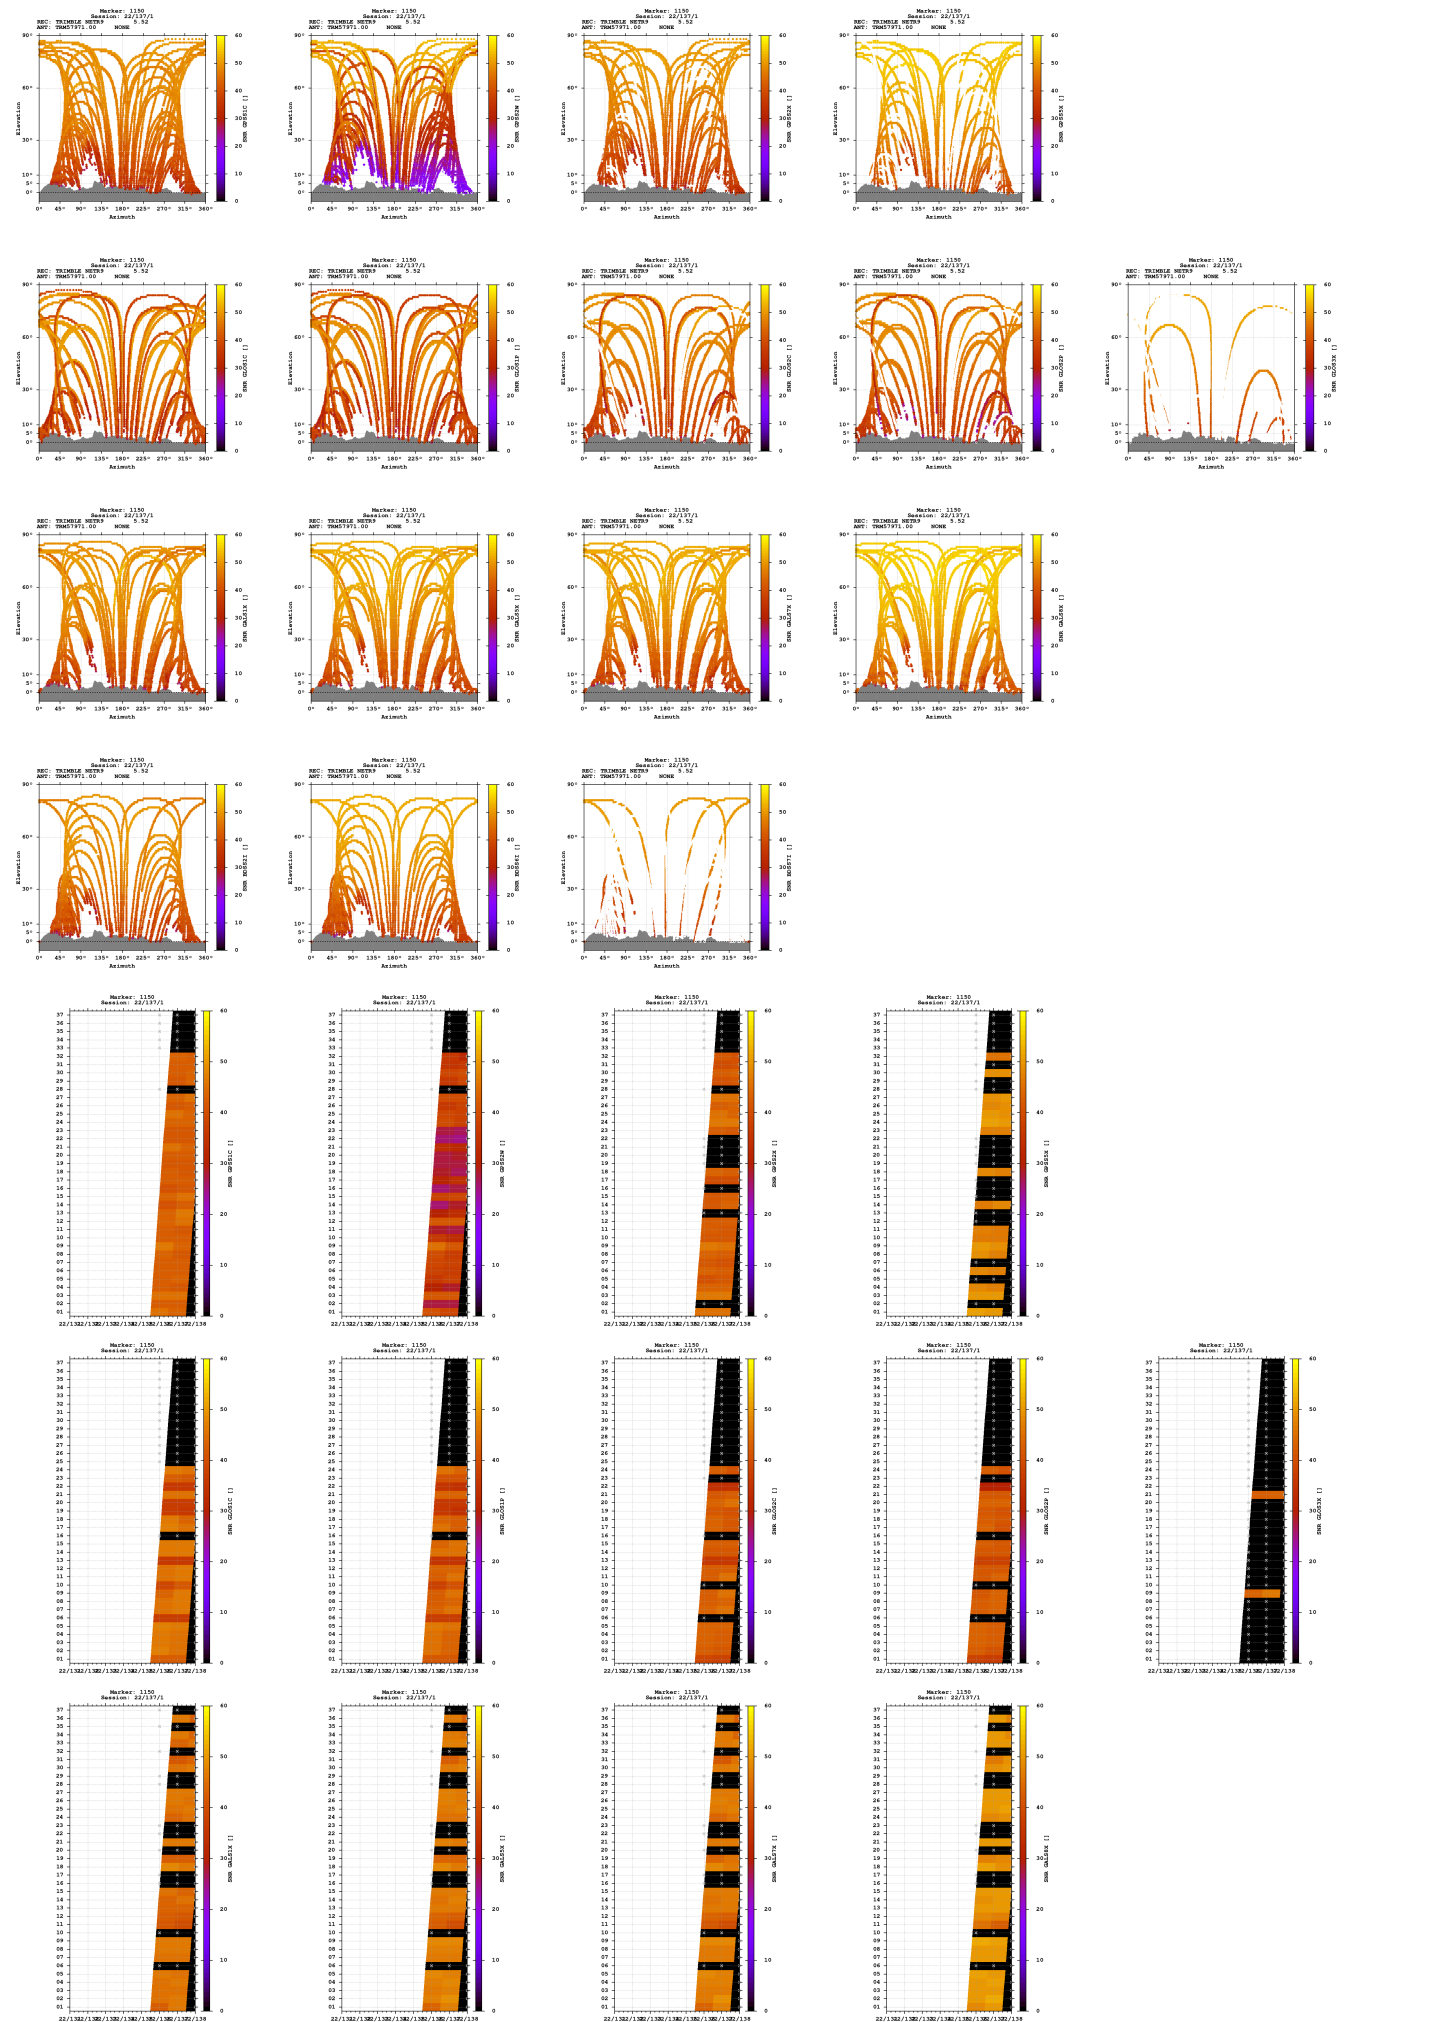

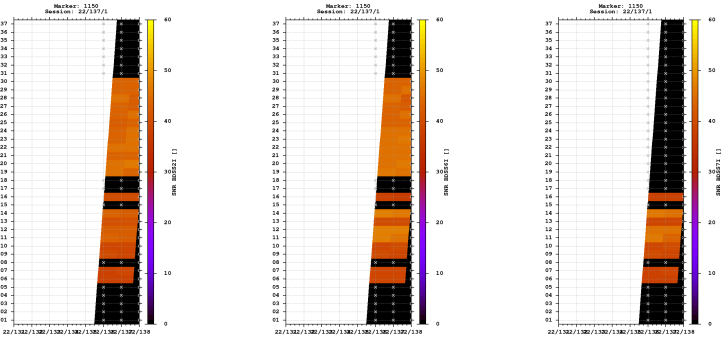



Estimates

2022-05-16 15:28:30	GPS	4303994.9039	634855.0160	4649538.6548	47.094536987	8.390832446	836.2222
2022-05-16 15:28:30	GLO	4303994.8334	634855.1615	4649538.5968	47.094536952	8.390834478	836.1467
2022-05-16 15:28:30	GAL	4303994.9406	634855.2153	4649538.5155	47.094535703	8.390834972	836.1647
2022-05-16 15:28:30	BDS	4303994.2646	634855.5024	4649541.4186	47.094557609	8.390840013	837.8644

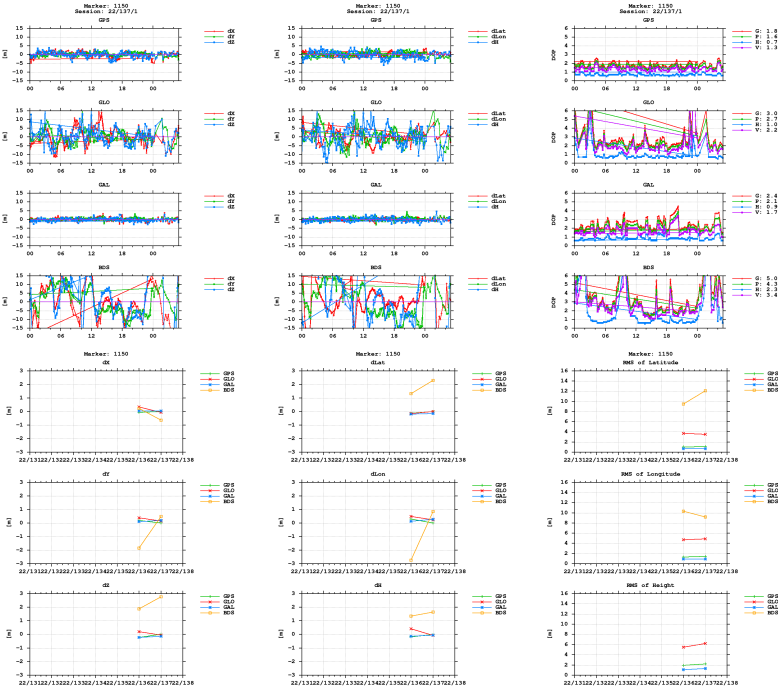

BNC

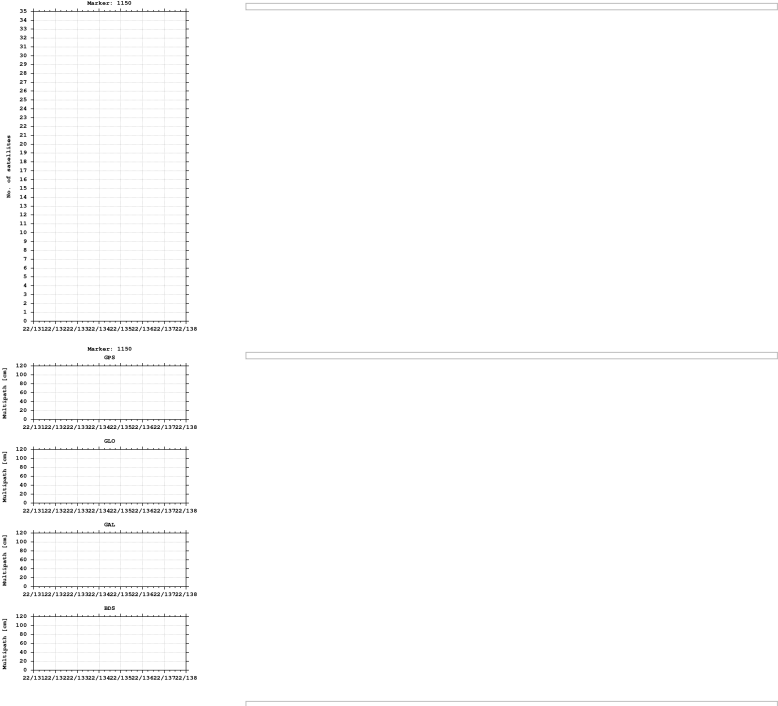

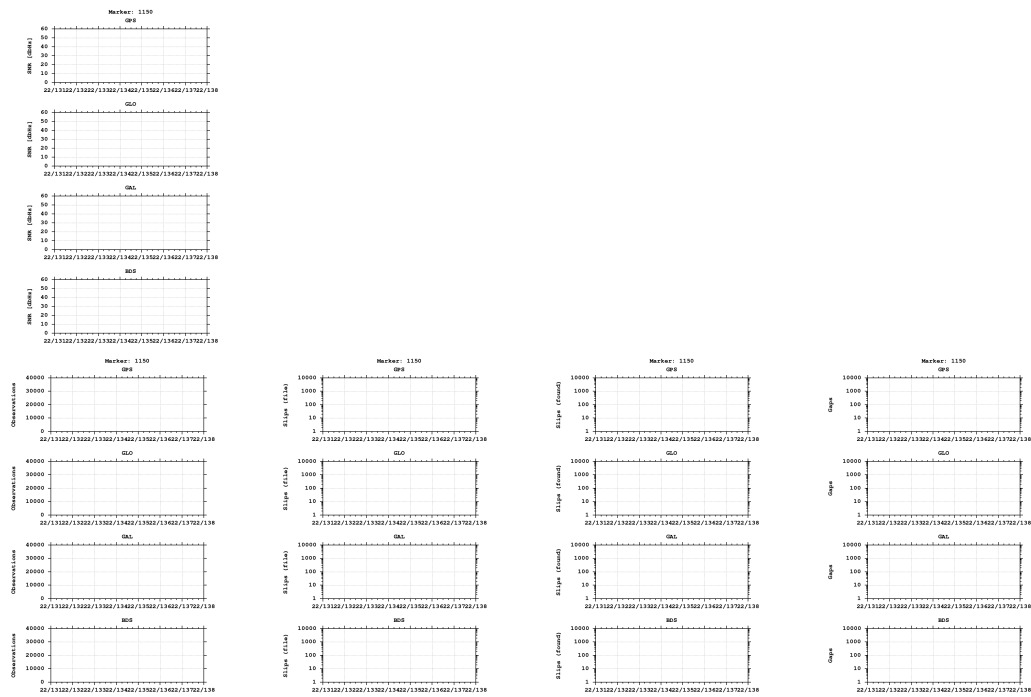

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)