

GNSS observation file monitoring for 0514

Last RINEX file: 05141381.220


RINEX version: 3.02

Marker: 1111

Receiver: 514 TRIMBLE NETR9 5.52


Antenna: 514 TRM57971.00 NONE

Epochs

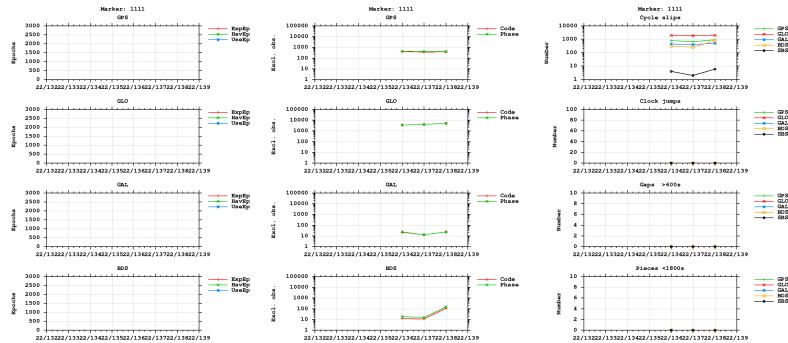



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

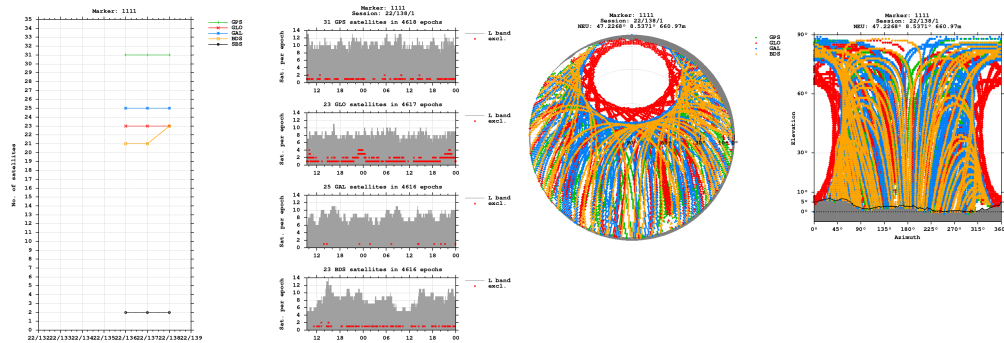


Bands

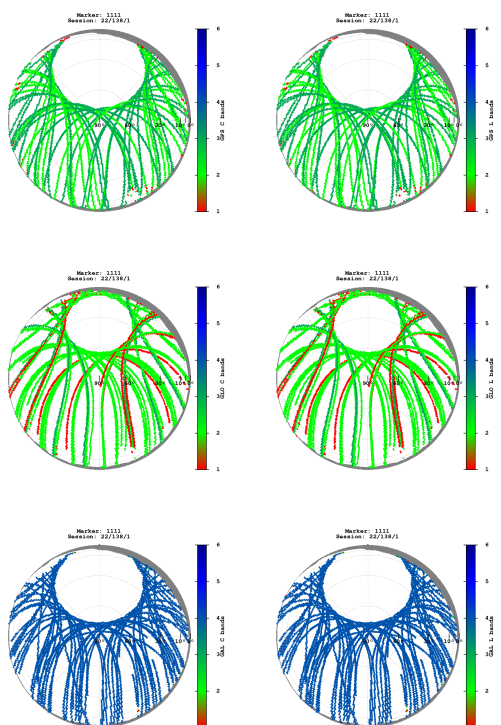


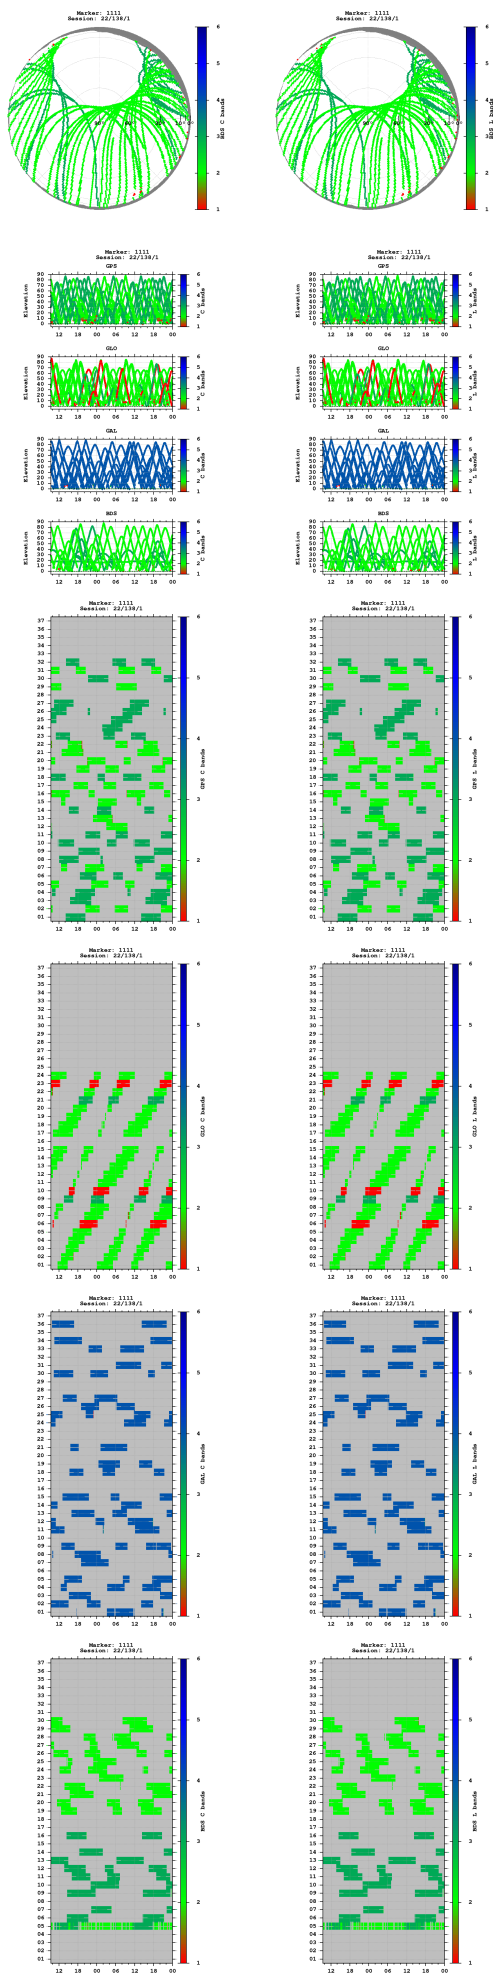


Observations

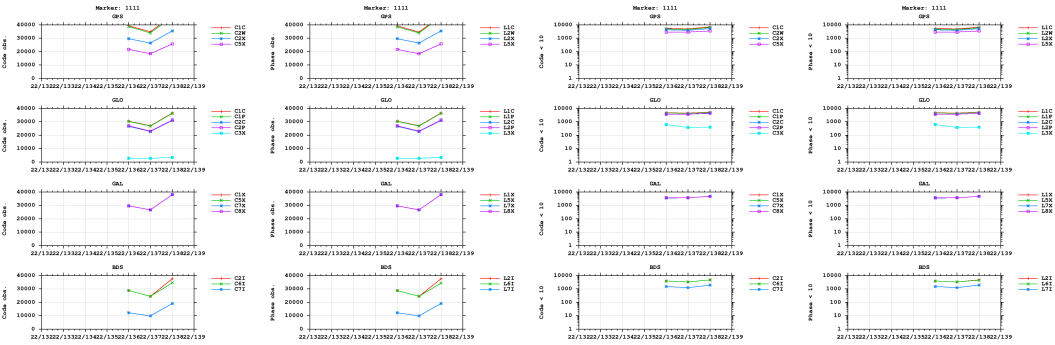


Multipath

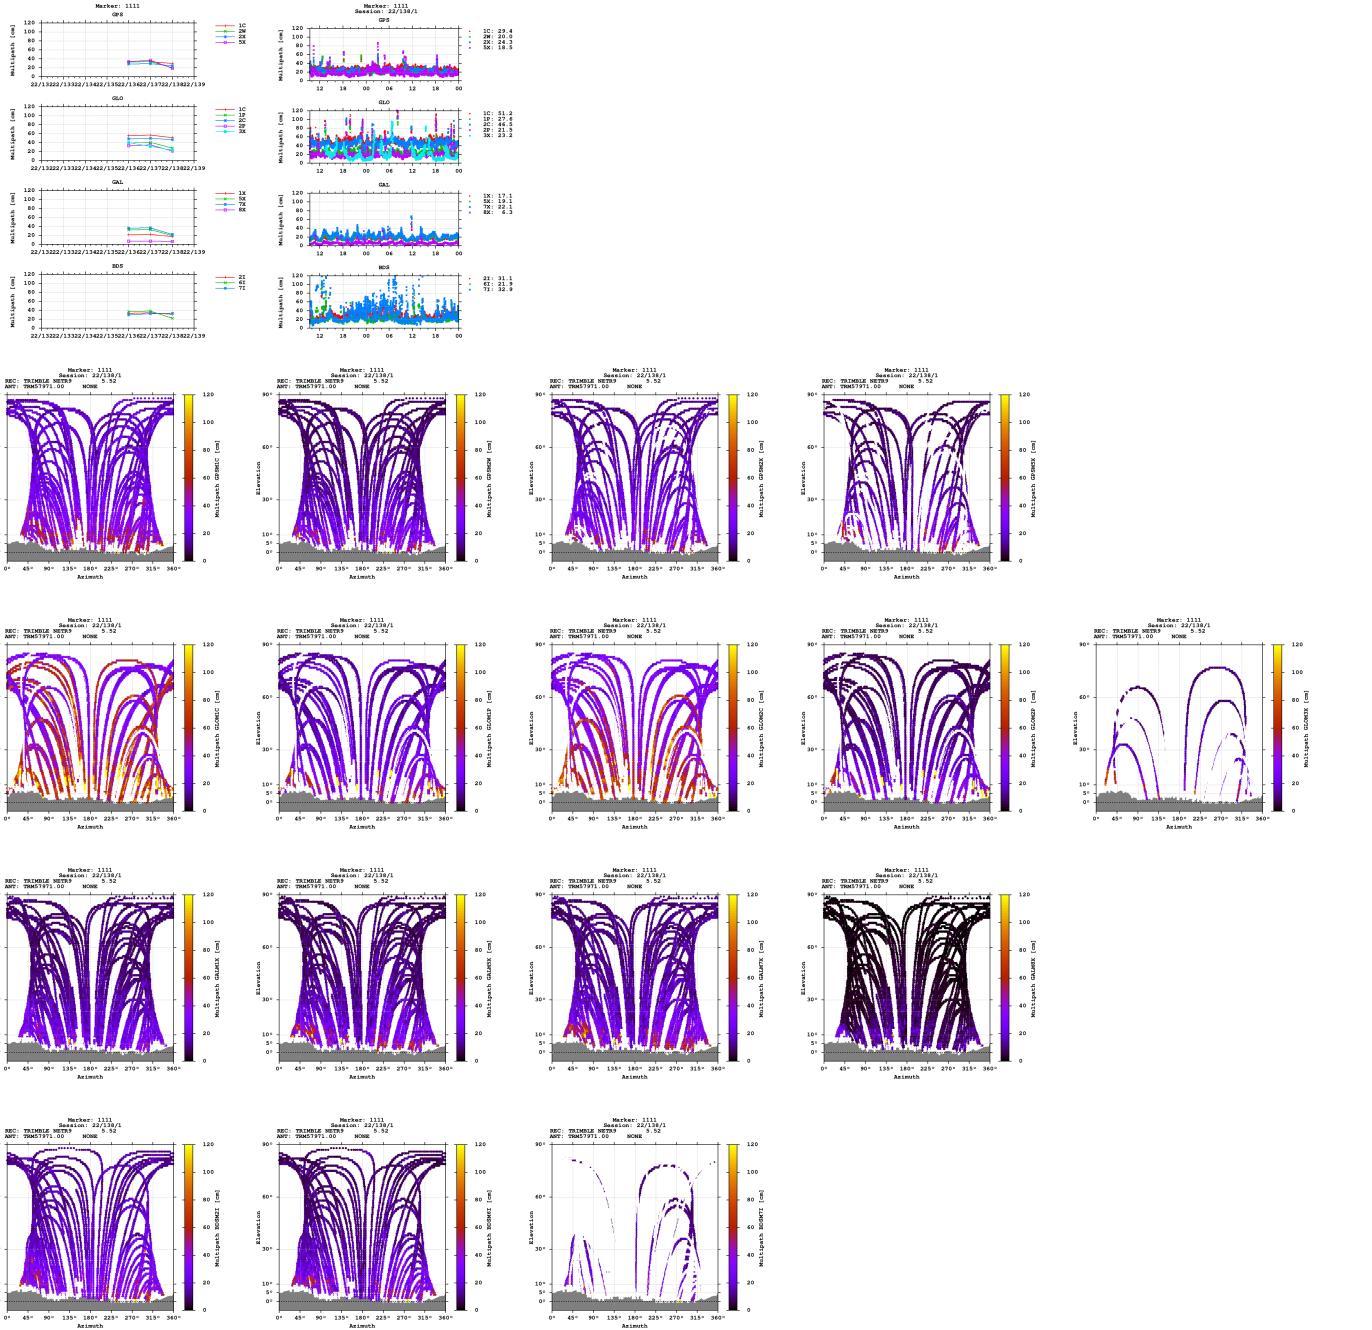


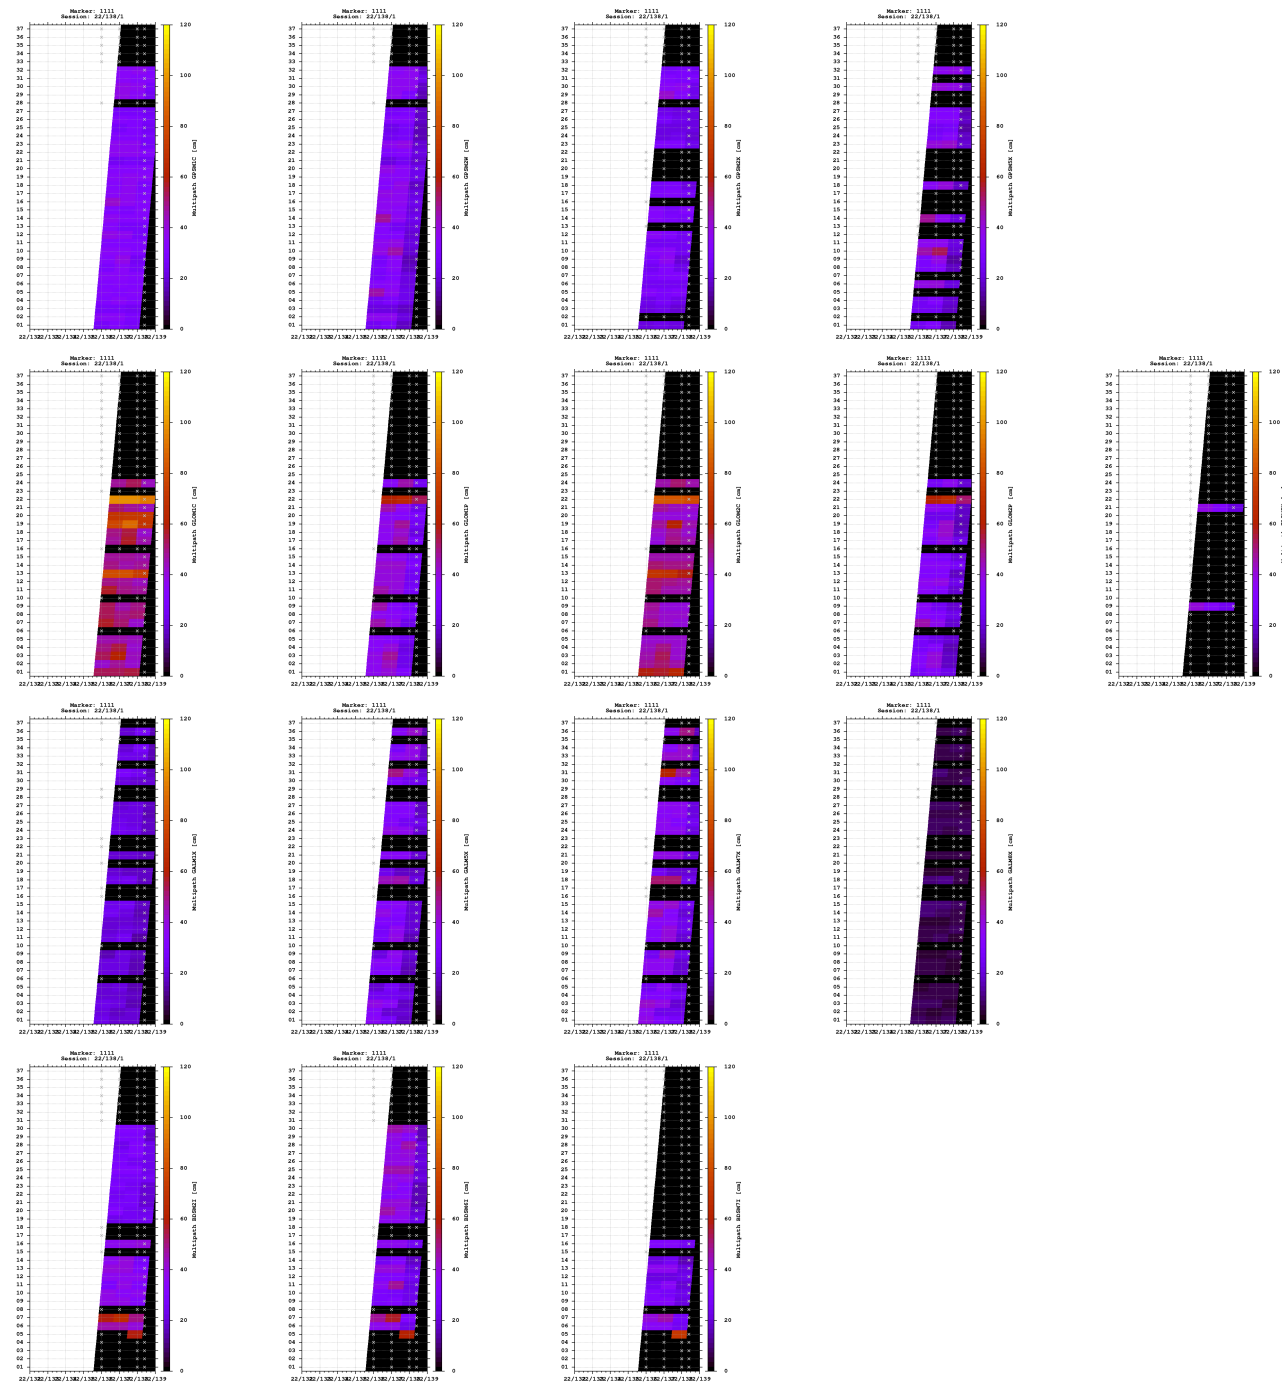


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

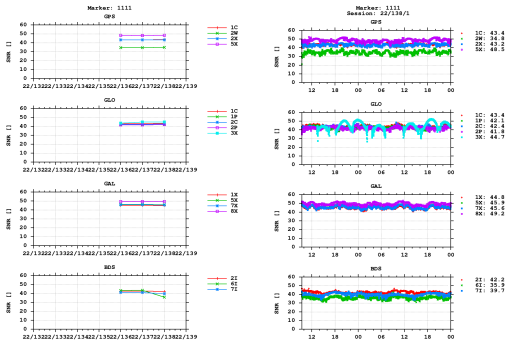


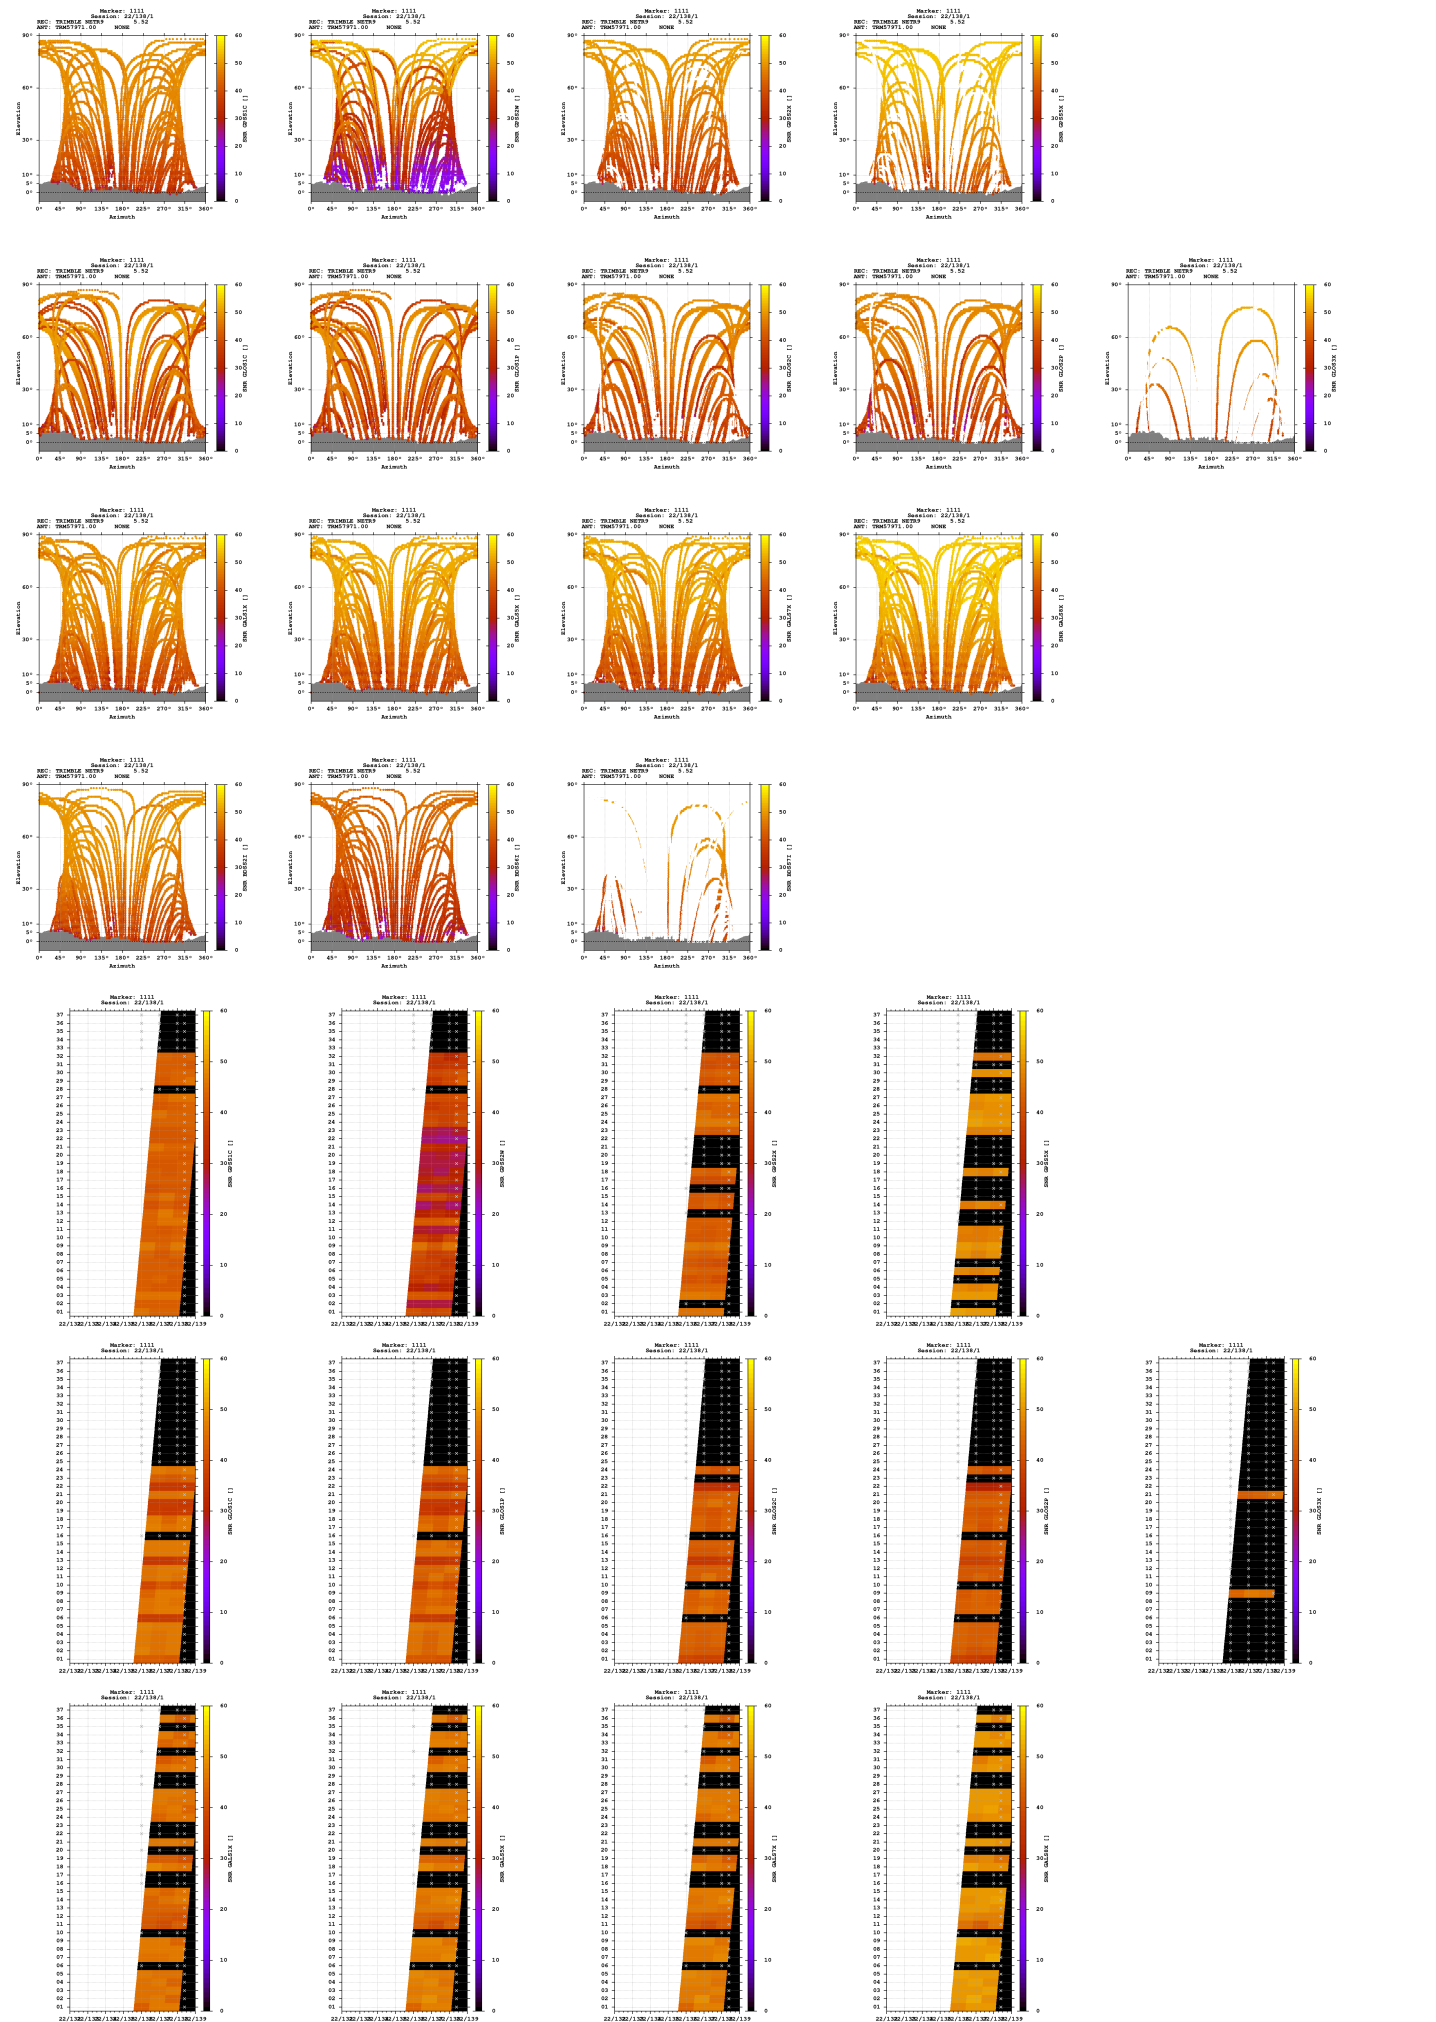

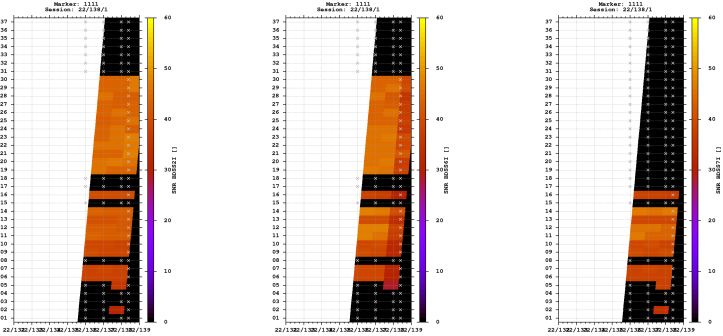



Estimates

2022-05-18 09:28:00	GPS	4291581.7113	644218.6719	4659406.8901	47.226767146	8.537051324	660.9717
2022-05-18 09:28:00	GLO	4291582.7832	644218.2719	4659407.5589	47.226764625	8.537043999	662.1421
2022-05-18 09:28:00	GAL	4291581.7291	644218.3609	4659406.7075	47.226766219	8.537047228	660.8183
2022-05-18 09:28:00	BDS	4291579.5073	644219.6366	4659404.0419	47.226763194	8.537068239	657.4981

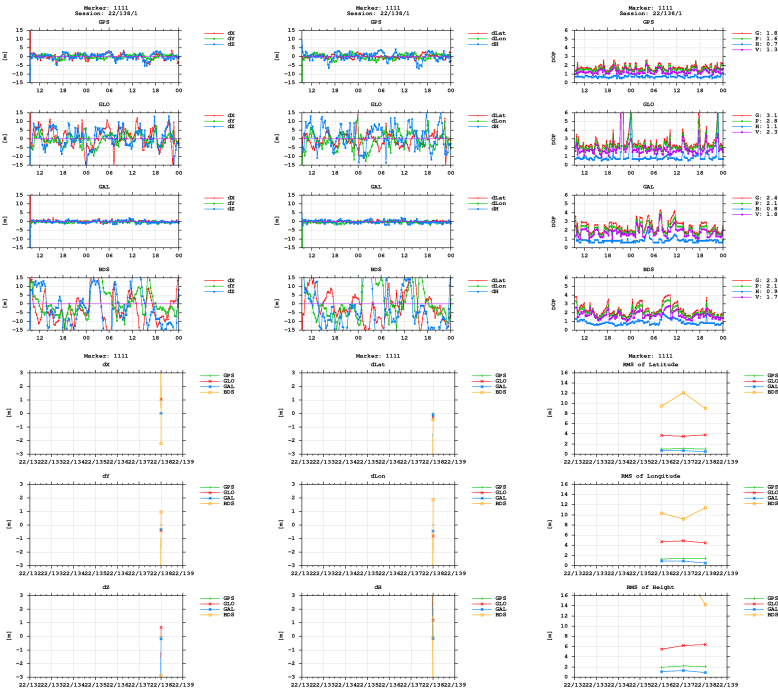

BNC

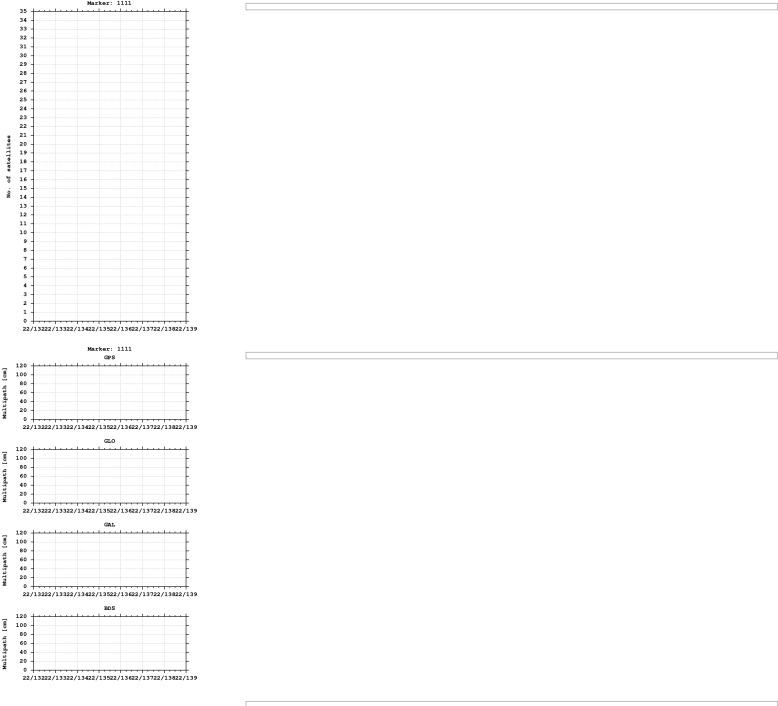

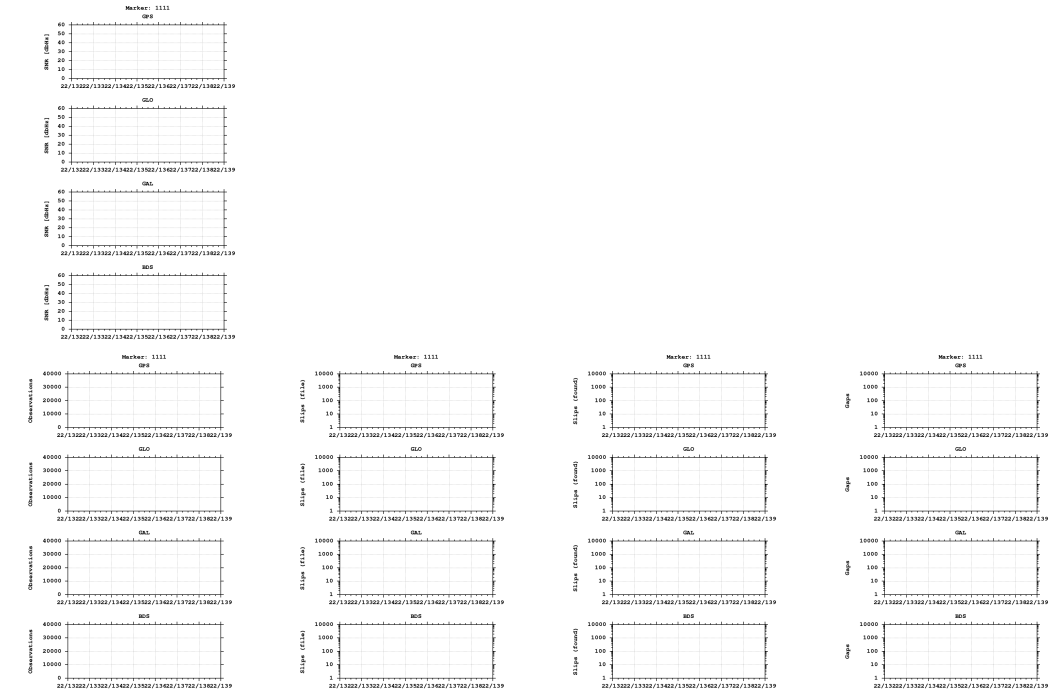

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)