


GNSS observation file monitoring for 0515


Last RINEX file: 05151371.220
RINEX version: 3.02
Marker: 1169
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

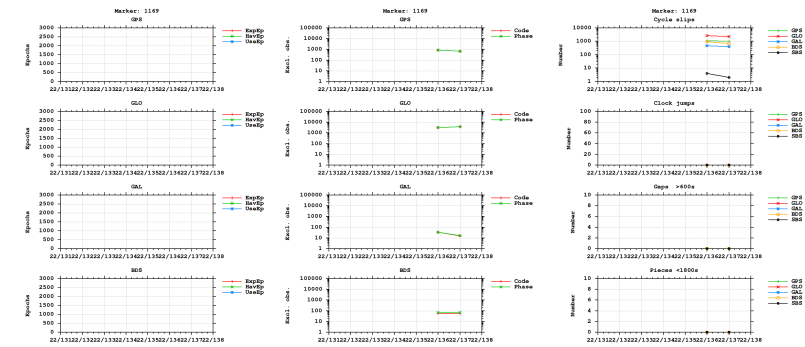



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

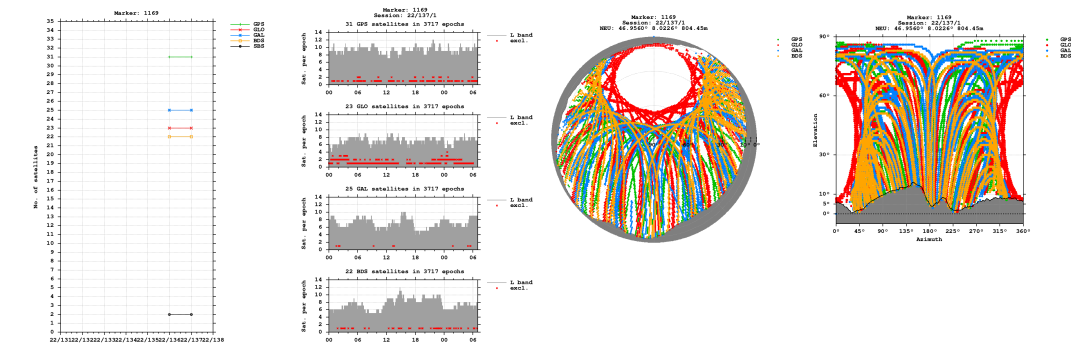


Bands

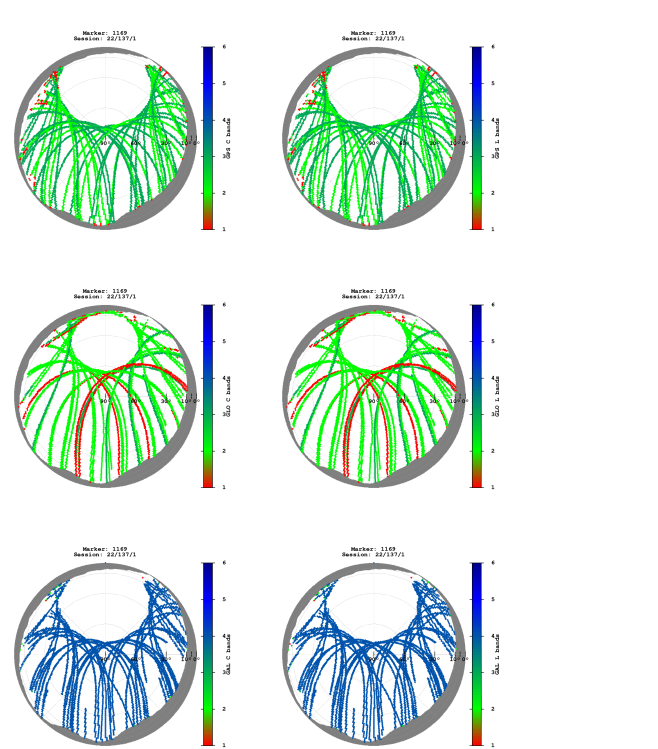


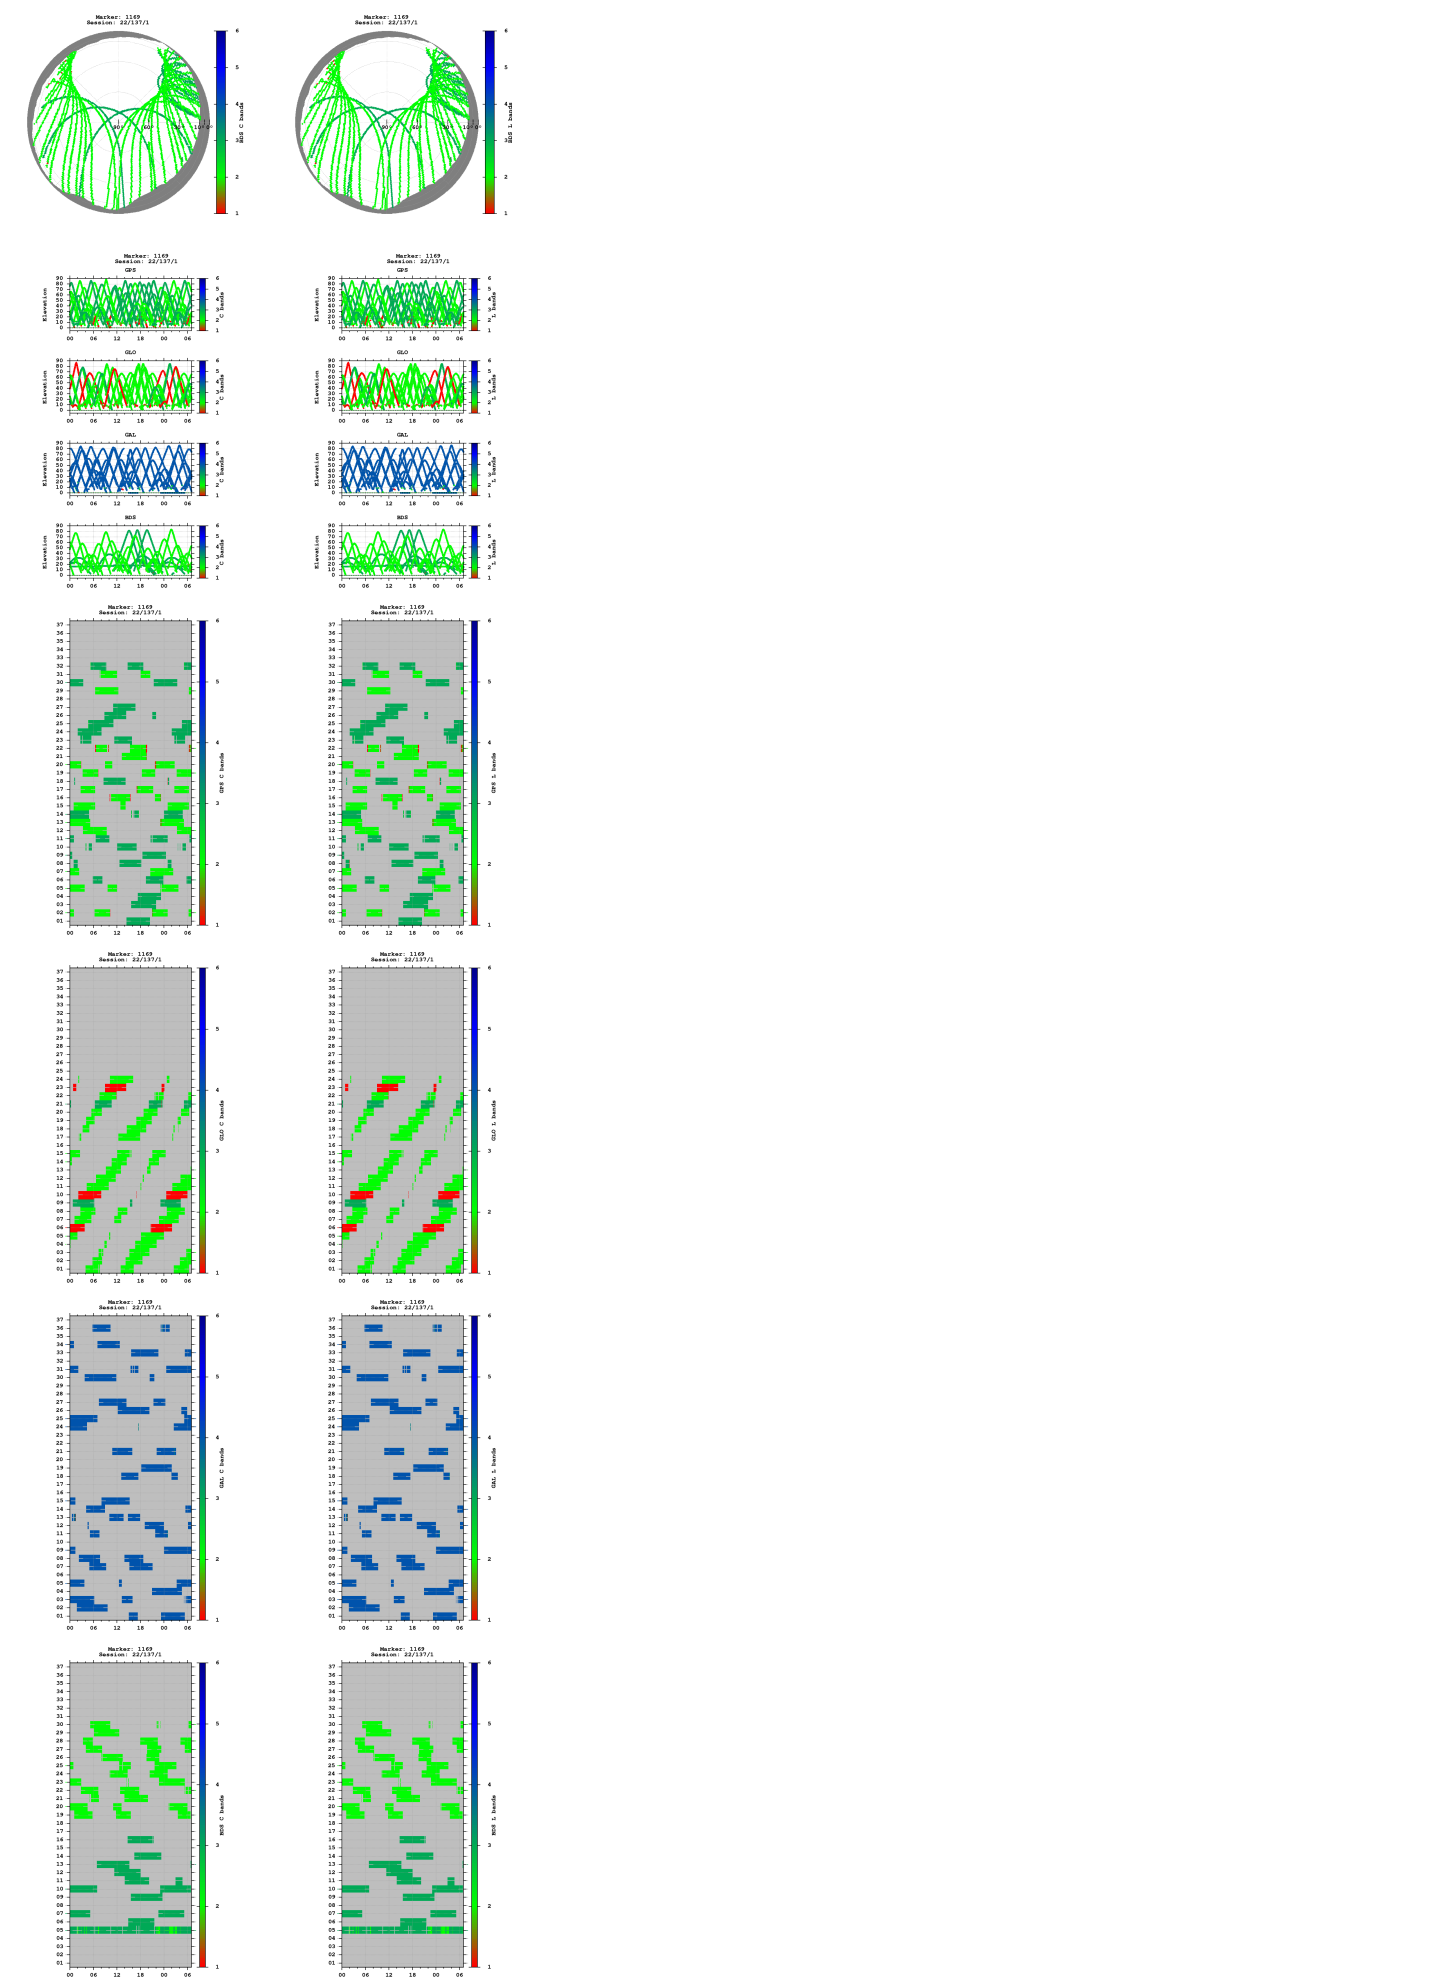


Observations

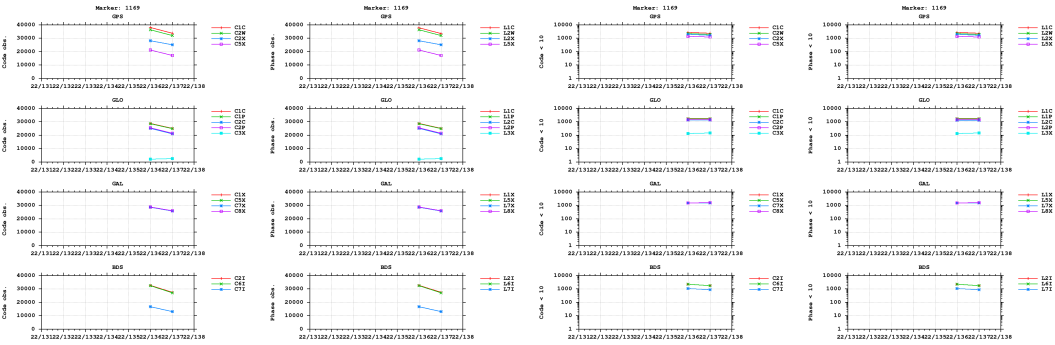



Multipath

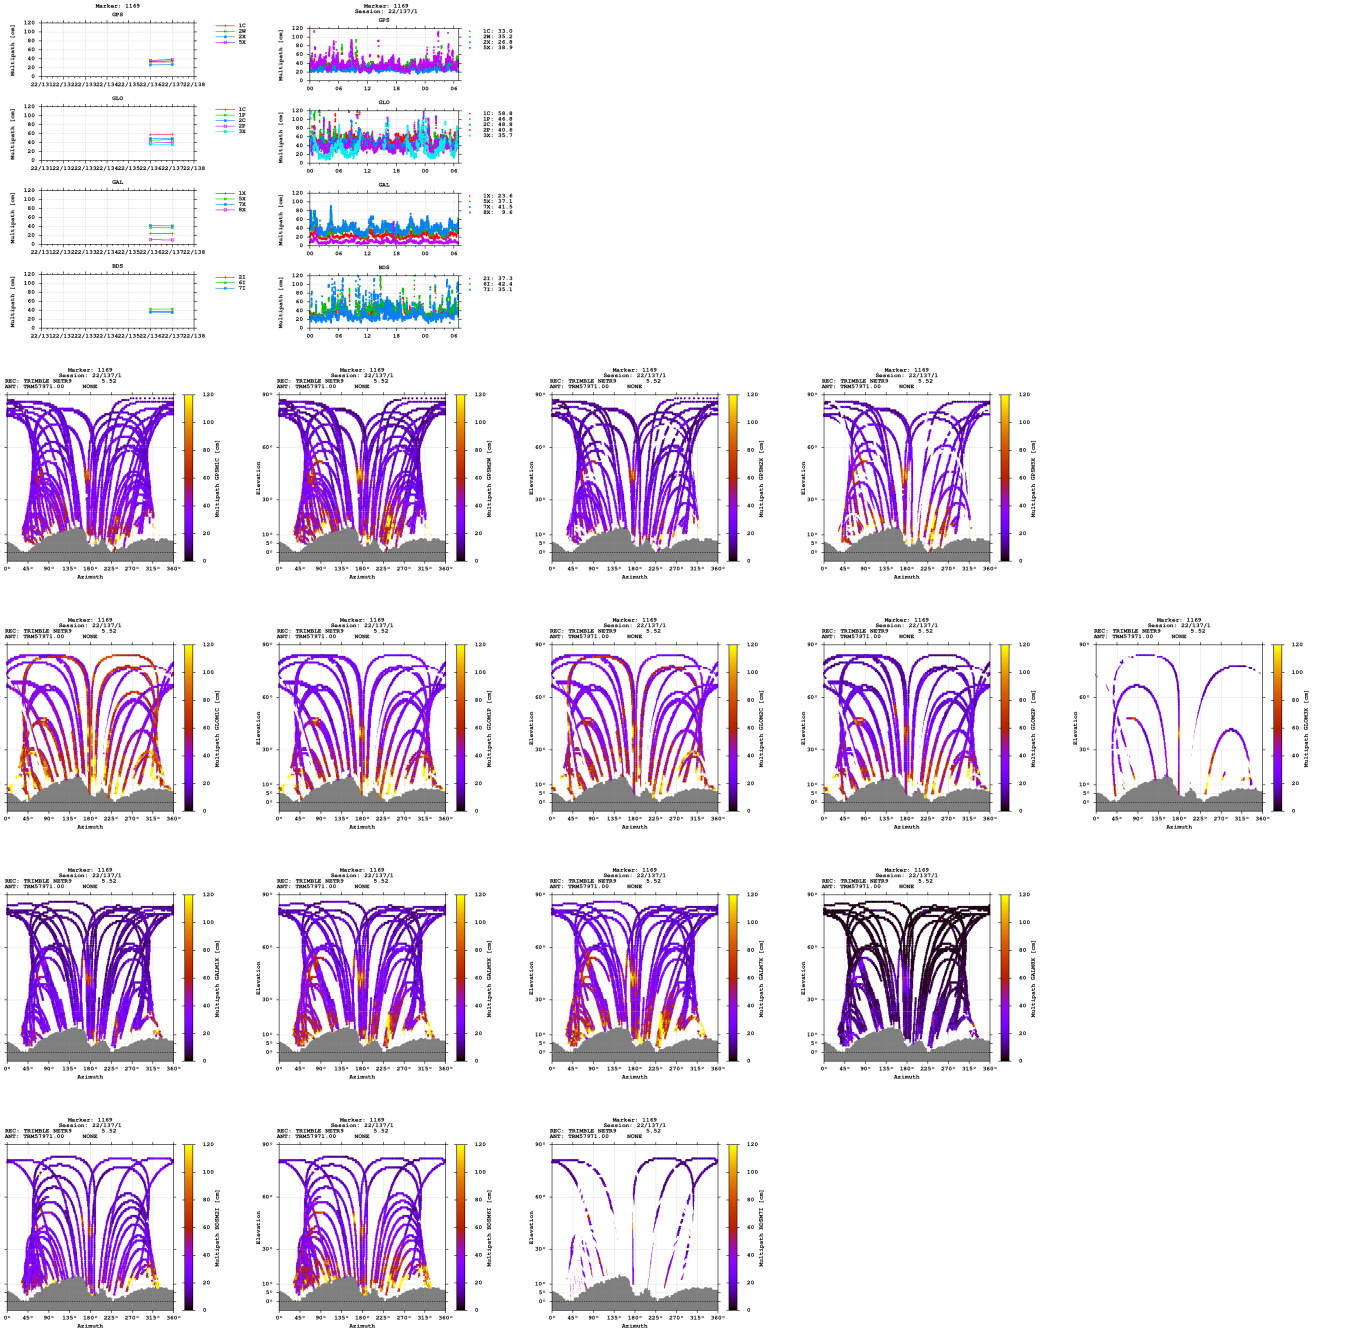


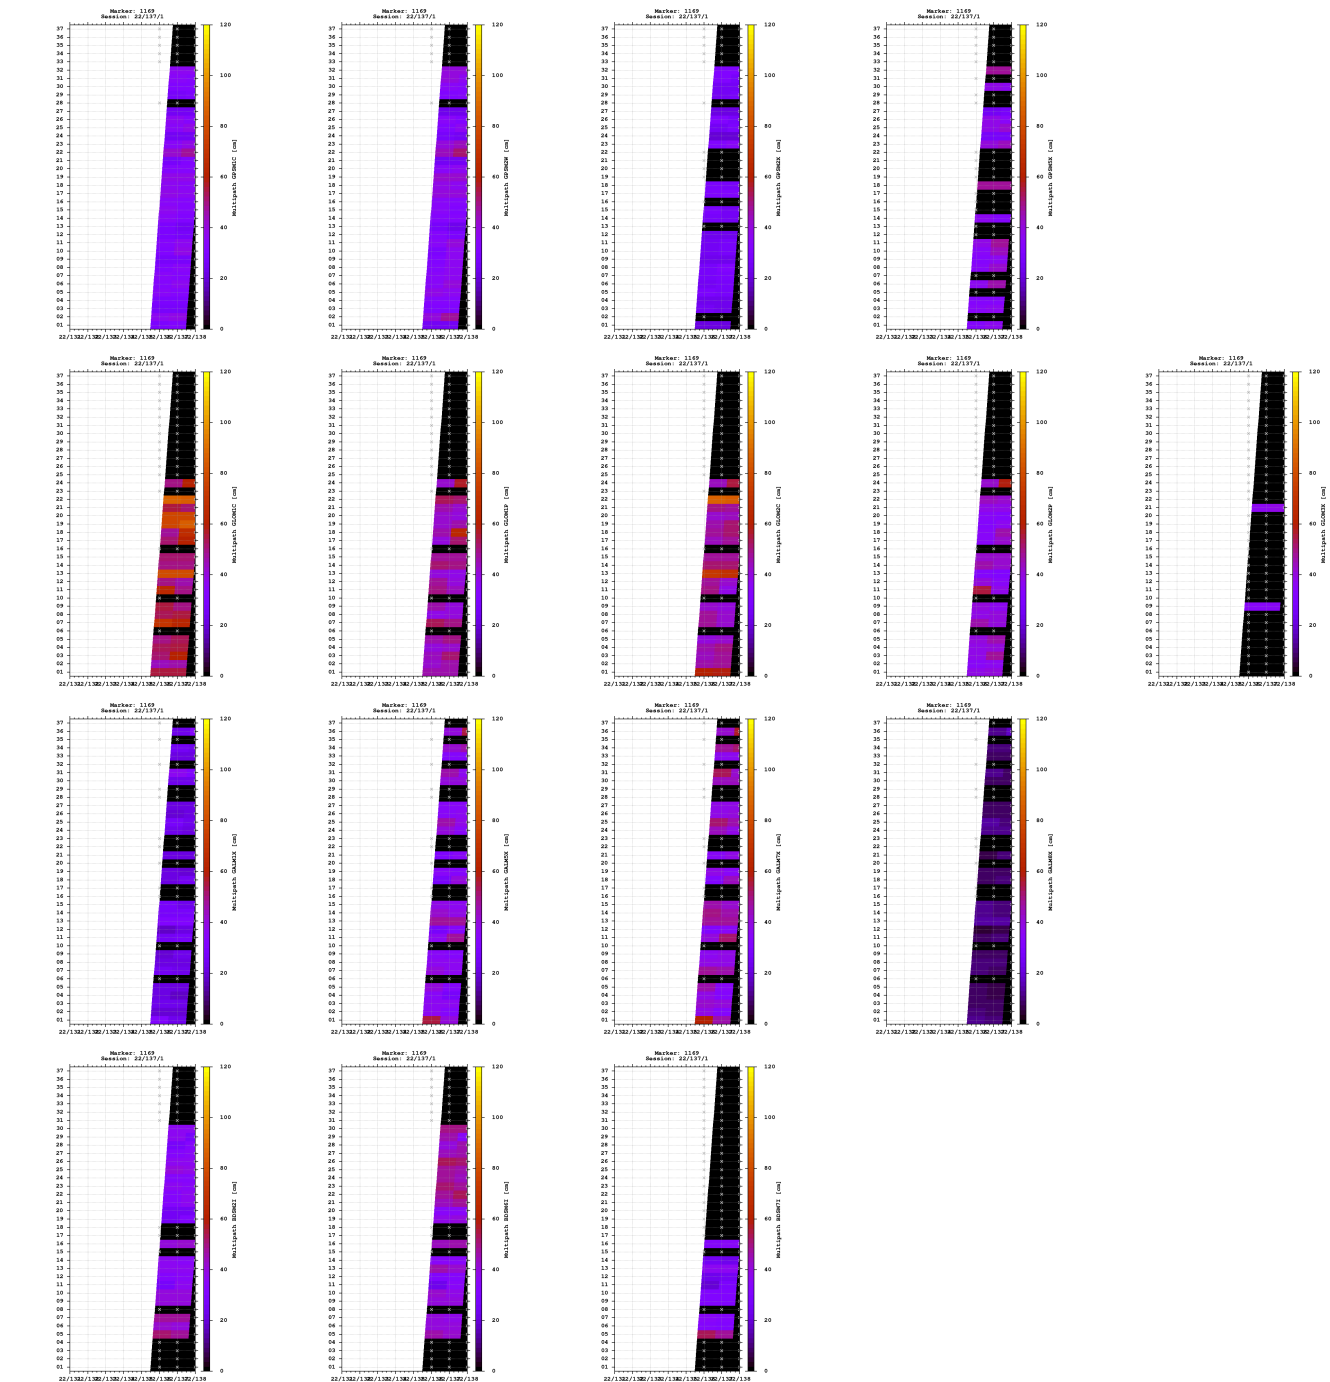

Signal-to-noise ratio

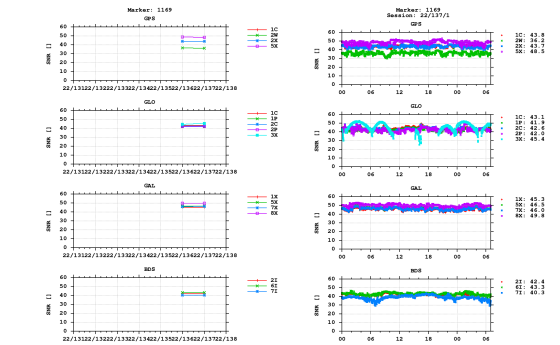


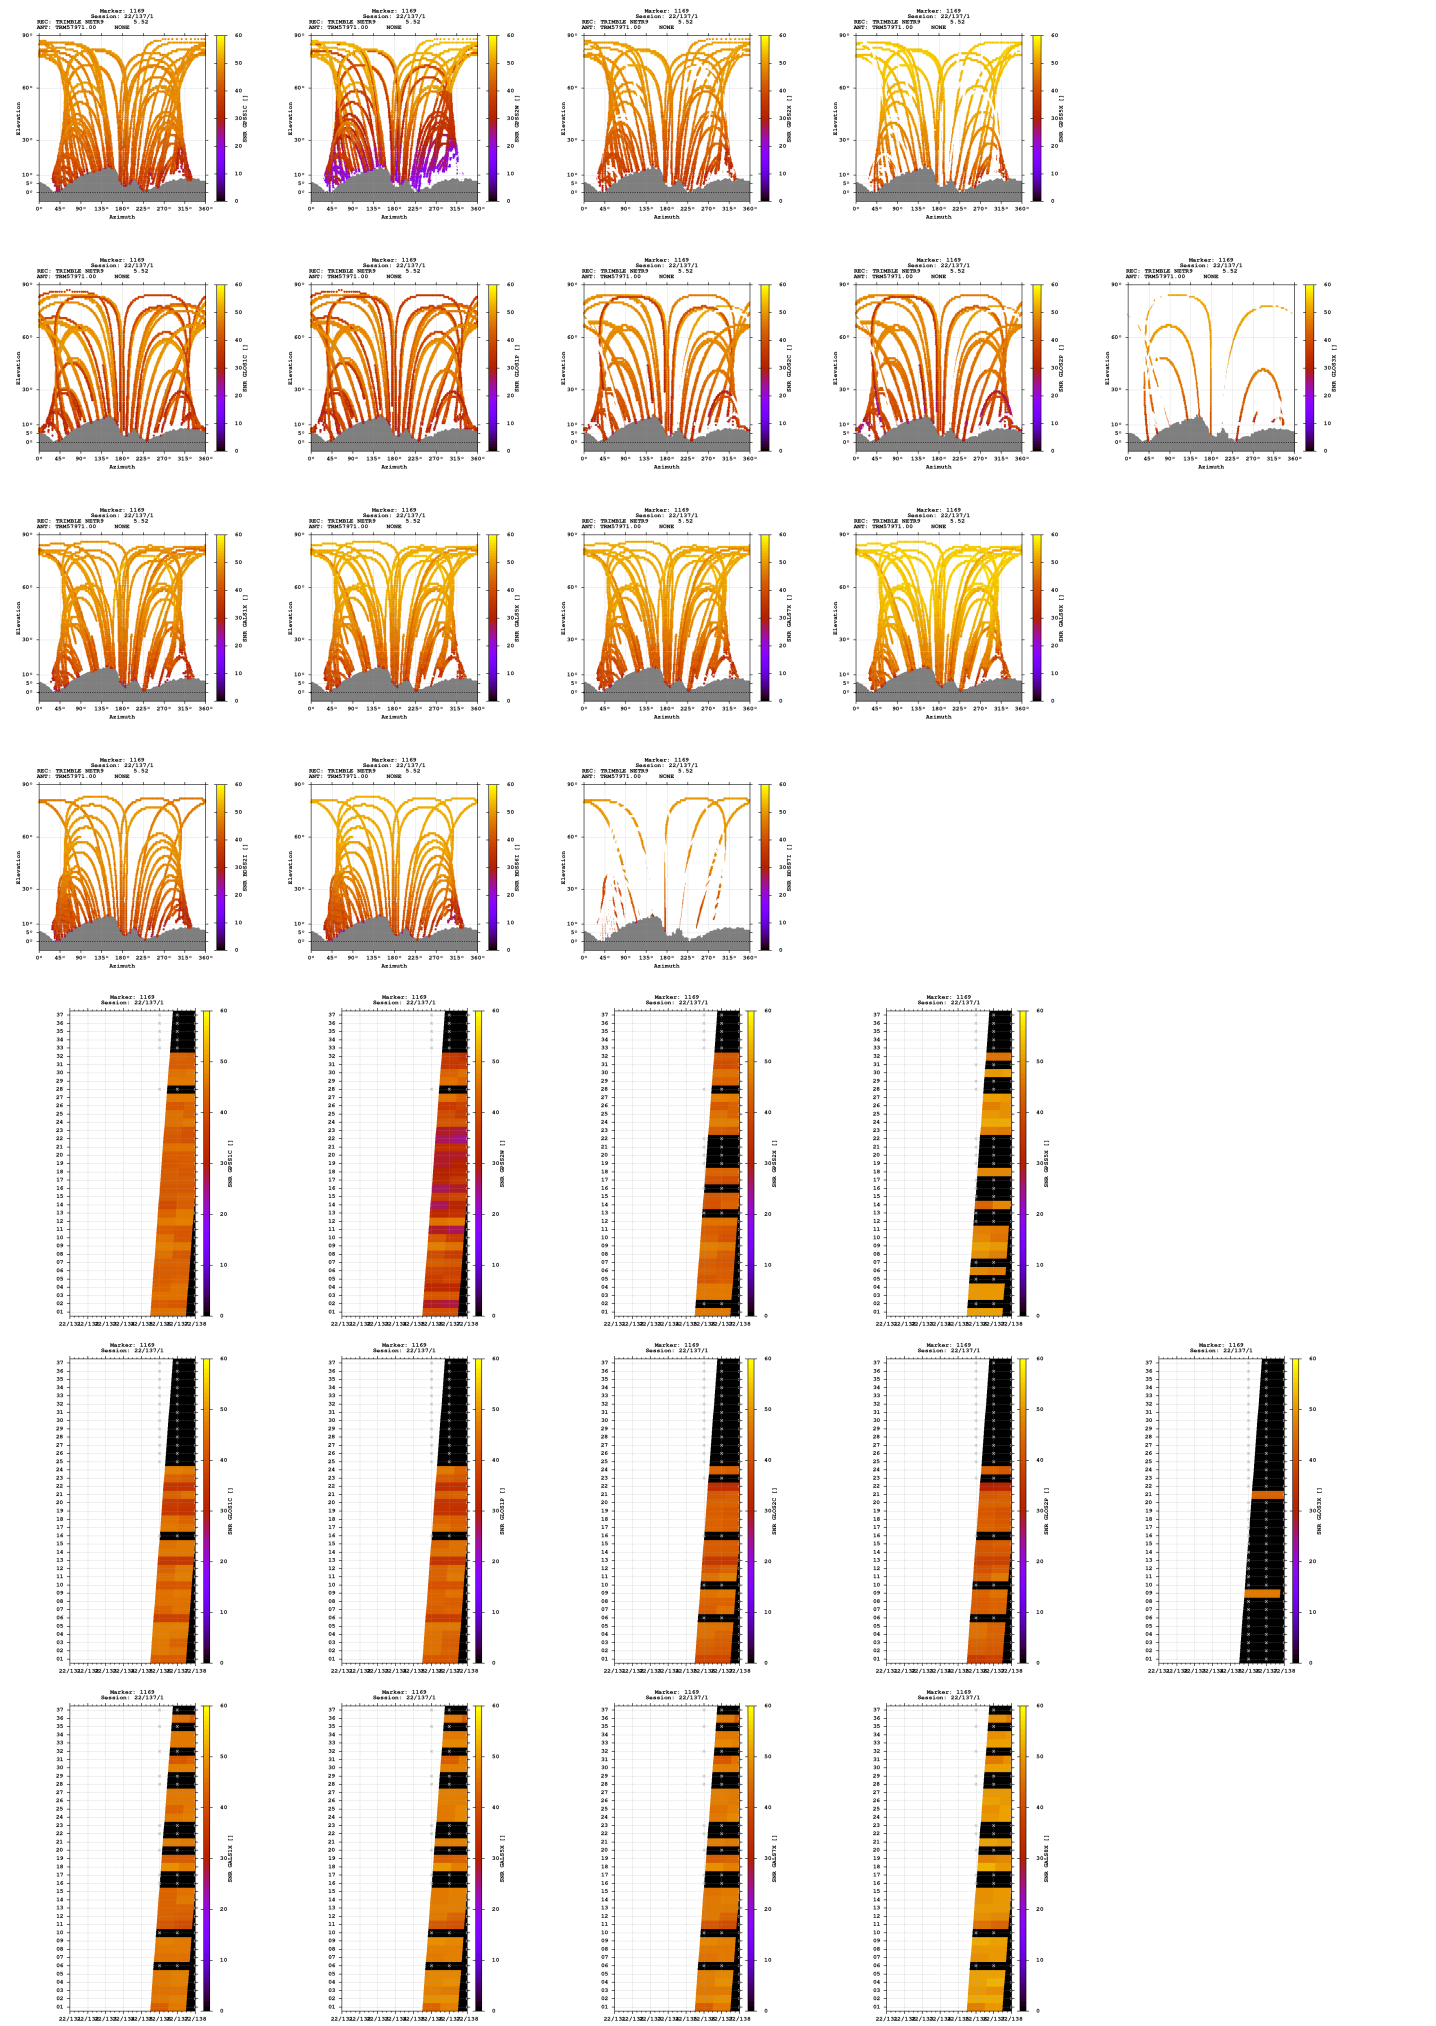

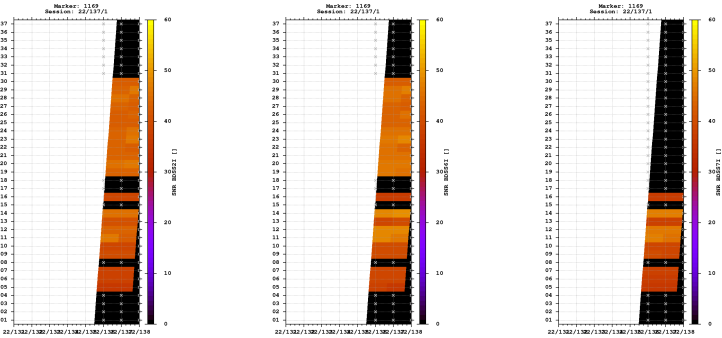


Estimates

2022-05-16 13:13:30	GPS	4319121.0091	608748.0081	4639018.7216	46.956044580	8.022570561	804.4509
2022-05-16 13:13:30	GLO	4319121.4001	608747.8854	4639018.6194	46.956041520	8.022568248	804.6288
2022-05-16 13:13:30	GAL	4319121.0642	608748.1459	4639018.5536	46.956043063	8.022572252	804.3785
2022-05-16 13:13:30	BDS	4319120.9634	608749.9389	4639020.3668	46.956053205	8.022595759	805.8063

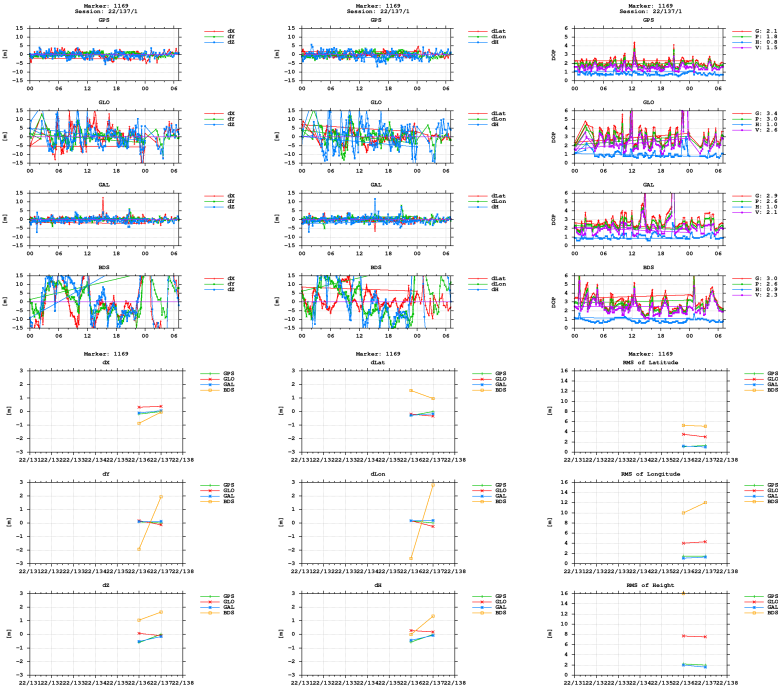

BNC



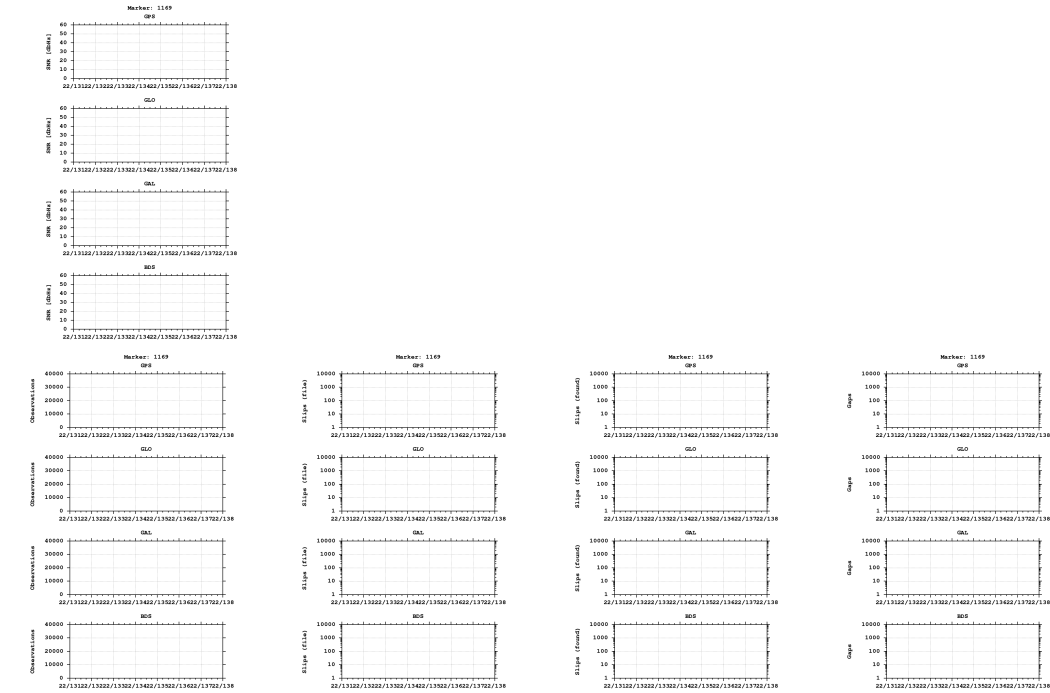

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)