

GNSS observation file monitoring for 0515

Last RINEX file: 05151381.220

RINEX version: 3.02

Marker: 1170

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

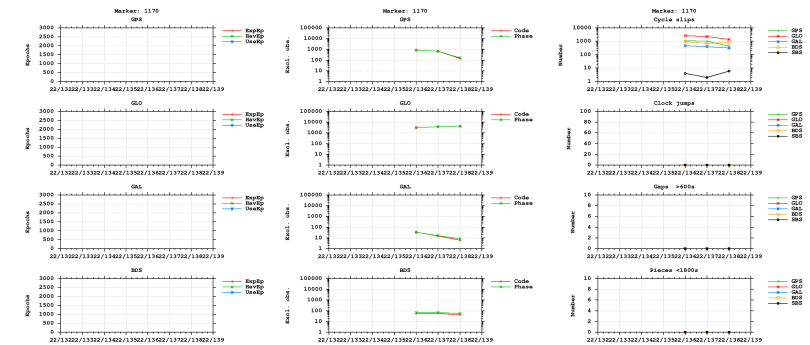



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

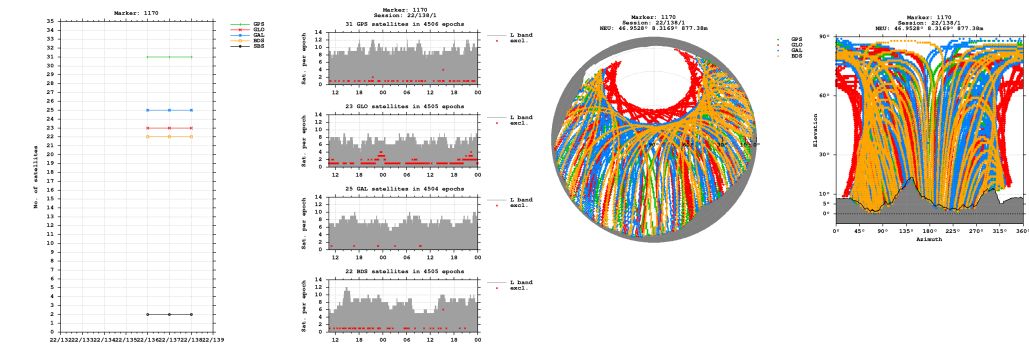


Bands

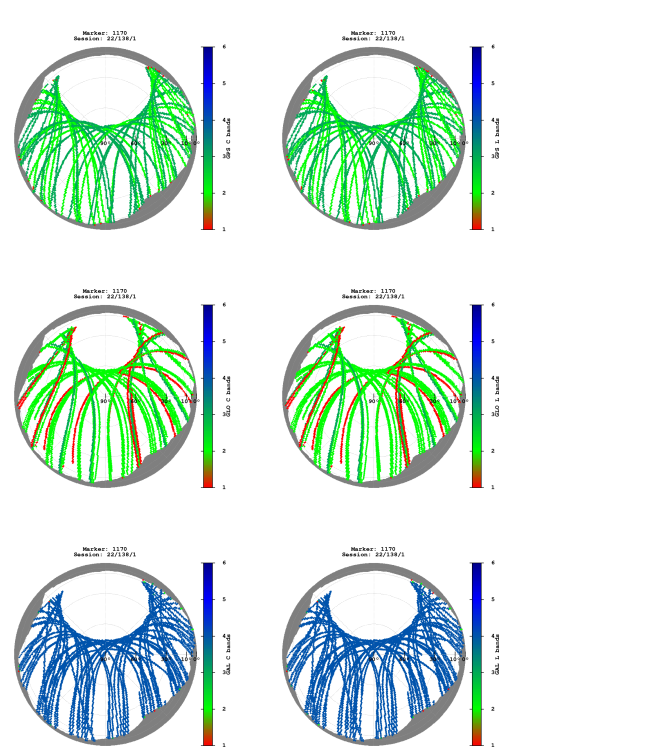


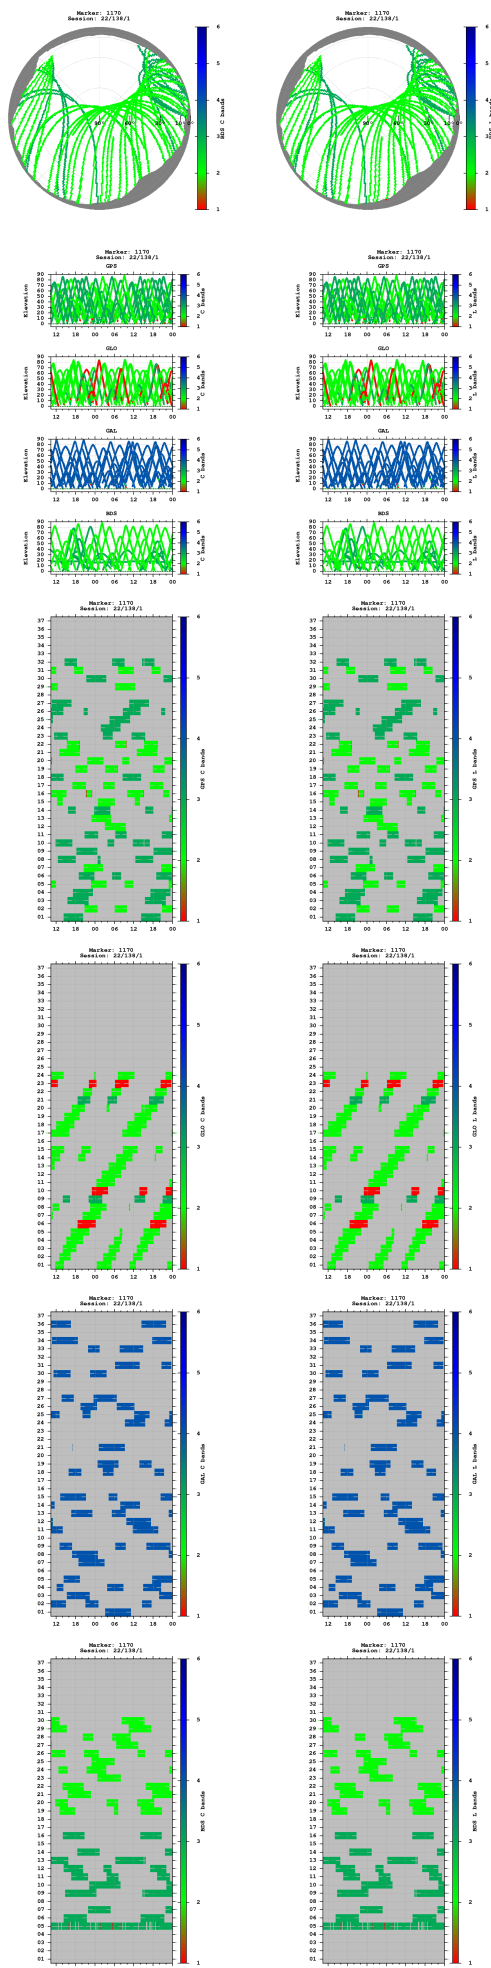


Observations

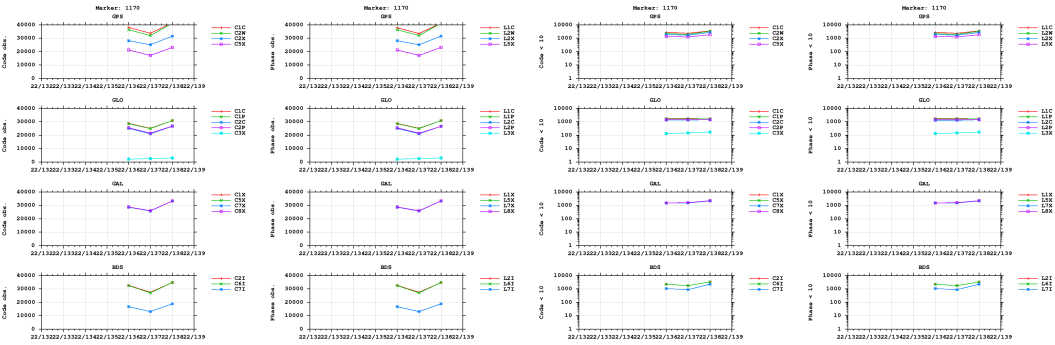



Multipath

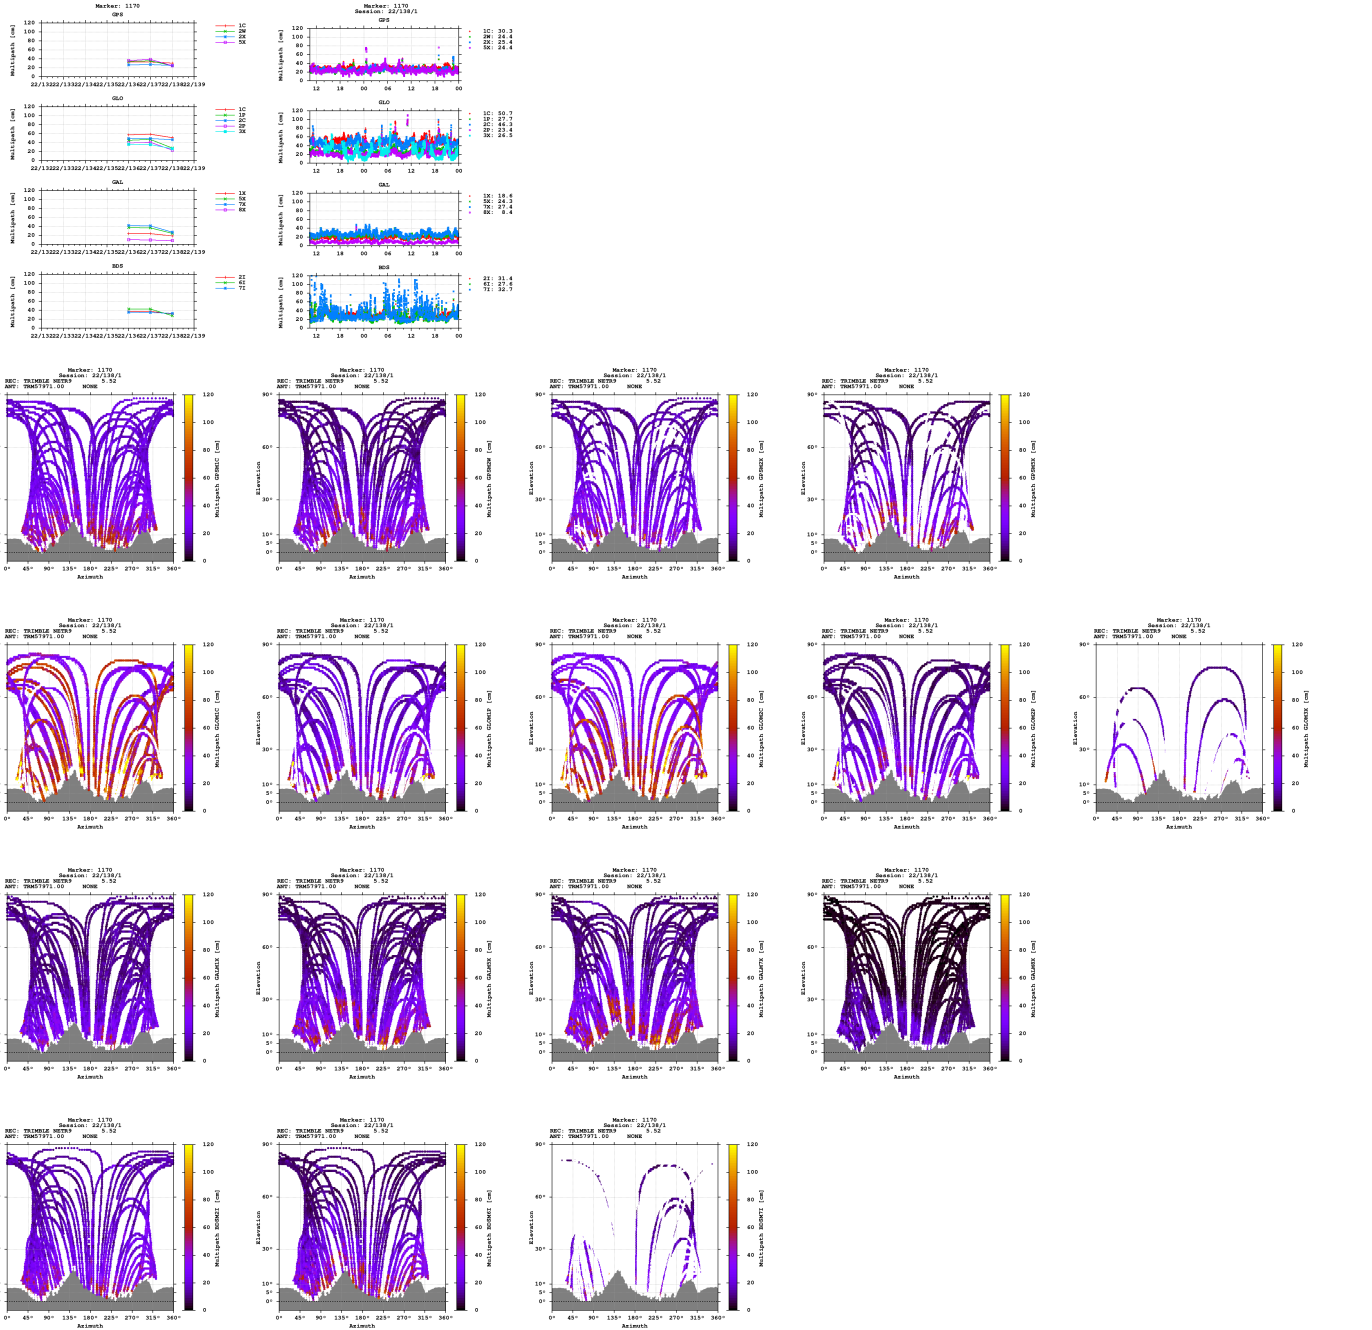


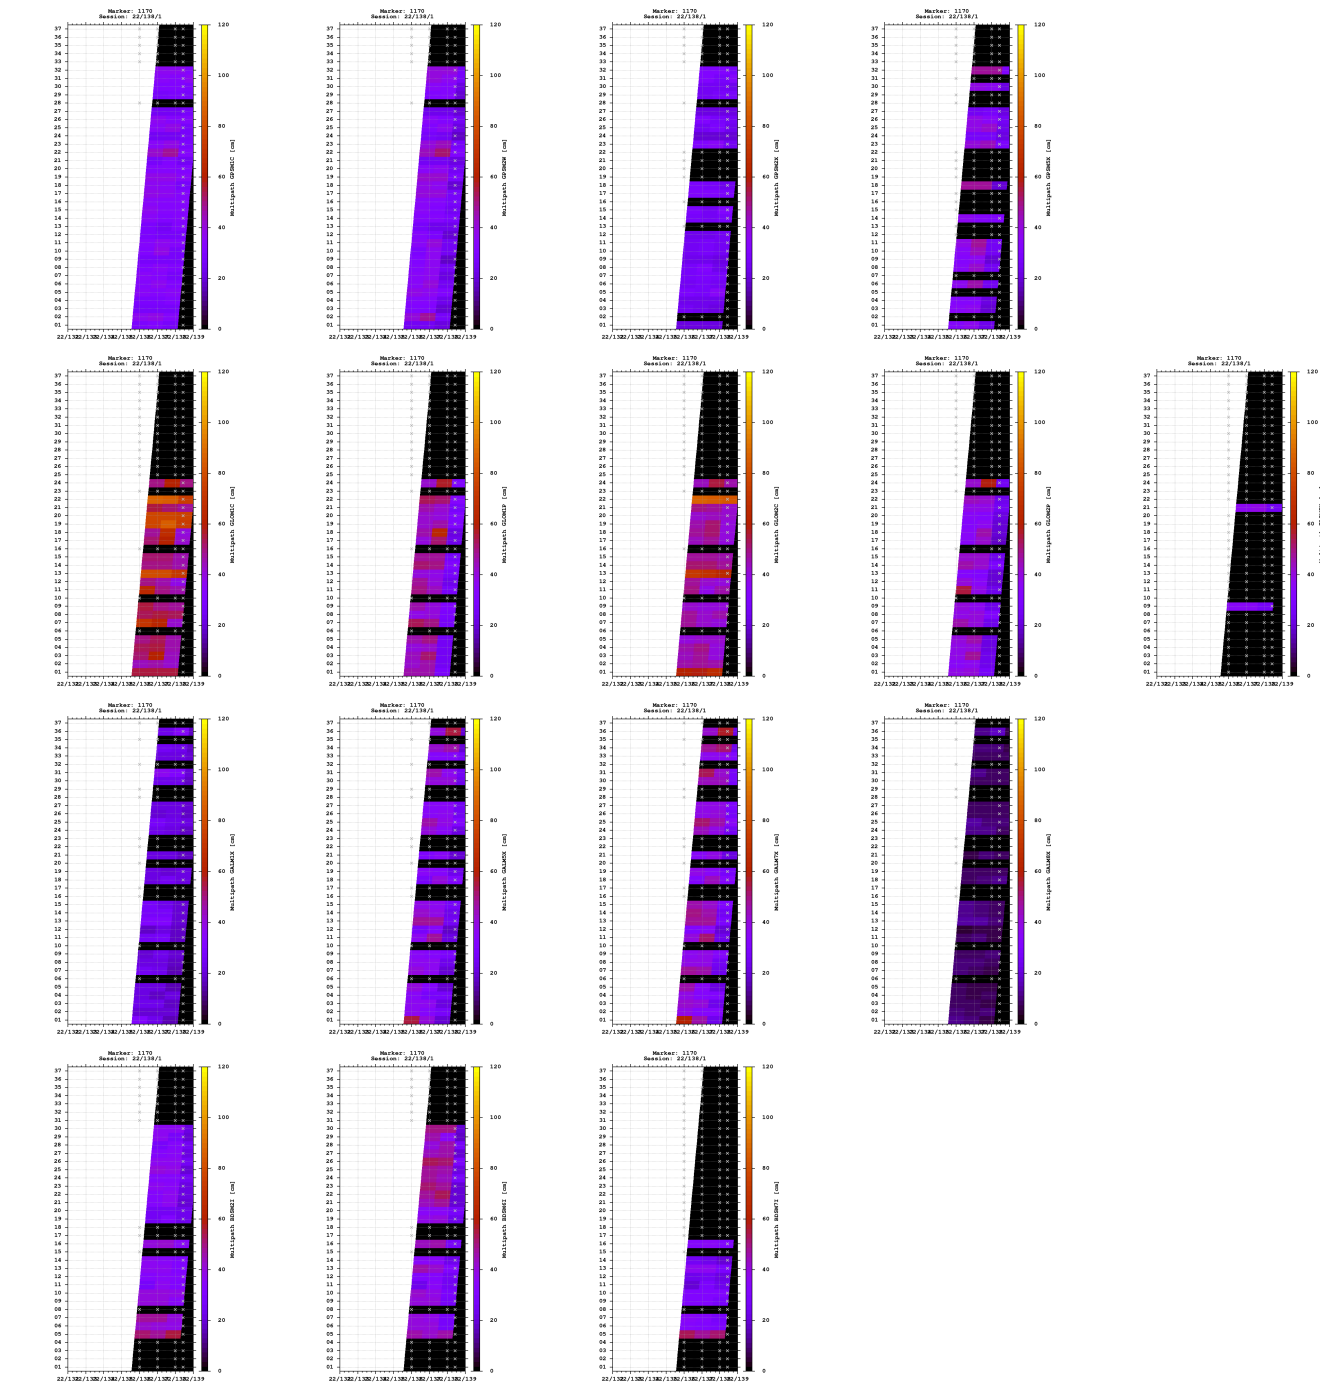

Signal-to-noise ratio

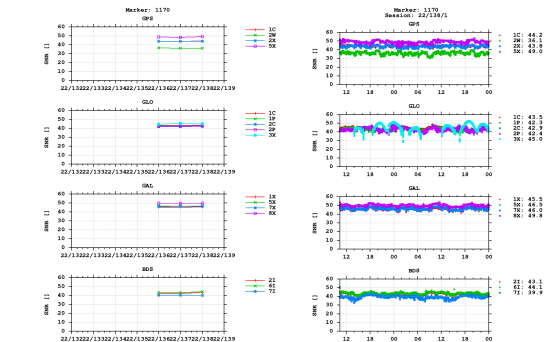


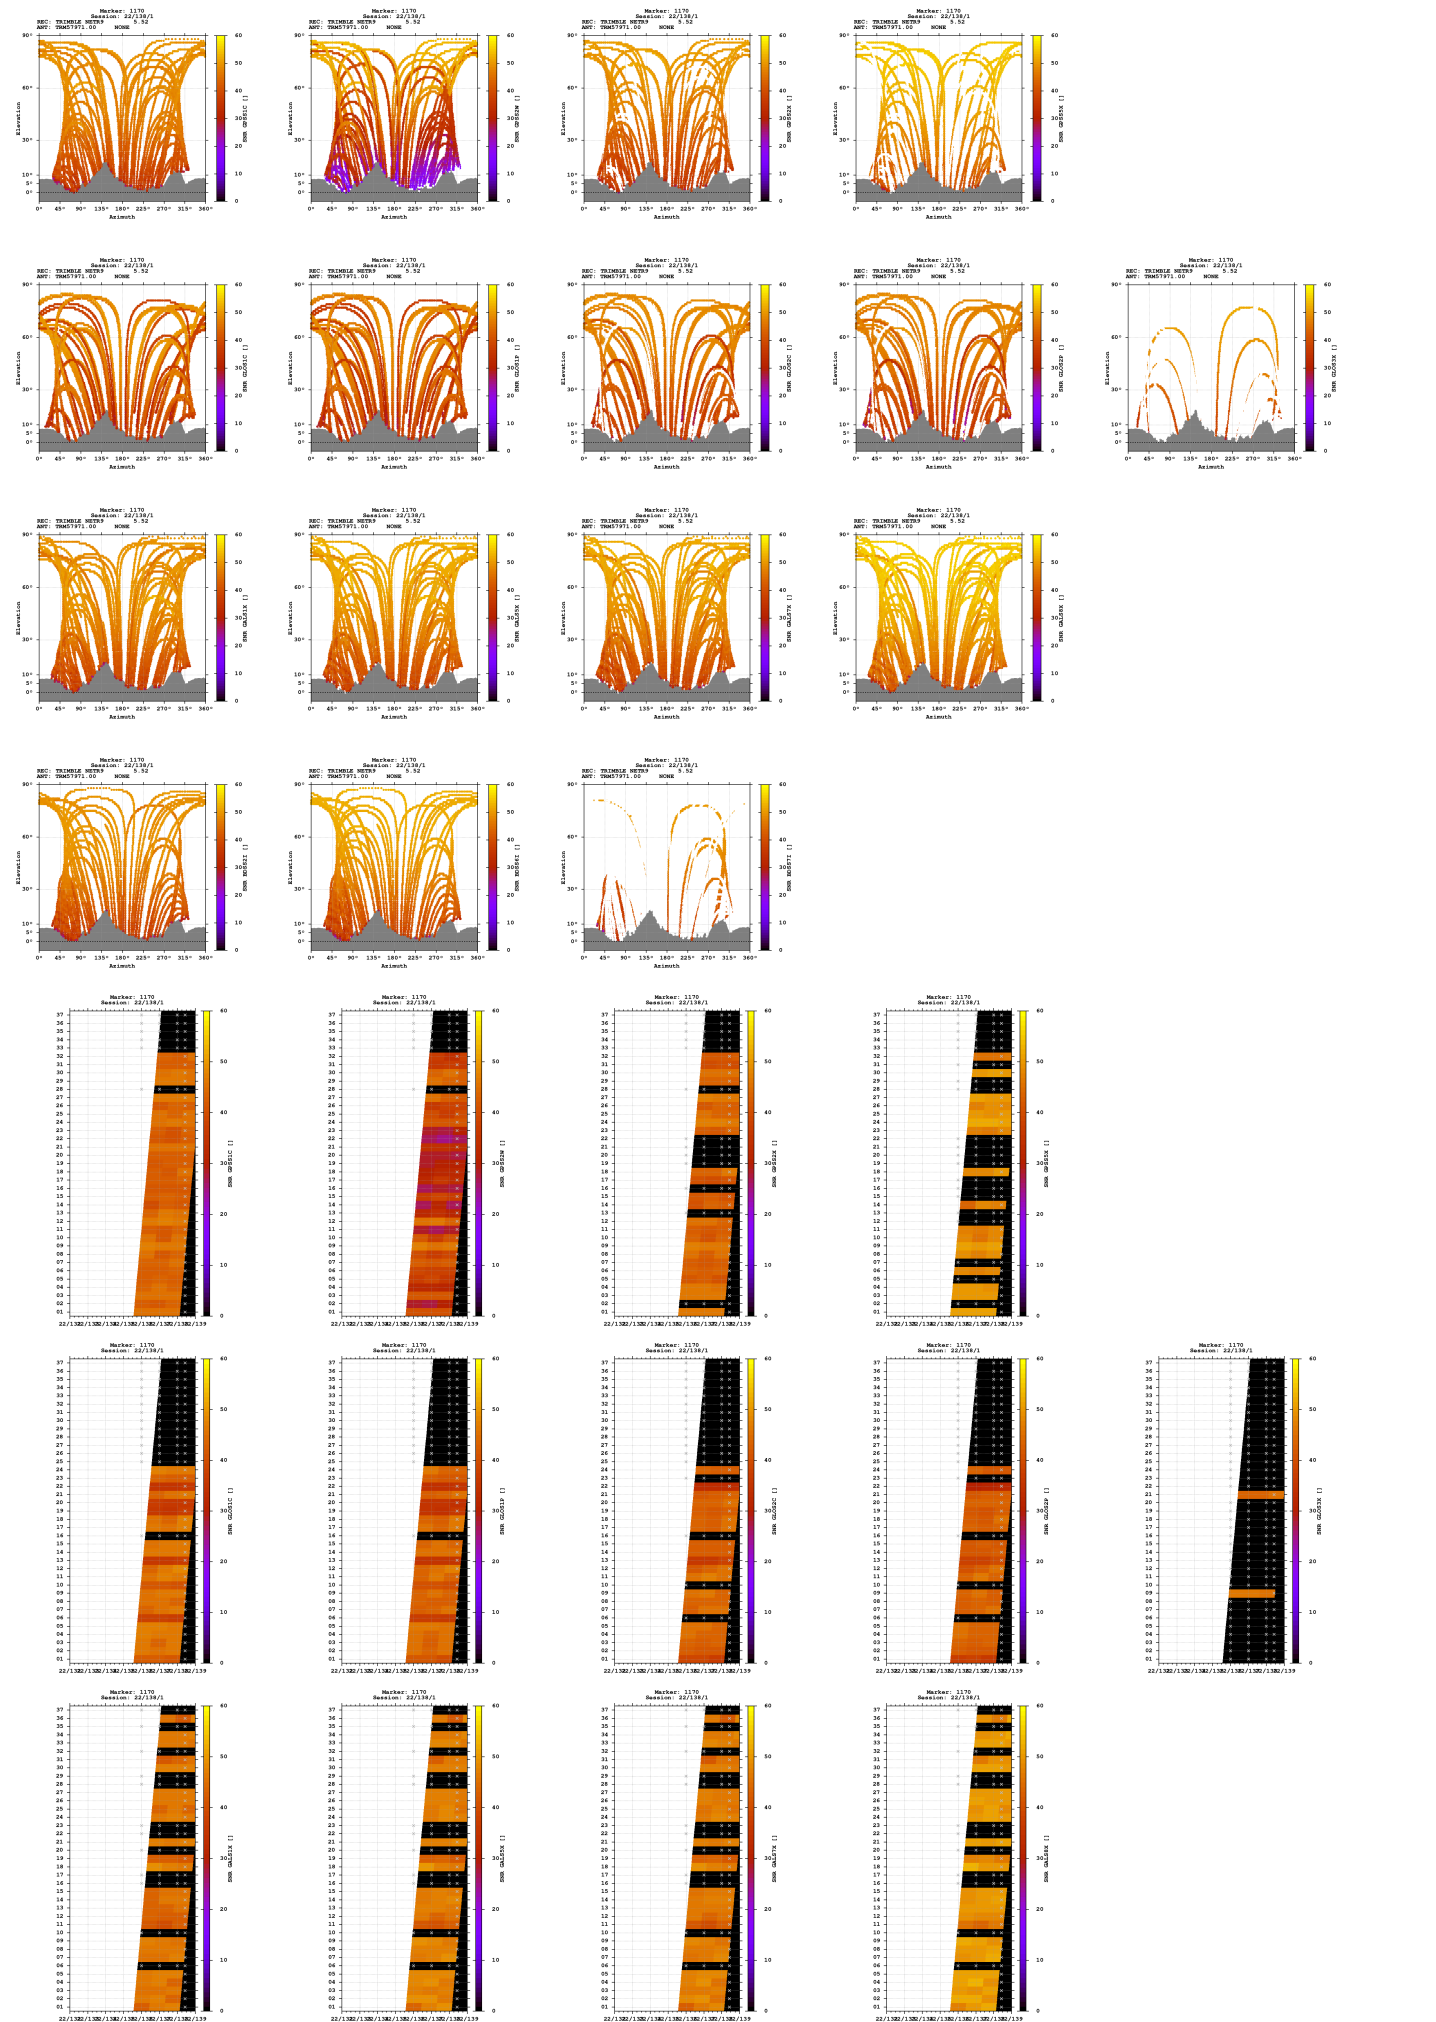

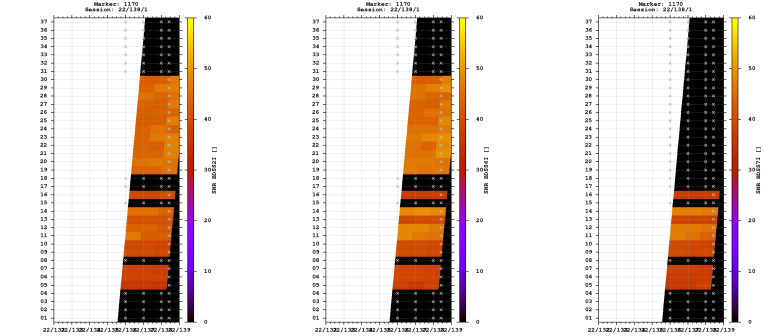


Estimates

2022-05-18 10:23:30	GPS	4316248.6964	630975.7303	4638823.7952	46.952773865	8.316937275	877.3782
2022-05-18 10:23:30	GLO	4316249.2893	630975.5190	4638823.7872	46.952770161	8.316933402	877.7519
2022-05-18 10:23:30	GAL	4316248.7666	630975.3984	4638823.6181	46.952772637	8.316932828	877.2633
2022-05-18 10:23:30	BDS	4316245.3912	630974.4520	4638824.1030	46.952798466	8.316926940	875.2444

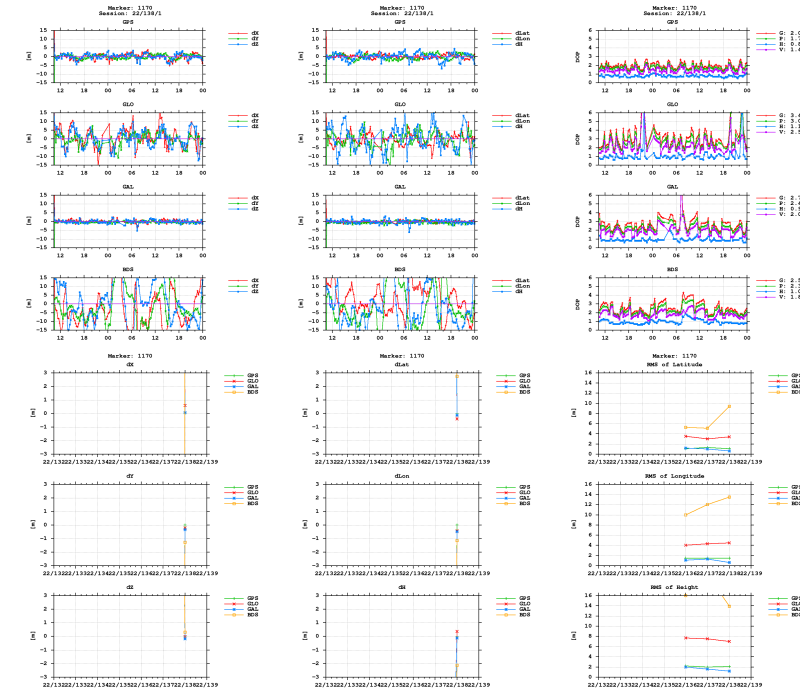

BNC



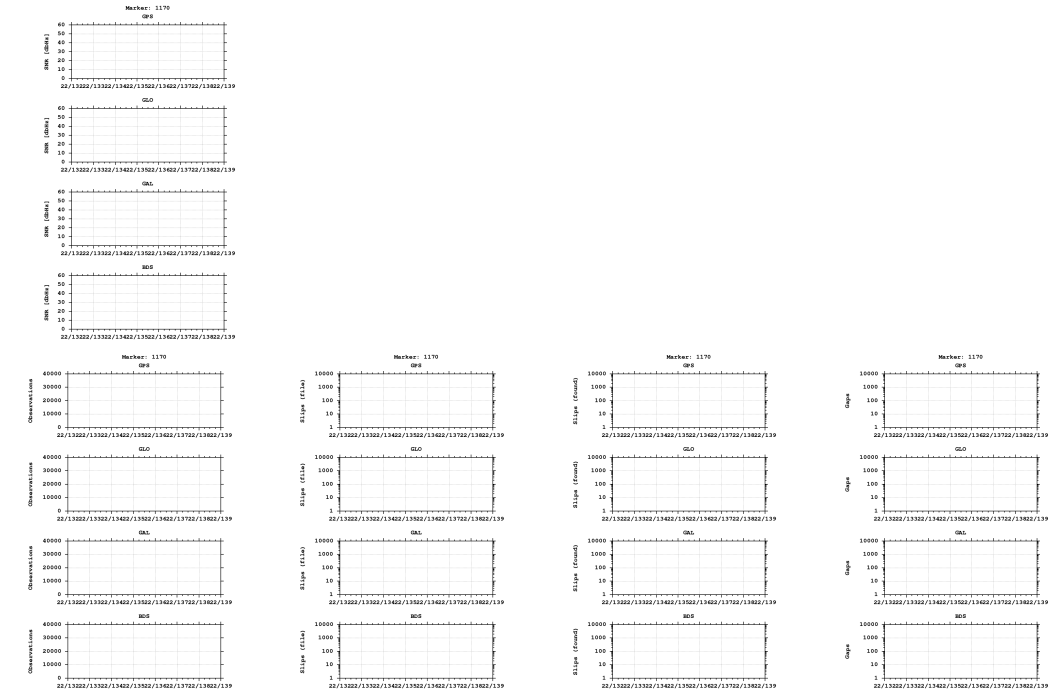

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)