


GNSS observation file monitoring for 0515


Last RINEX file: 05151391.220
RINEX version: 3.02
Marker: 1170
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

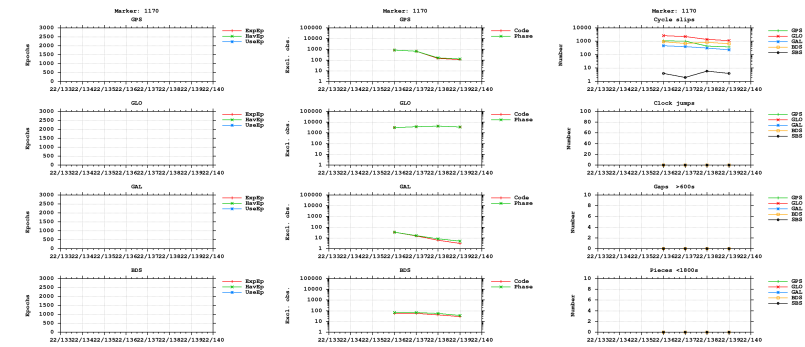



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

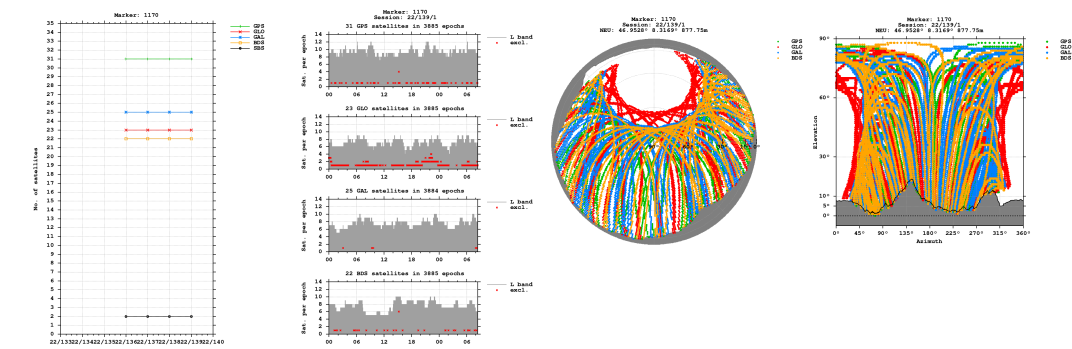


Bands

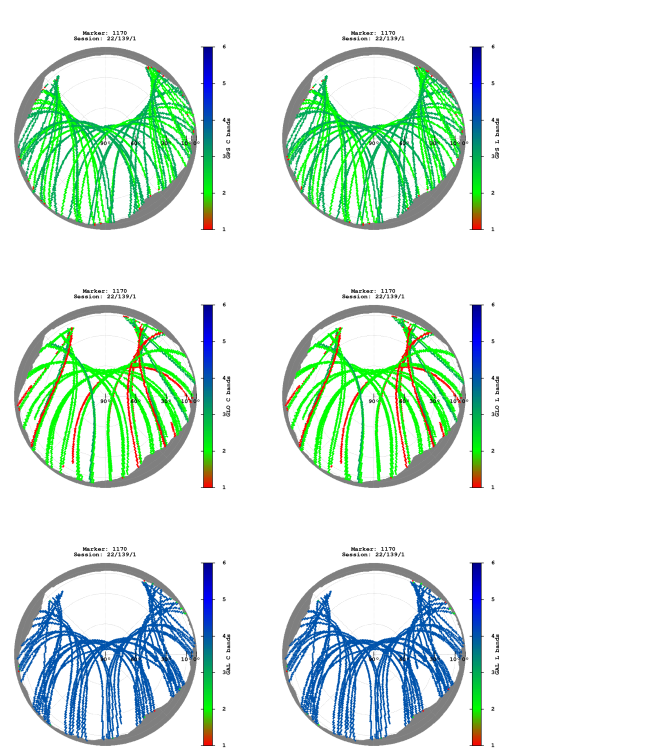


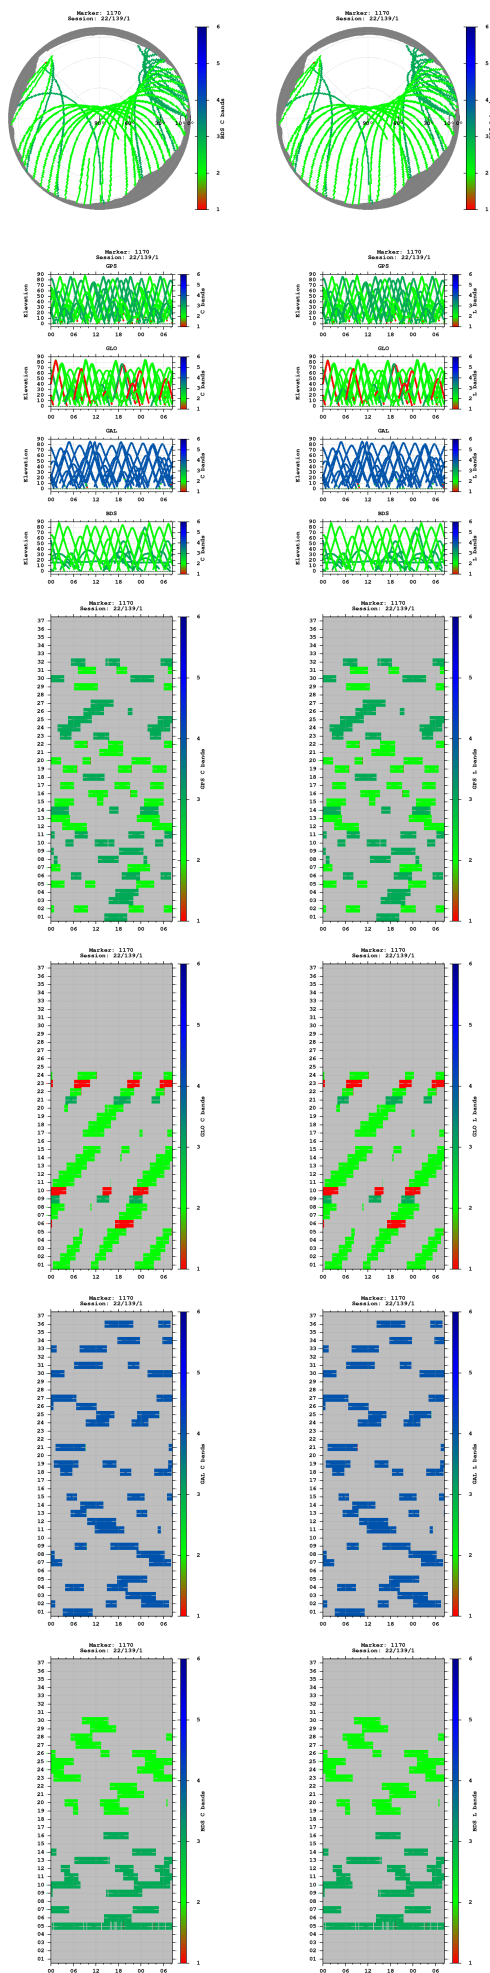


Observations

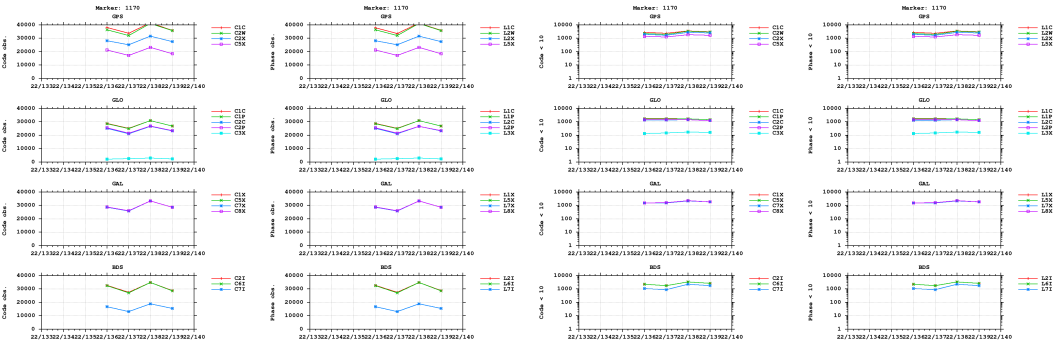


Multipath

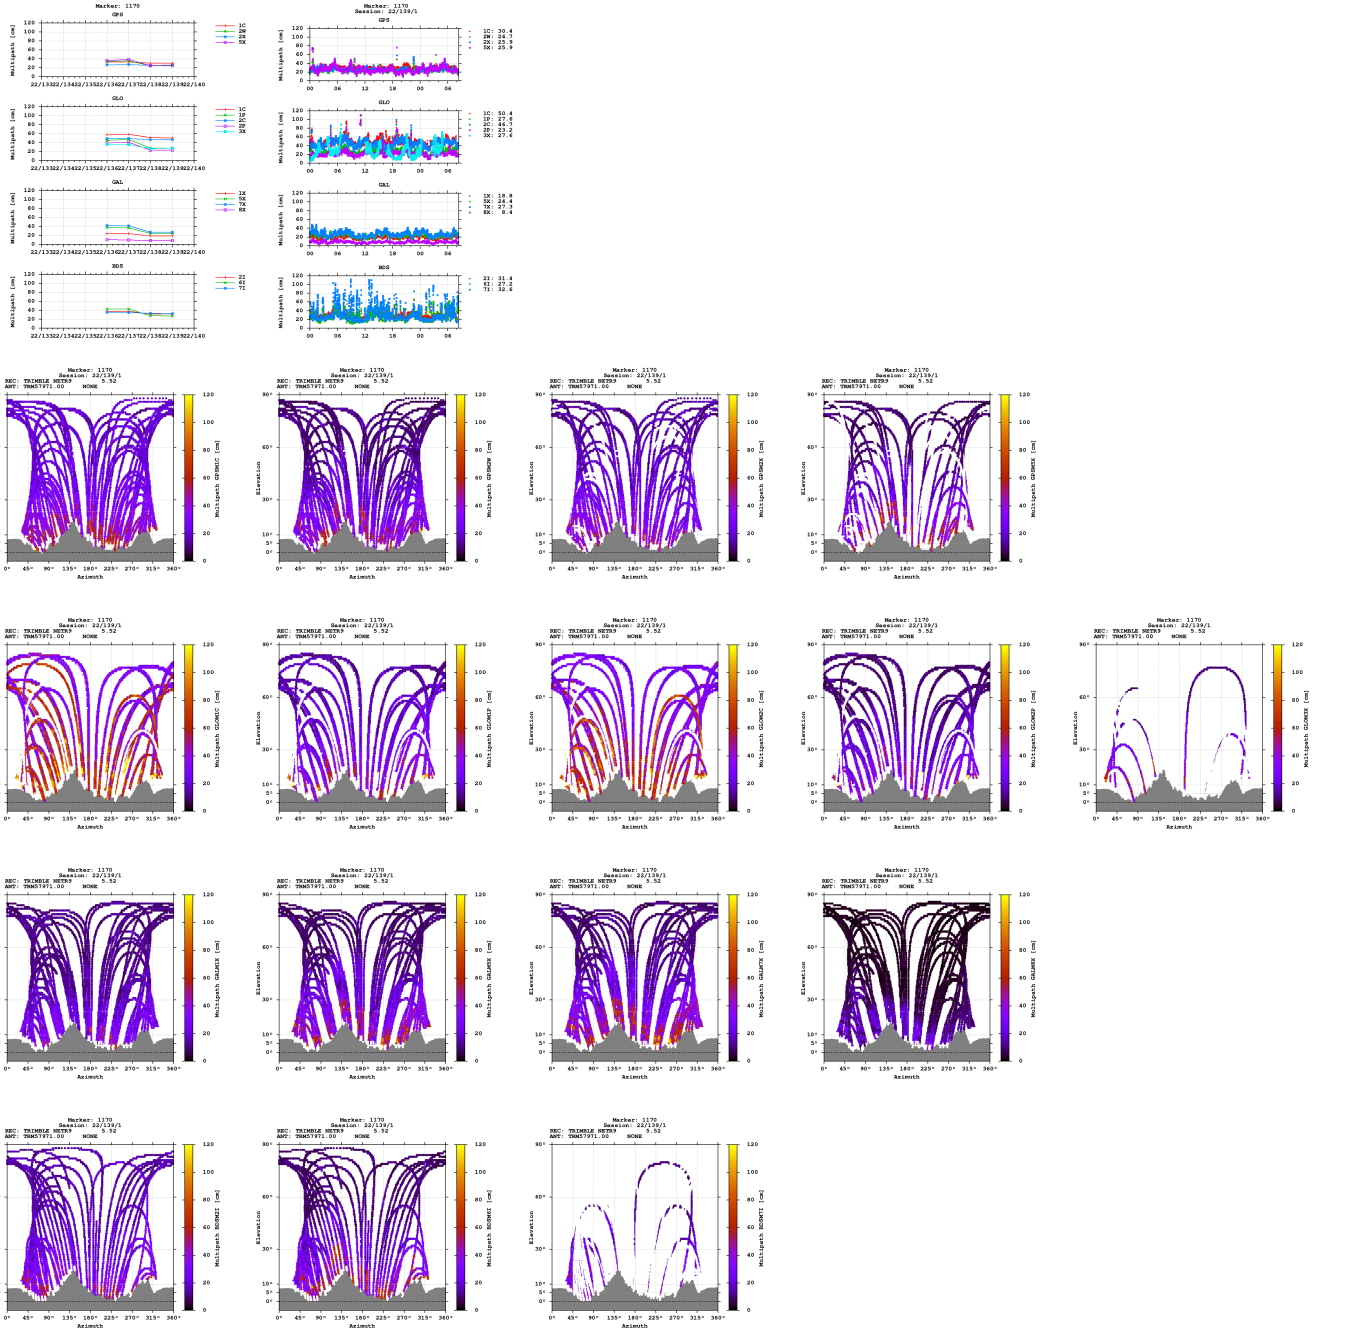


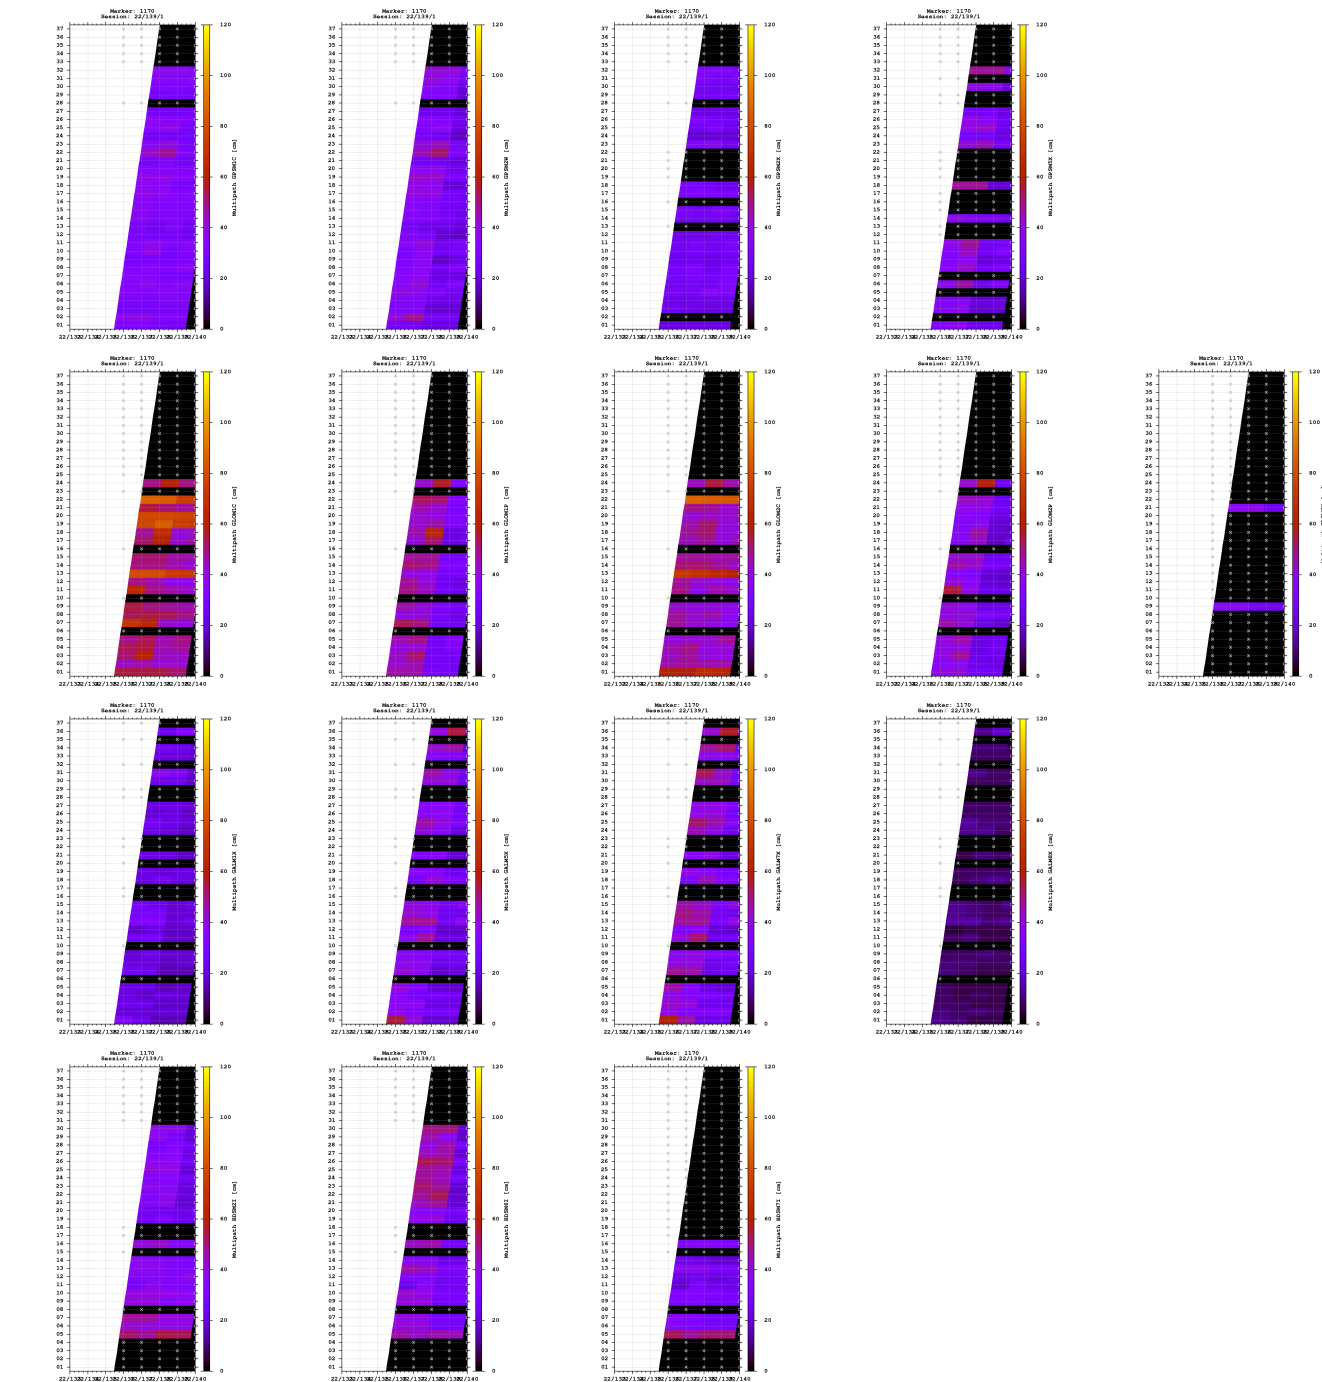


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

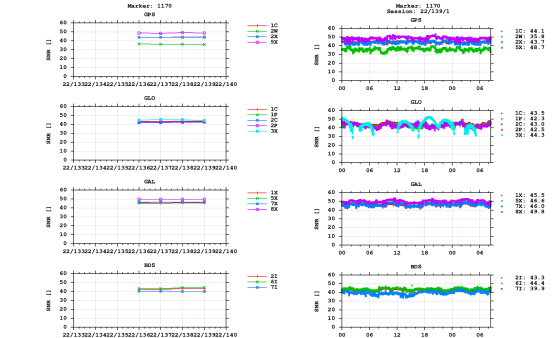


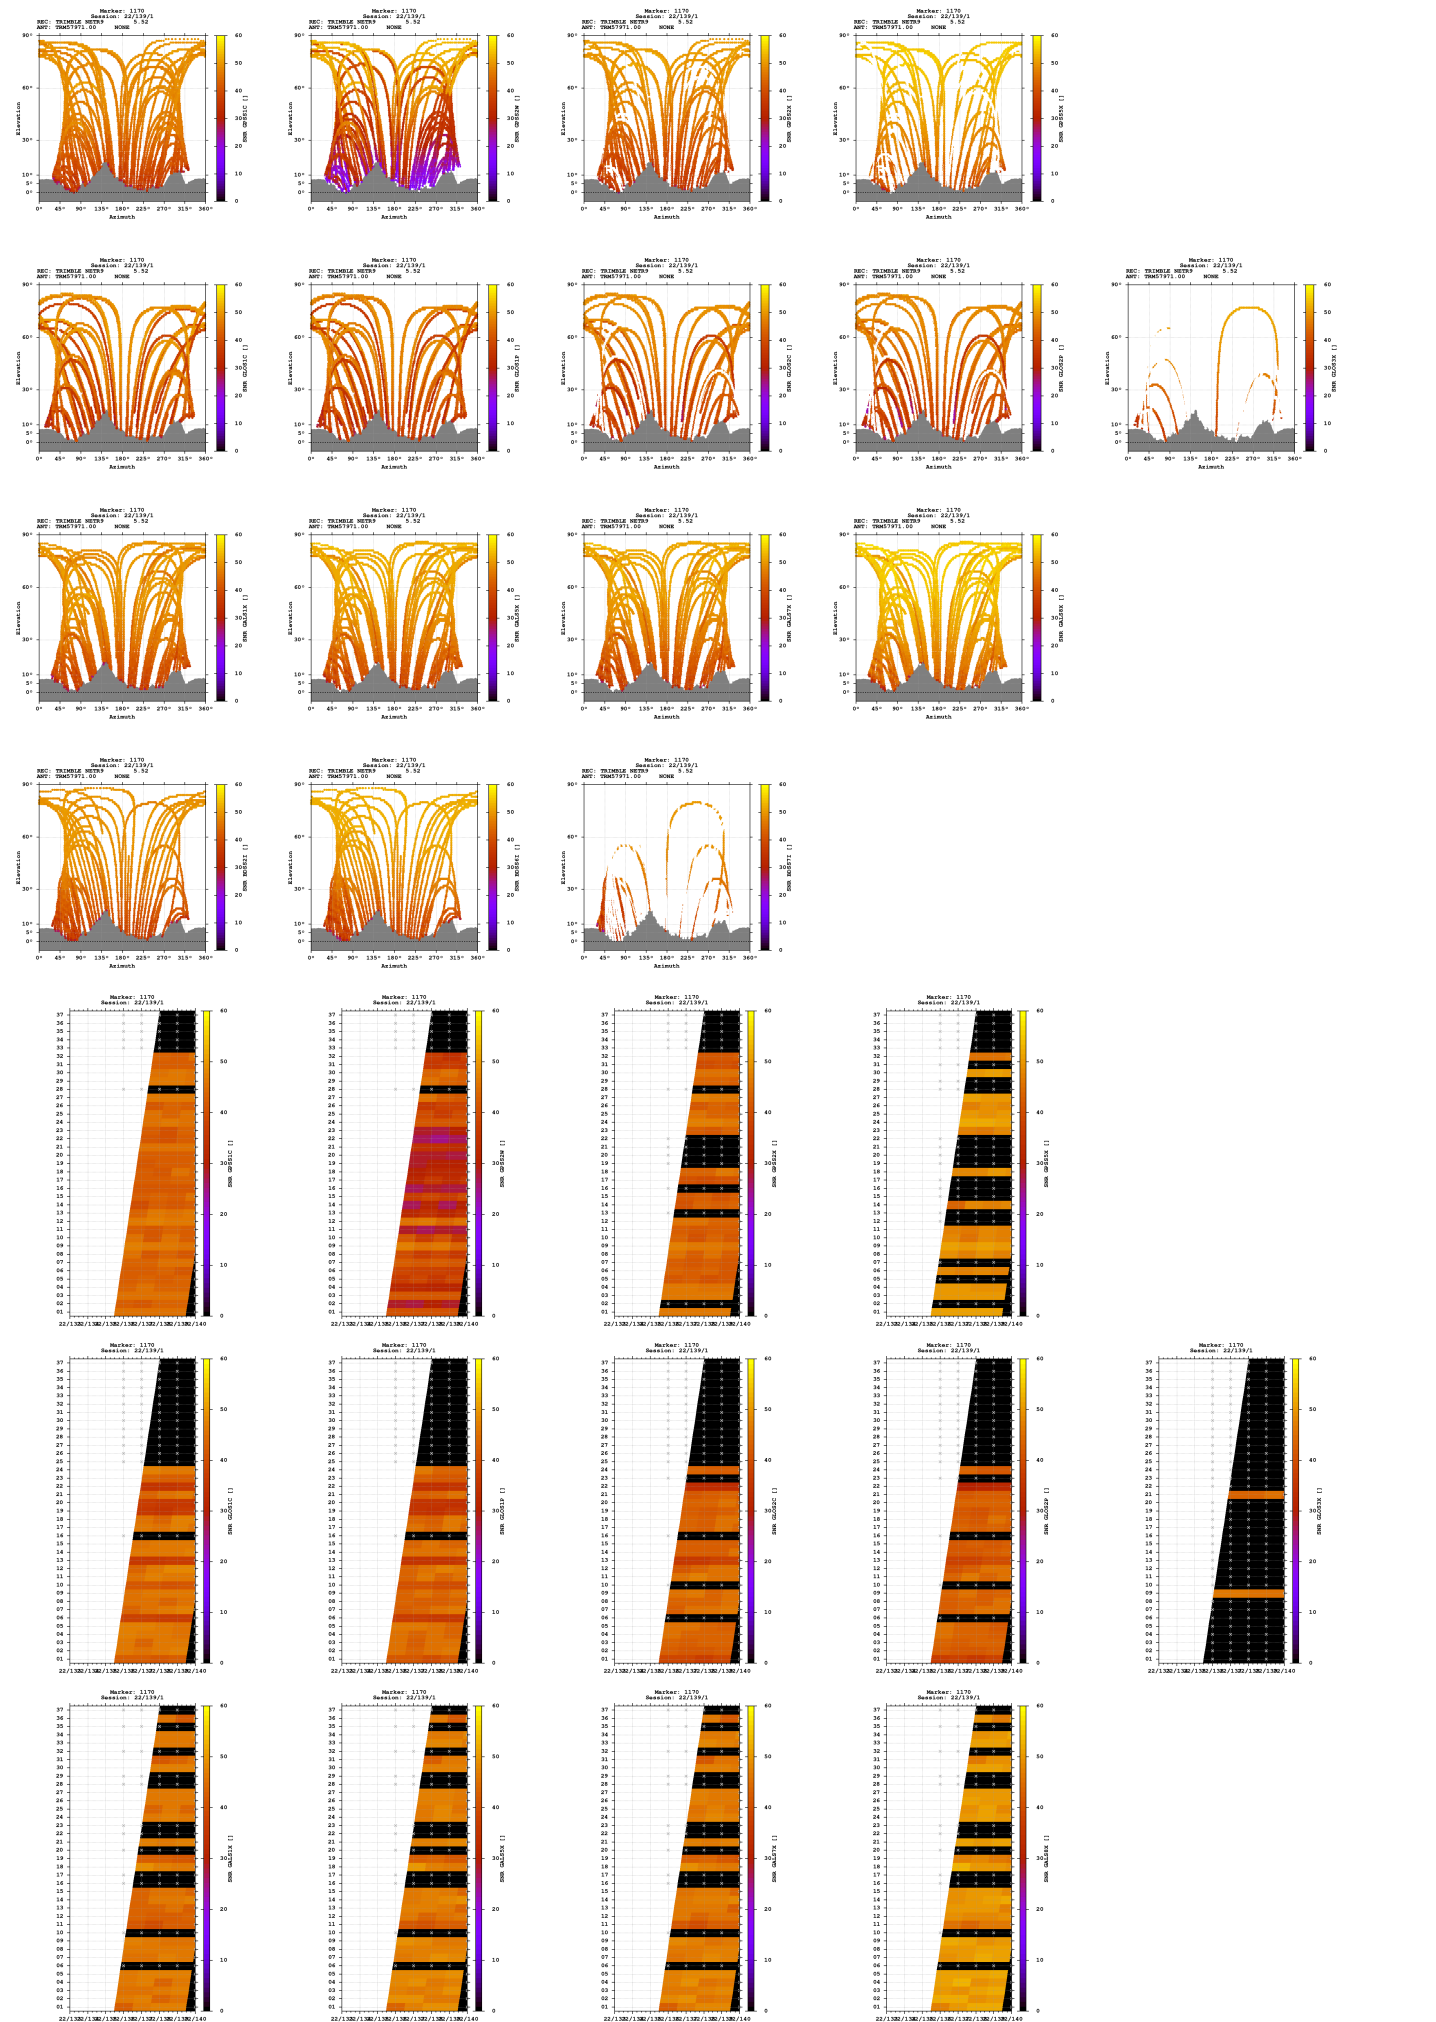

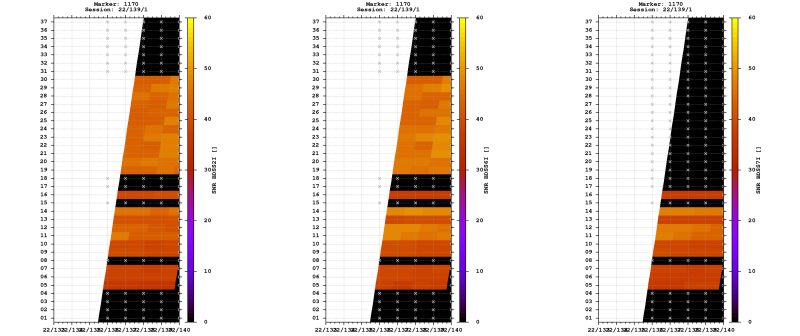


Estimates

2022-05-18 10:23:30	GPS	4316248.9719	630975.4821	4638824.0774	46.952774042	8.316933526	877.7459
2022-05-18 10:23:30	GLO	4316249.9743	630975.4824	4638824.6762	46.952771198	8.316931626	878.8606
2022-05-18 10:23:30	GAL	4316248.8570	630975.5409	4638823.7199	46.952772538	8.316934509	877.4129
2022-05-18 10:23:30	BDS	4316248.5468	630977.4813	4638825.8930	46.952786053	8.316960316	878.9831

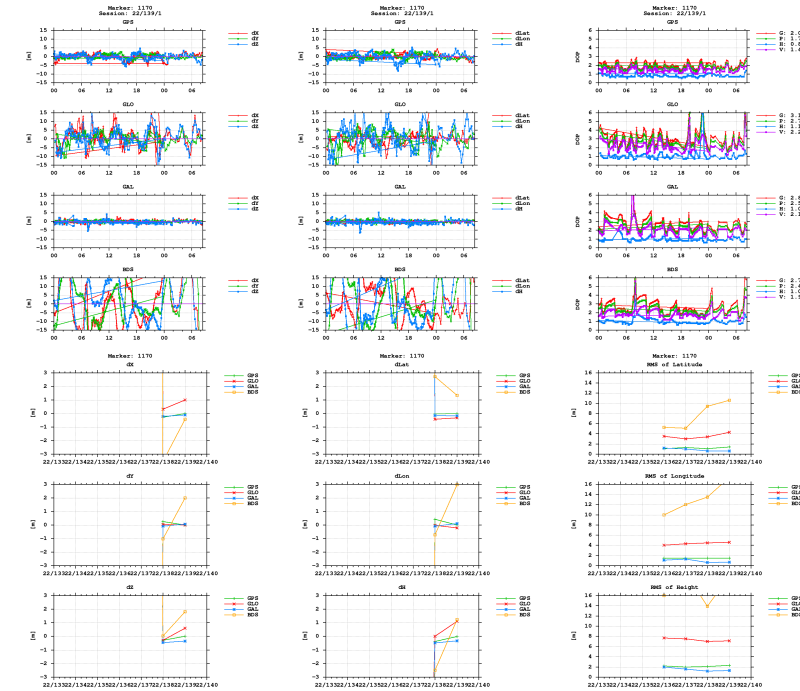

BNC



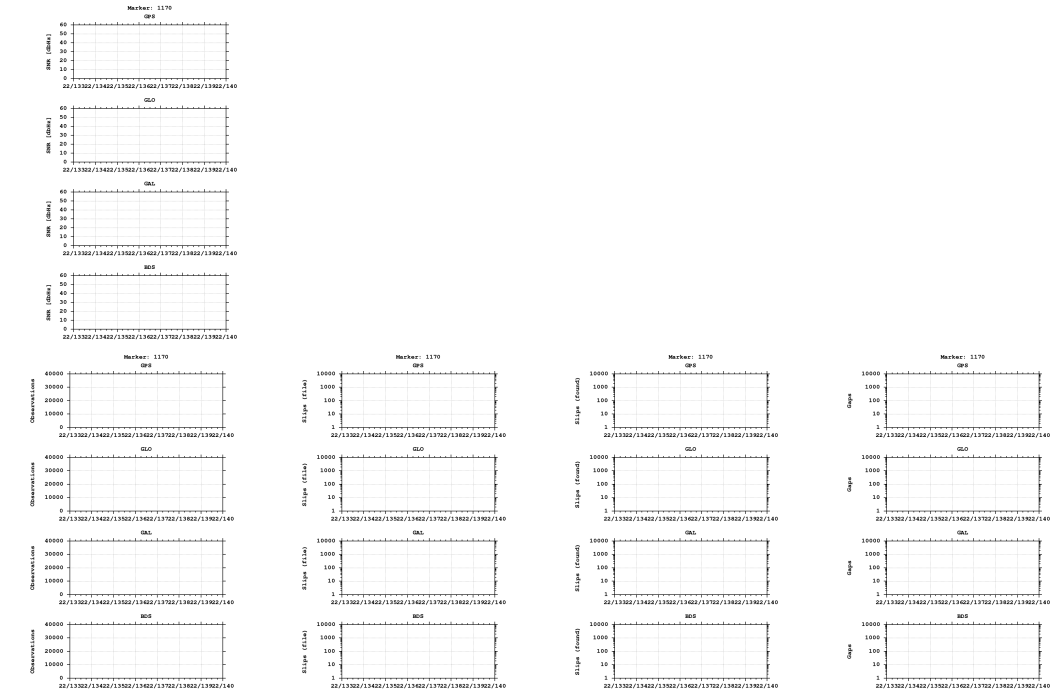

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)