


GNSS observation file monitoring for 0516


Last RINEX file: 05161361.22O
RINEX version: 3.02
Marker: 1149
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

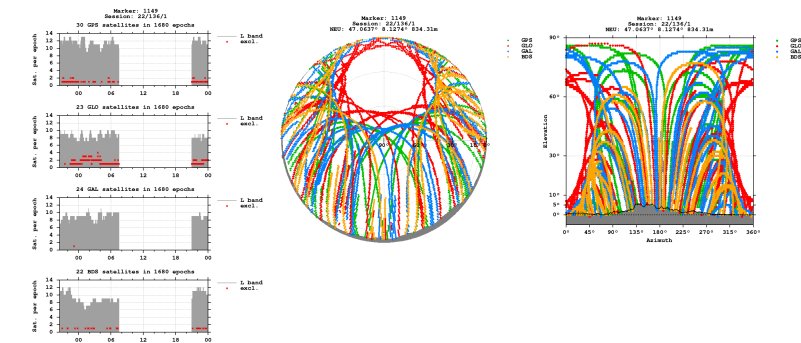


Bands

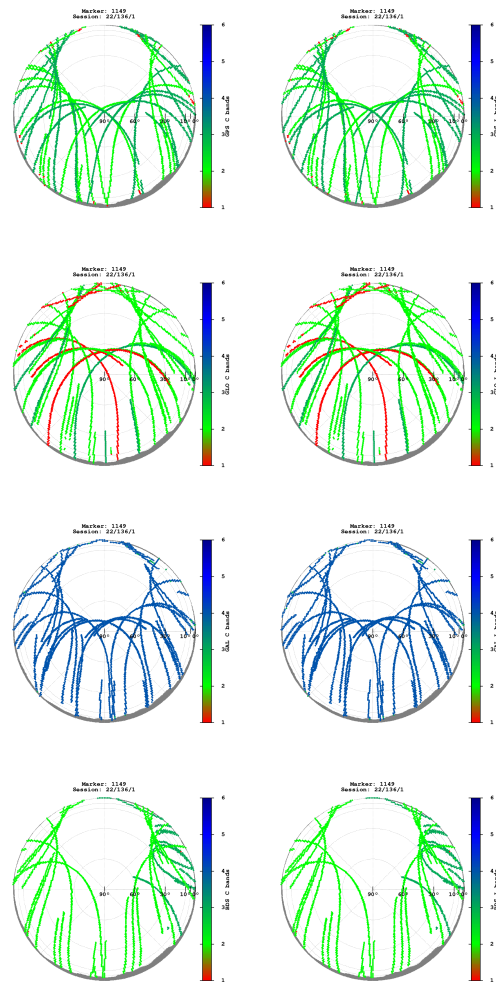

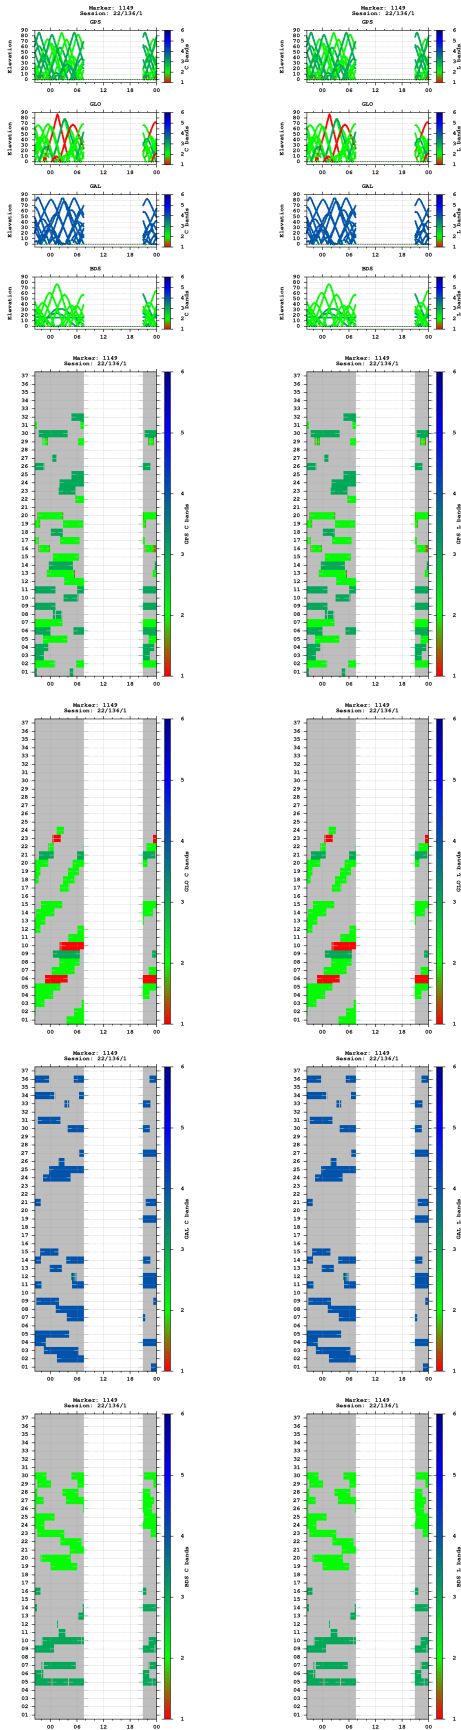


Multipath

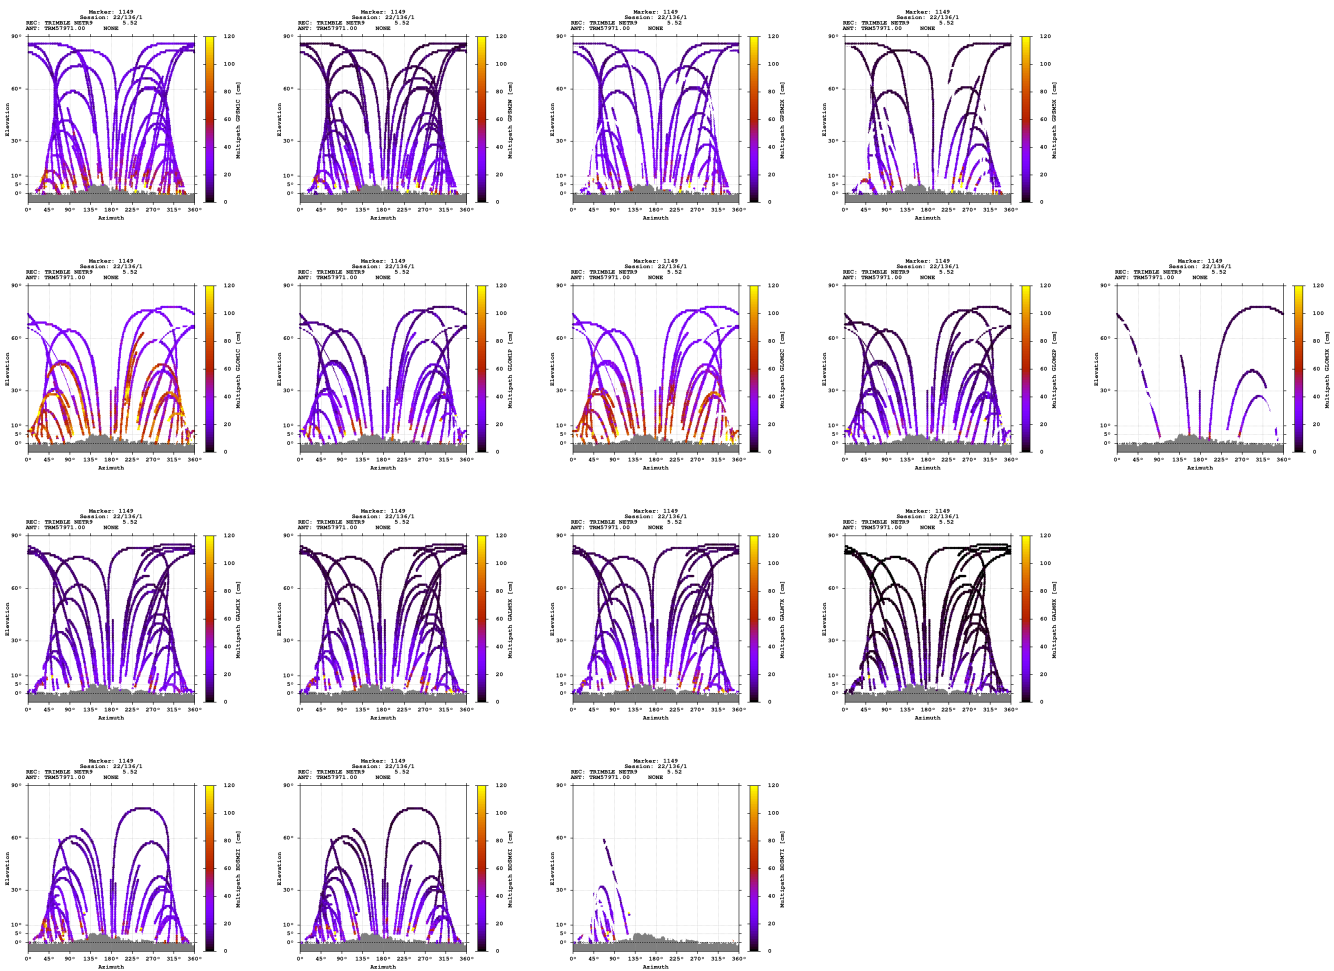


Signal-to-noise ratio



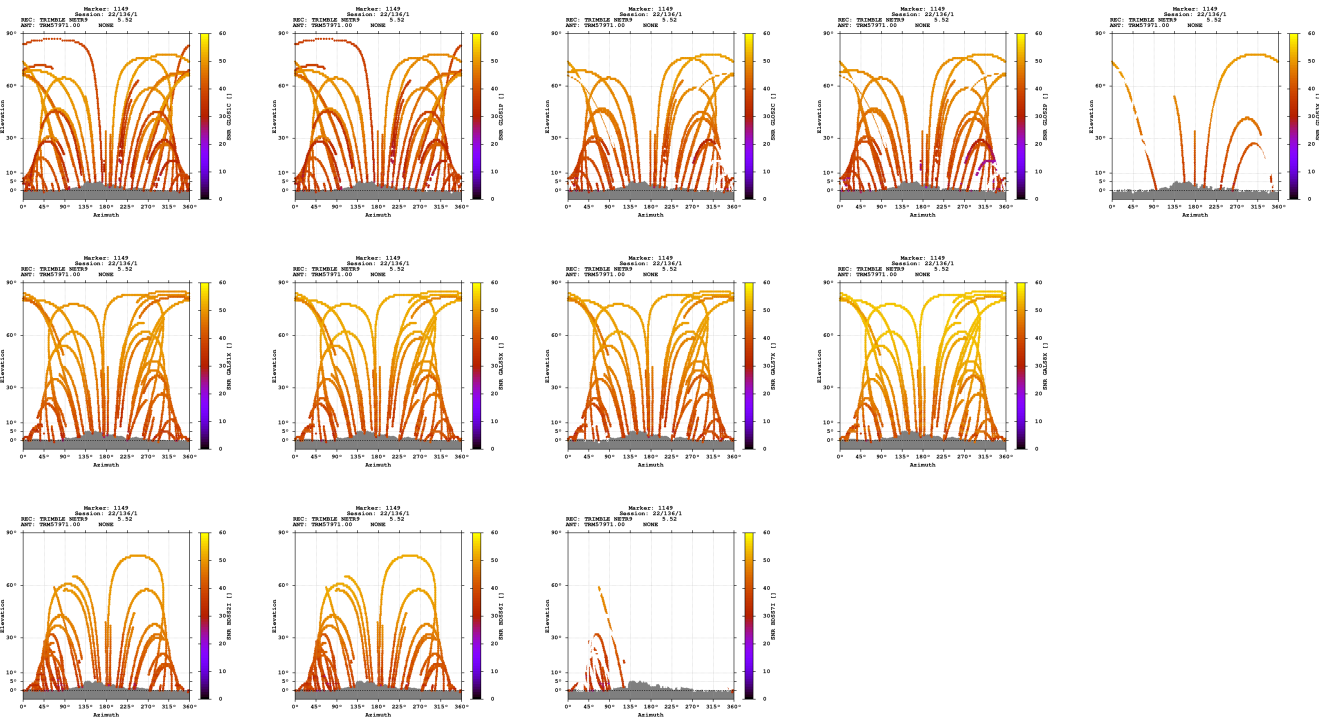

Estimates

2022-05-16 11:05:00	GPS	4309349.9048	615414.5468	4647204.8384	47.063732585	8.127406890	834.3086
2022-05-16 11:05:00	GLO	4309348.0027	615414.7991	4647204.7084	47.063743953	8.127413717	832.9552
2022-05-16 11:05:00	GAL	4309349.6075	615414.3659	4647204.8254	47.063734612	8.127405086	834.0812
2022-05-16 11:05:00	BDS	4309349.7328	615414.9578	4647207.5140	47.063749716	8.127412566	836.1911

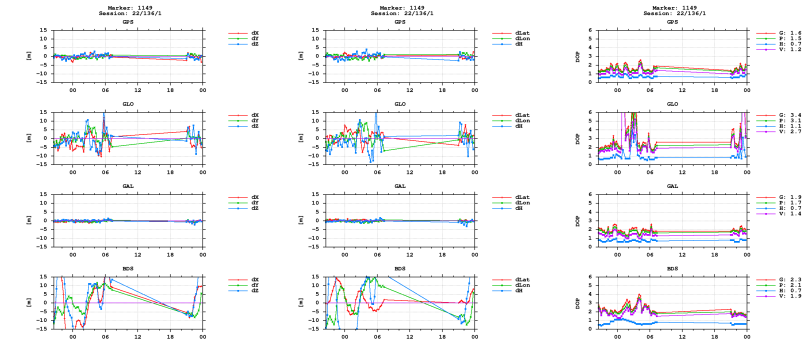

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)