


GNSS observation file monitoring for 0516


Last RINEX file: 05161371.220
RINEX version: 3.02
Marker: 1149
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

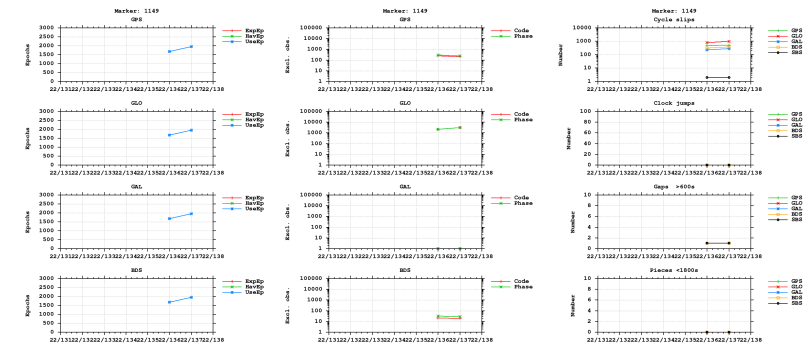



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

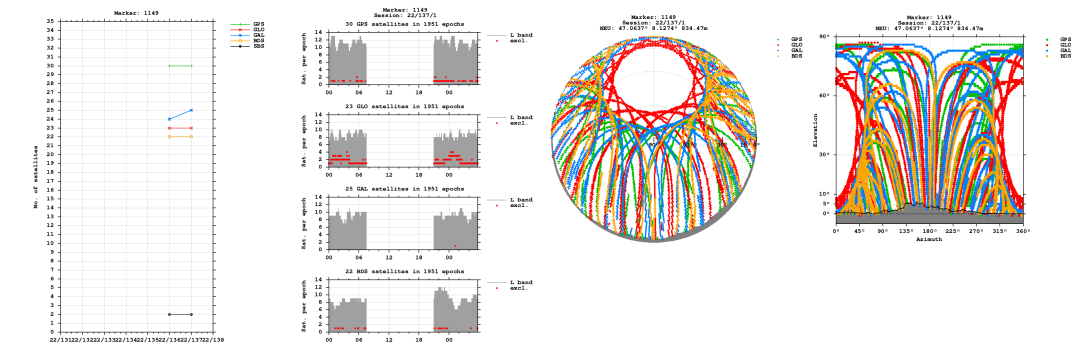


Bands

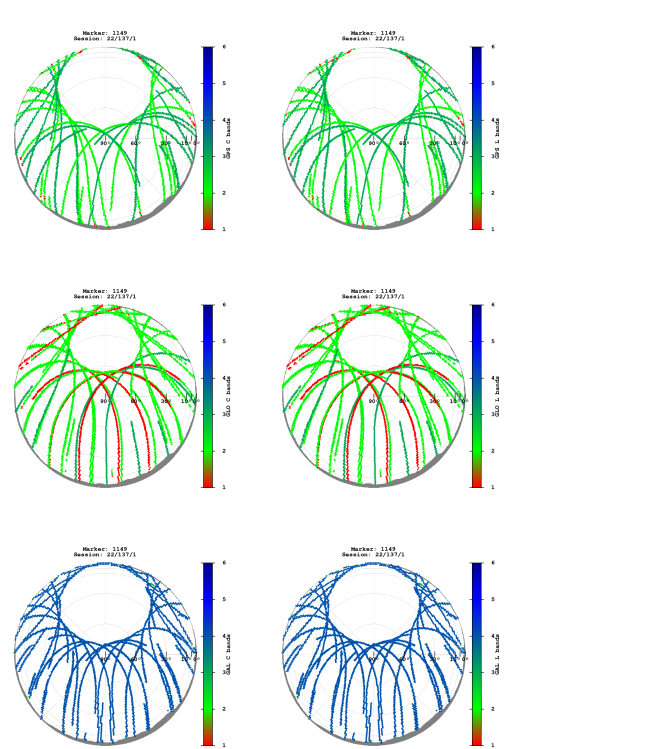

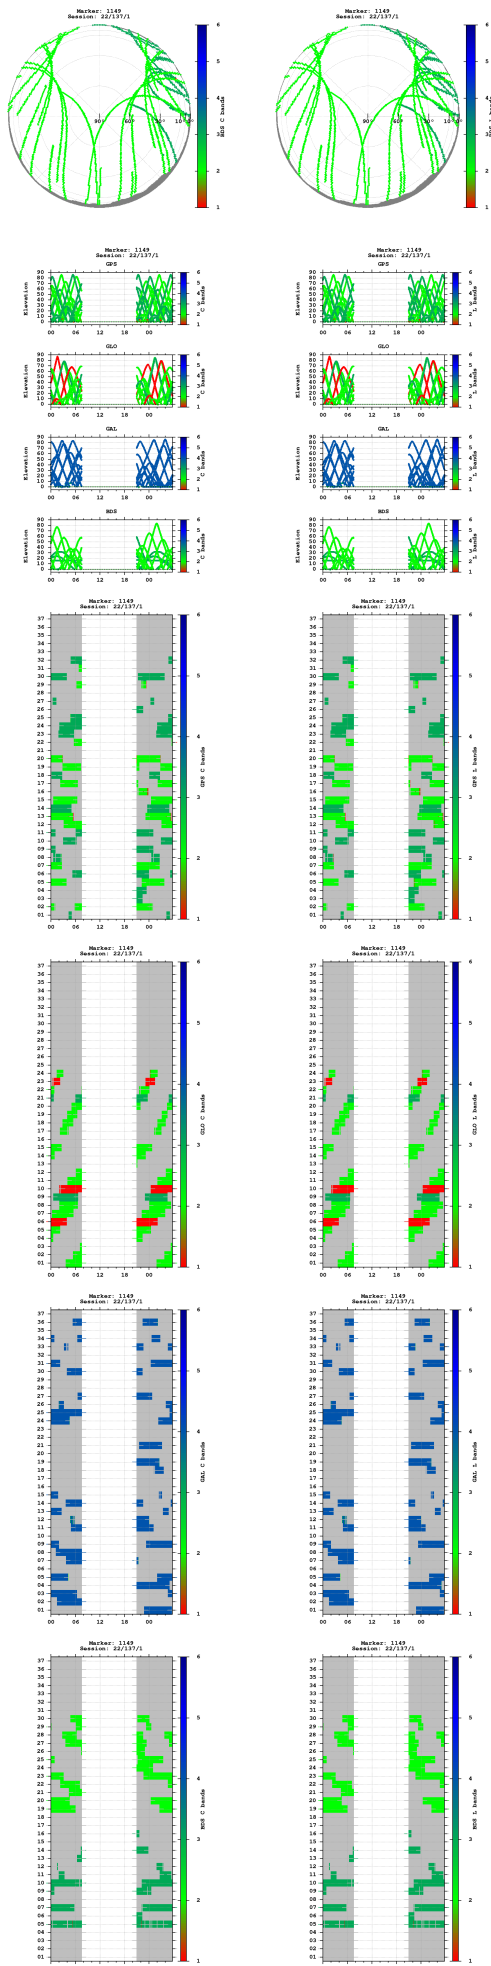



Observations

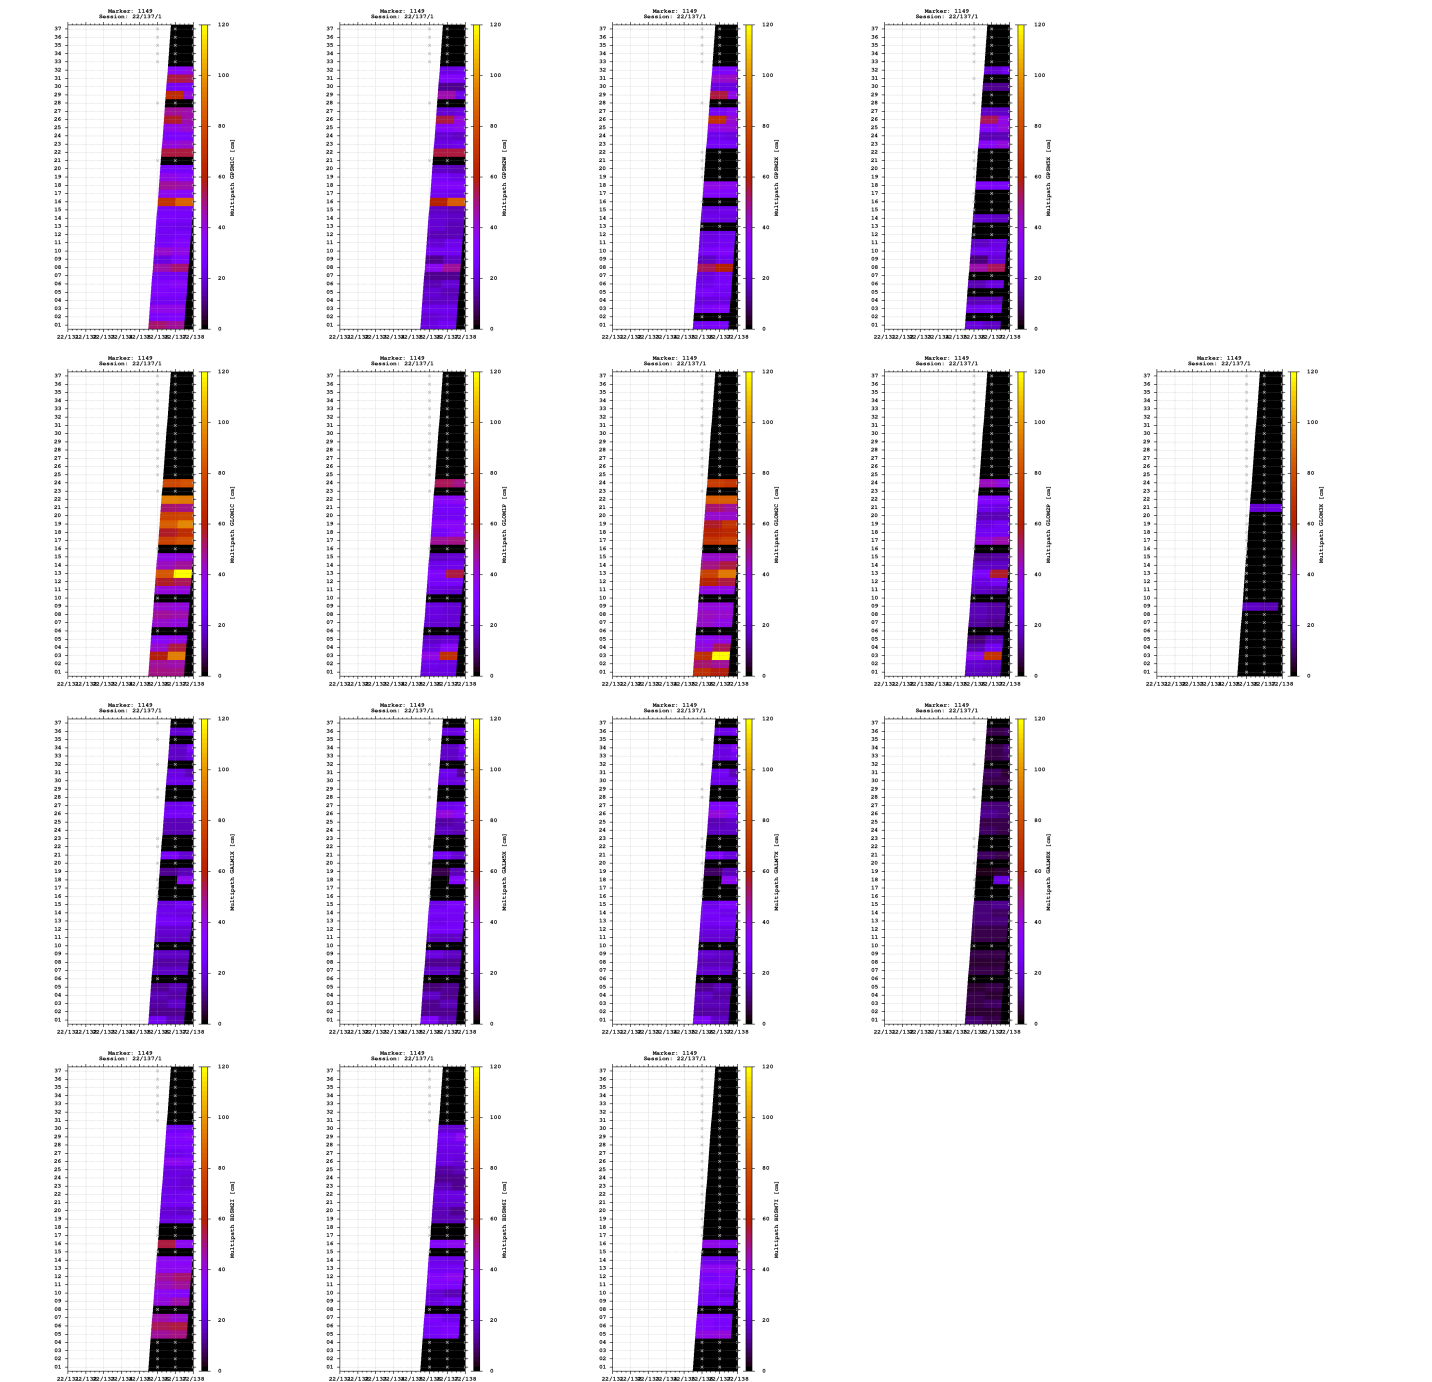

Signal-to-noise ratio




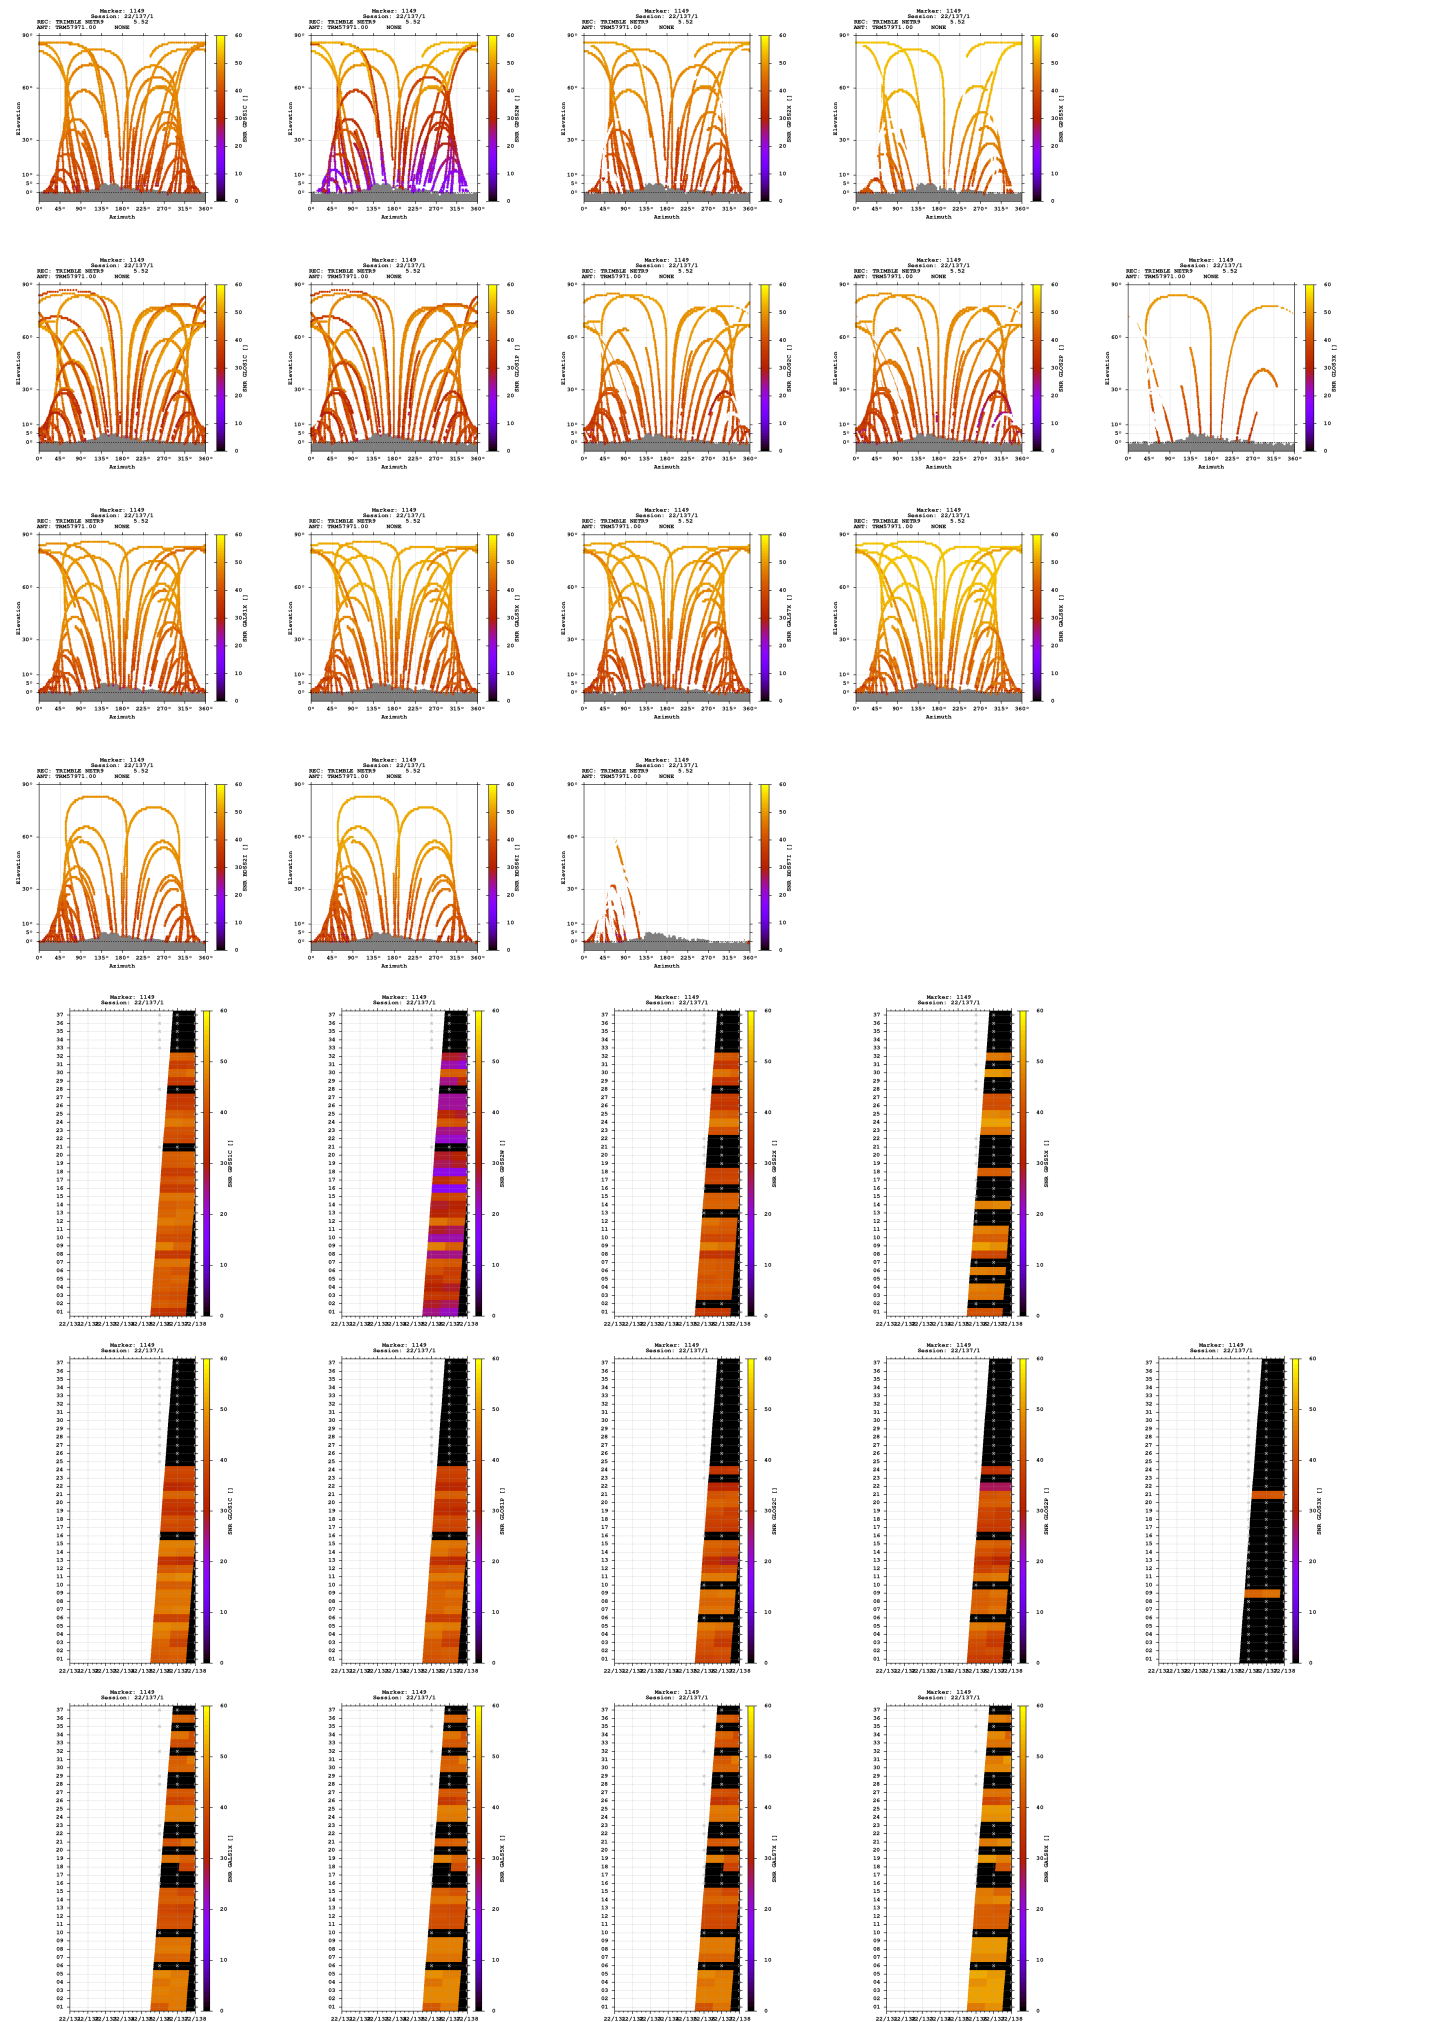

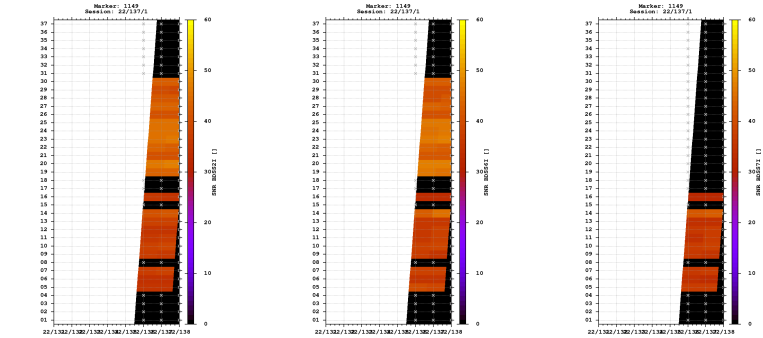


Estimates

2022-05-16 11:05:00	GPS	4309349.9049	615414.0813	4647205.1133	47.063734702	8.127400825	834.4651
2022-05-16 11:05:00	GLO	4309348.1537	615415.1287	4647205.6175	47.063748231	8.127417731	833.7542
2022-05-16 11:05:00	GAL	4309349.7125	615414.3294	4647204.7960	47.063733781	8.127404416	834.1271
2022-05-16 11:05:00	BDS	4309348.6681	615417.7464	4647205.5616	47.063742099	8.127450882	834.3123

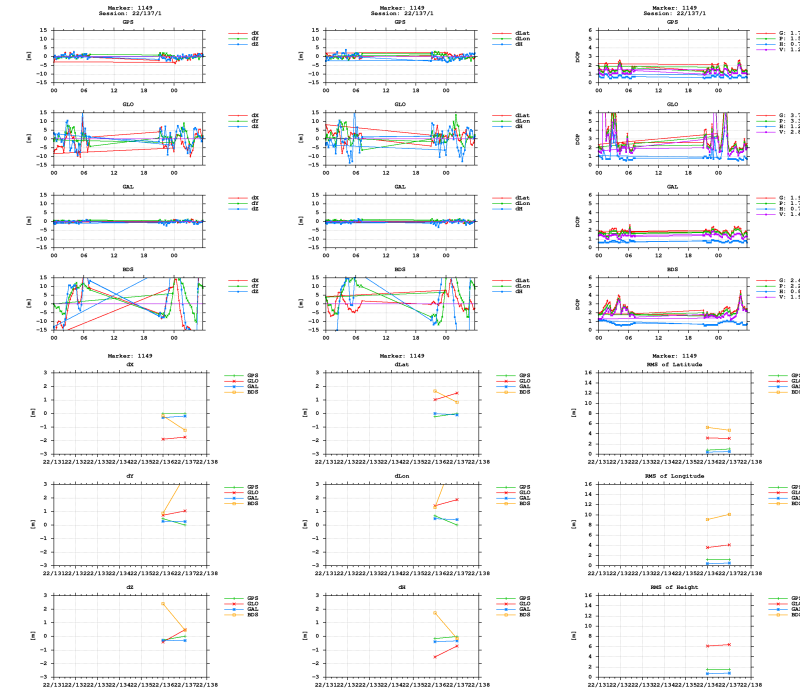

BNC



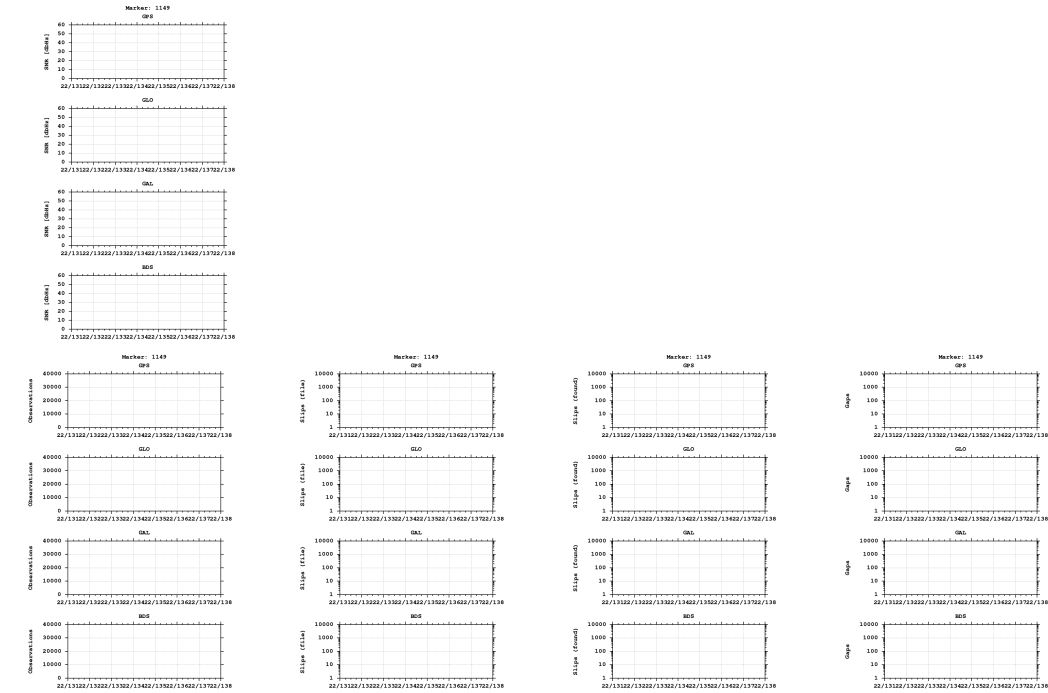

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)