


GNSS observation file monitoring for 0517


Last RINEX file: 05171401.220
RINEX version: 3.02
Marker: 1171
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

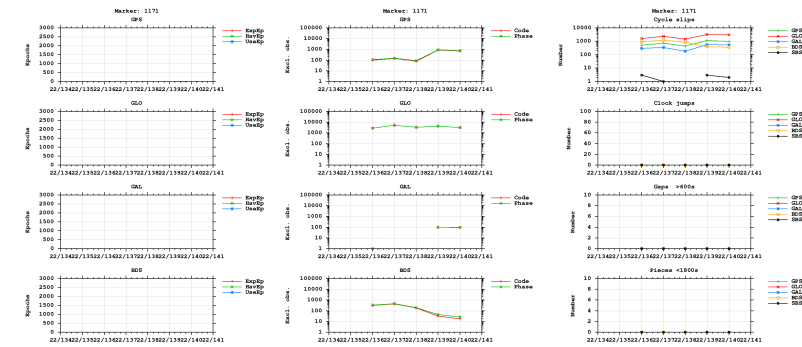



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

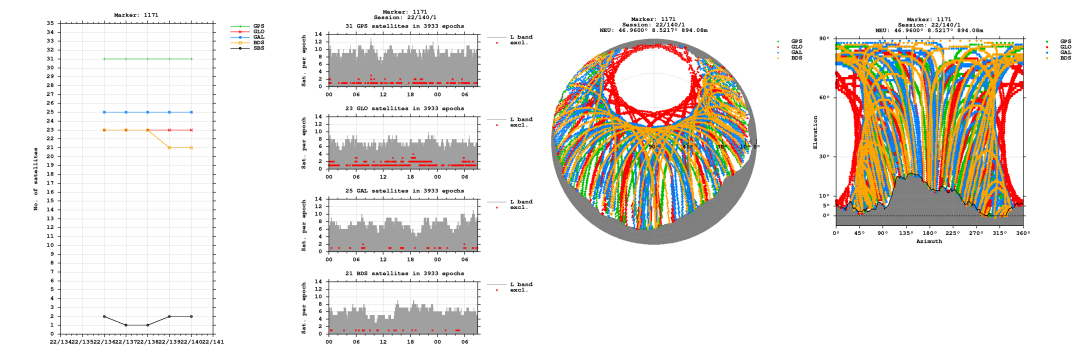


Bands

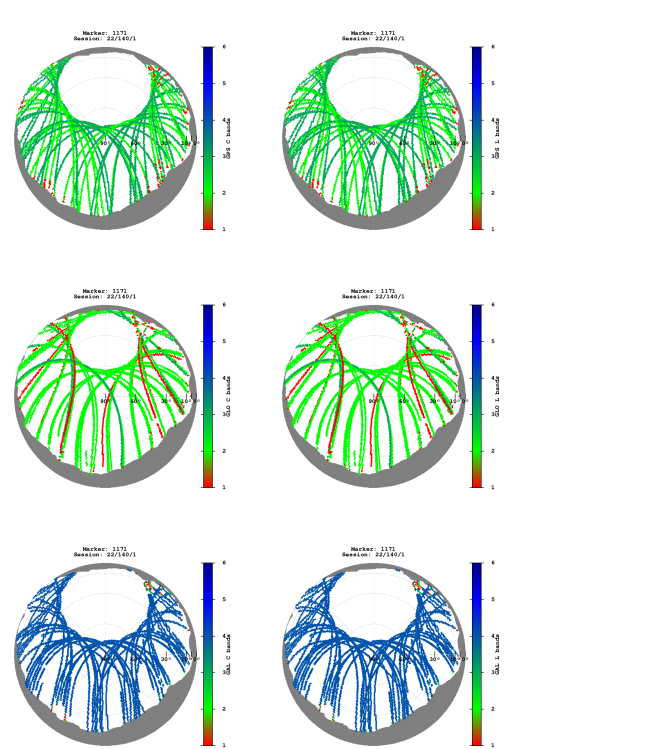


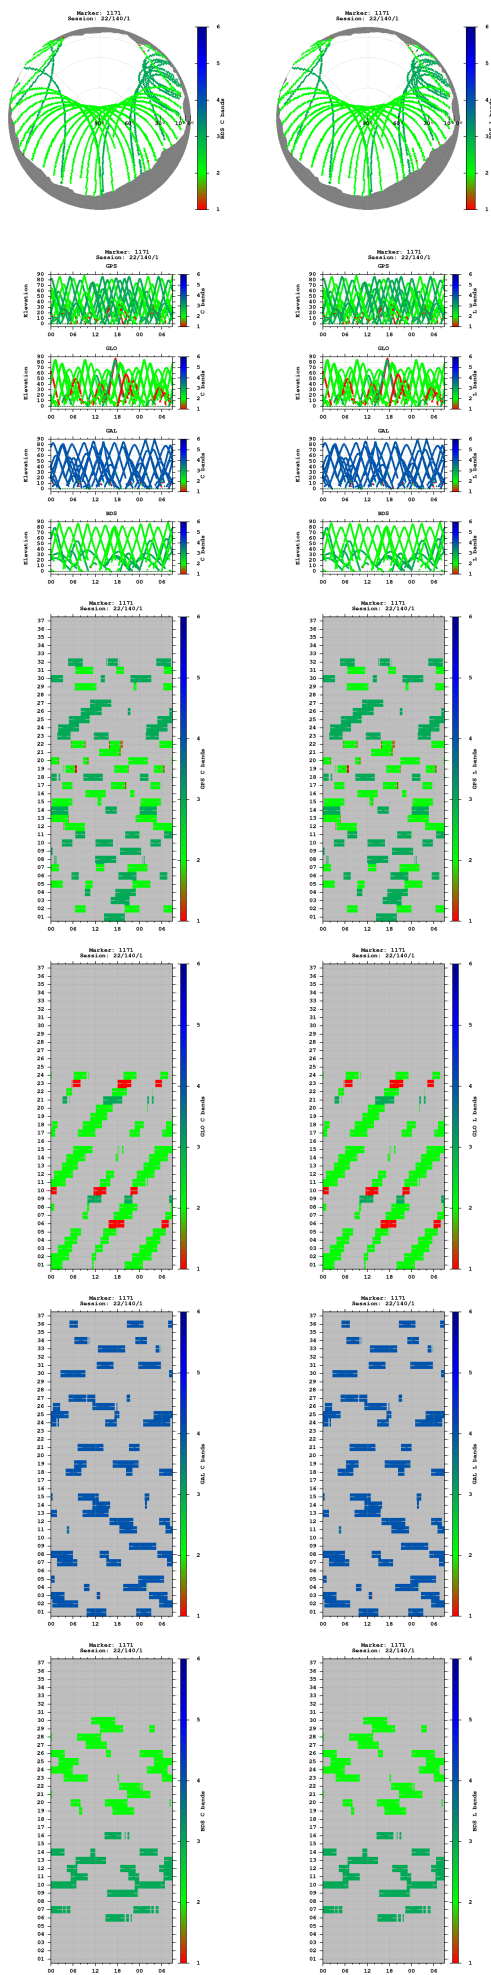


Observations

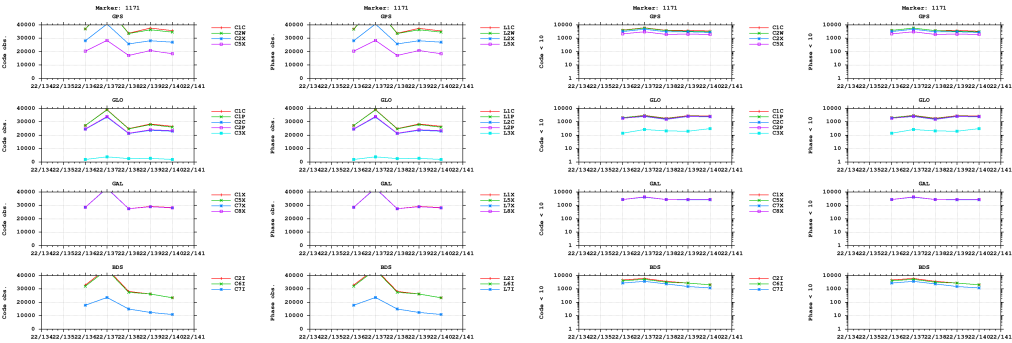


Multipath

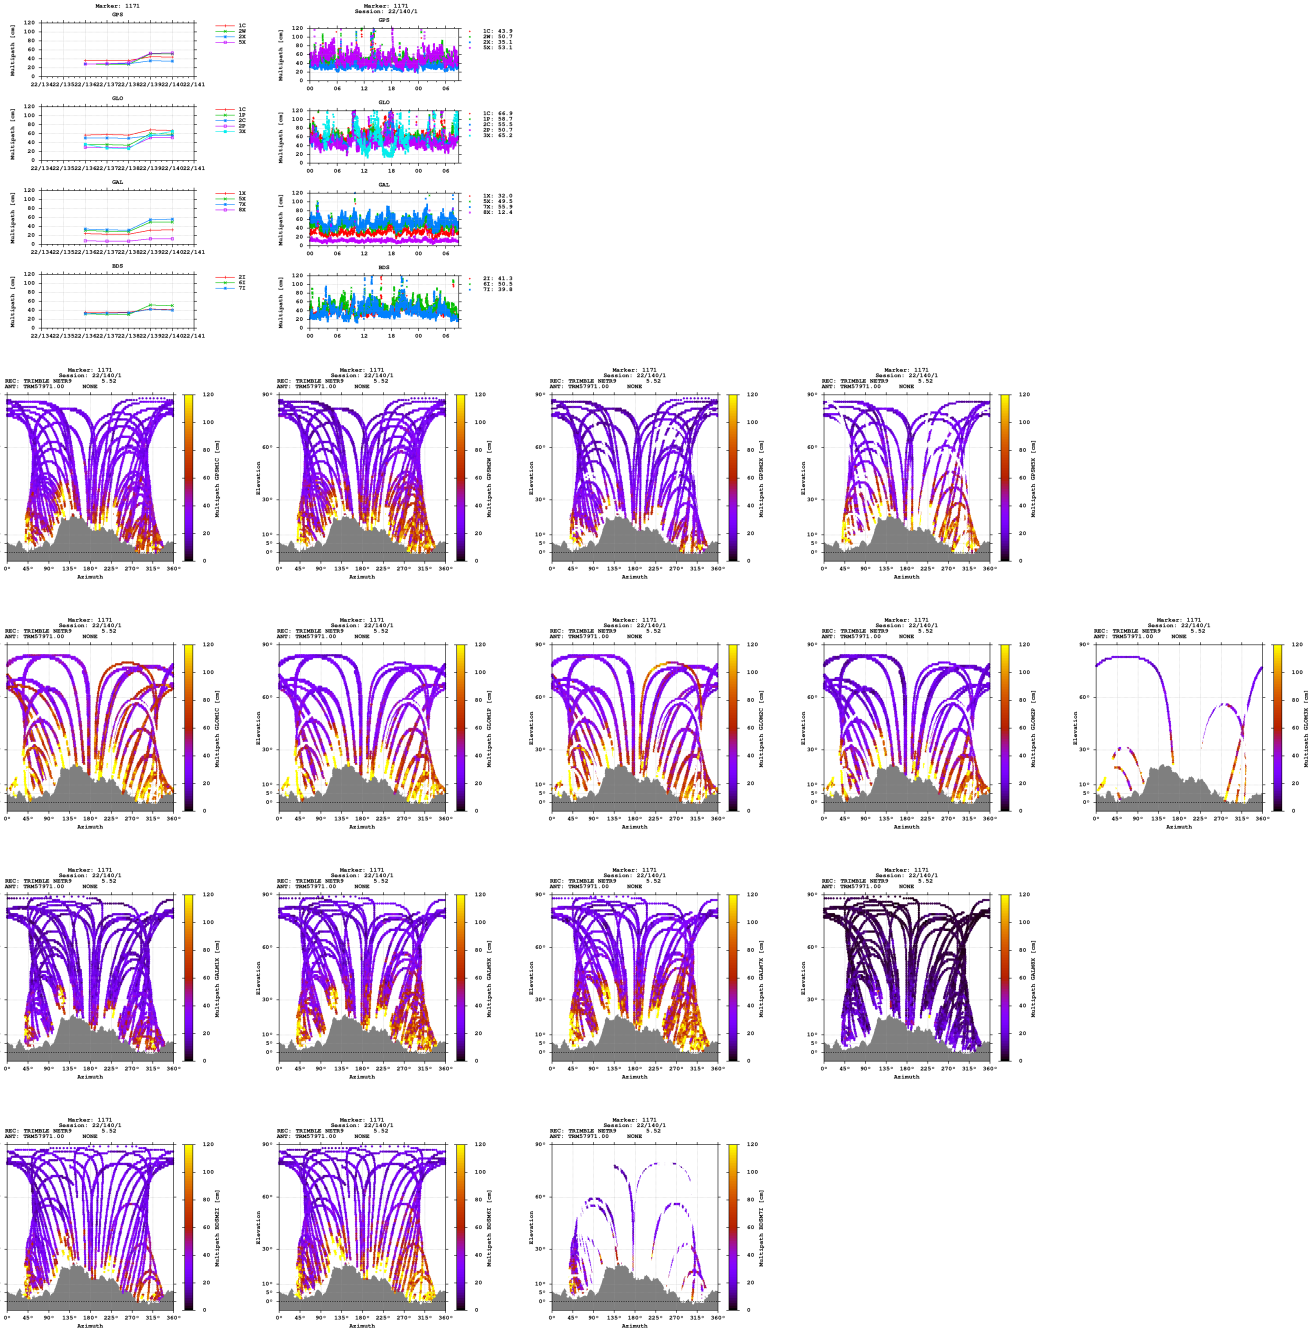


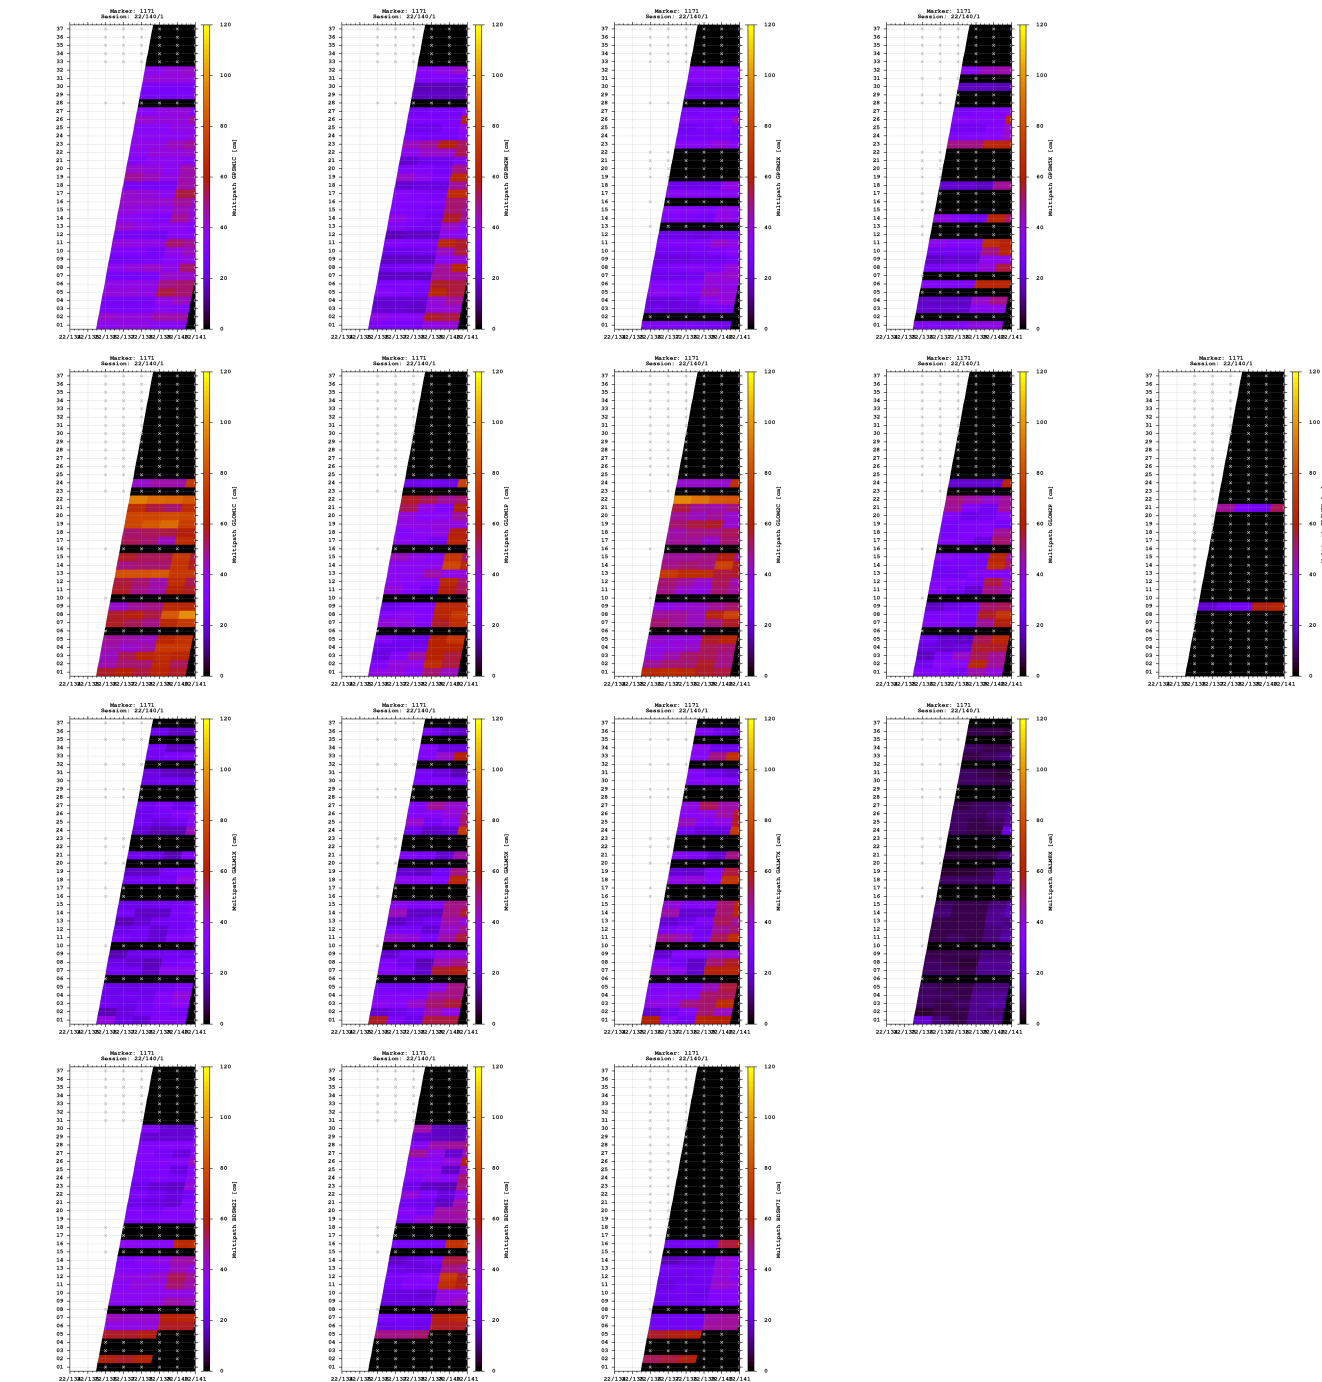


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

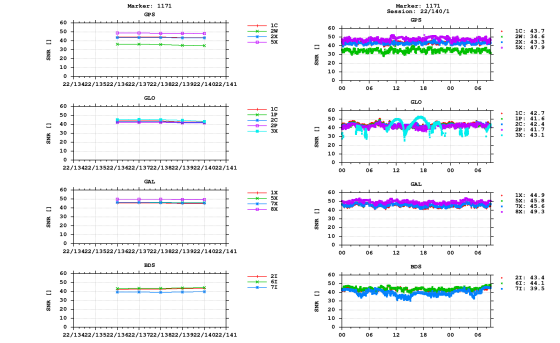


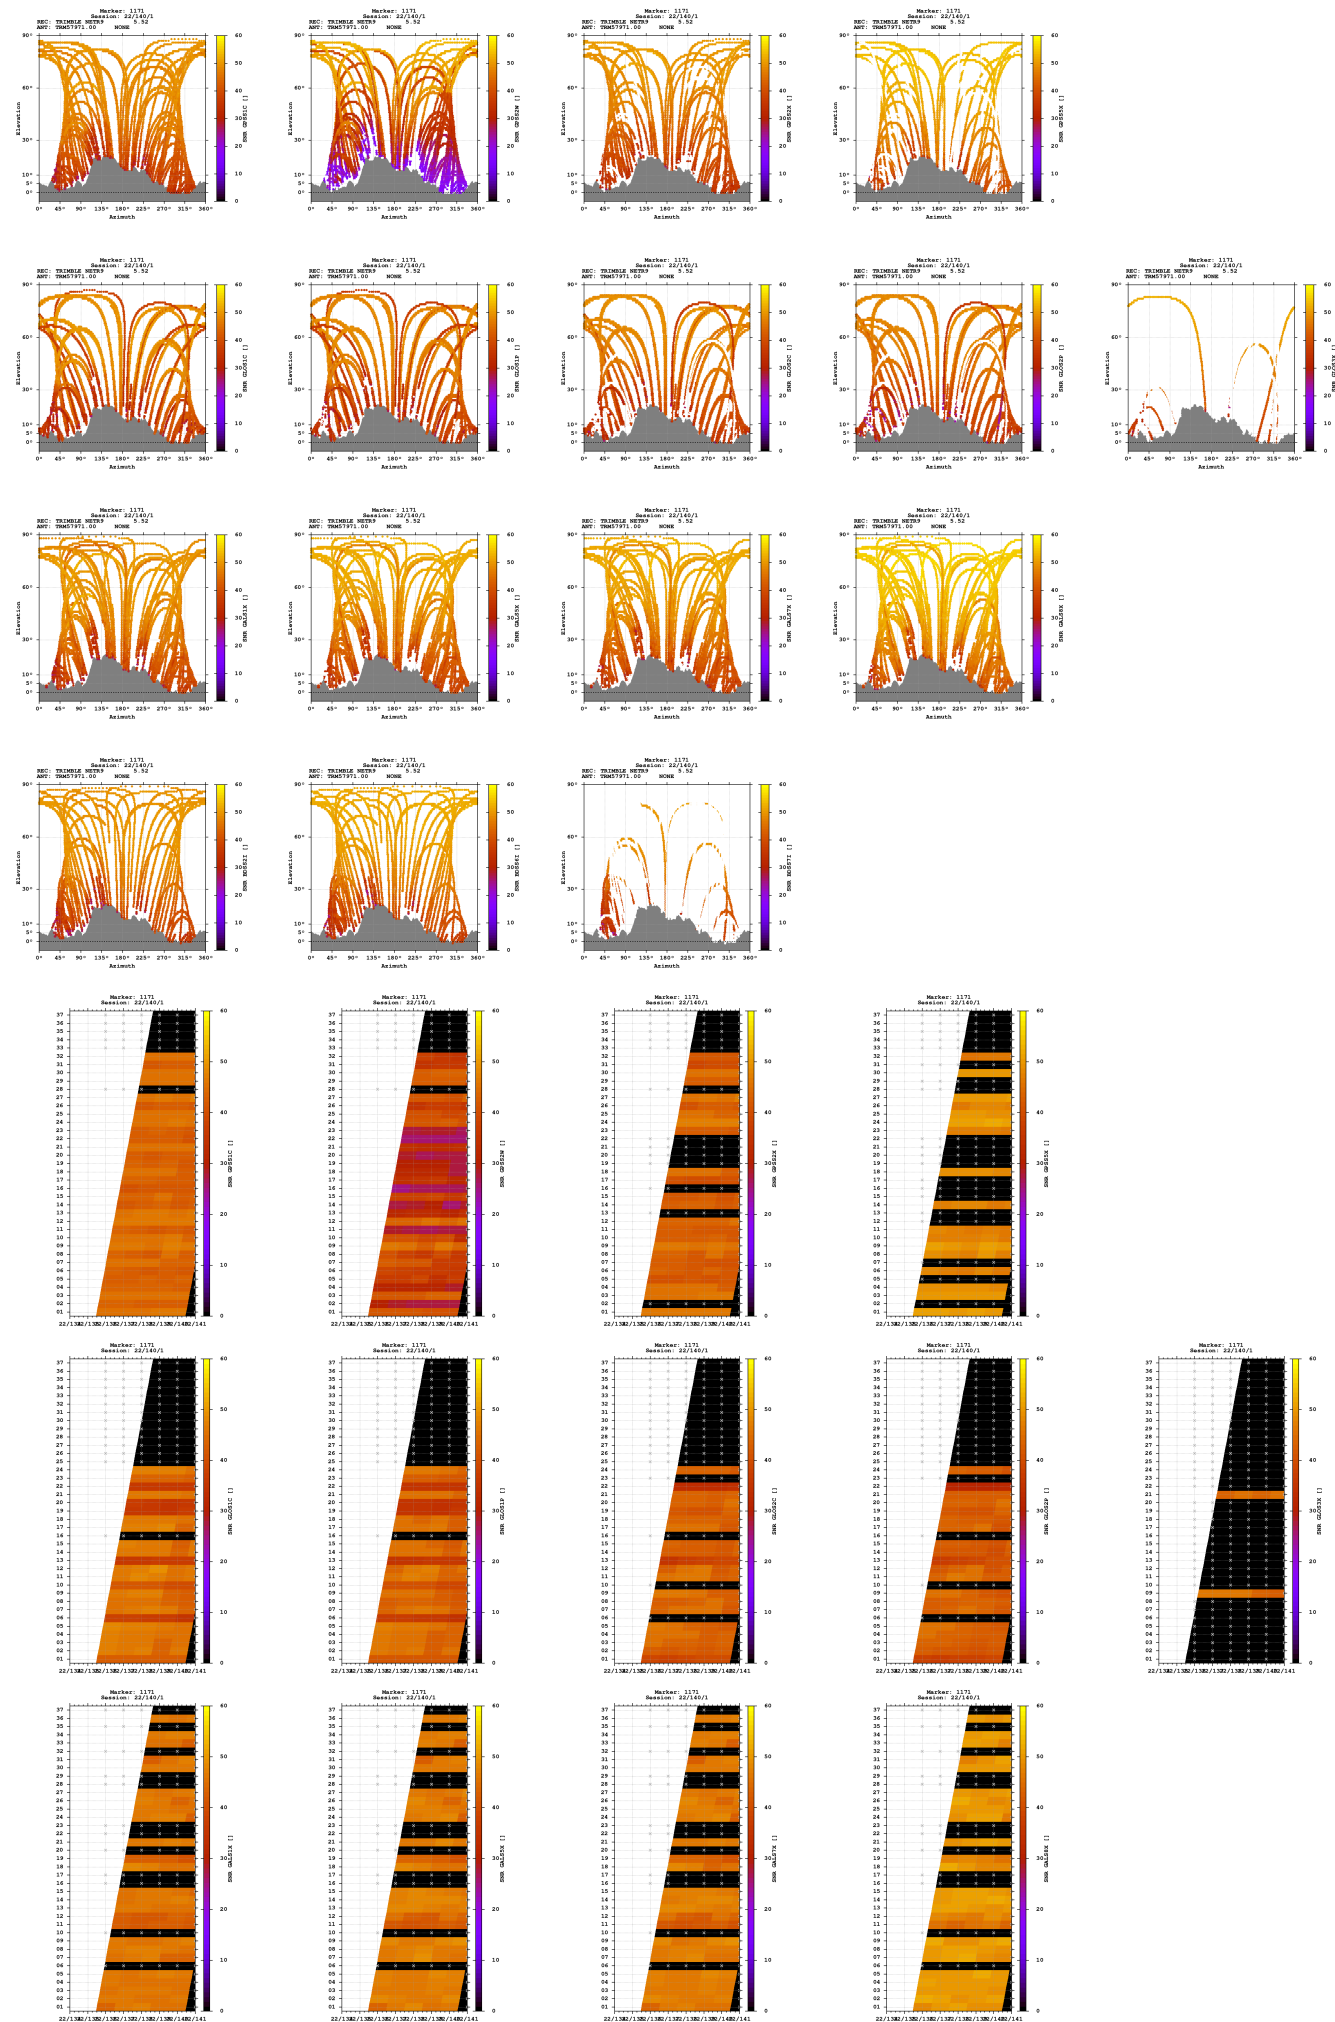

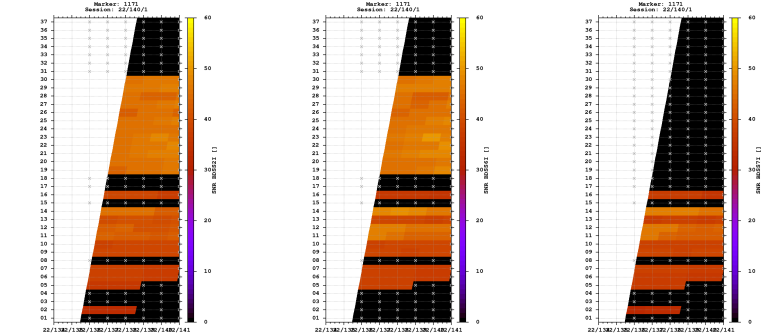


Estimates

2022-05-19 13:27:00	GPS	4313395.0232	646313.3726	4639385.7521	46.960017863	8.521725259	894.0834
2022-05-19 13:27:00	GLO	4313396.0598	646313.2858	4639386.2377	46.960014189	8.521722115	895.1293
2022-05-19 13:27:00	GAL	4313395.1323	646313.2604	4639385.5274	46.960015883	8.521723589	893.9815
2022-05-19 13:27:00	BDS	4313398.2802	646317.2217	4639389.7193	46.960017292	8.521768925	899.5707

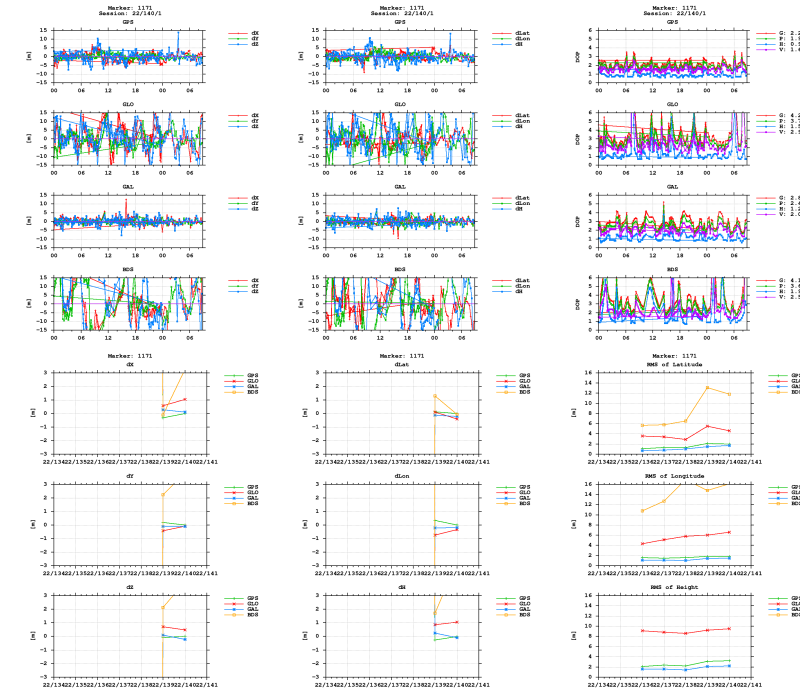

BNC



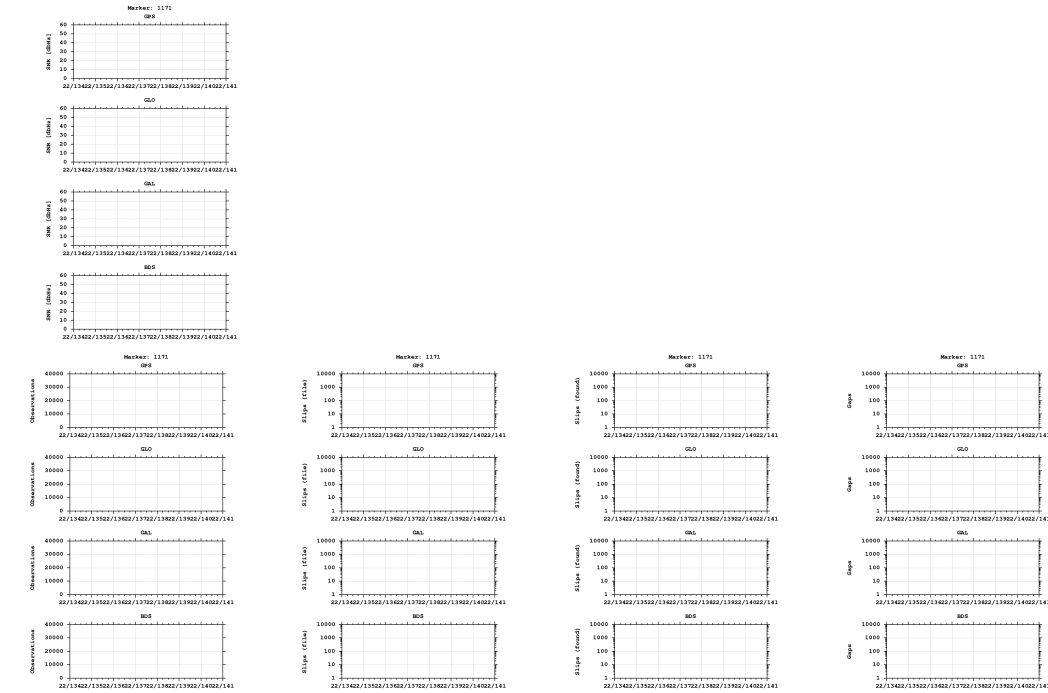

Equipment

2022-05-16 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)