


GNSS observation file monitoring for 0518


Last RINEX file: 05181371.22O
RINEX version: 3.02
Marker: 1190
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

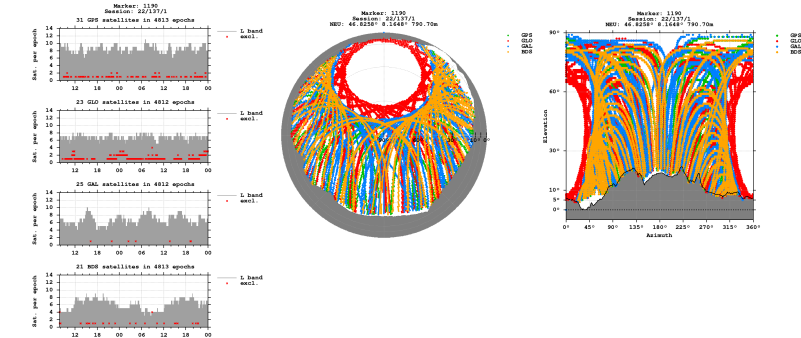


Bands

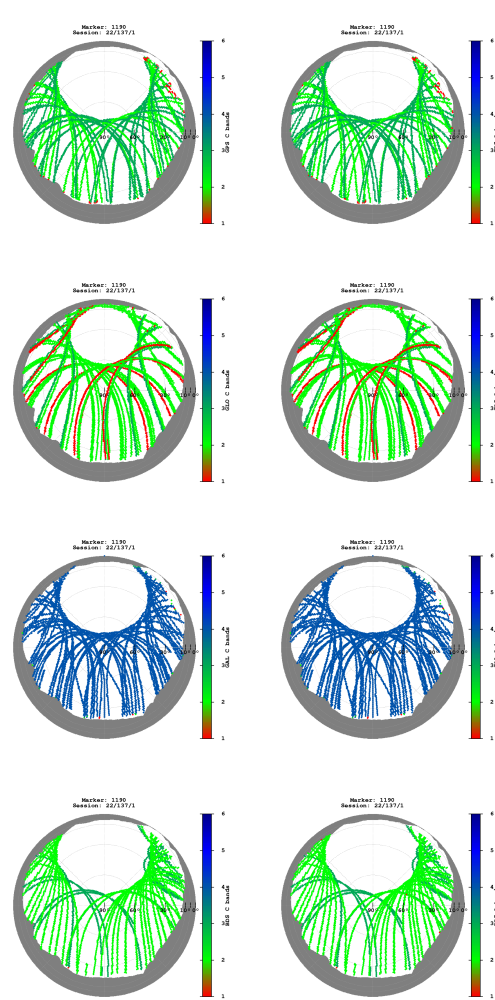


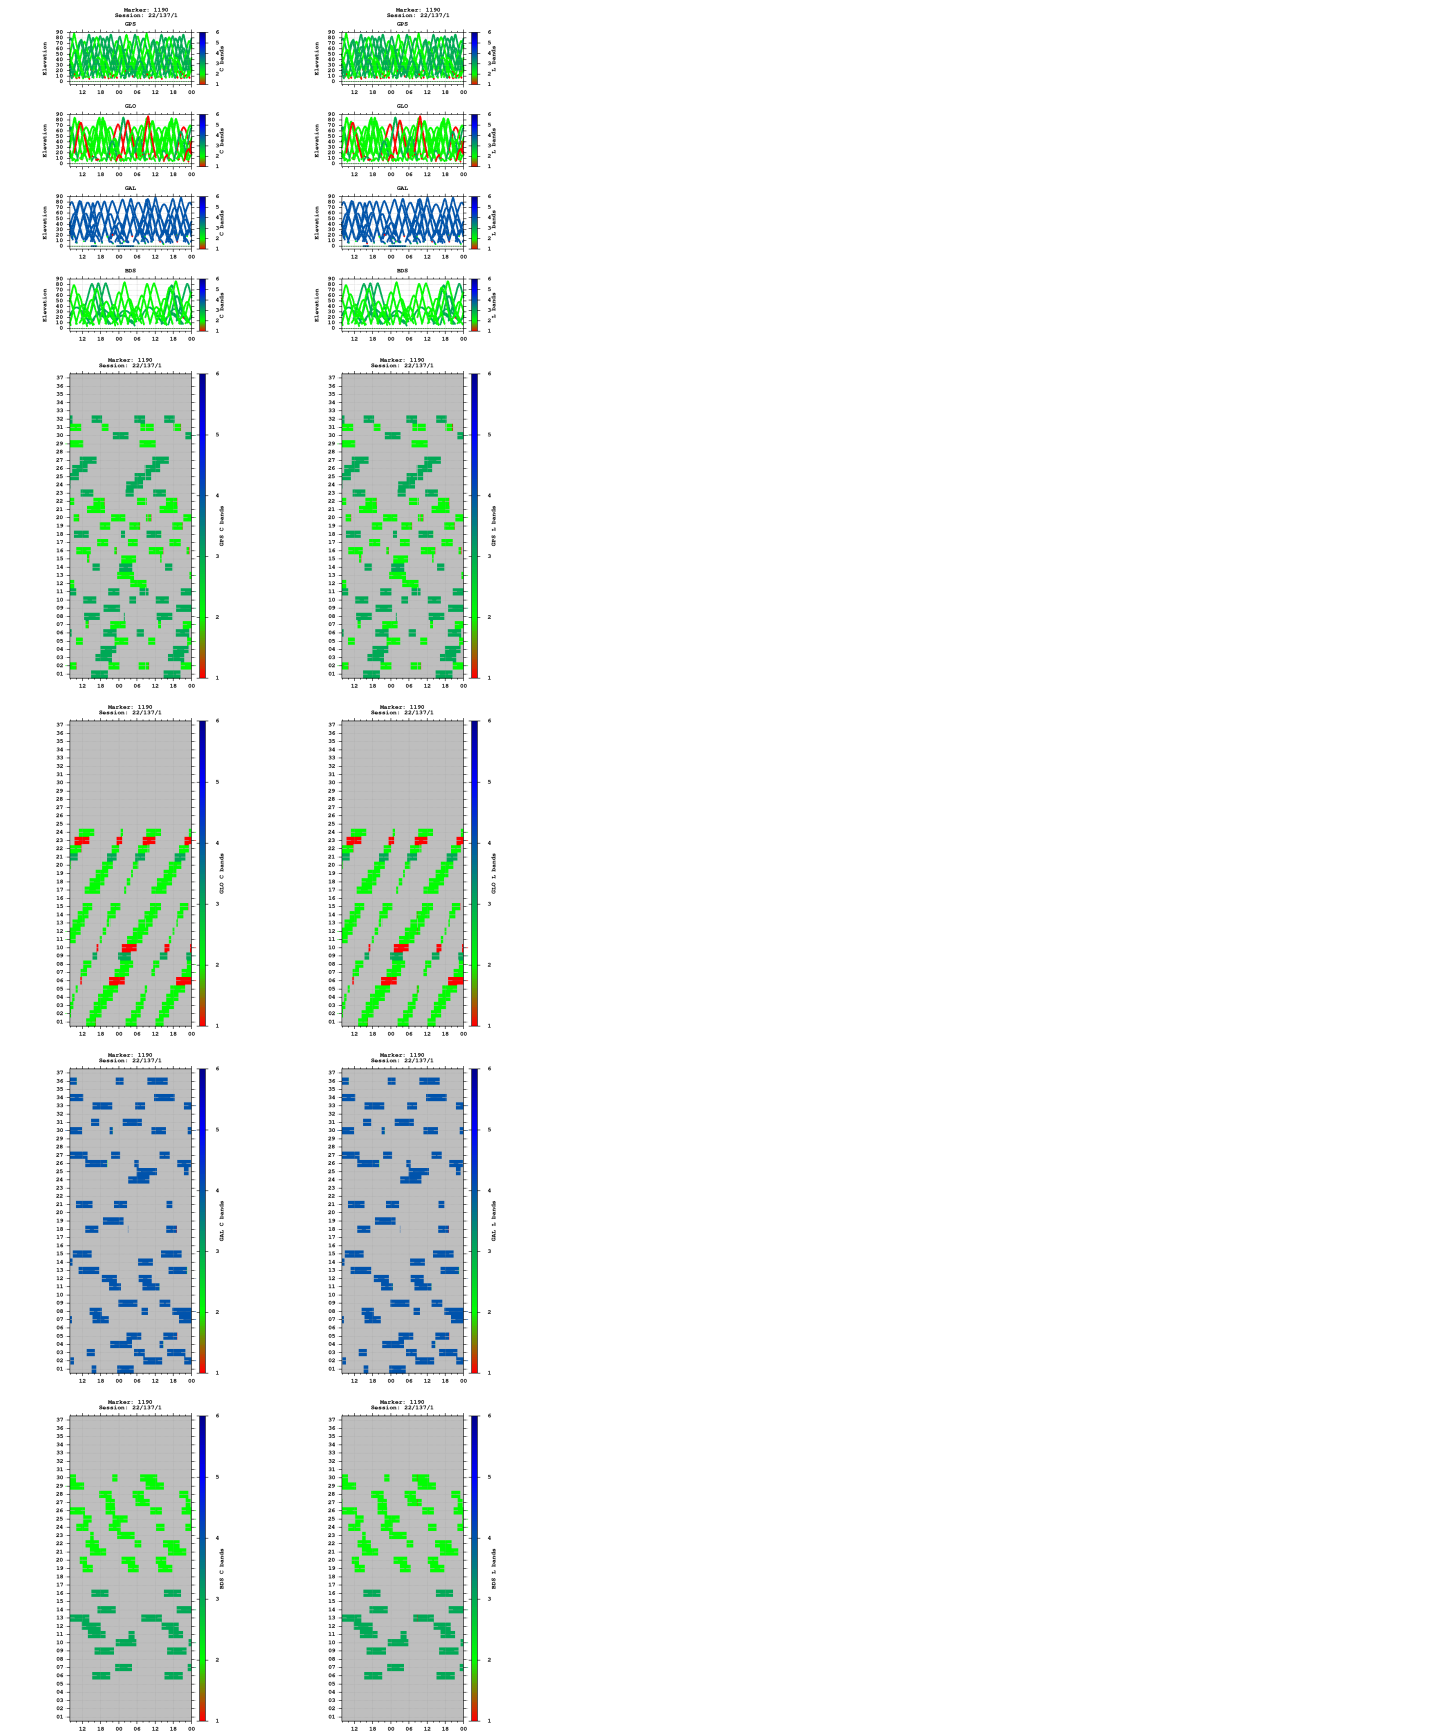


Multipath

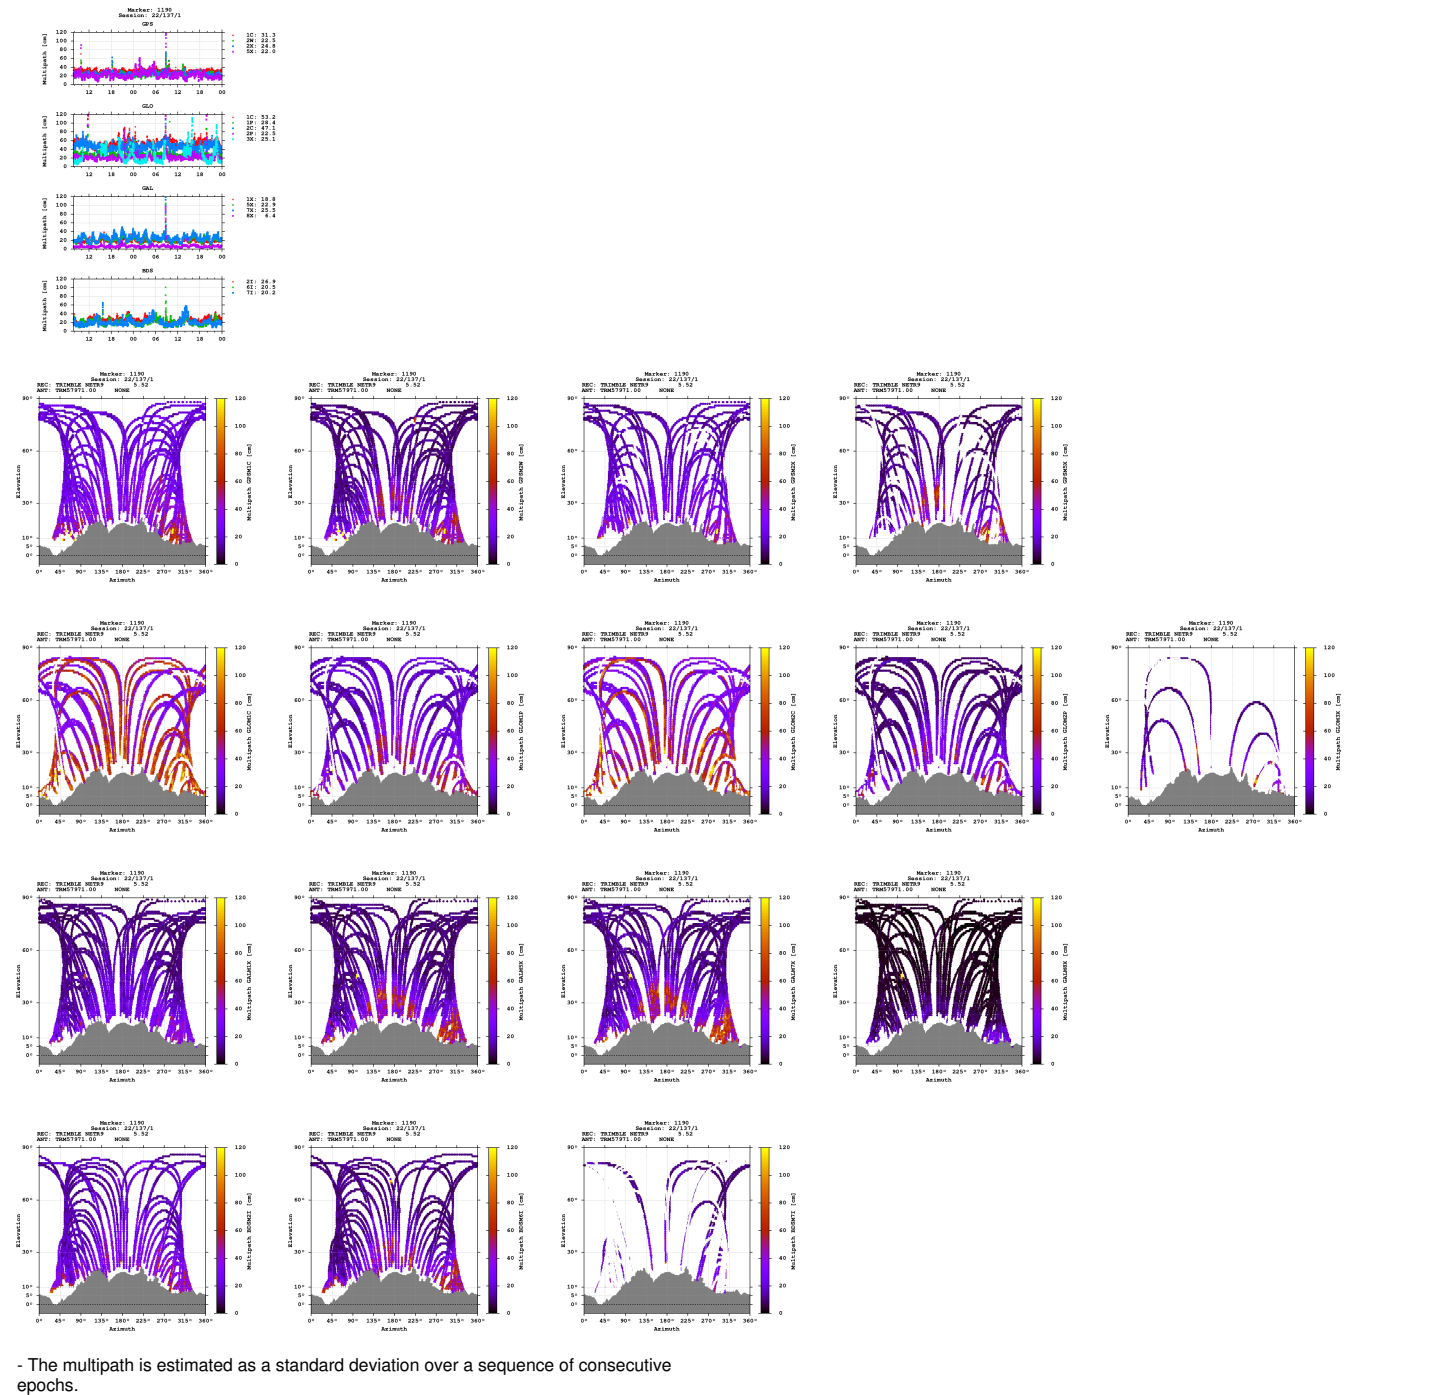


Signal-to-noise ratio

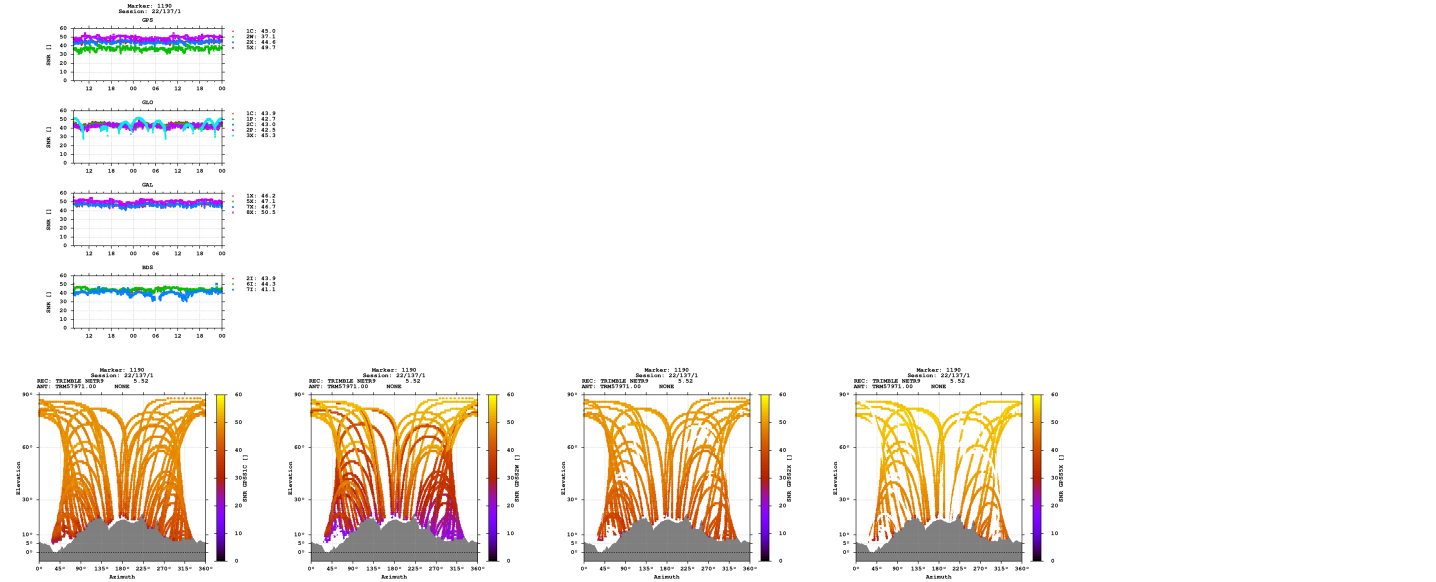

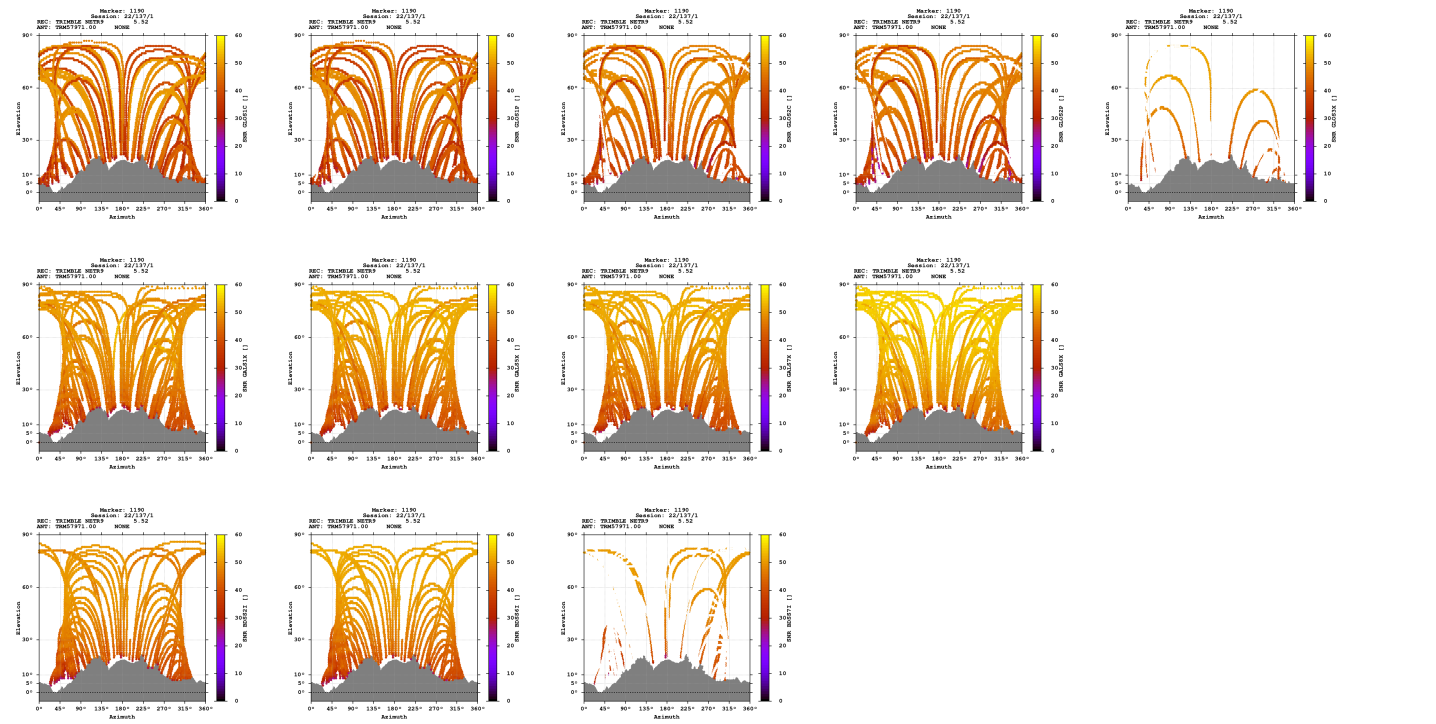

Estimates

2022-05-17 07:50:30	GPS	4328053.0328	620969.6947	4629111.3319	46.825783775	8.164821594	790.6996
2022-05-17 07:50:30	GLO	4328054.6998	620969.8222	4629112.1937	46.825778137	8.164820145	792.4695
2022-05-17 07:50:30	GAL	4328052.8875	620969.6147	4629111.0897	46.825783303	8.164820827	790.4168
2022-05-17 07:50:30	BDS	4328050.5113	620966.6879	4629111.1894	46.825802071	8.164787284	788.5958

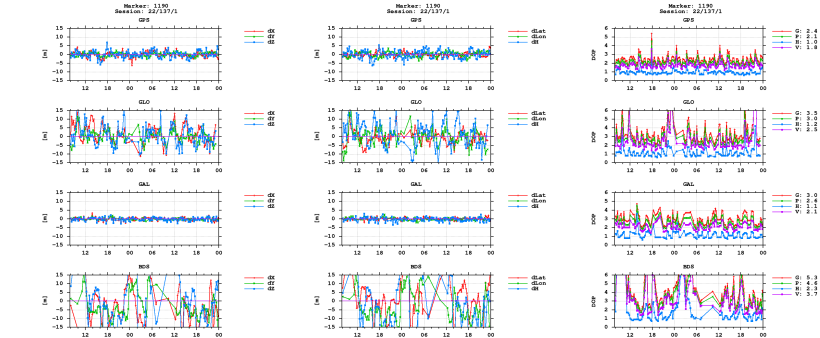

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)