


GNSS observation file monitoring for 0518


Last RINEX file: 05181401.220
RINEX version: 3.02
Marker: 1191
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

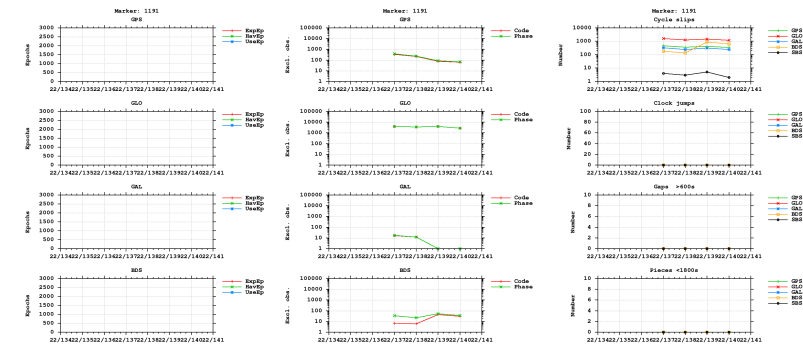



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

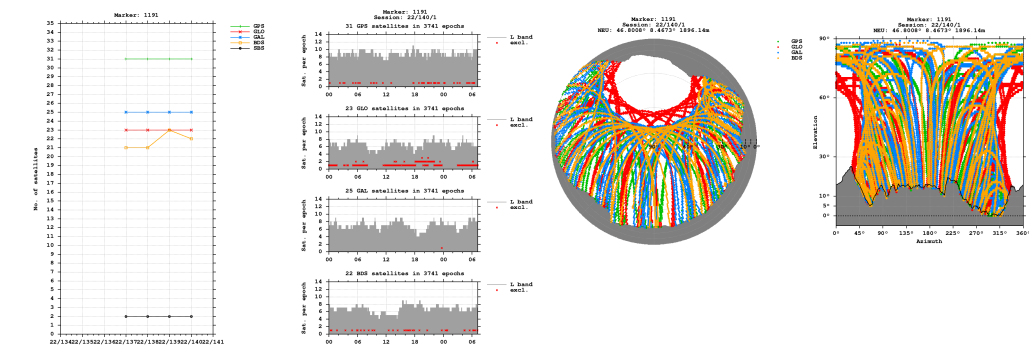


Bands

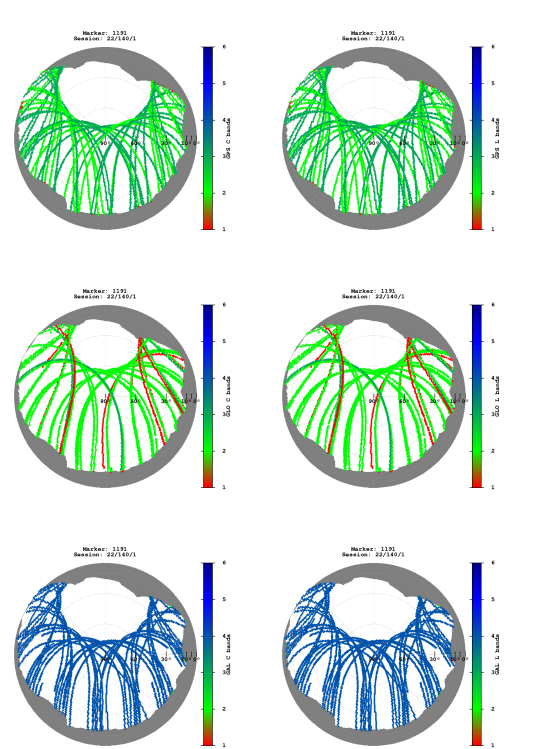

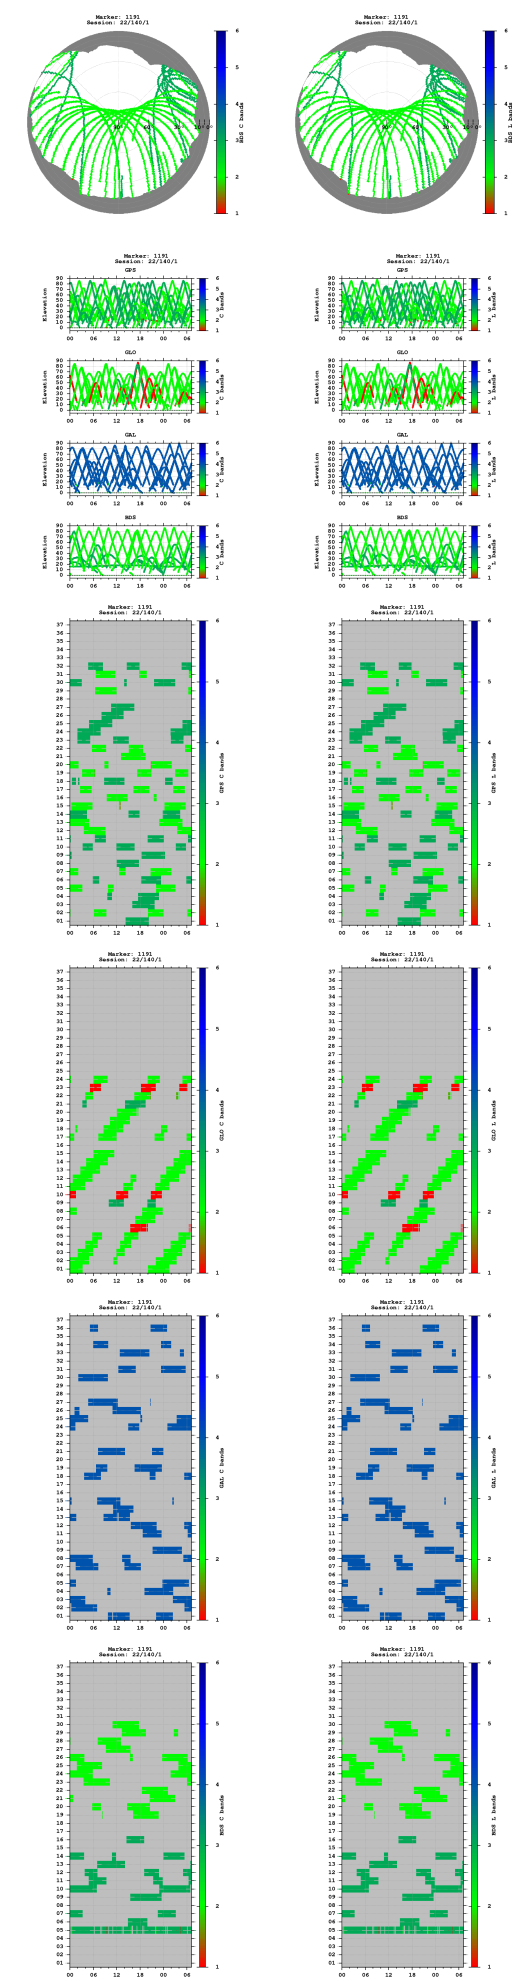


Observations




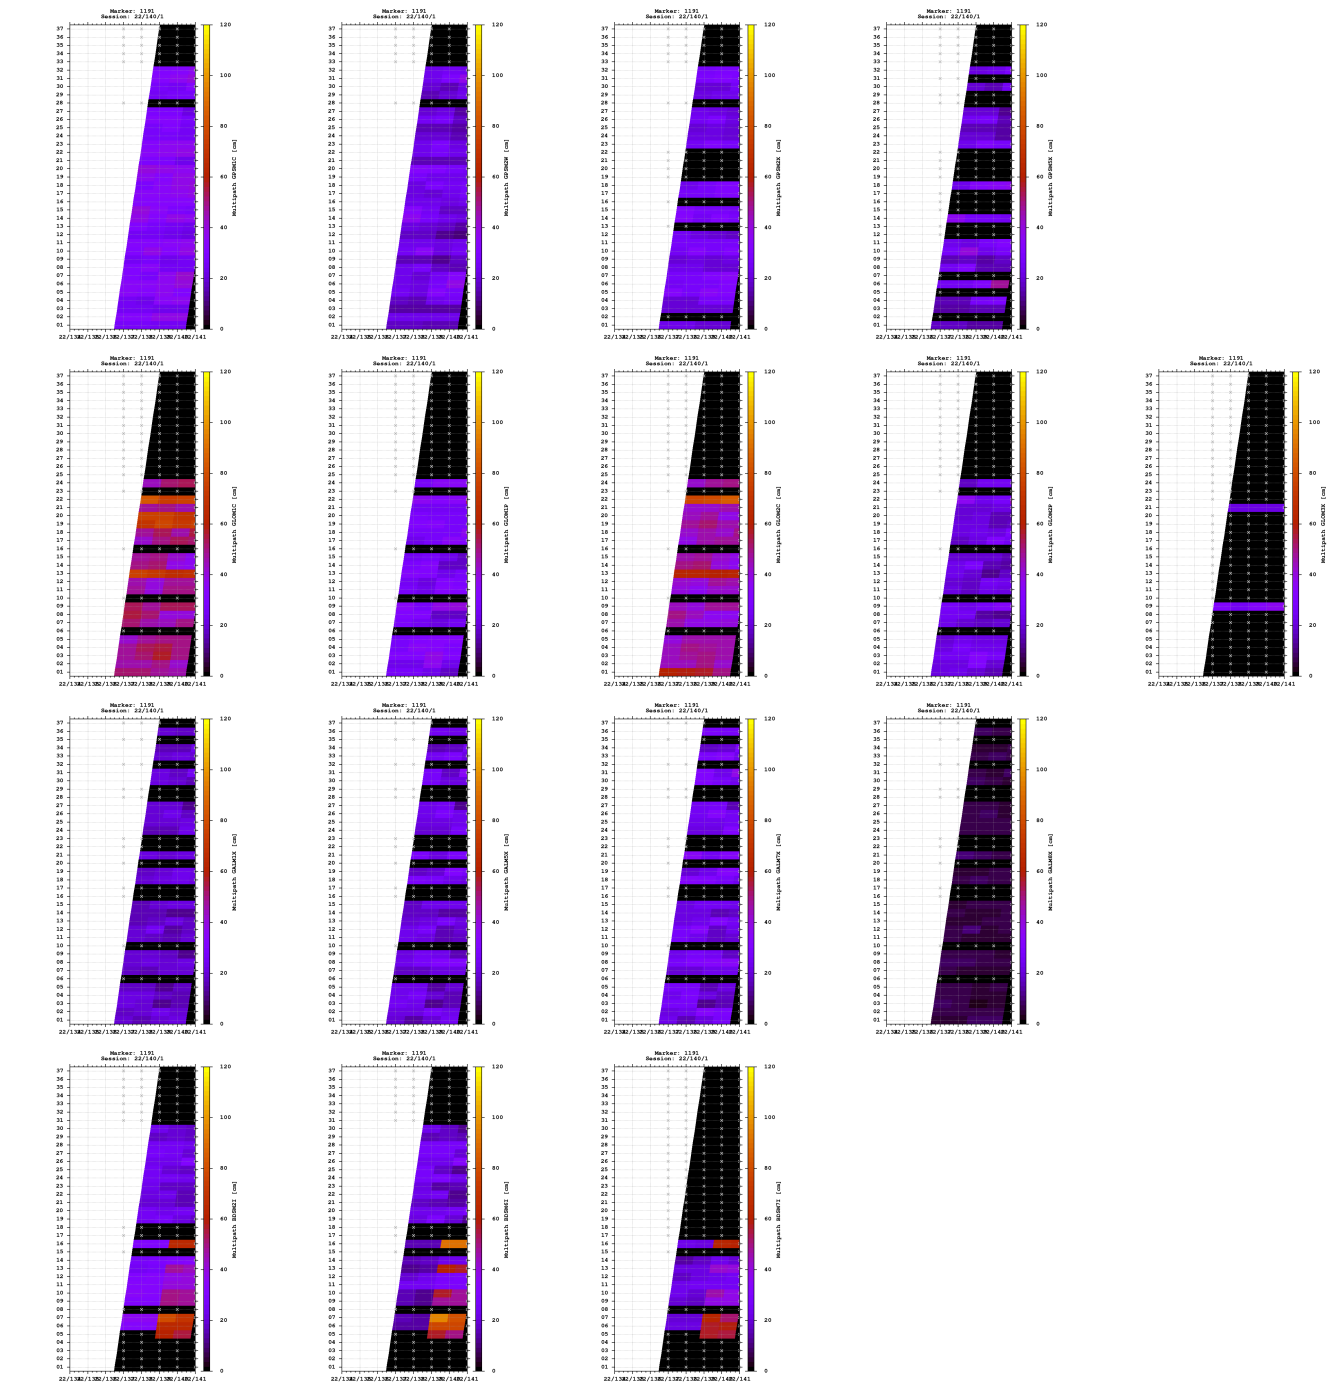


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

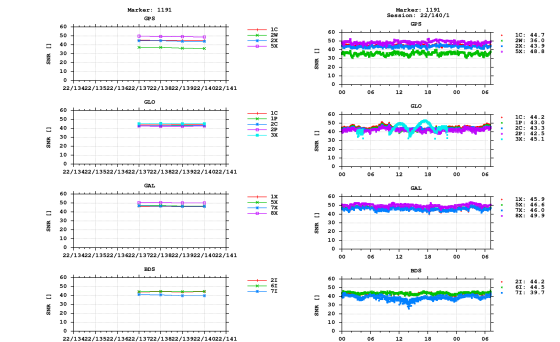


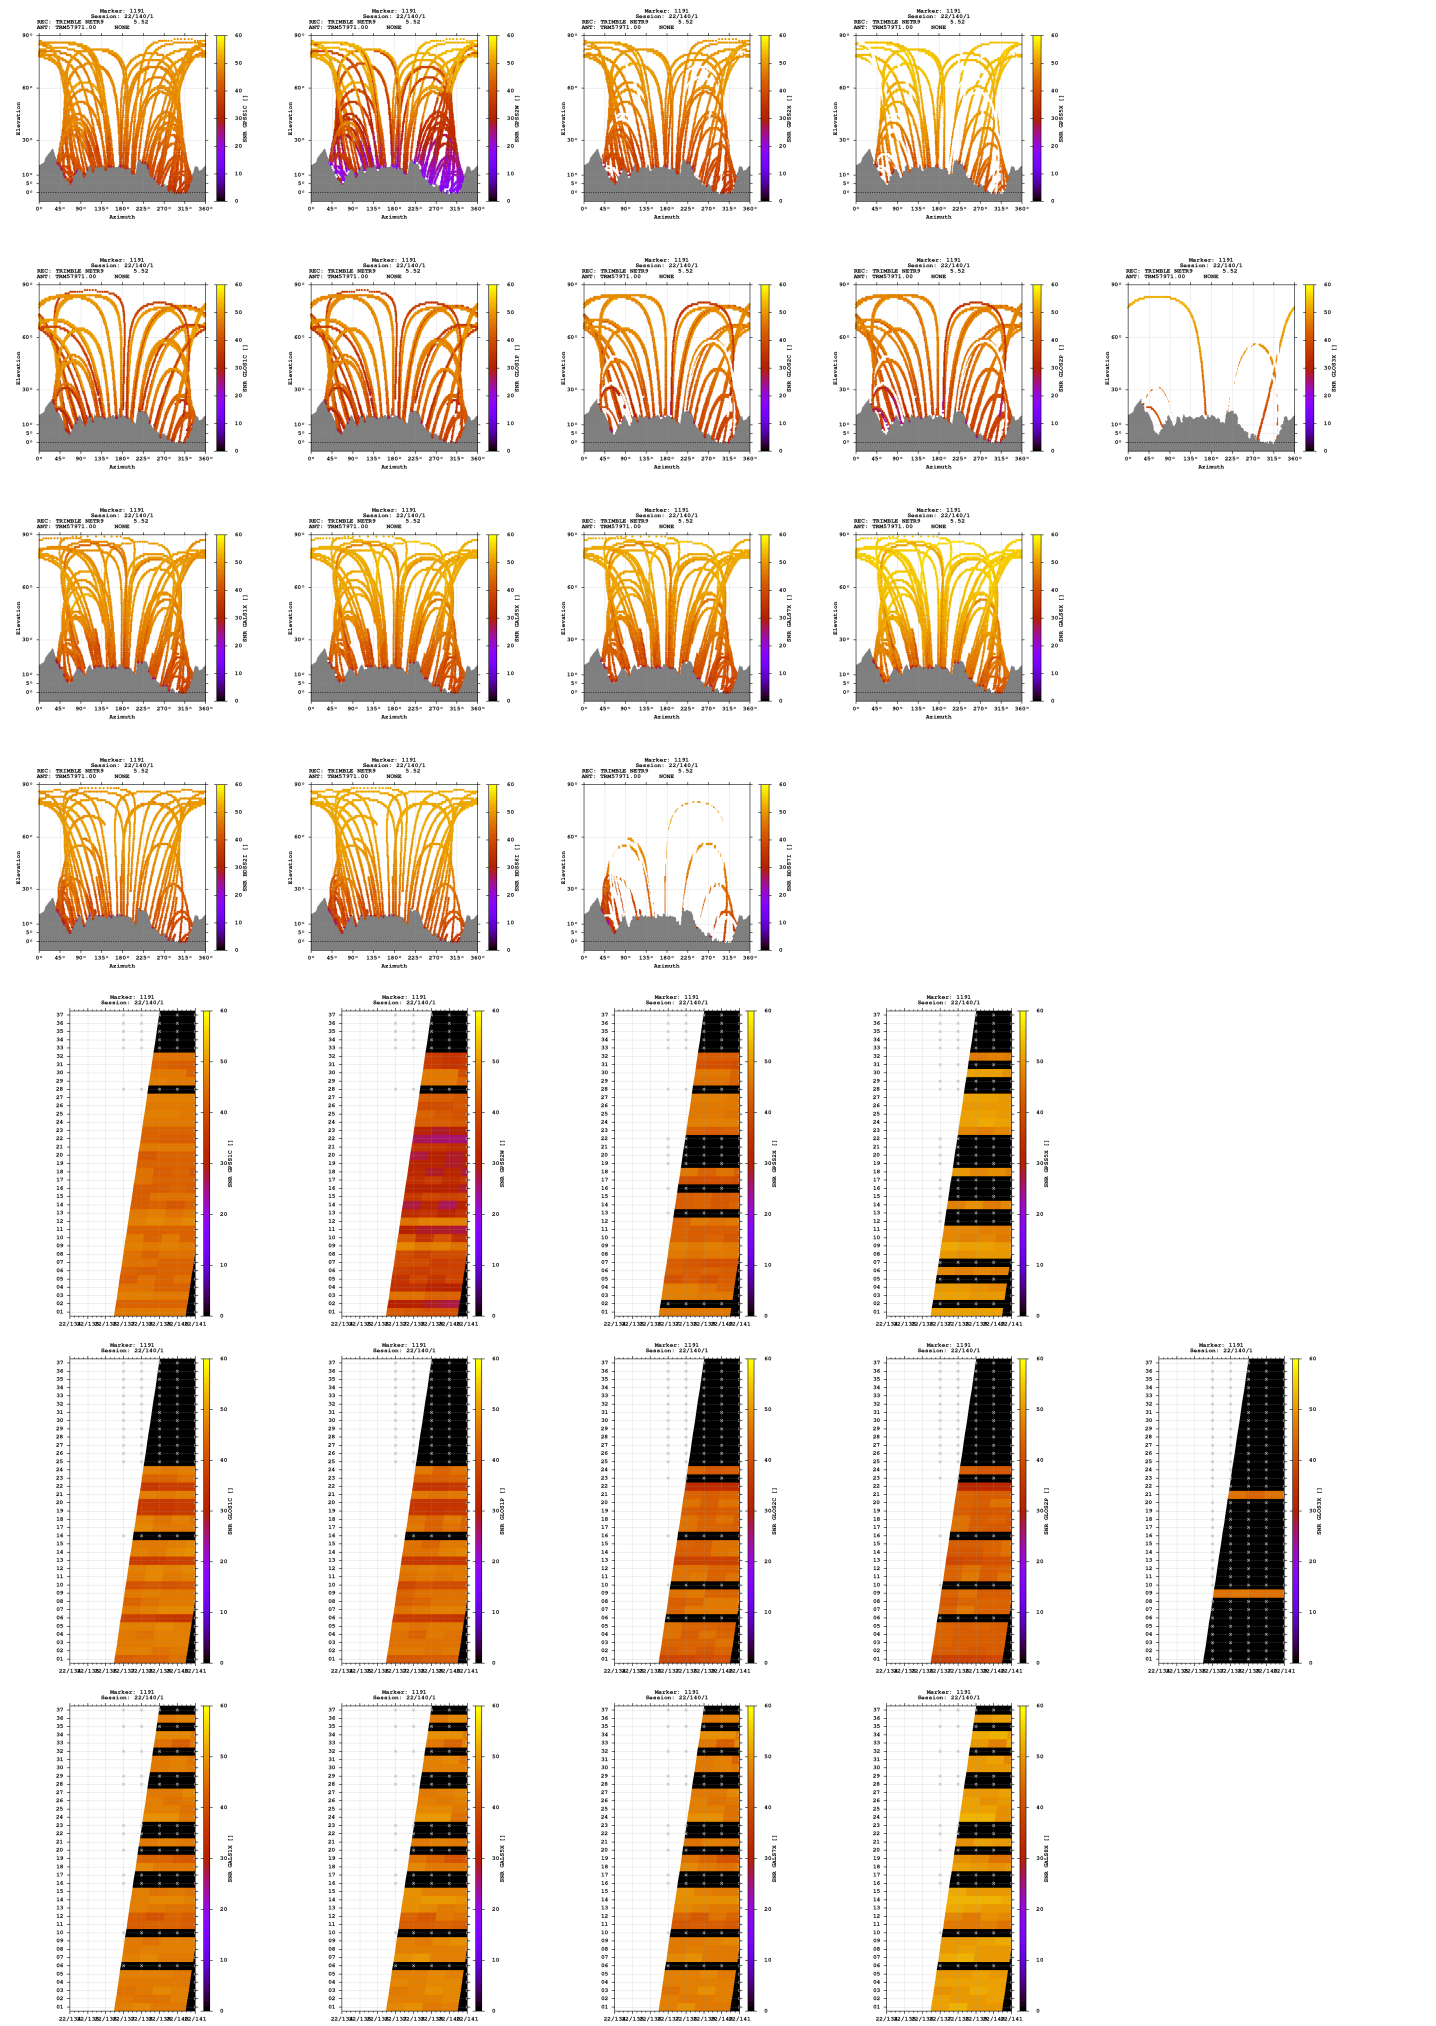

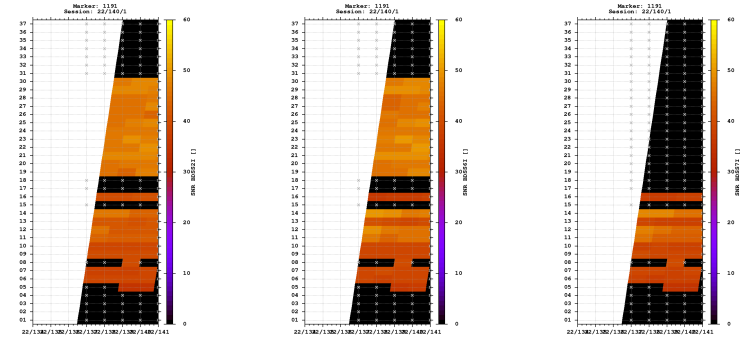



Estimates

2022-05-19 10:43:30	GPS	4327466.5366	644220.0785	4628015.7429	46.800794527	8.467307818	1896.1356
2022-05-19 10:43:30	GLO	4327467.2203	644219.5970	4628016.7291	46.800796629	8.467300263	1897.2689
2022-05-19 10:43:30	GAL	4327466.9139	644220.0061	4628015.2946	46.800789391	8.467306152	1896.0569
2022-05-19 10:43:30	BDS	4327467.7059	644220.9706	4628018.3502	46.800802135	8.467317118	1898.9179

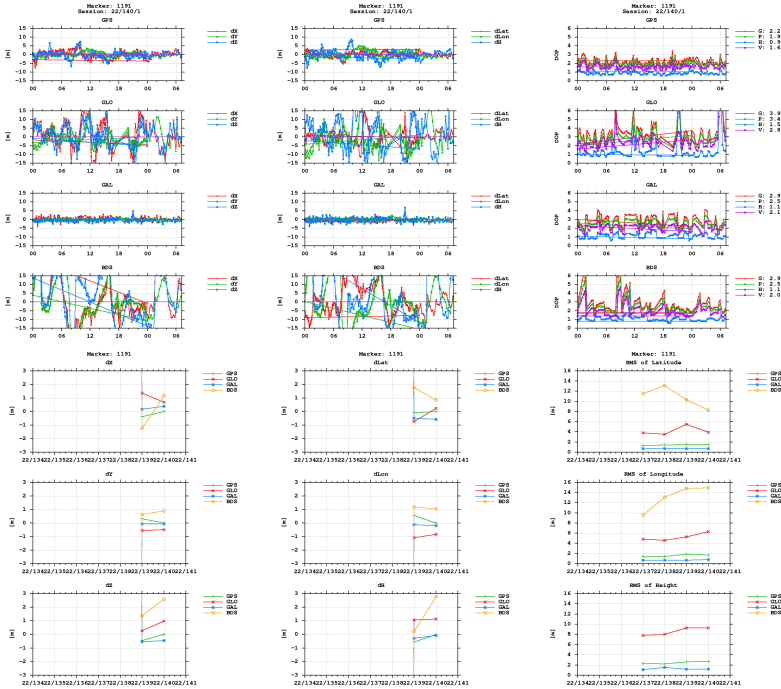

BNC

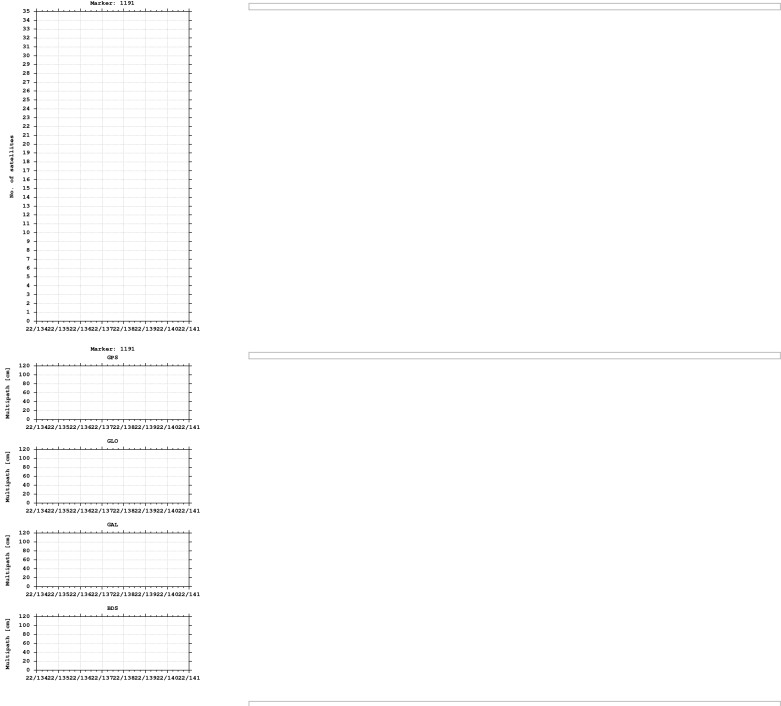

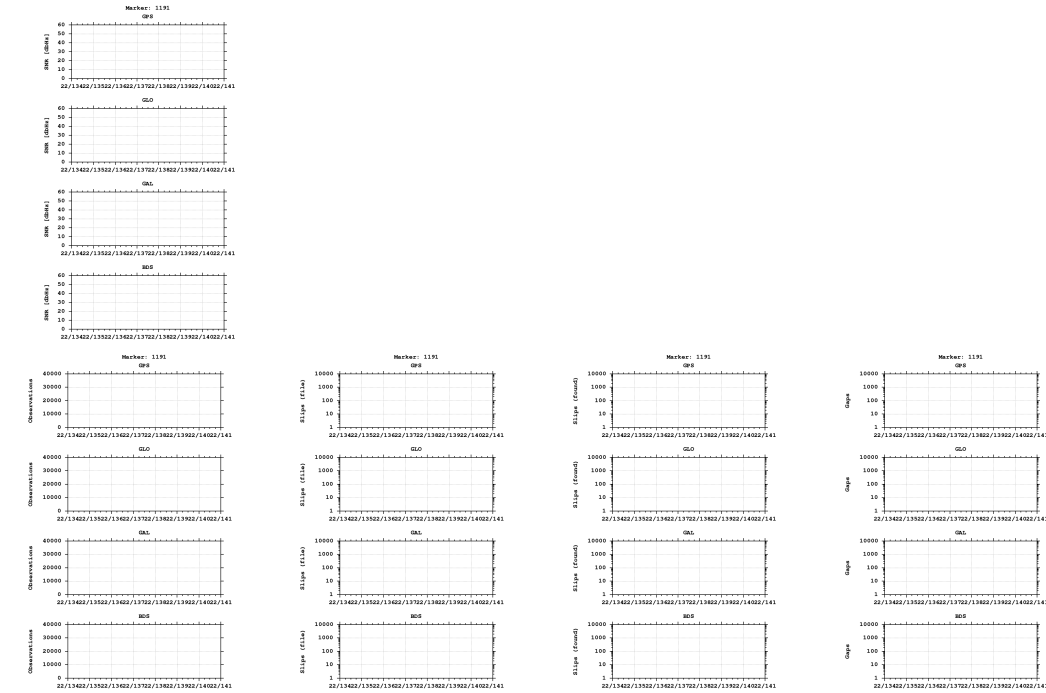

Equipment

2022-05-17 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)