


GNSS observation file monitoring for 0511


Last RINEX file: 05111641.22O
RINEX version: 3.02
Marker: 1225
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

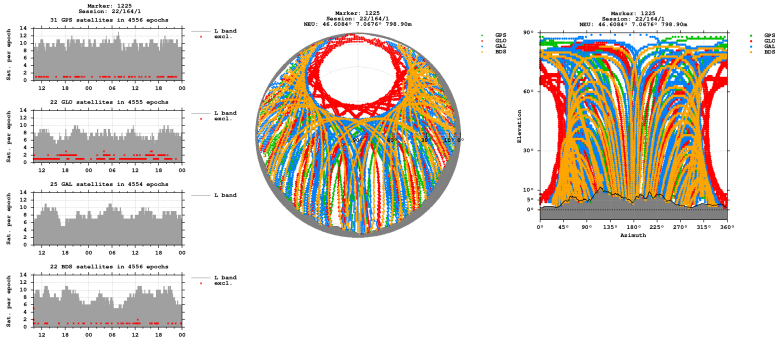


Bands

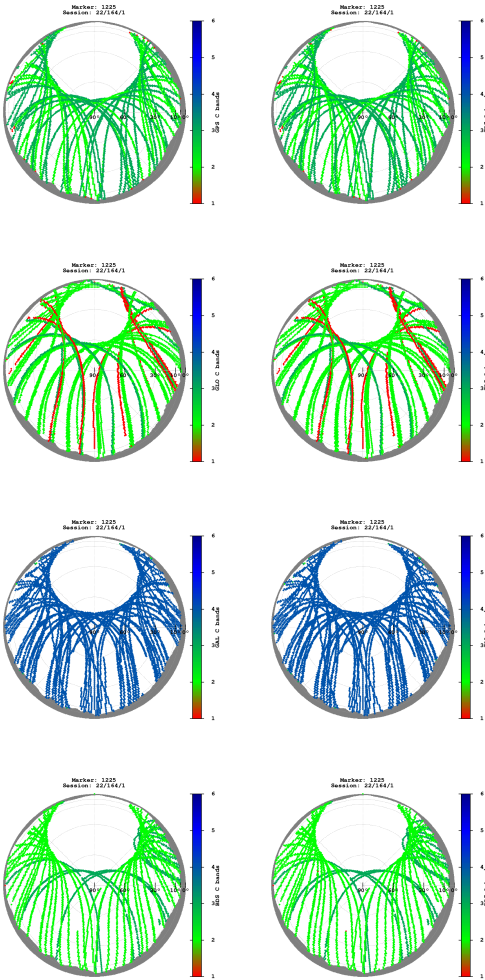

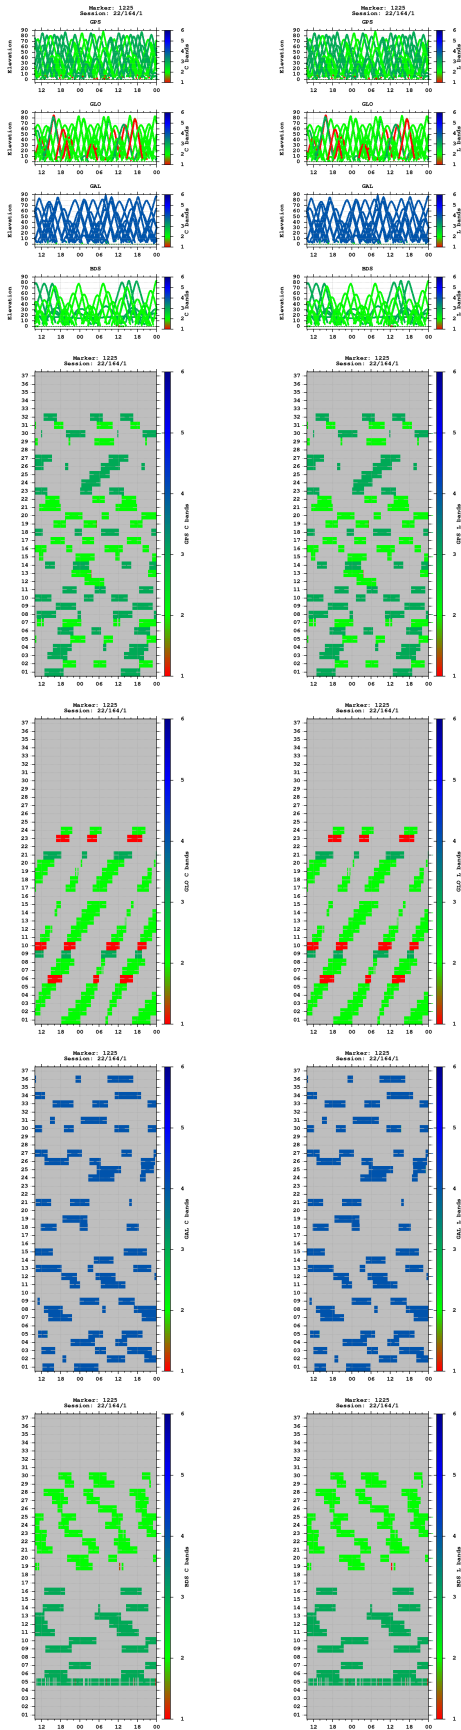



Multipath

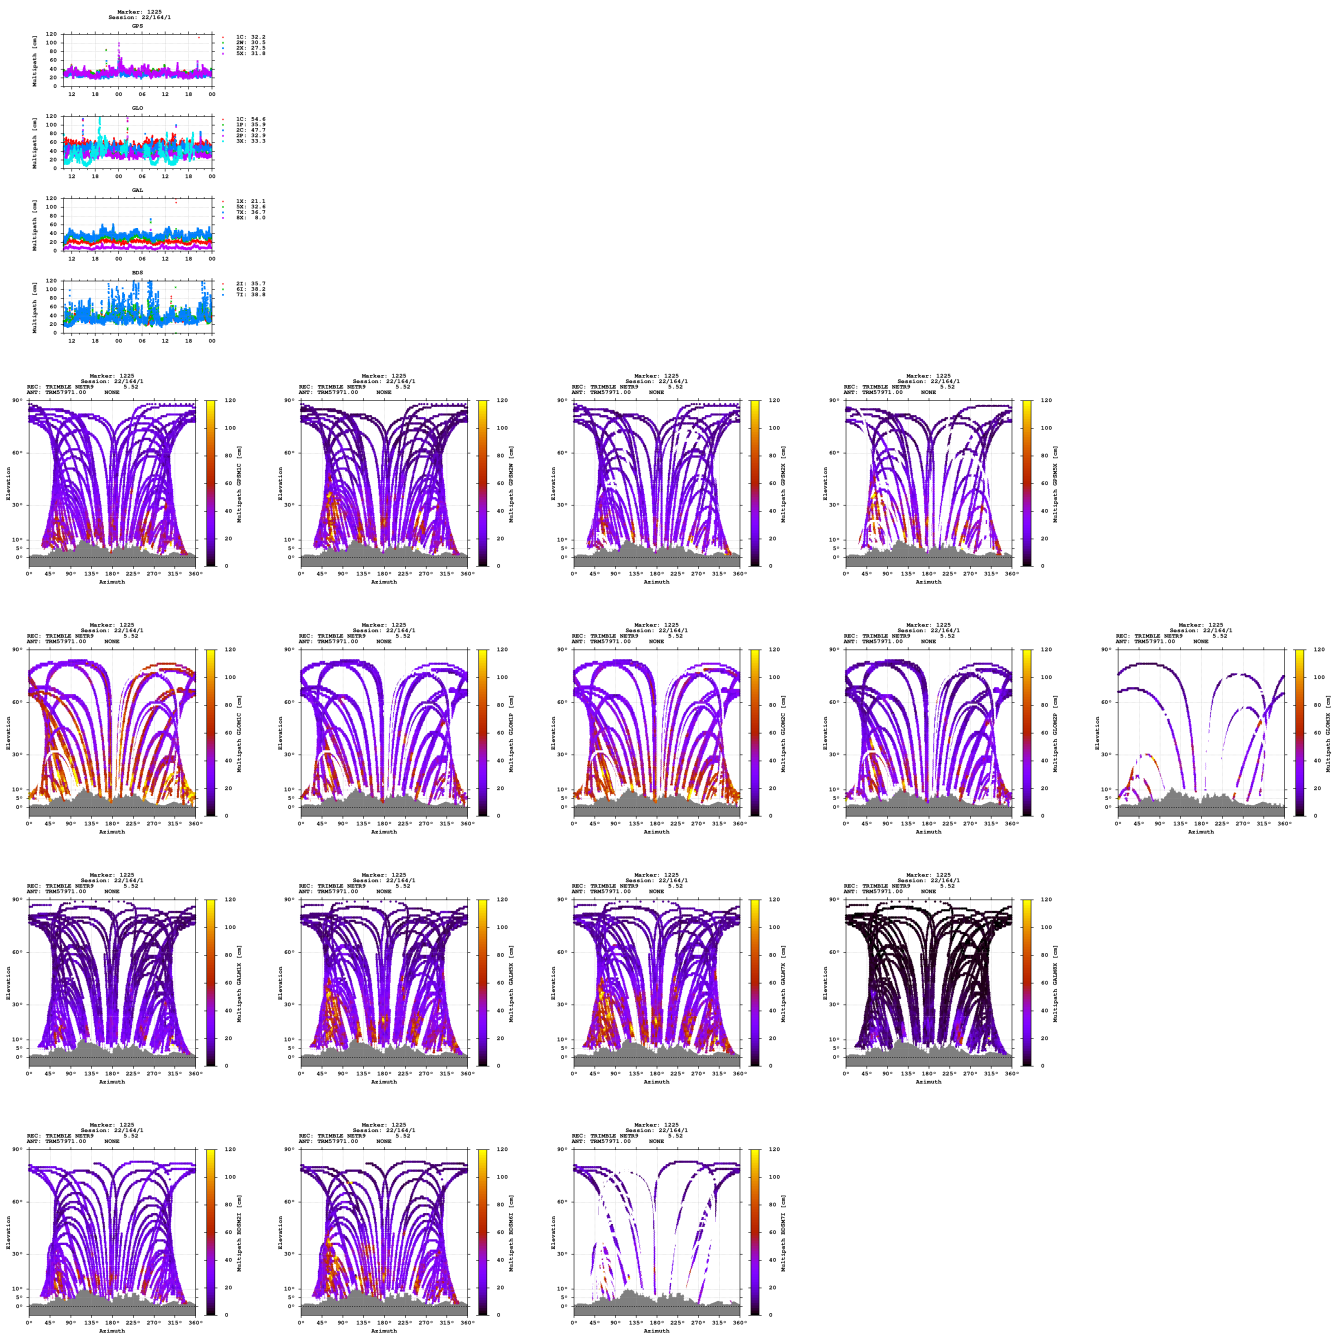

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

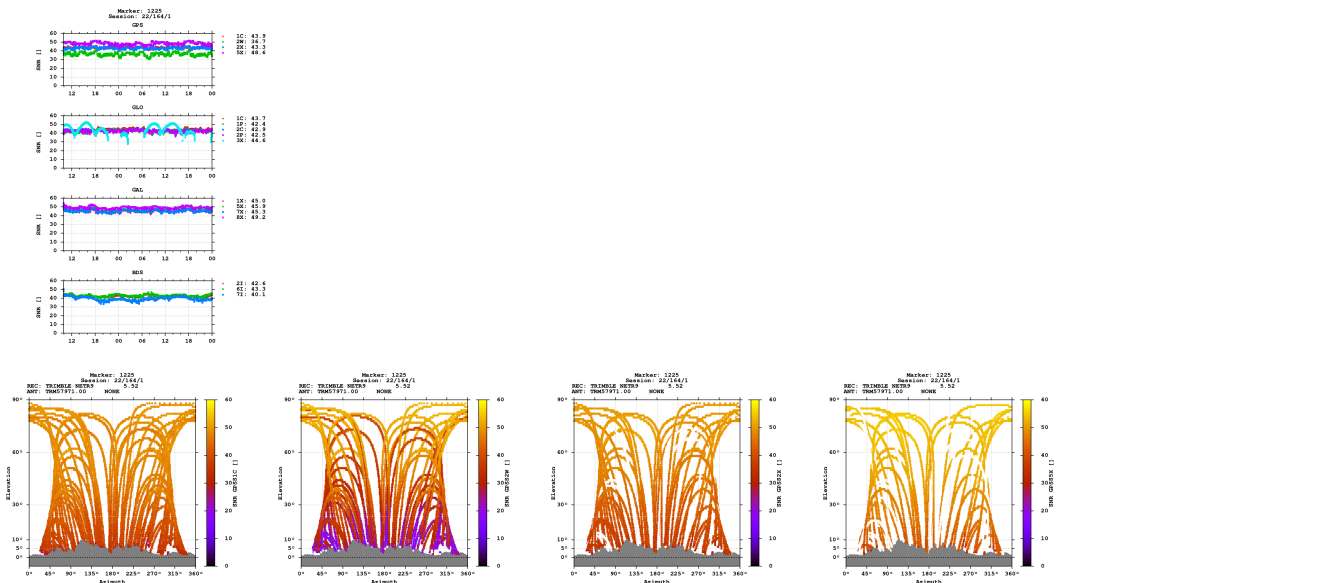

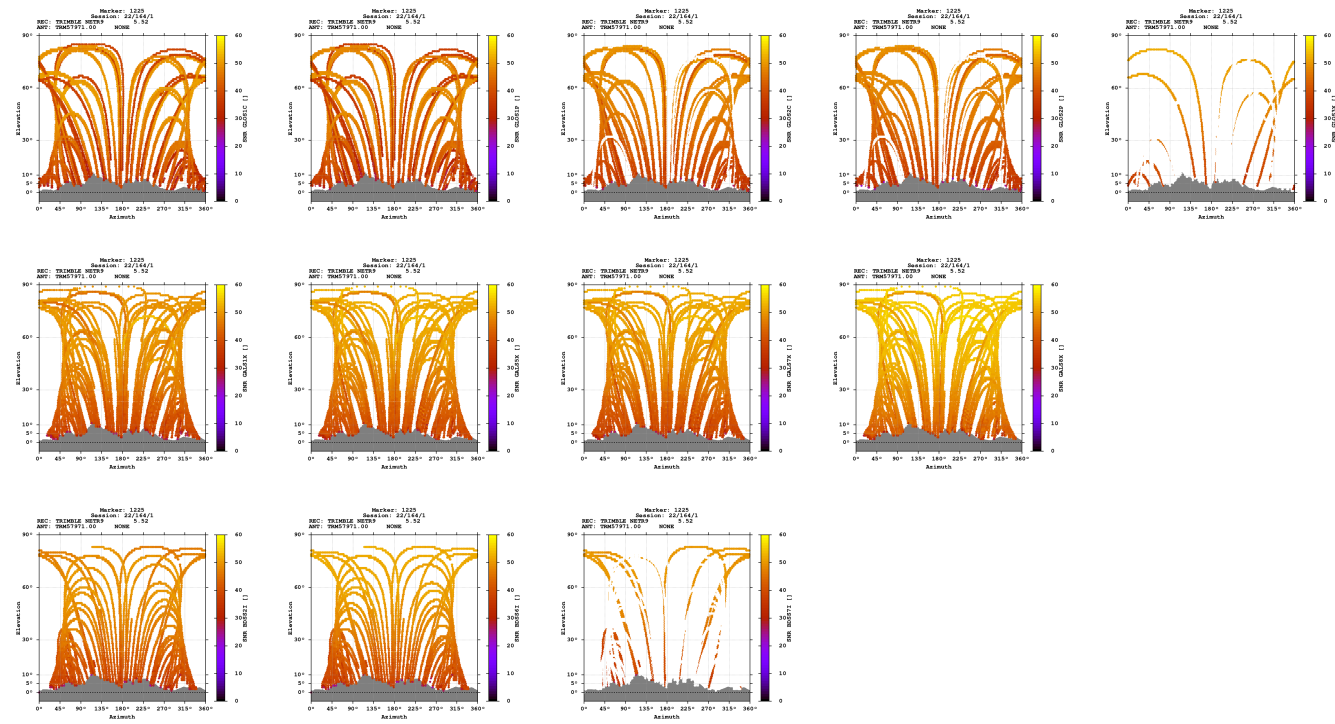

Estimates

2022-06-13 09:55:30	GPS	4356617.0587	540142.6109	4612546.8308	46.608393577	7.067586075	798.8985
2022-06-13 09:55:30	GLO	4356617.6531	540142.6658	4612546.7759	46.608389338	7.067585831	799.2685
2022-06-13 09:55:30	GAL	4356617.4727	540142.5893	4612546.7110	46.608390169	7.067585131	799.0919
2022-06-13 09:55:30	BDS	4356617.4585	540141.5383	4612549.1987	46.608406478	7.067571540	800.8012

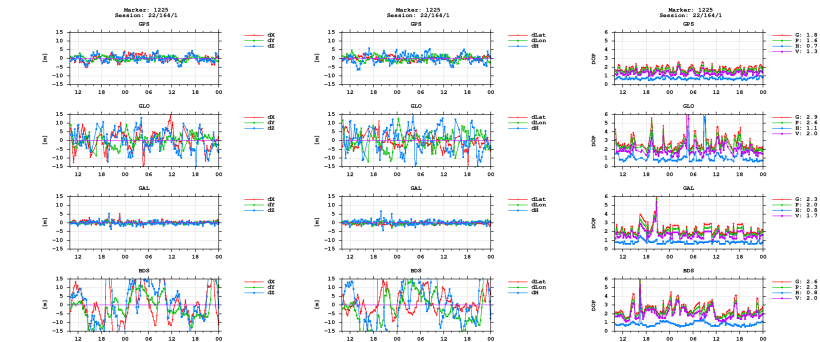

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)