

GNSS observation file monitoring for 0511

Last RINEX file: 05111651.220

RINEX version: 3.02

Marker: 1225

Receiver: 511

Antenna: 511


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

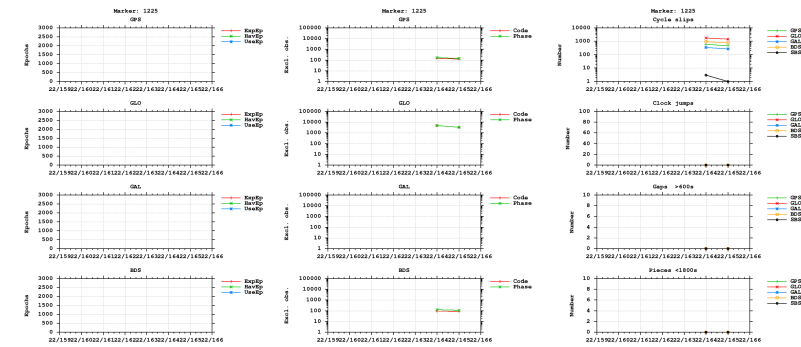



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

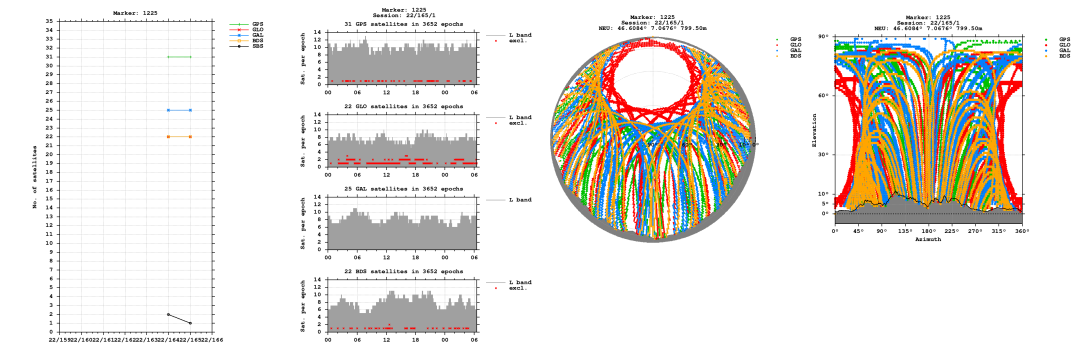


Bands

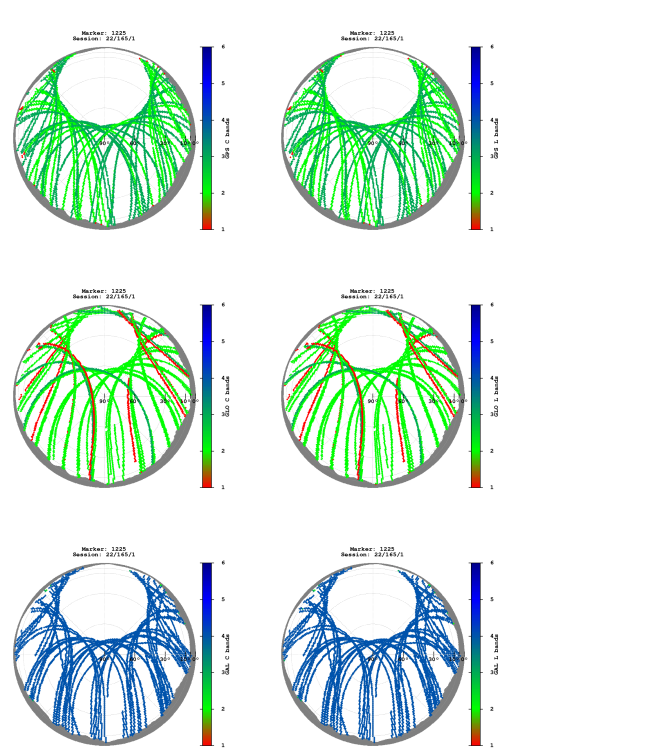


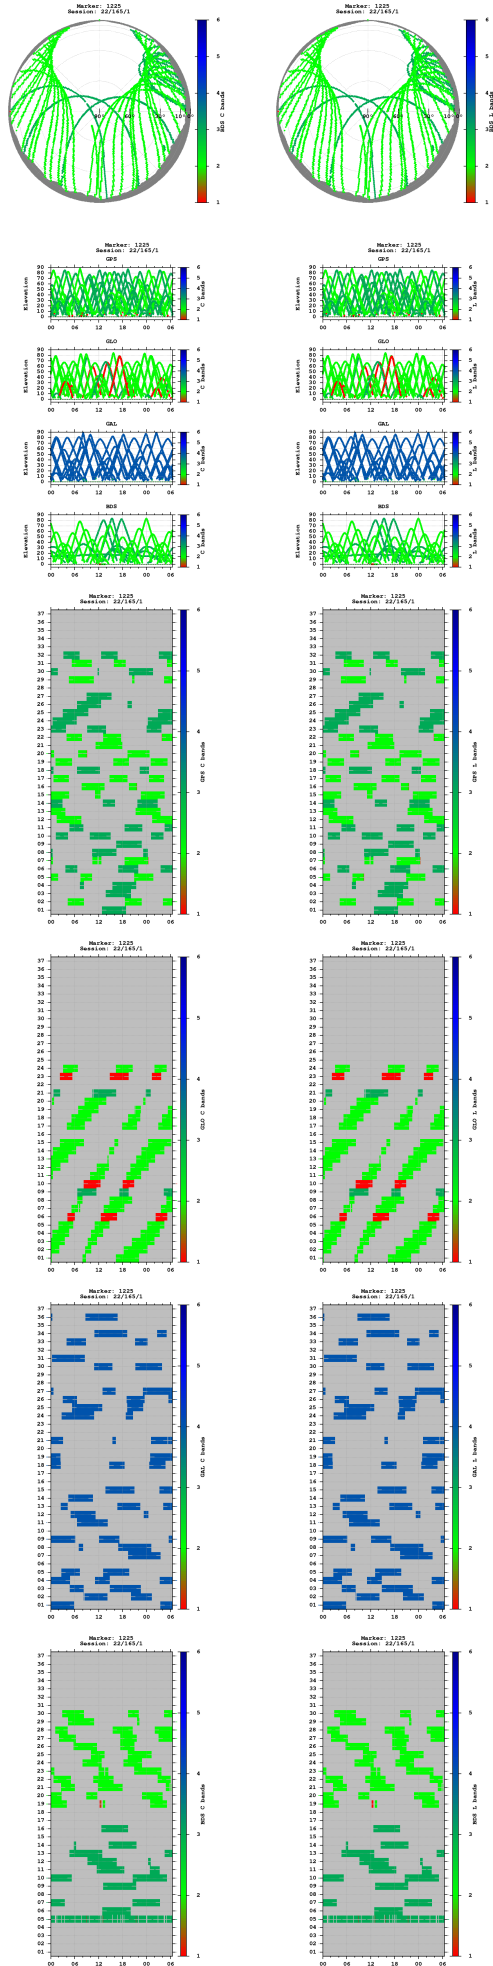


Observations

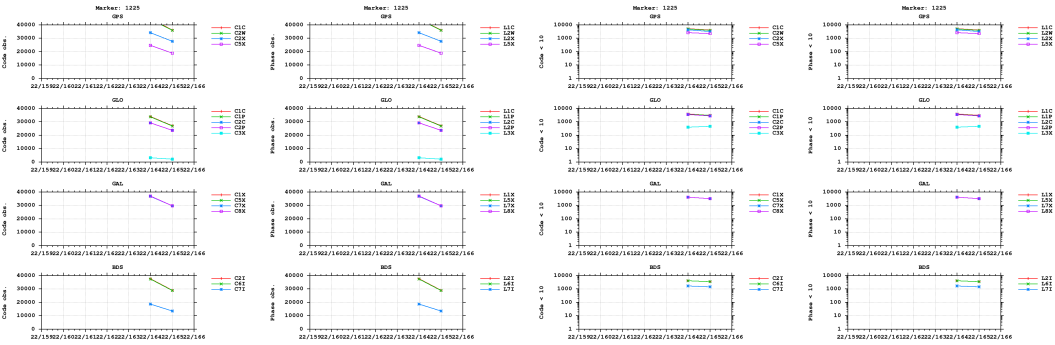


Multipath

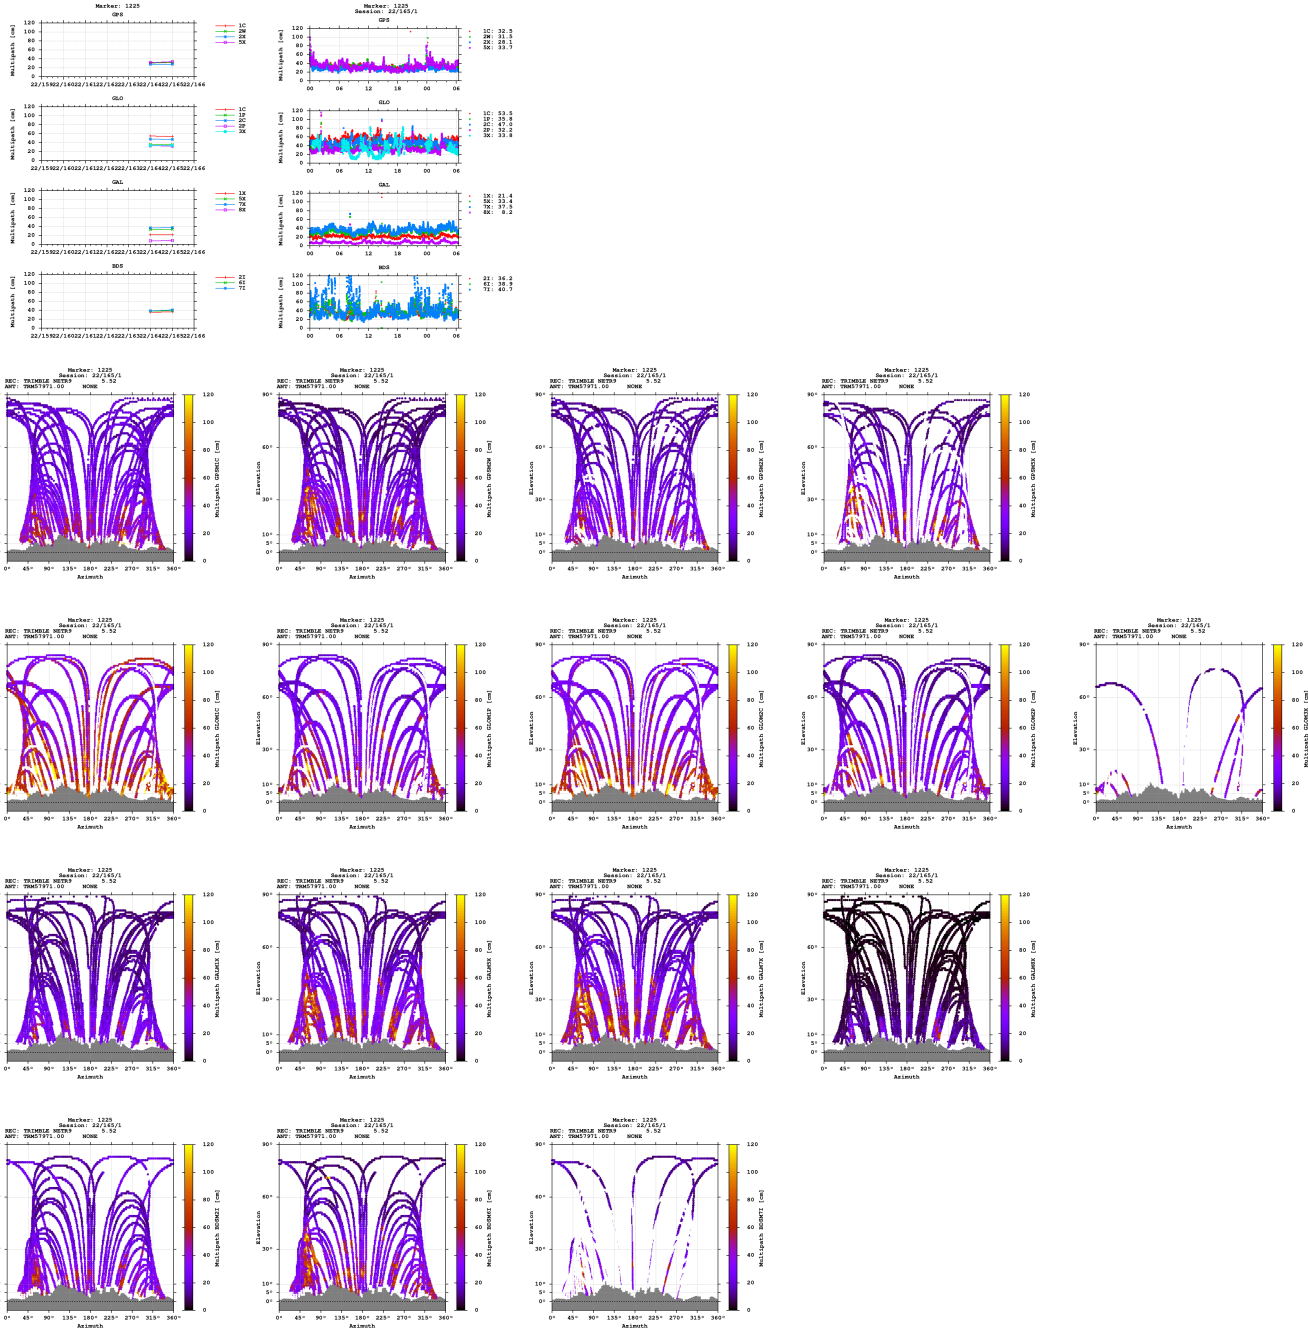


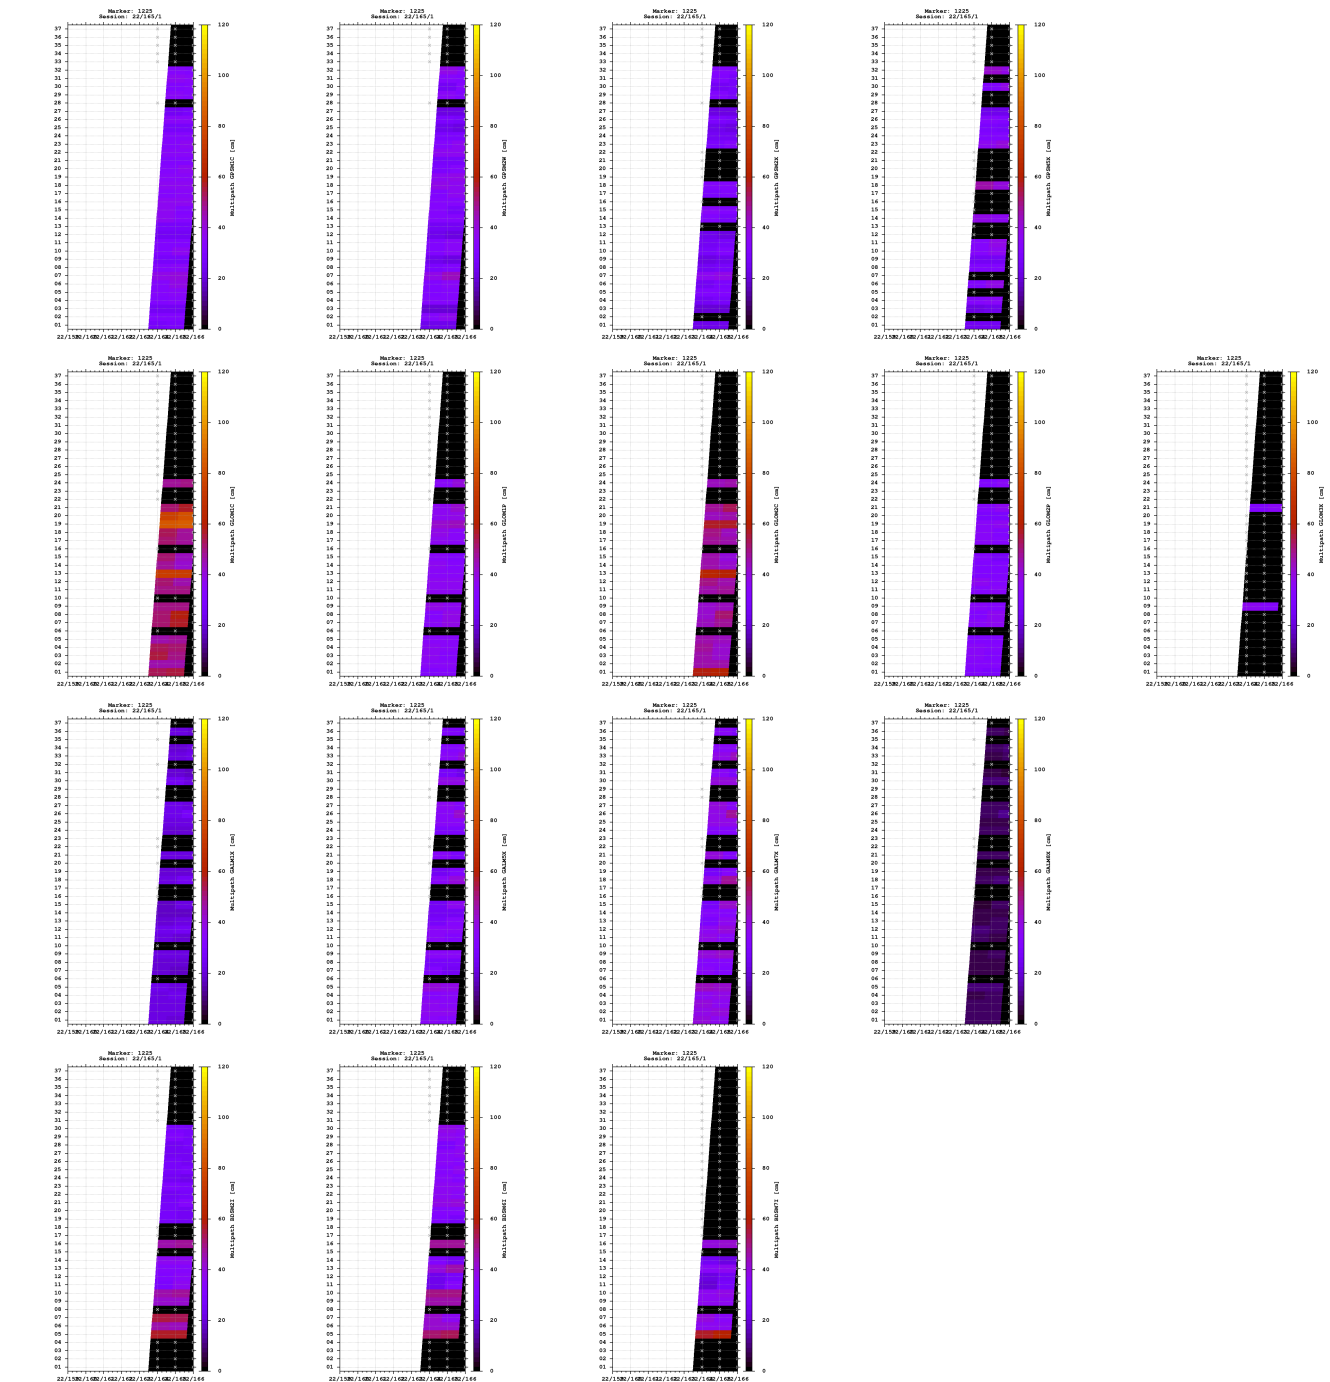


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

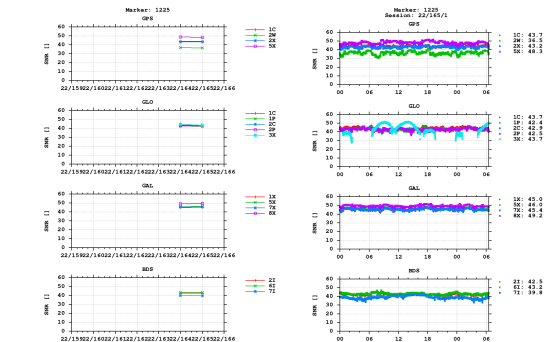


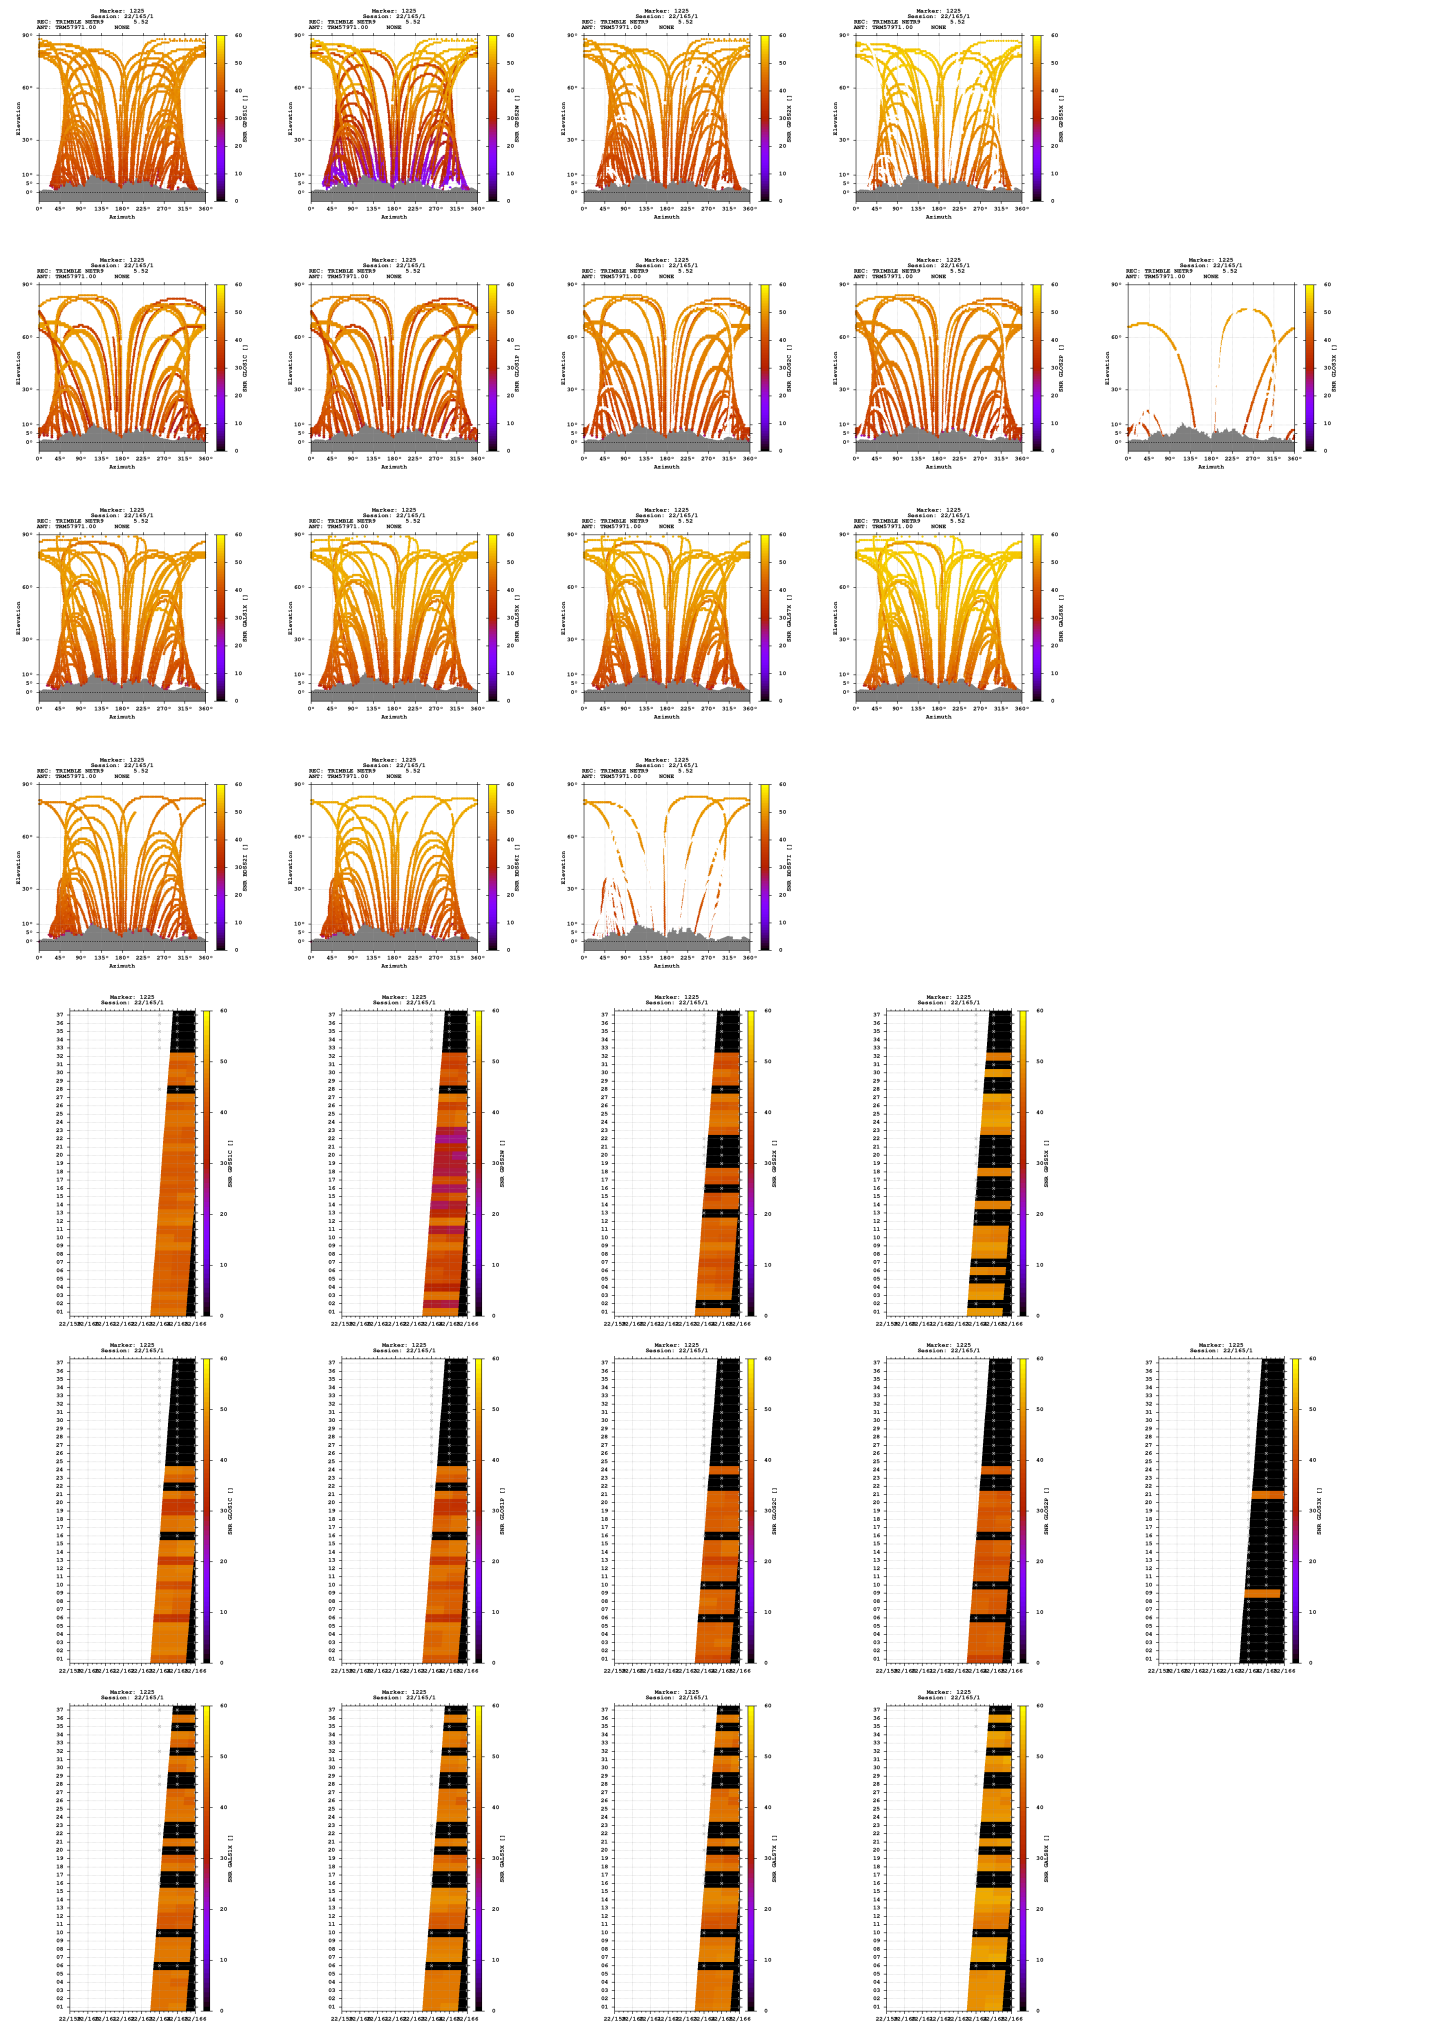

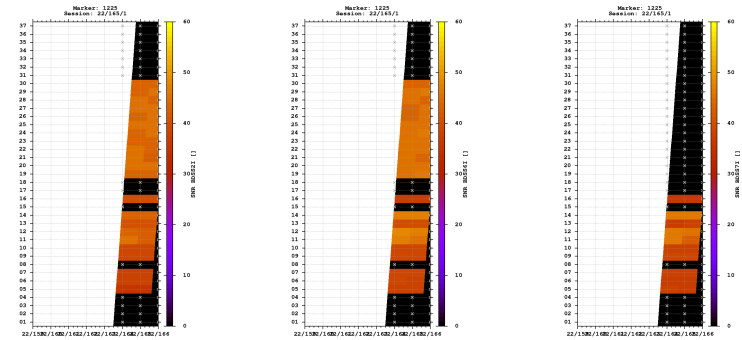



Estimates

2022-06-13 09:55:30	GPS	4356617.7953	540142.5831	4612546.9755	46.608389716	7.067584533	799.5035
2022-06-13 09:55:30	GLO	4356617.5976	540143.2042	4612545.9116	46.608383924	7.067592894	798.6481
2022-06-13 09:55:30	GAL	4356617.2646	540142.5985	4612546.6525	46.608391150	7.067585584	798.9083
2022-06-13 09:55:30	BDS	4356618.3581	540144.3219	4612549.7836	46.608402018	7.067606150	802.0747

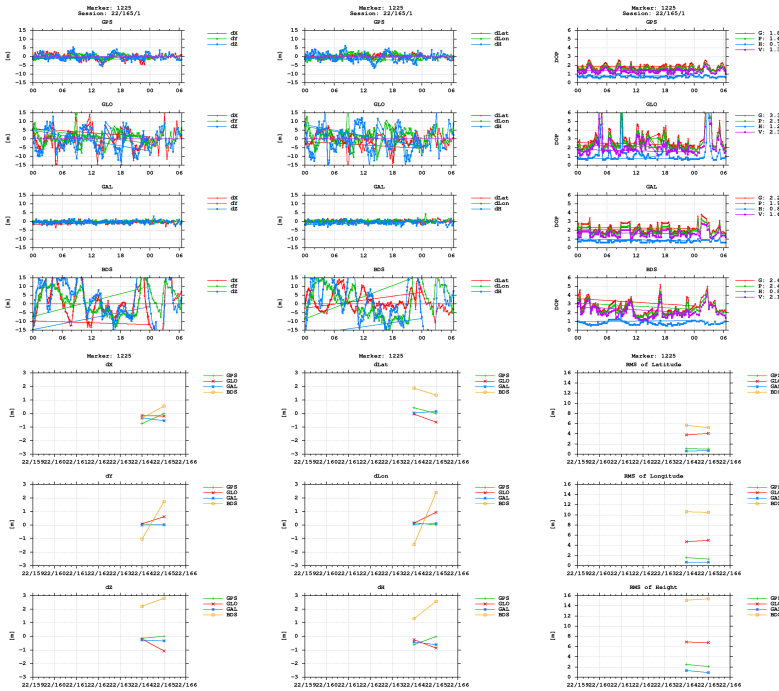

BNC

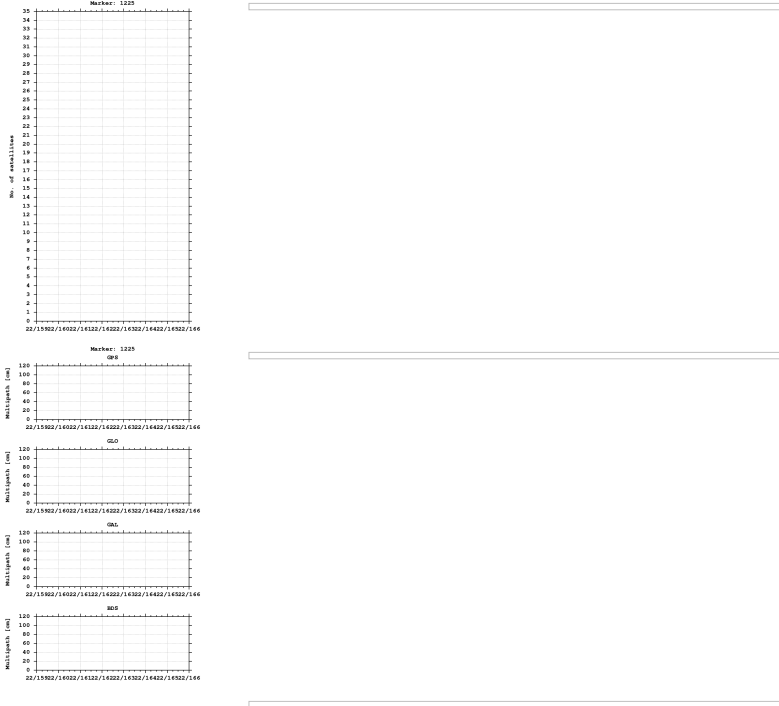

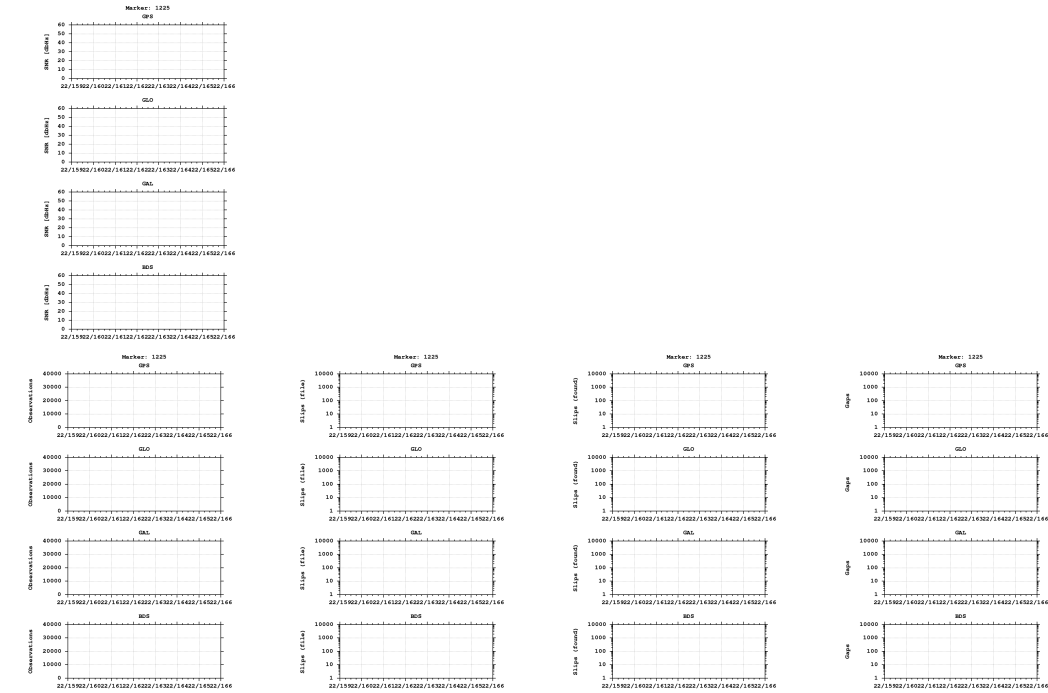

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)