

GNSS observation file monitoring for 0511

Last RINEX file: 05111661.220

RINEX version: 3.02

Marker: 1325

Receiver: 511

Antenna: 511


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

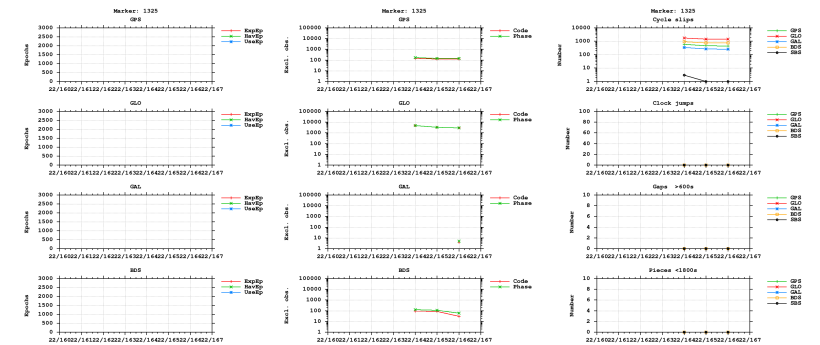



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

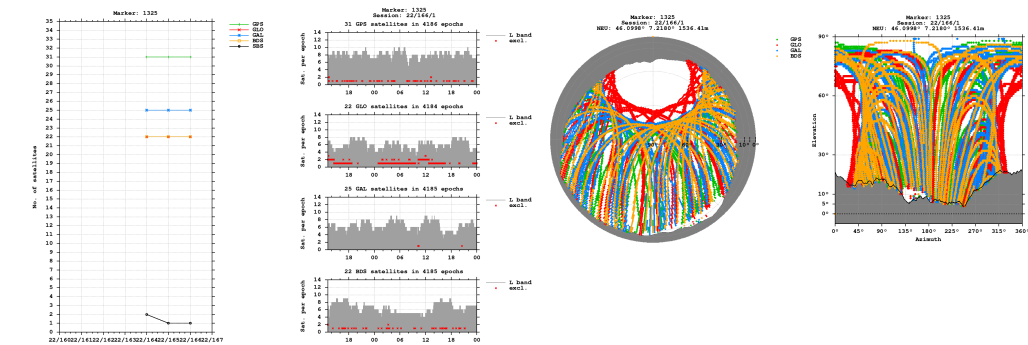



Bands

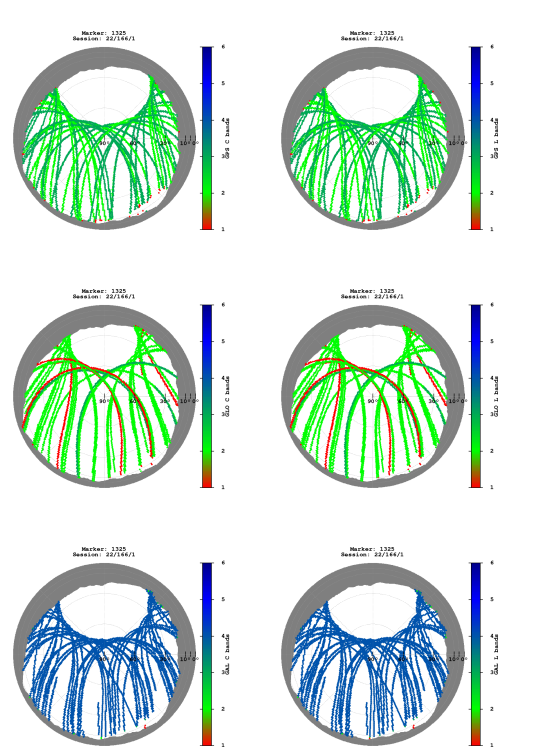


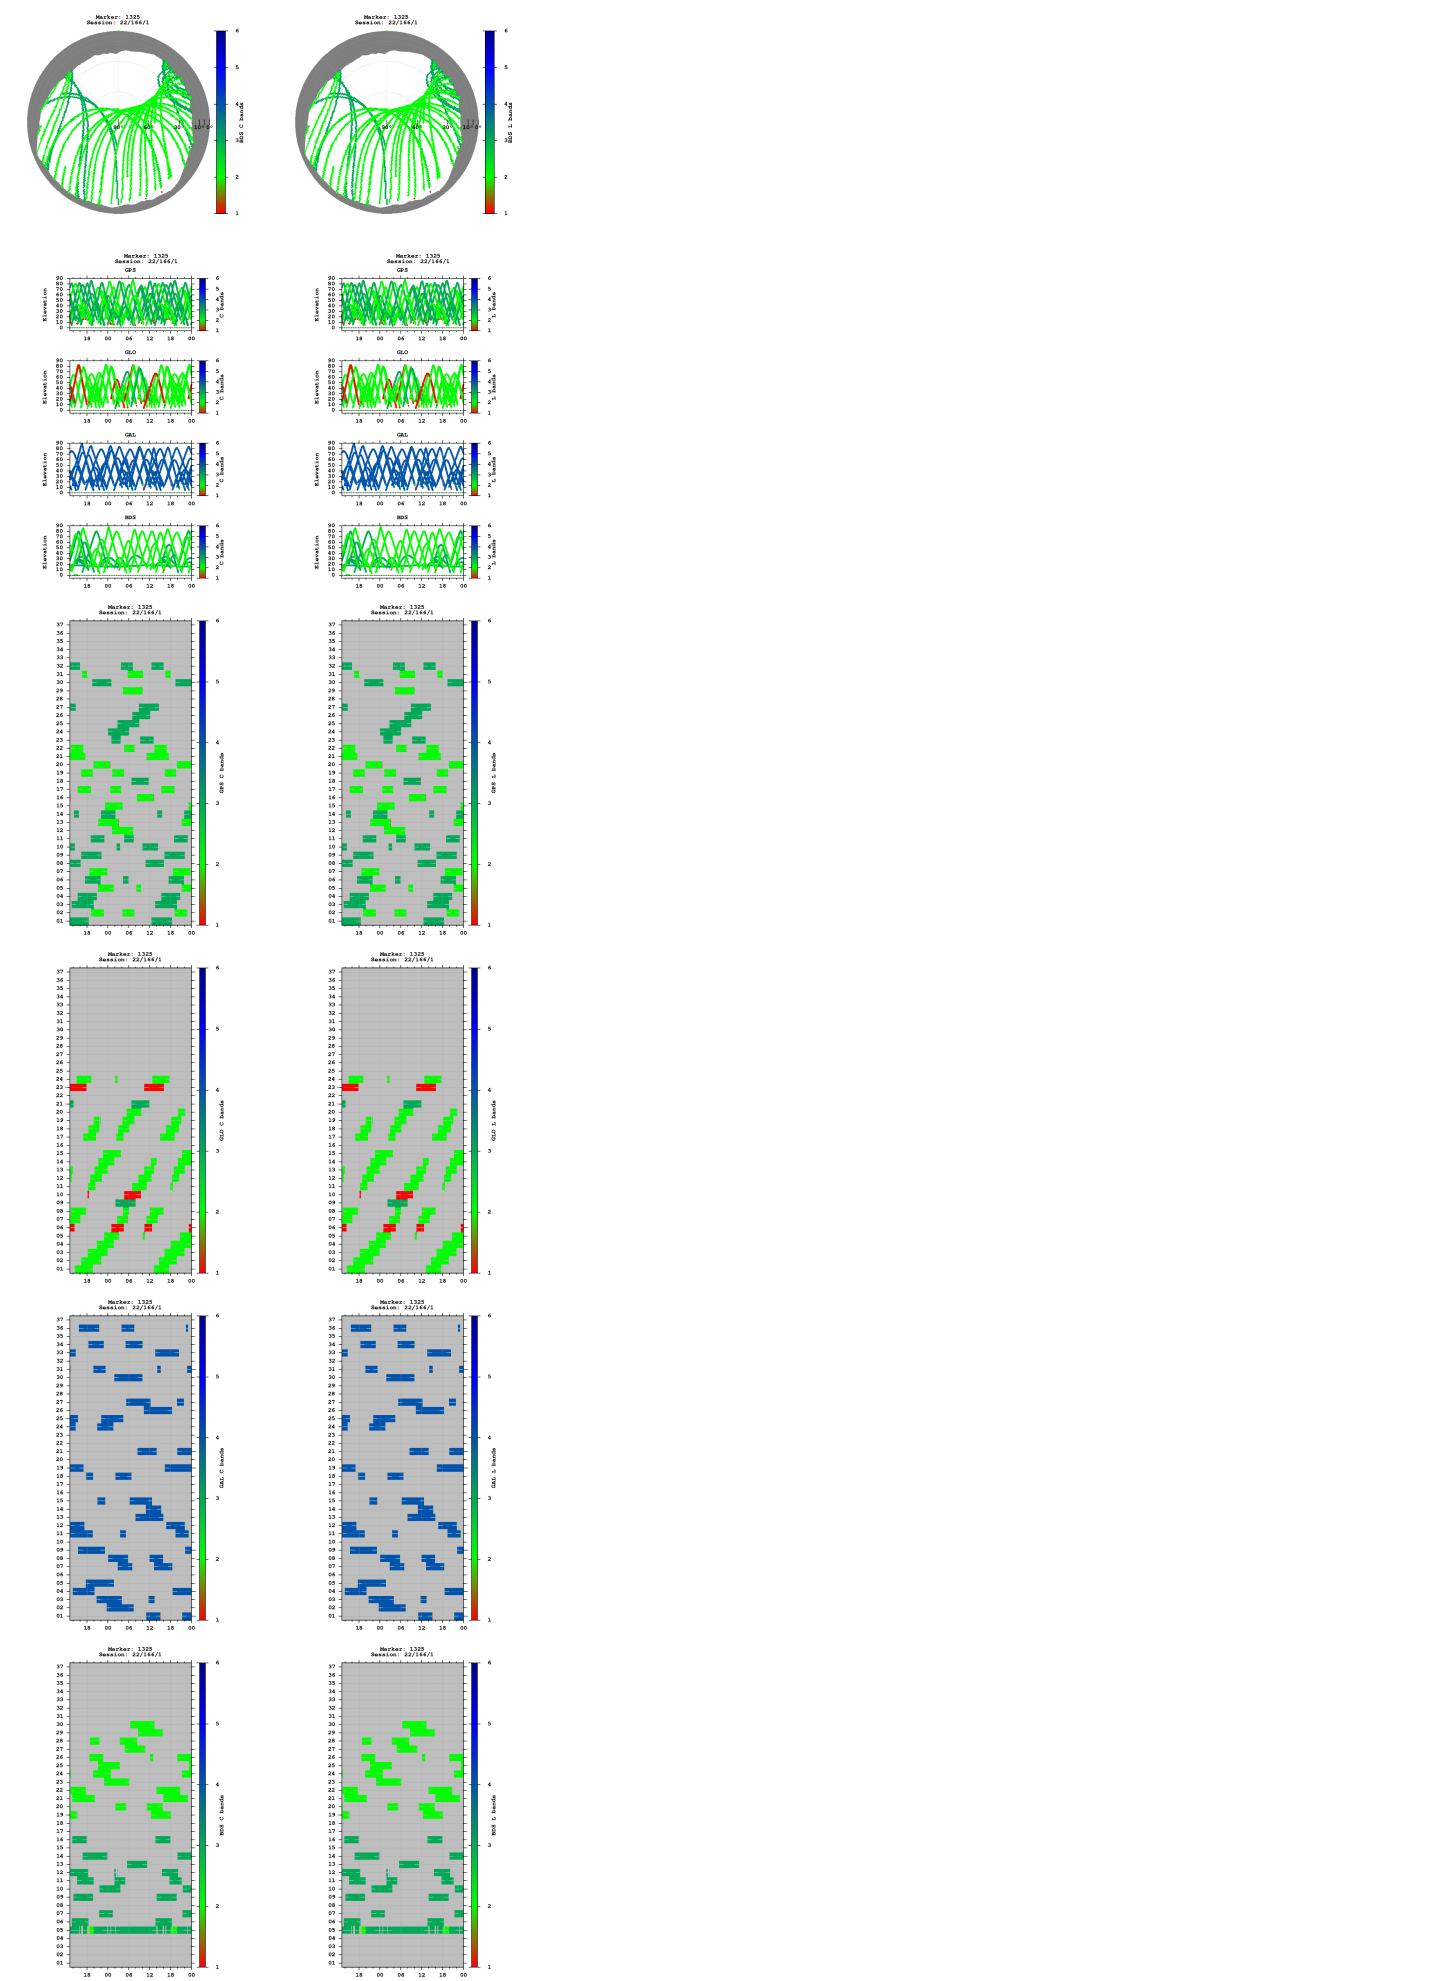

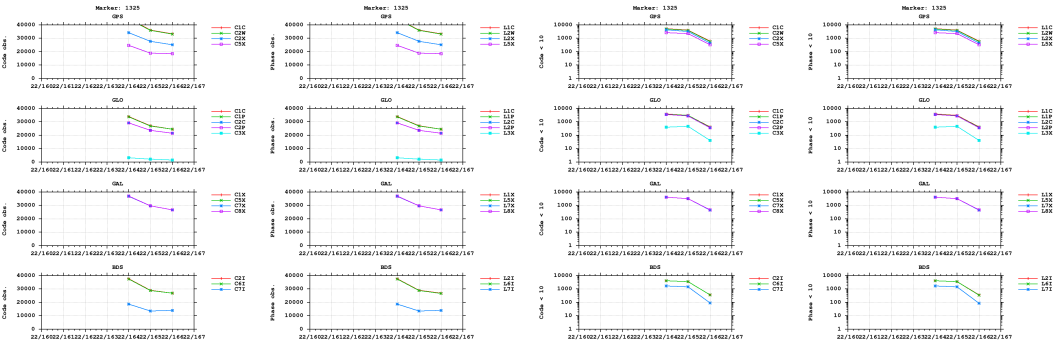



Multipath

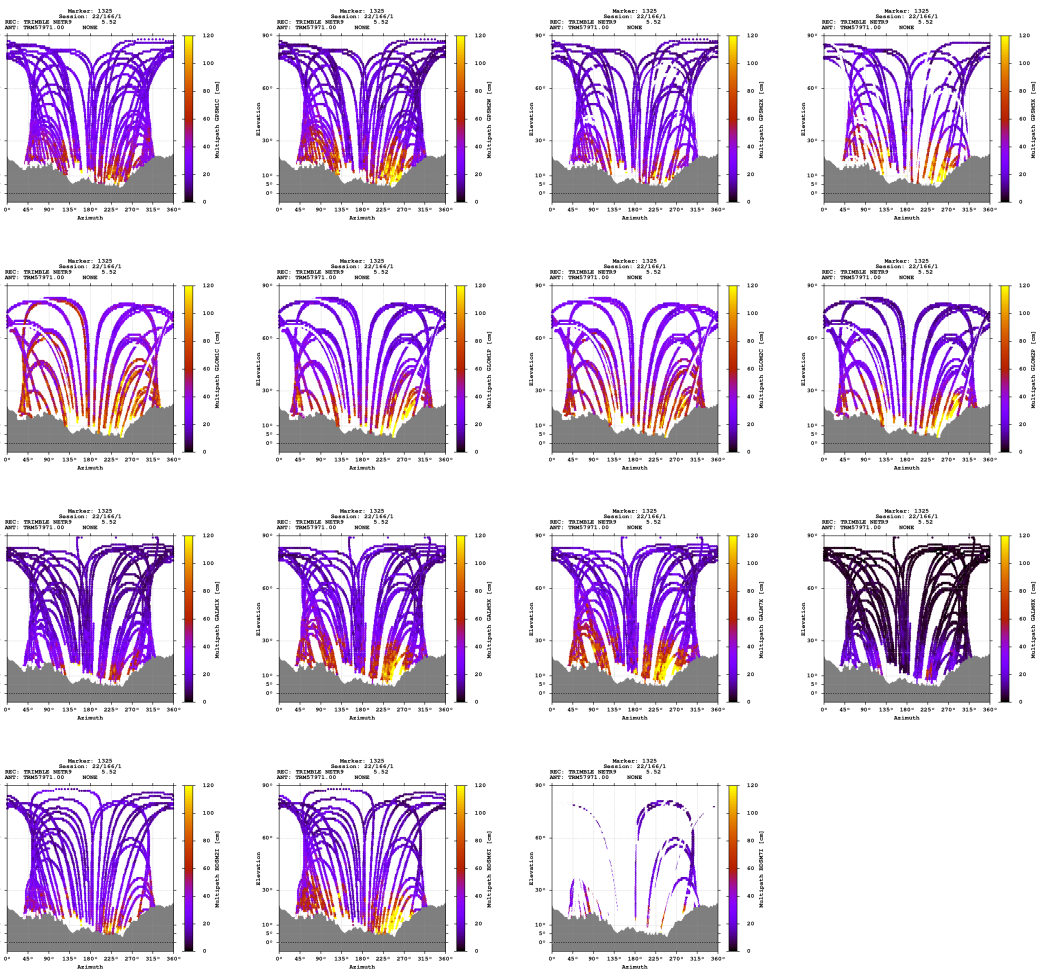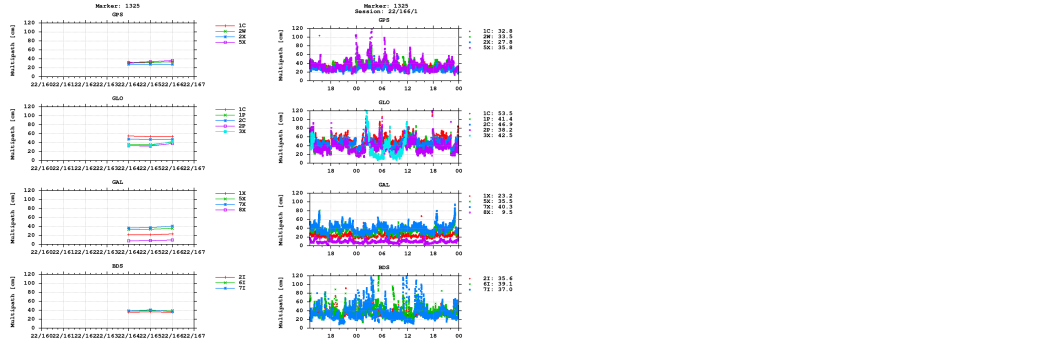


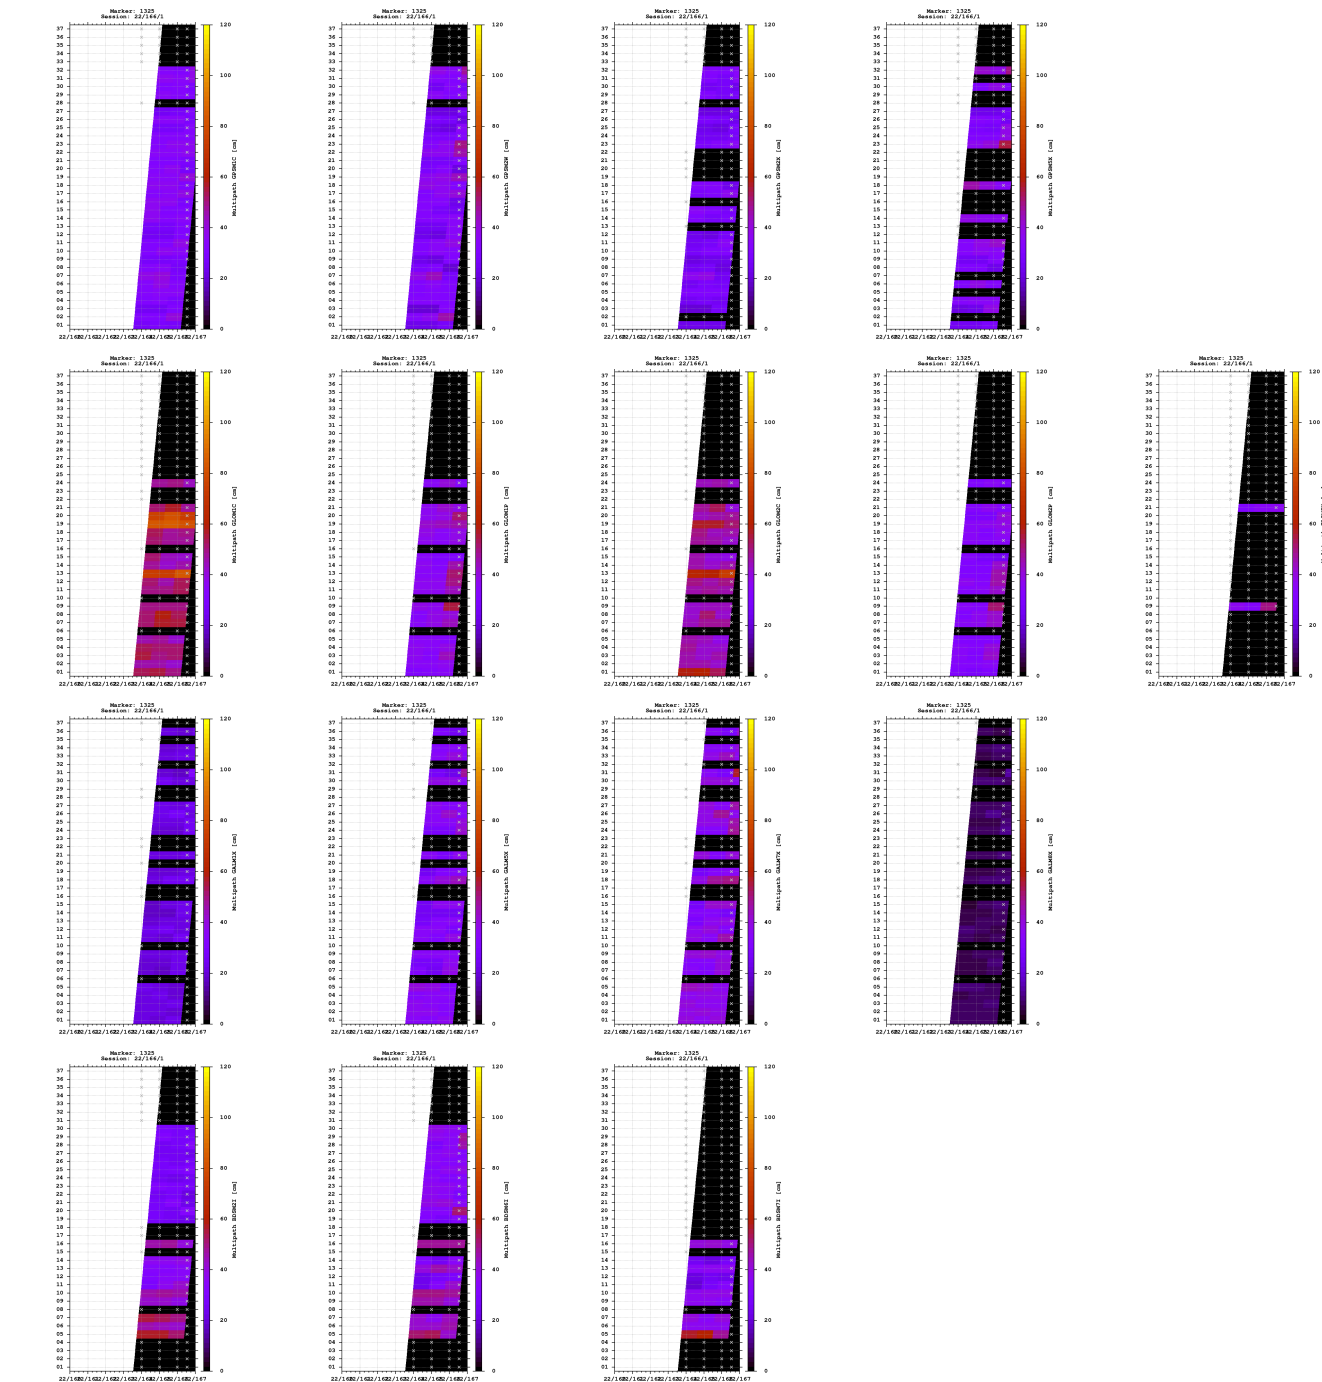

Signal-to-noise ratio

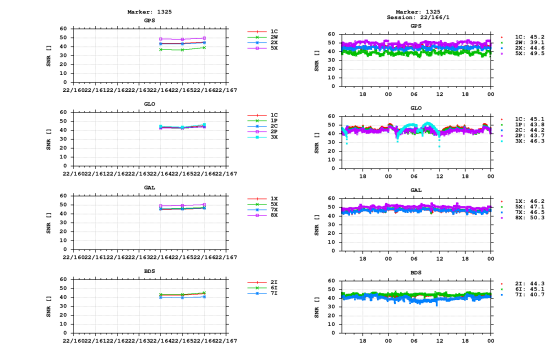


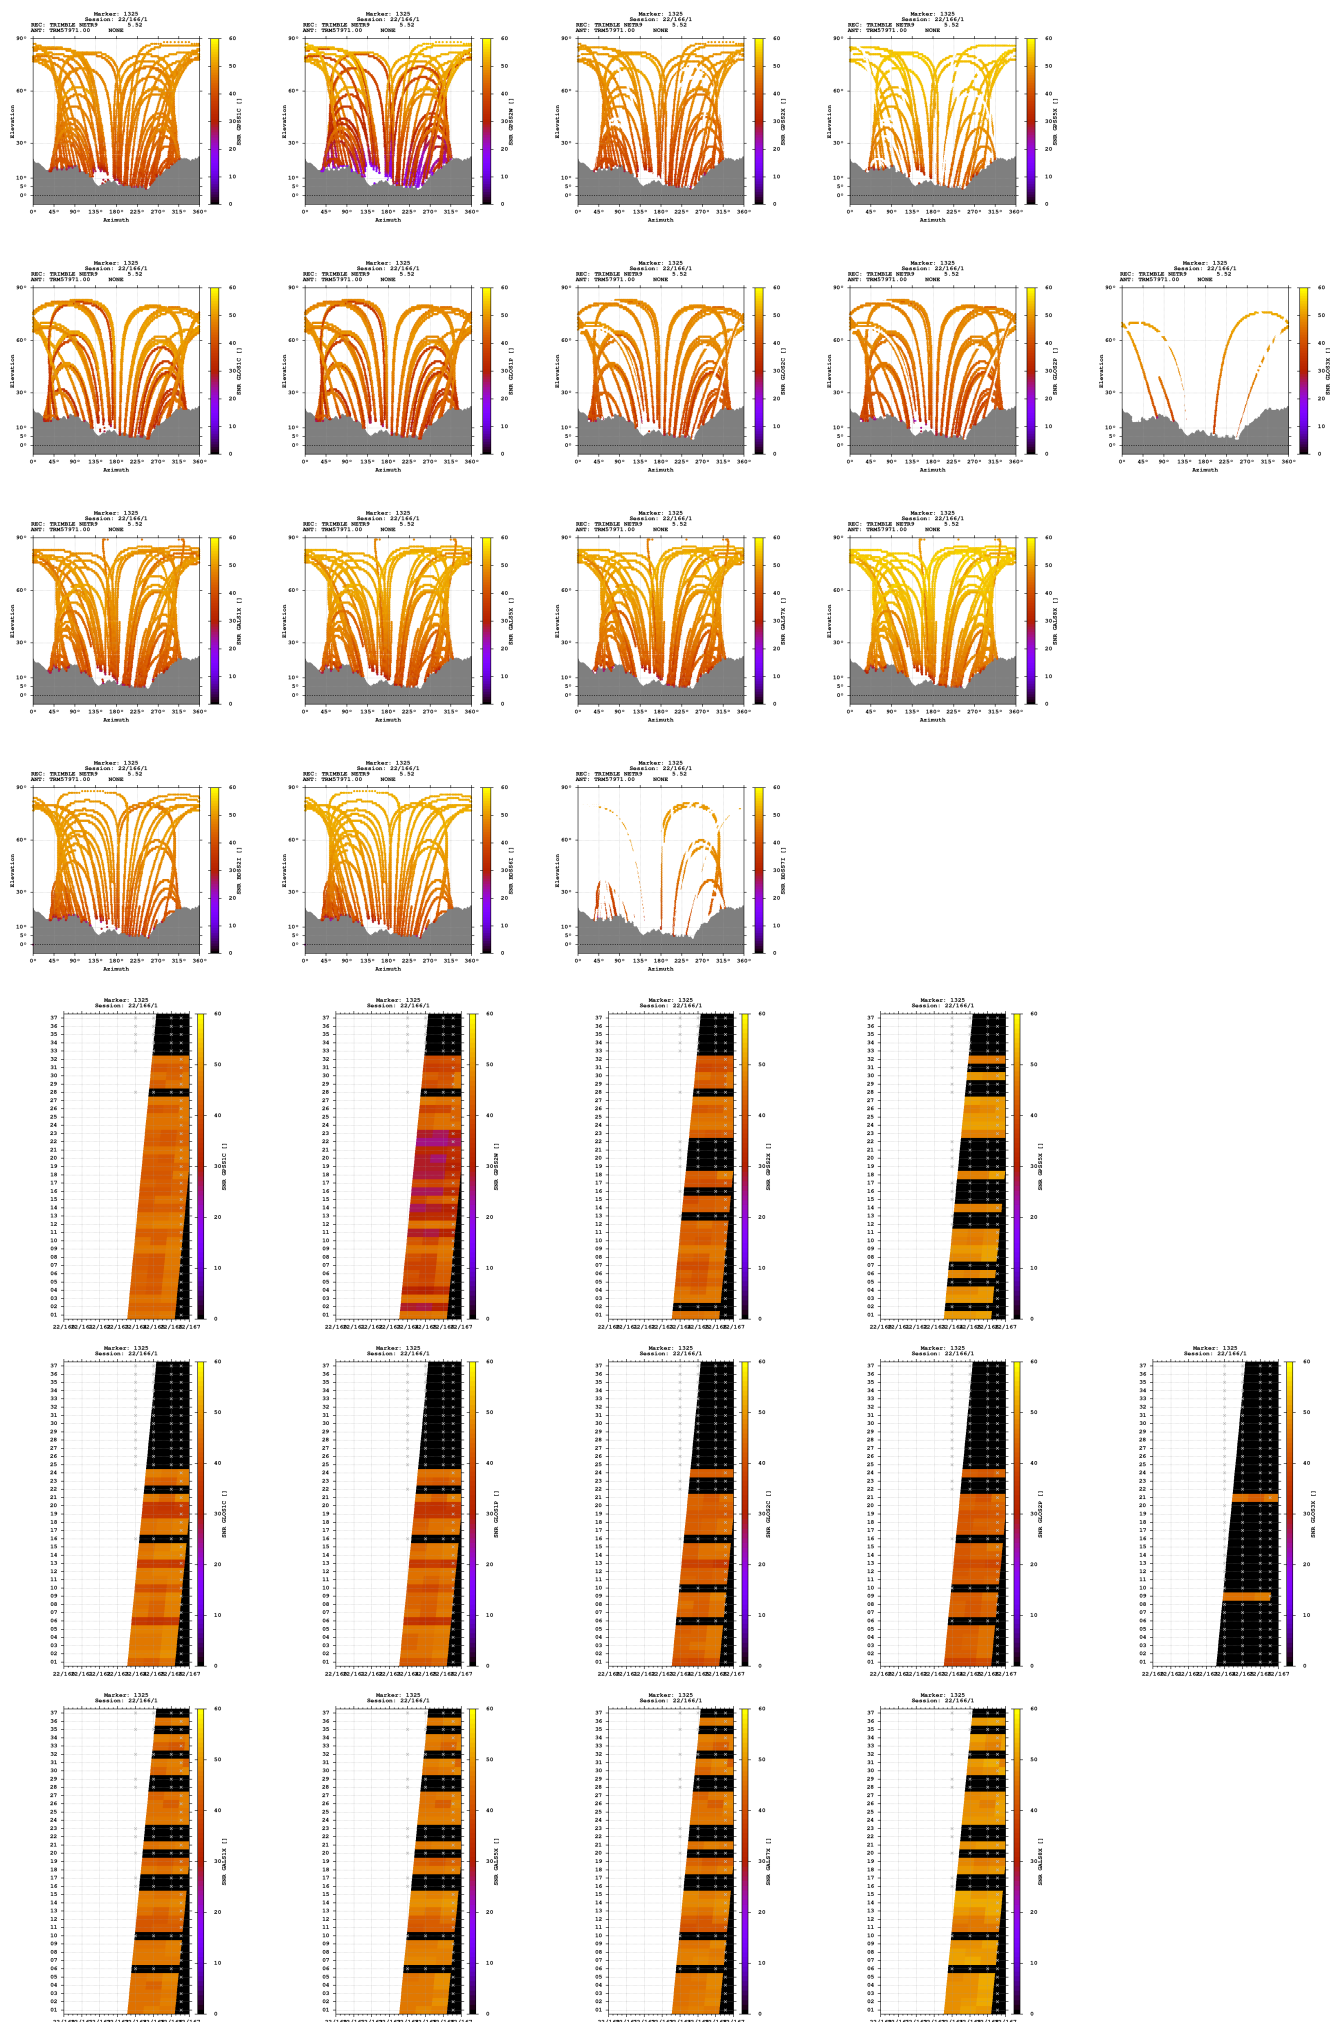

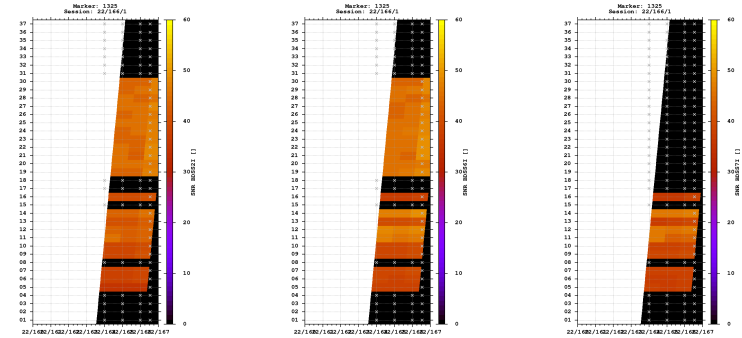



Estimates

2022-06-15 13:07:00	GPS	4396278.0380	556778.9884	4574057.2540	46.099848848	7.217957511	1536.4074
2022-06-15 13:07:00	GLO	4396278.7215	556780.0054	4574057.5321	46.099845360	7.217969446	1537.1665
2022-06-15 13:07:00	GAL	4396278.3102	556779.1747	4574057.0842	46.099845888	7.217959458	1536.4885
2022-06-15 13:07:00	BDS	4396274.3573	556779.0848	4574057.2572	46.099872455	7.217964727	1533.8861

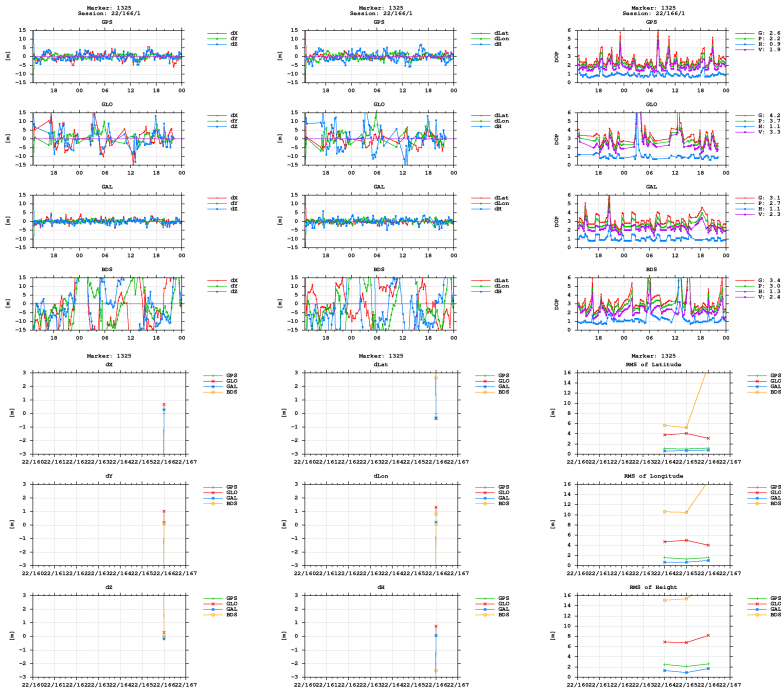

BNC

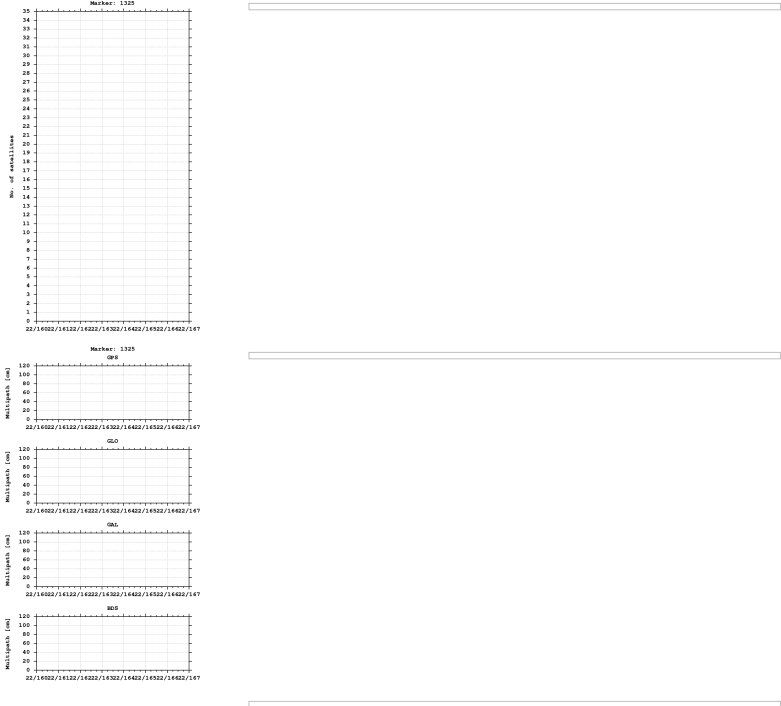

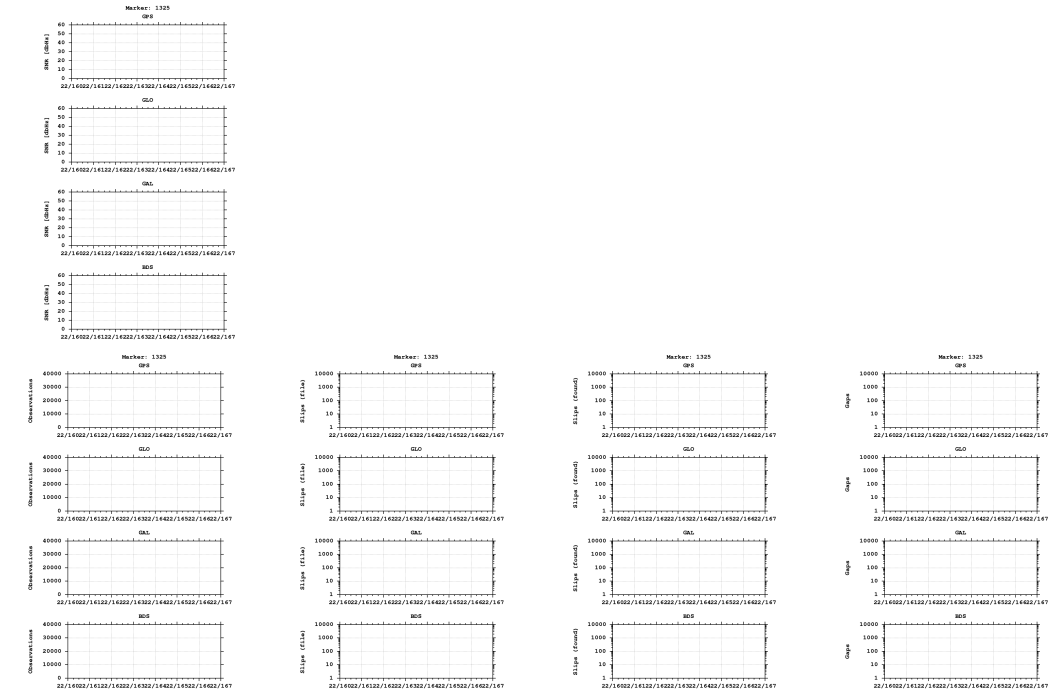

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)