


GNSS observation file monitoring for 0511


Last RINEX file: 05111671.220
RINEX version: 3.02
Marker: 1325
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

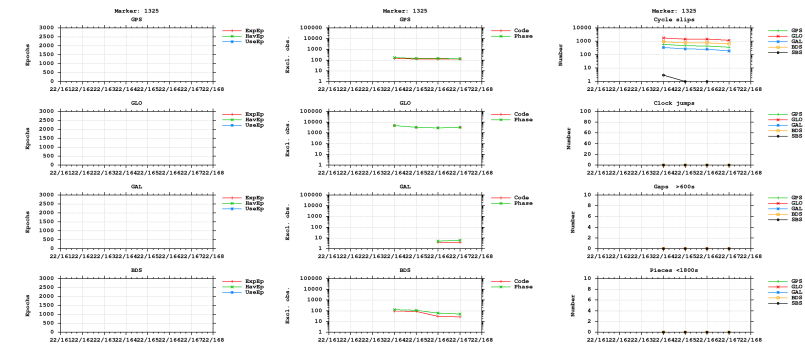



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

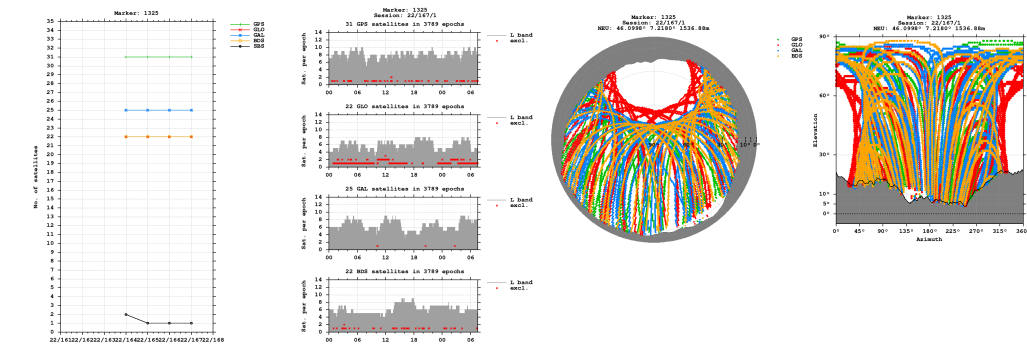


Bands

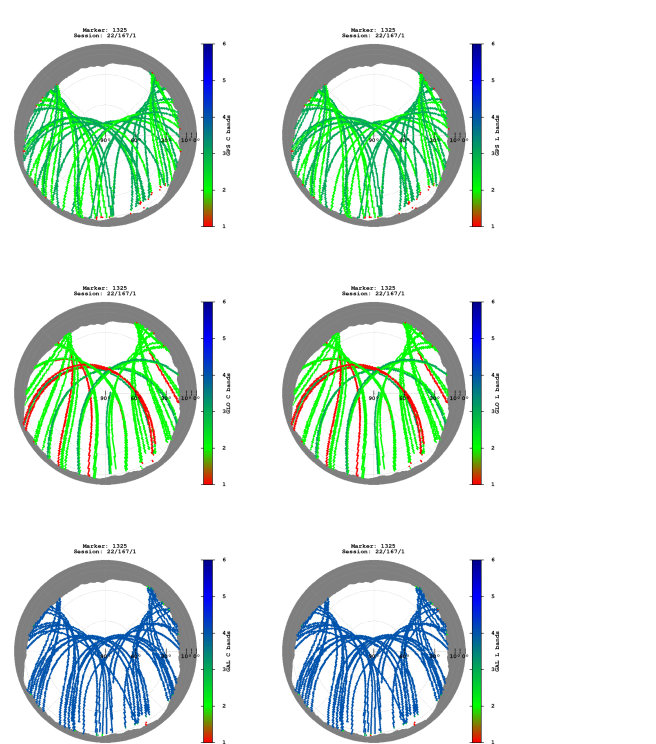


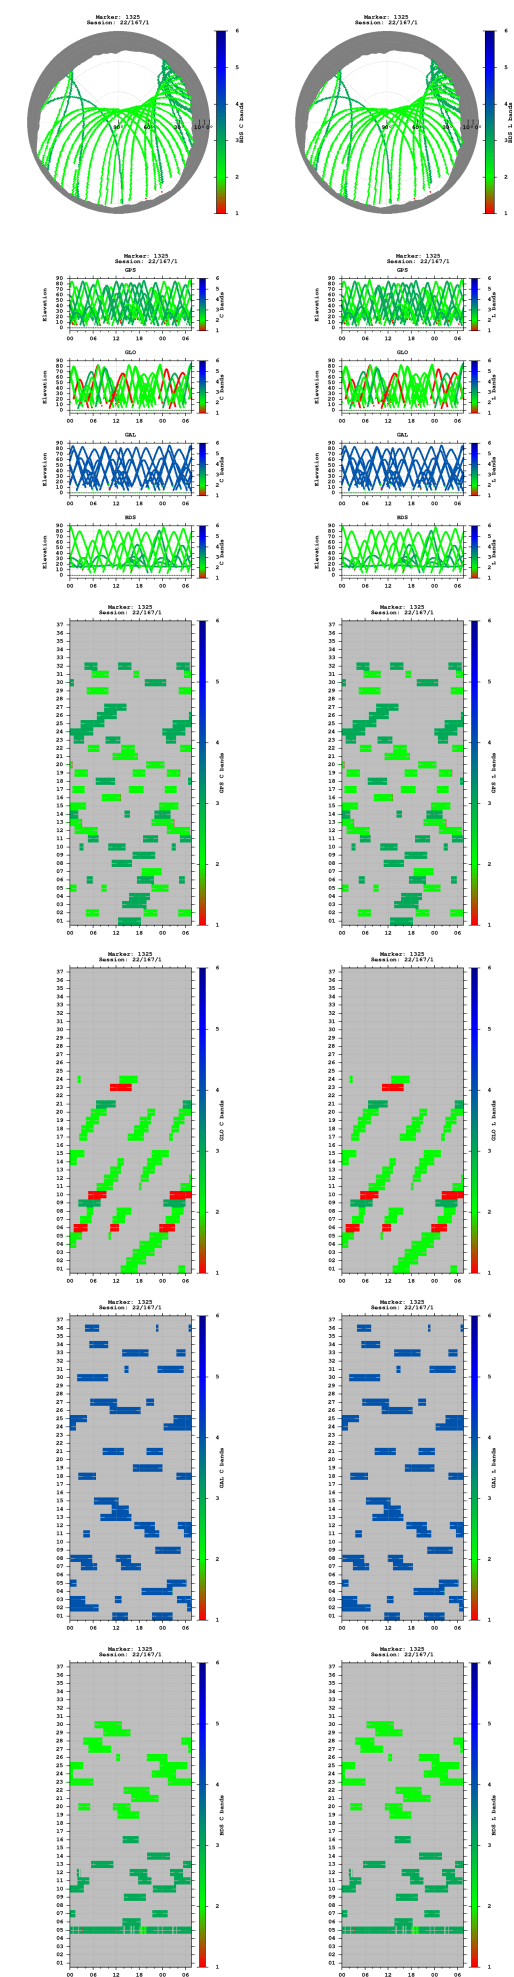


Observations

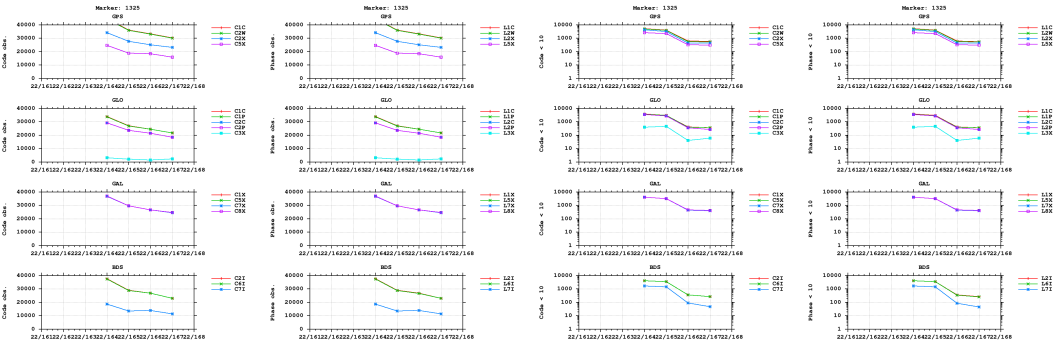


Multipath

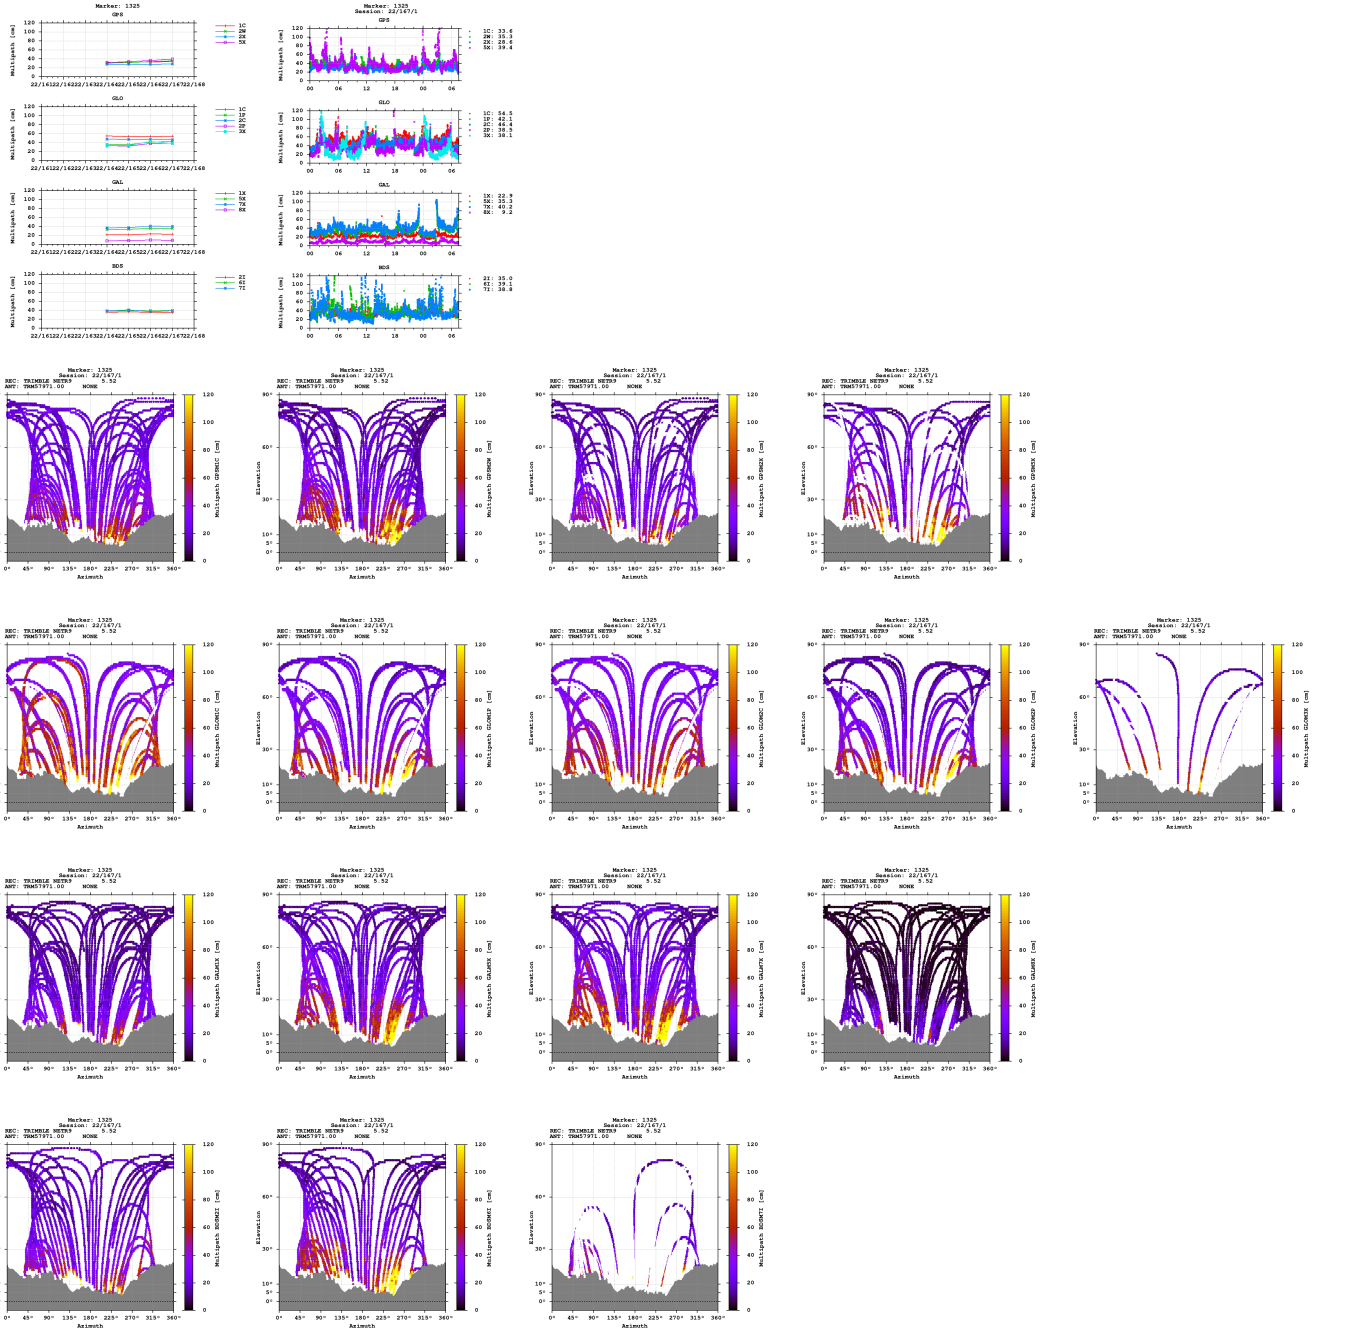


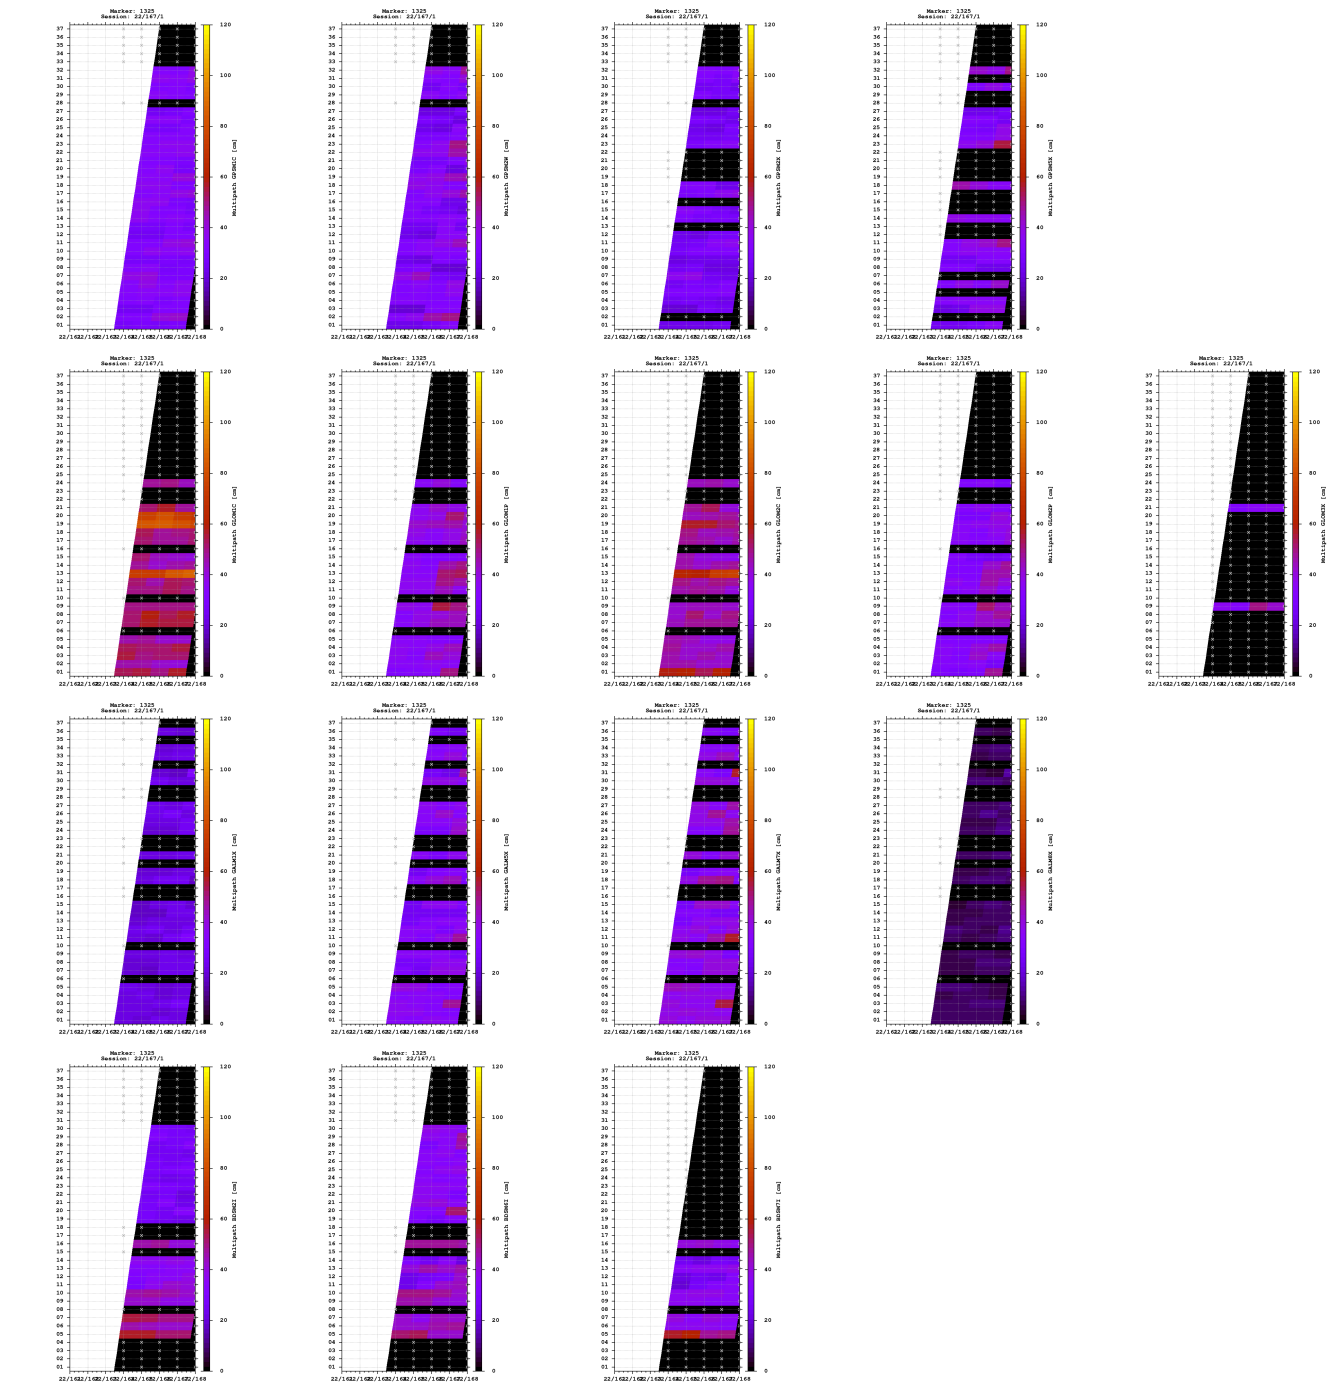


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

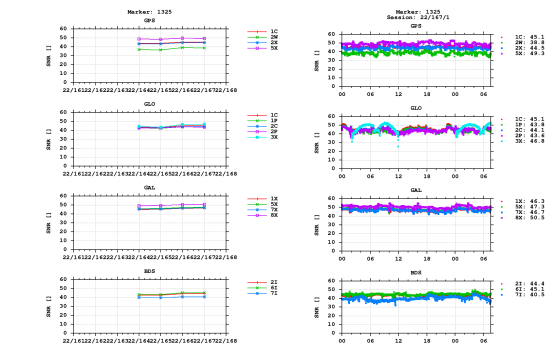


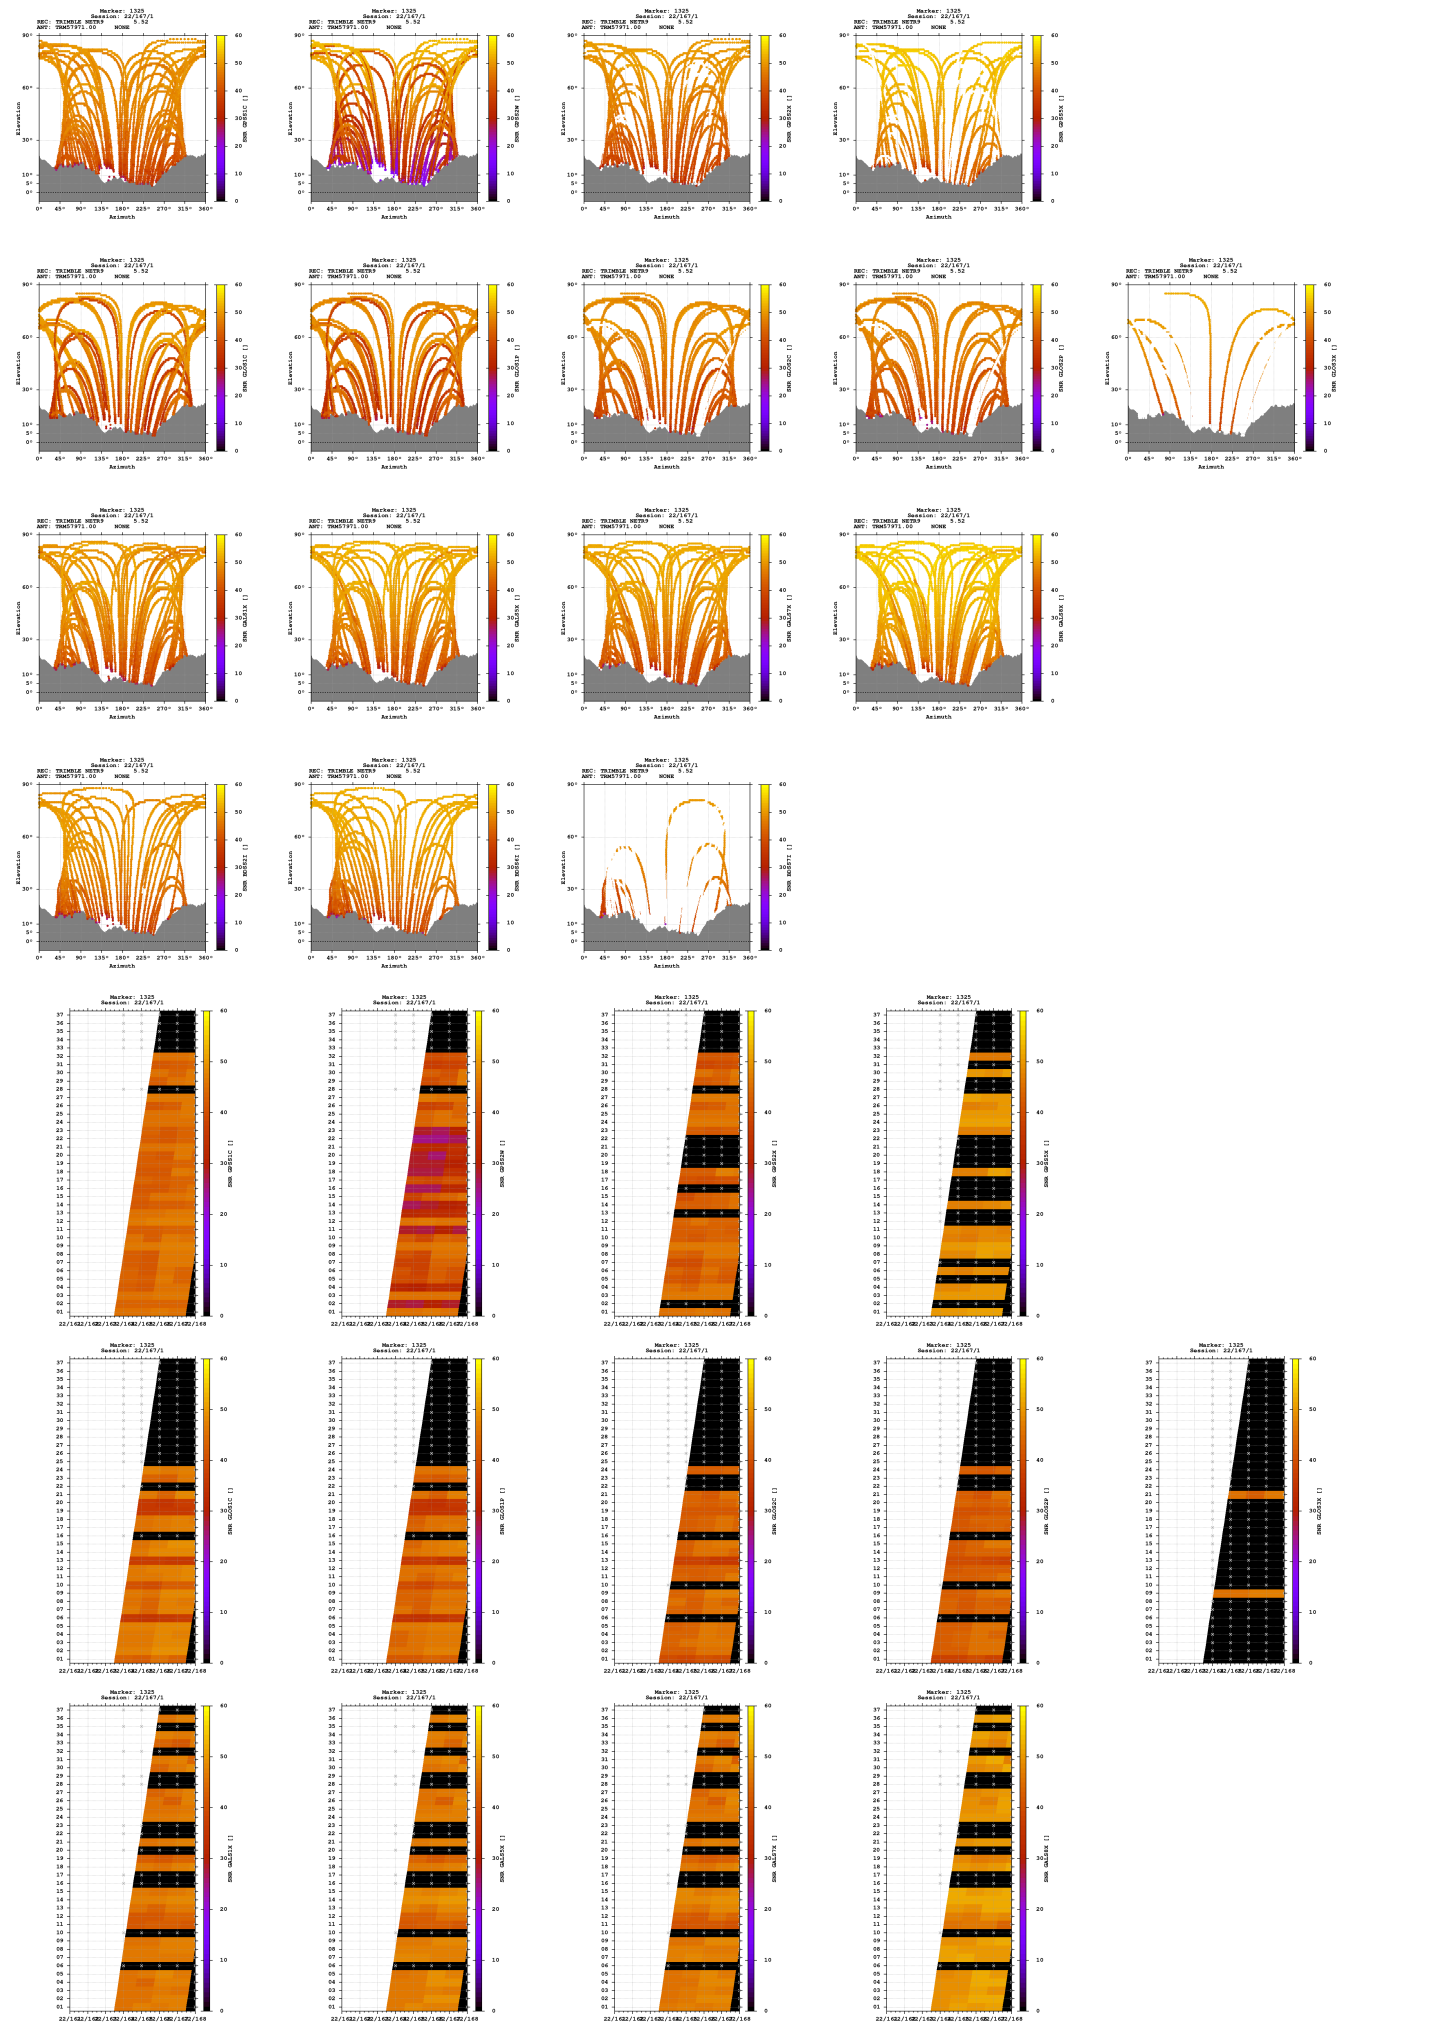

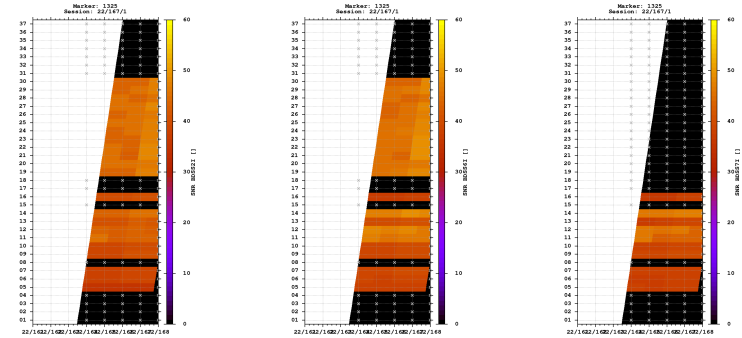



Estimates

2022-06-15 13:07:00	GPS	4396278.4381	556779.0373	4574057.5207	46.099847899	7.217957488	1536.8791
2022-06-15 13:07:00	GLO	4396277.2784	556779.8295	4574055.8651	46.099844386	7.217969533	1534.9573
2022-06-15 13:07:00	GAL	4396278.2672	556779.1608	4574057.2404	46.099847150	7.217959349	1536.5703
2022-06-15 13:07:00	BDS	4396275.6479	556780.3401	4574059.4168	46.099876604	7.217978732	1536.4395

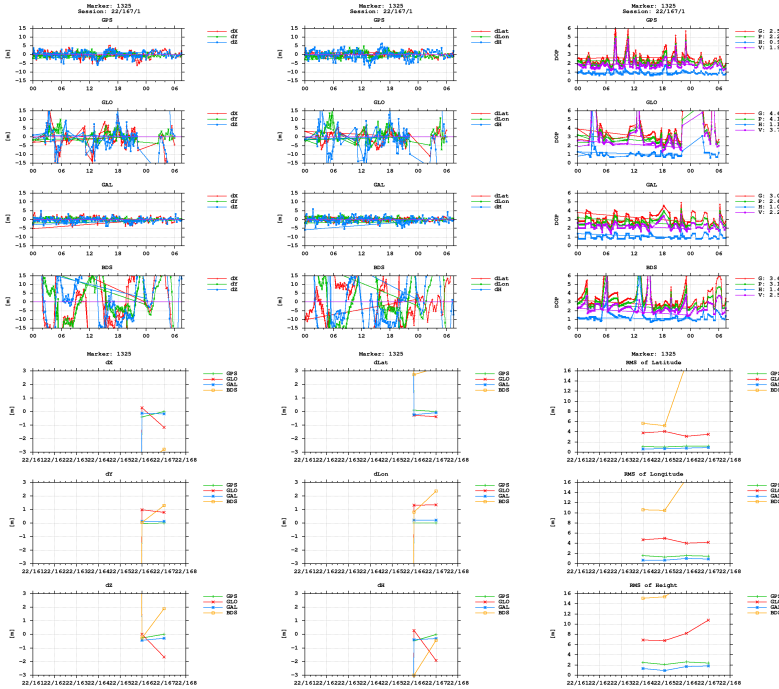

BNC

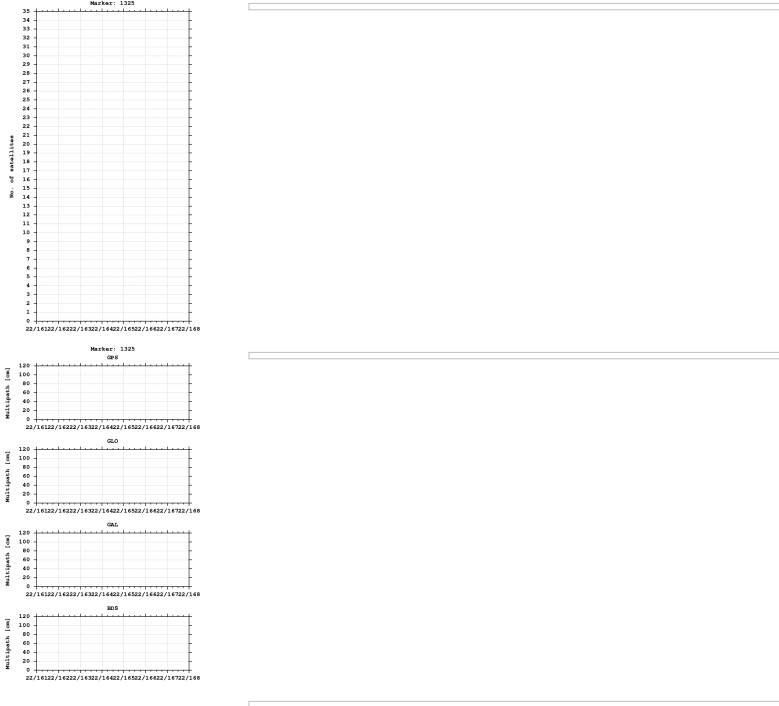

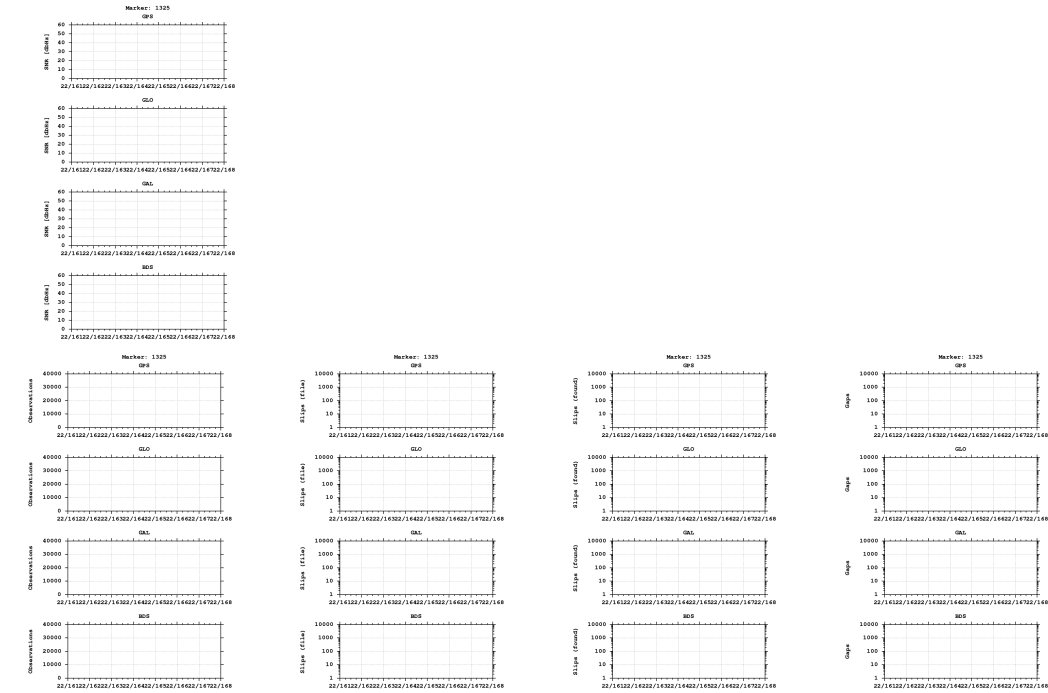

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)