


GNSS observation file monitoring for 0512


Last RINEX file: 05121651.220
RINEX version: 3.02
Marker: 1284
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

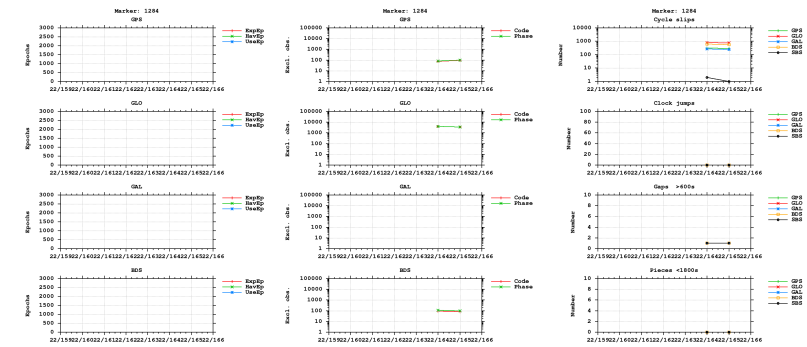



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

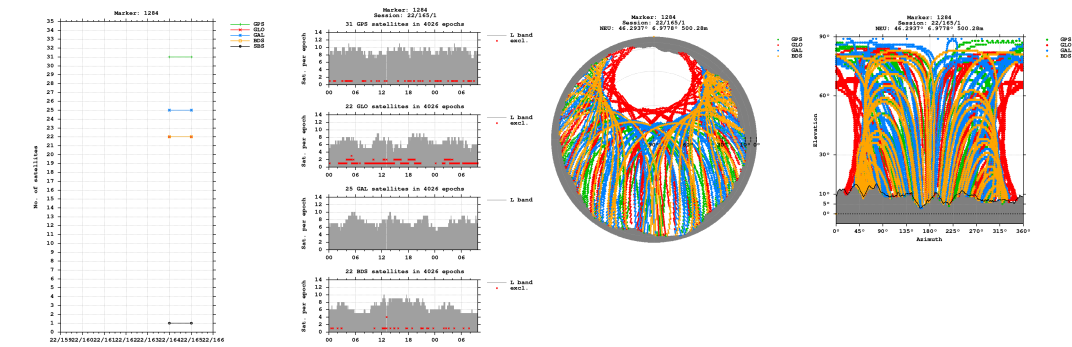


Bands

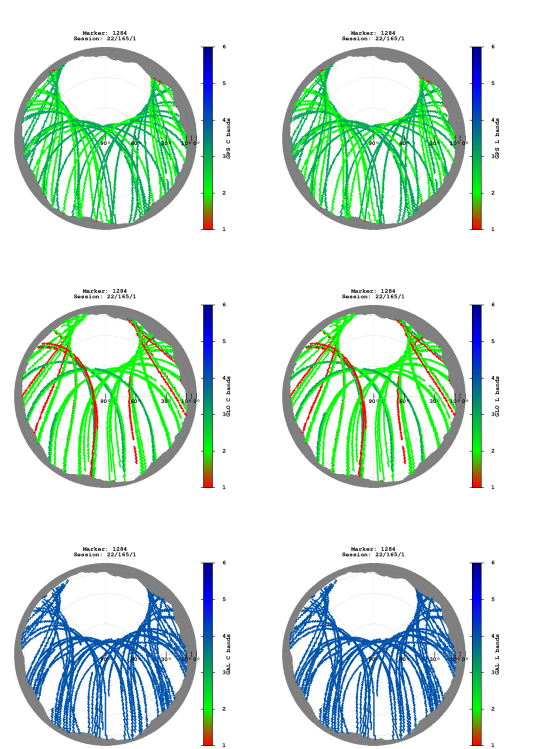


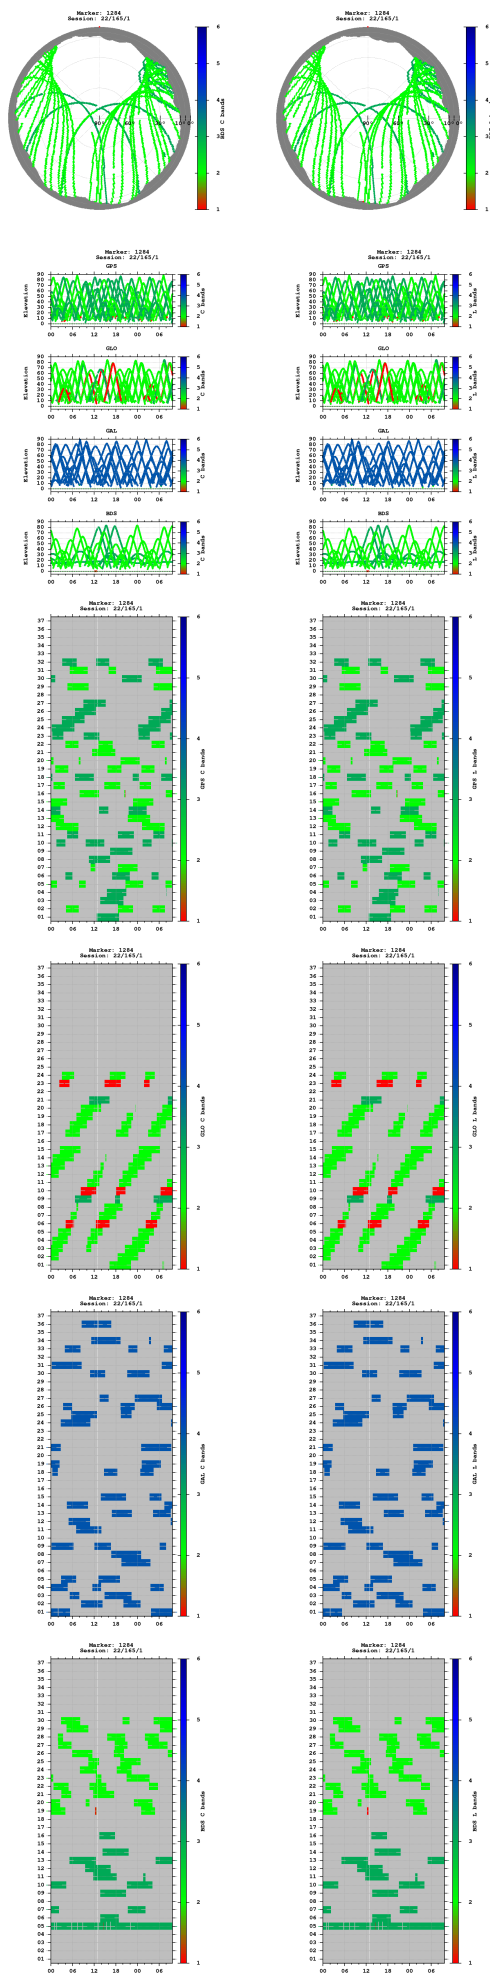


Observations

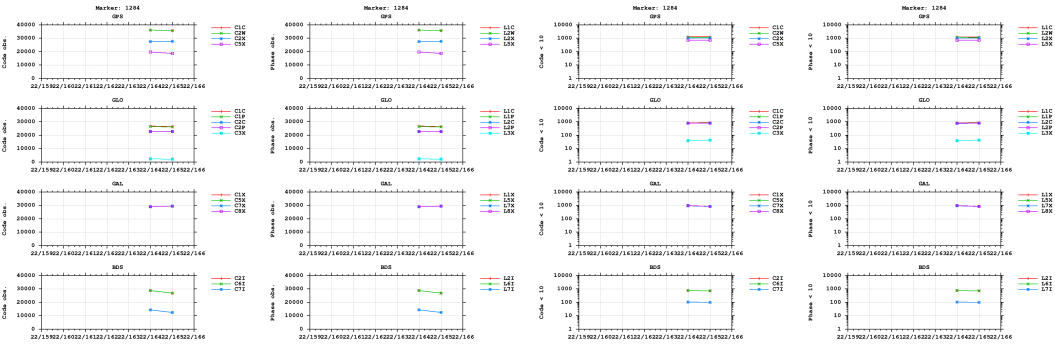



Multipath

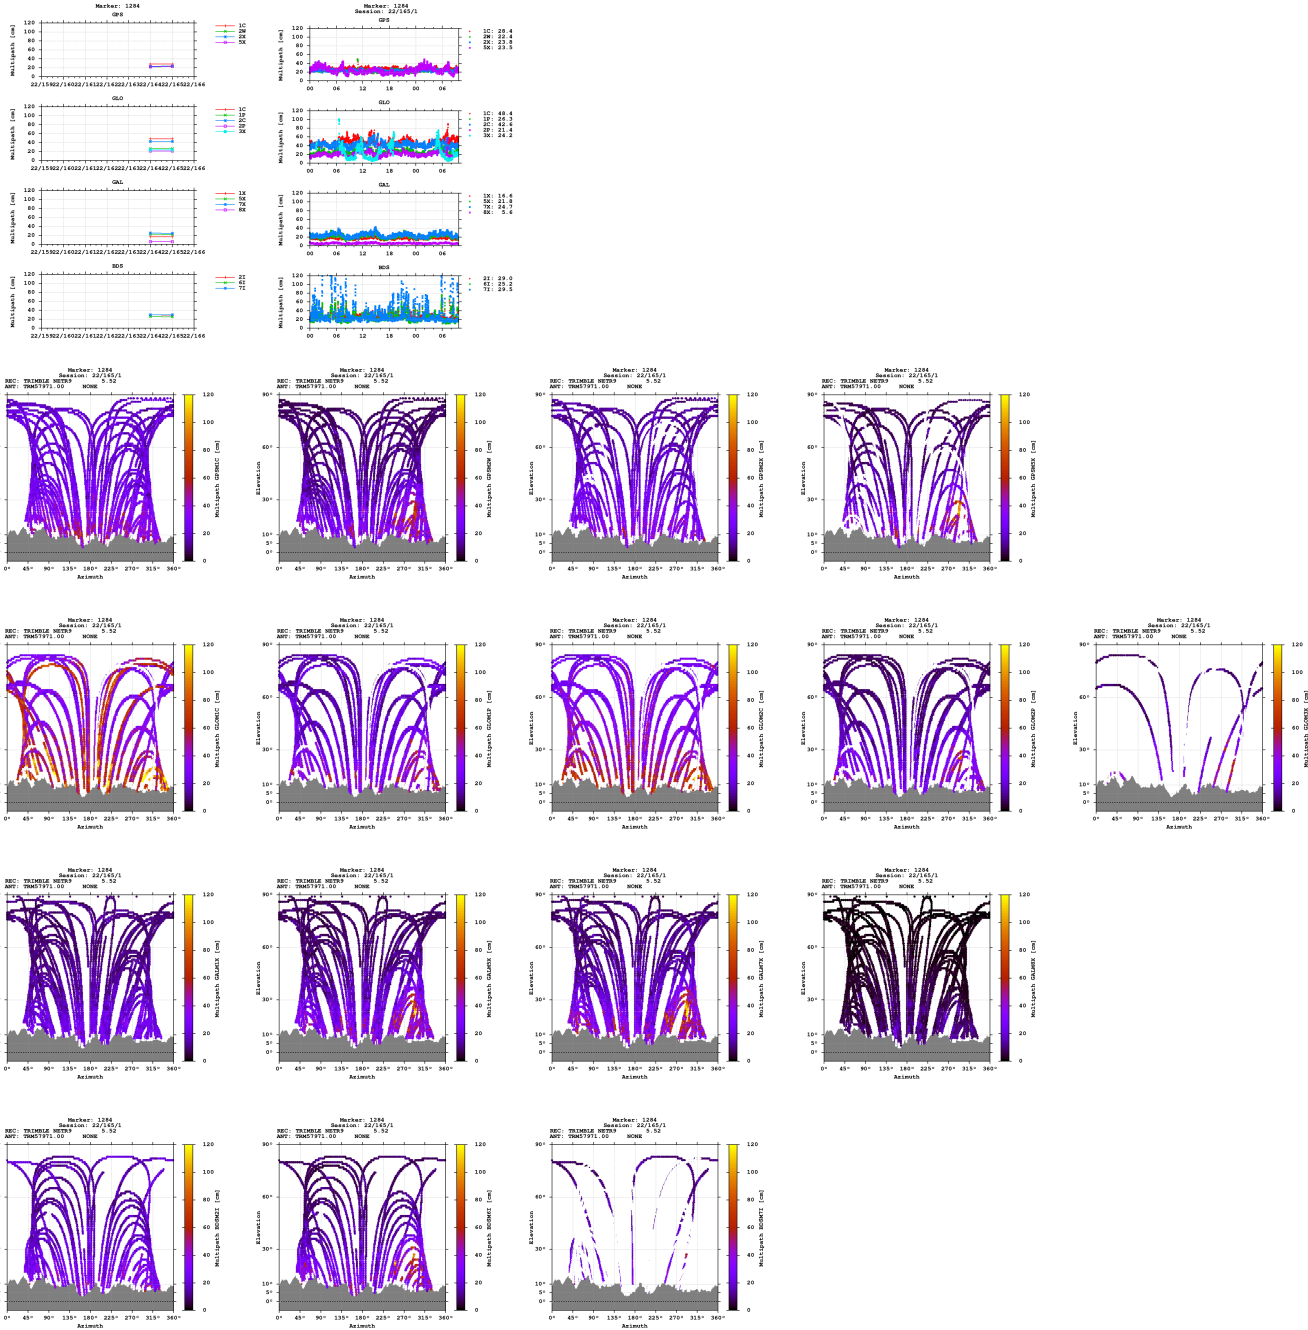


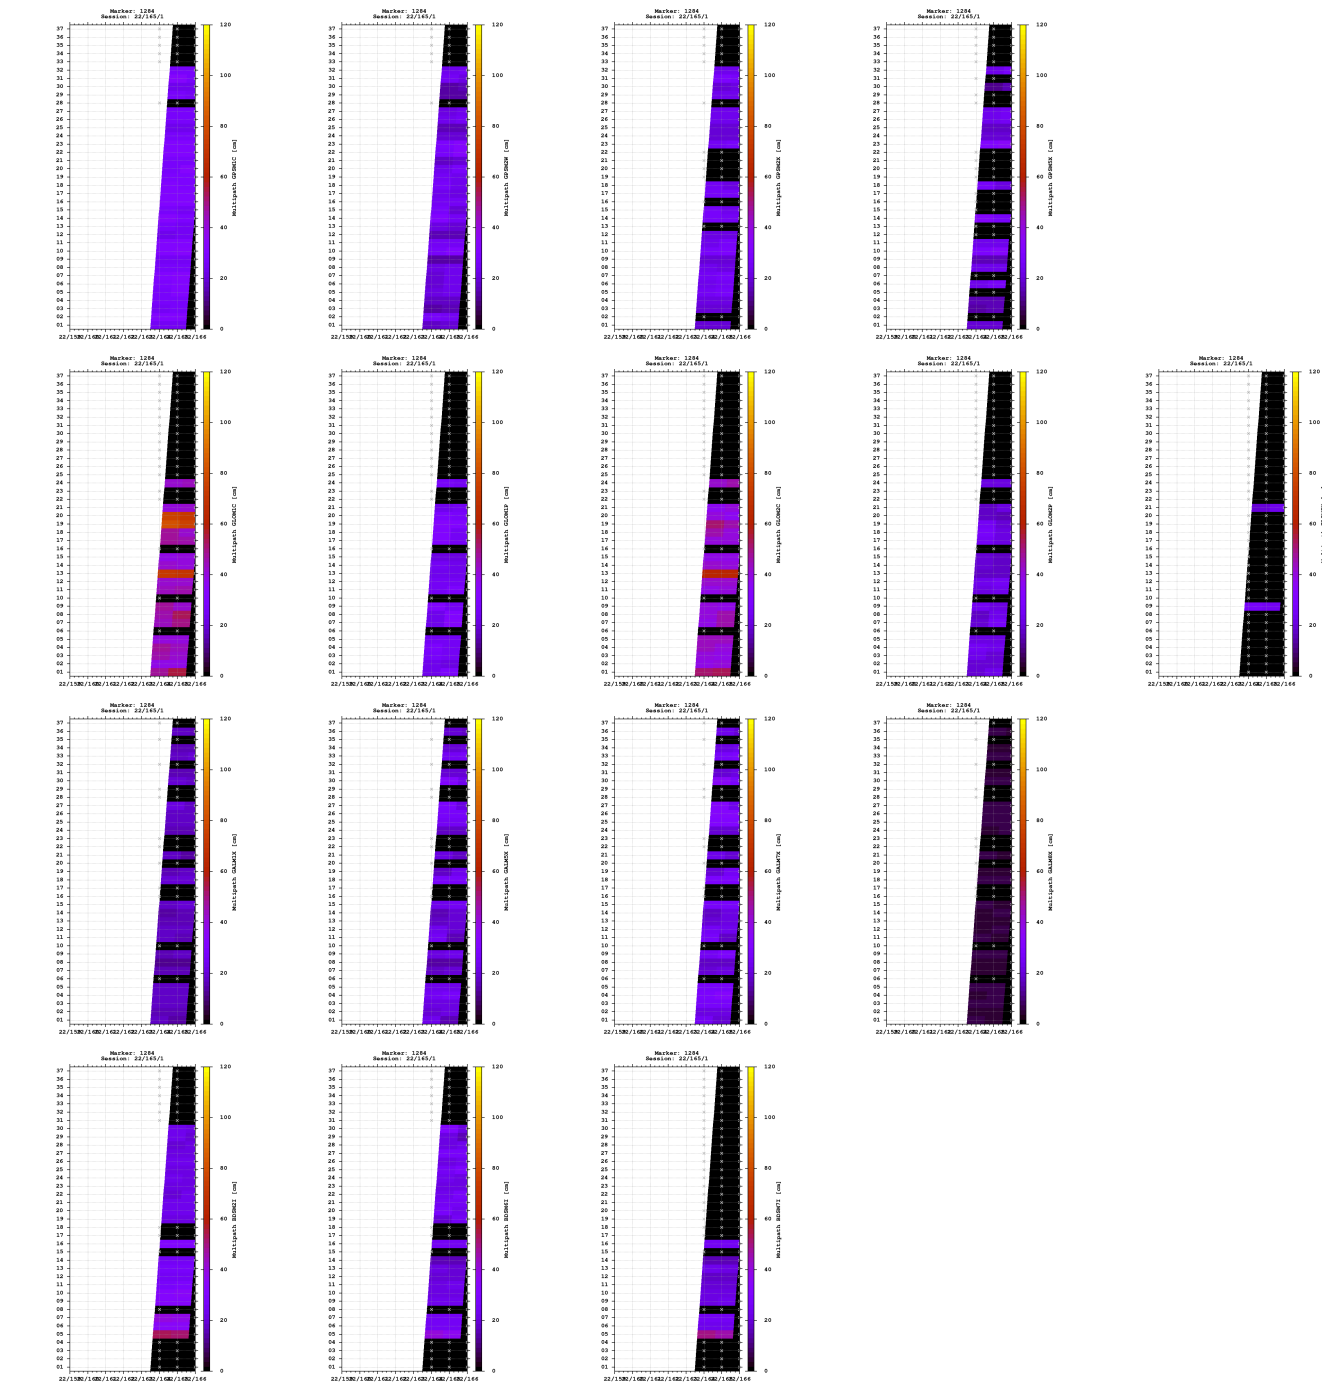

Signal-to-noise ratio

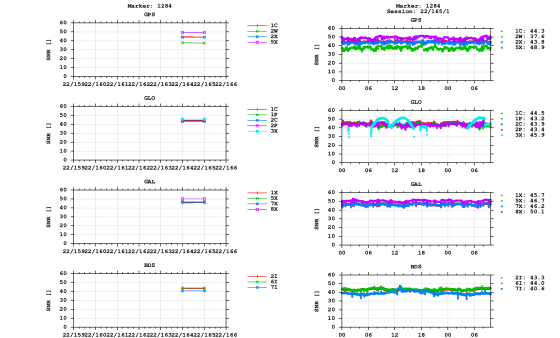


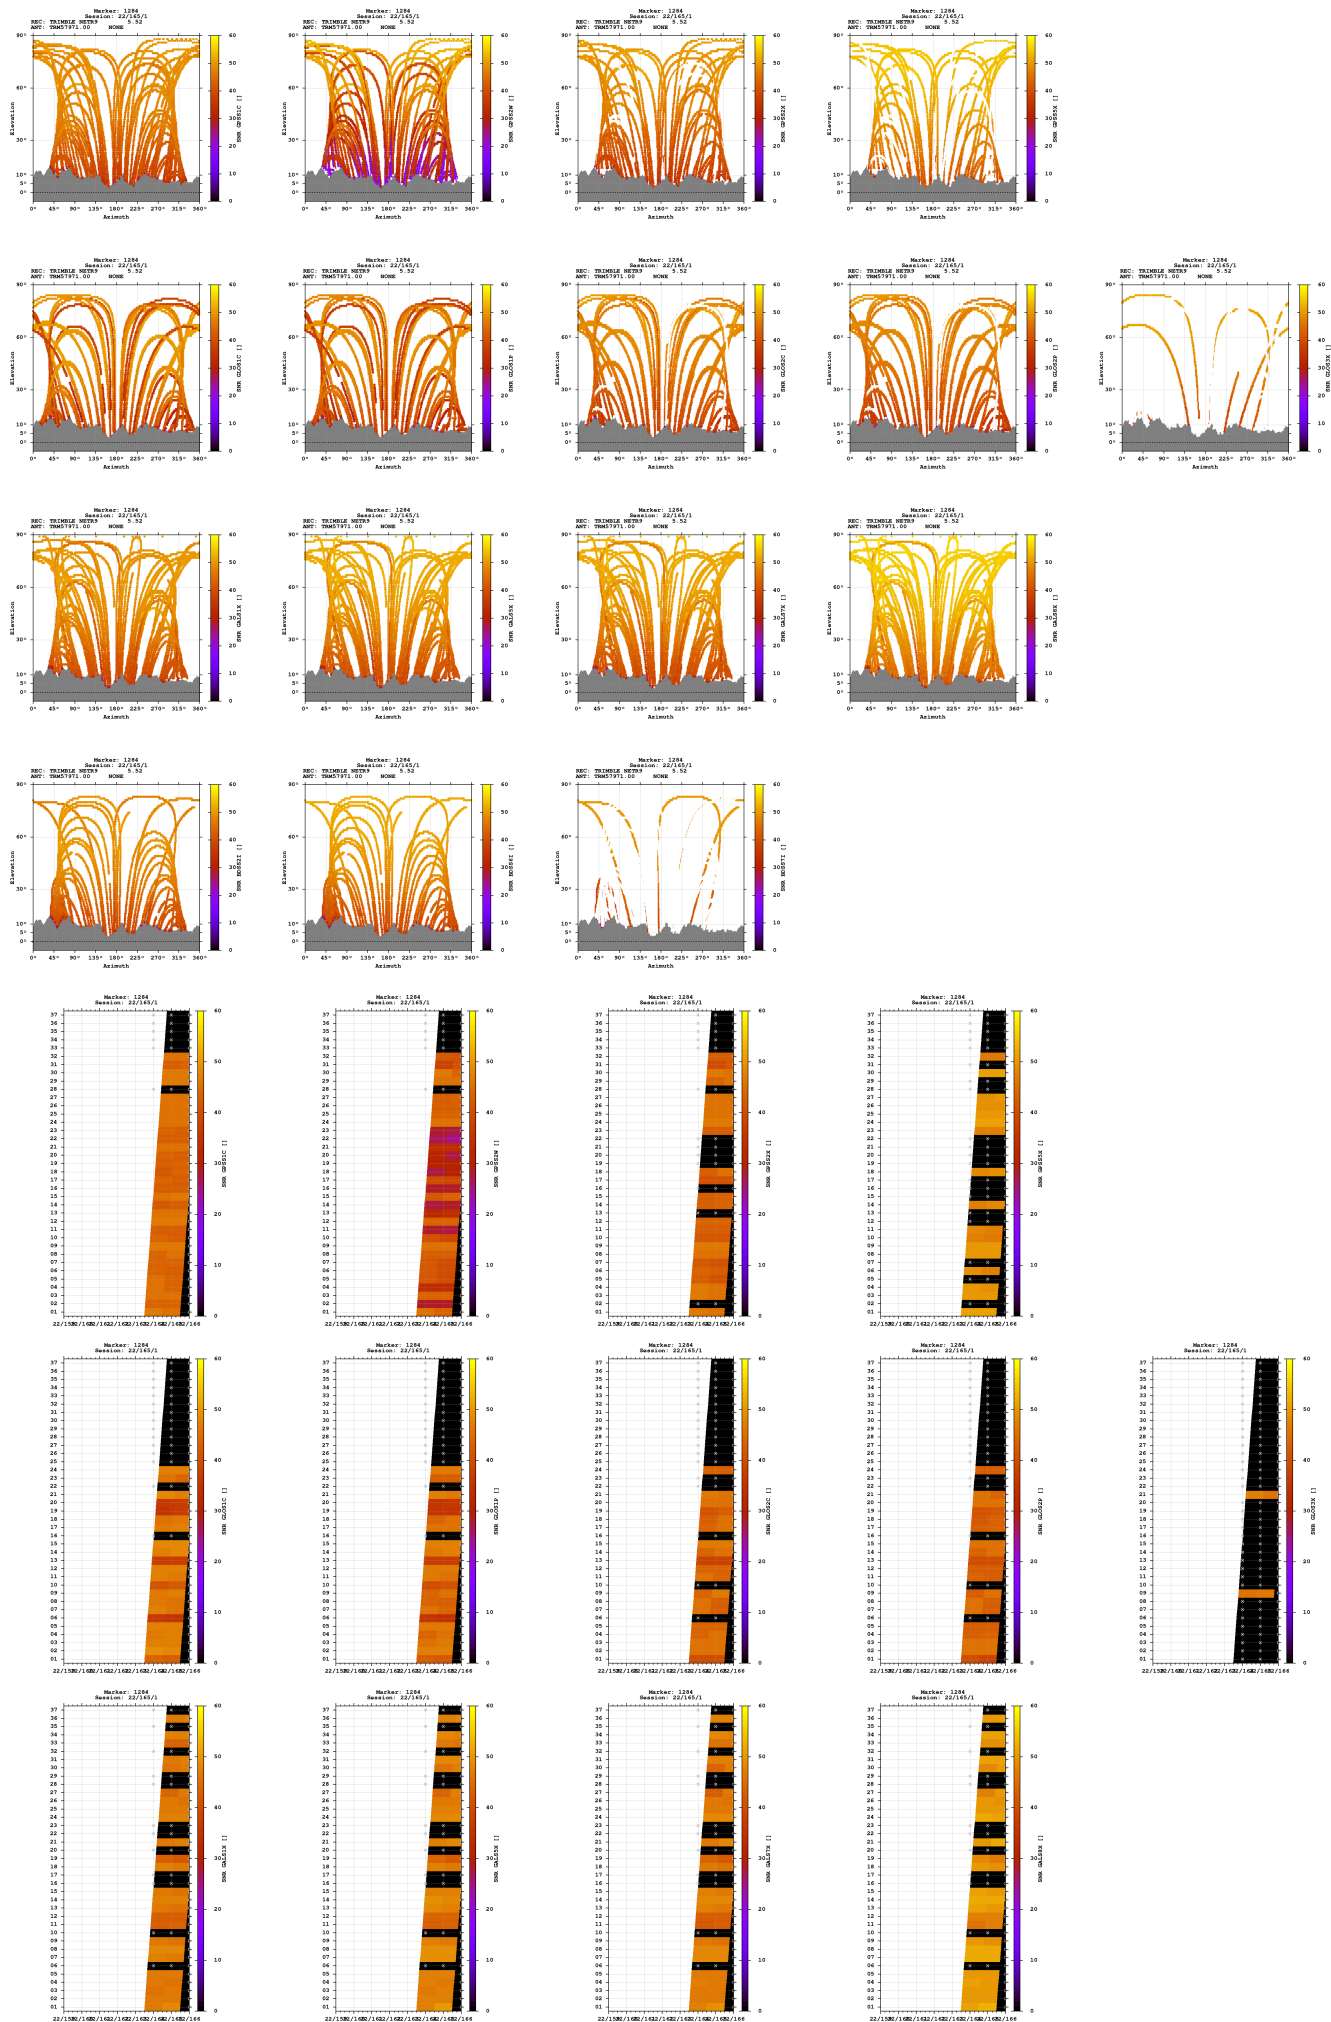

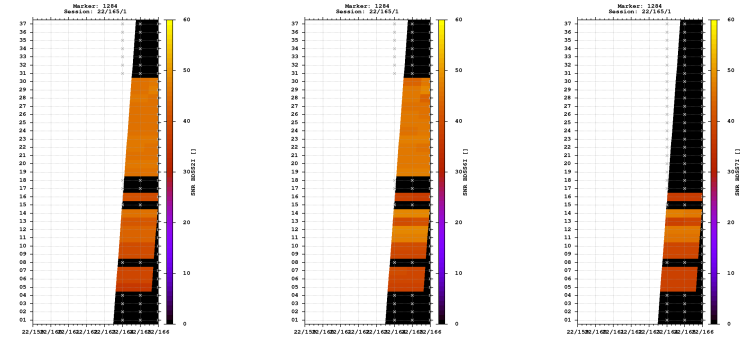



Estimates

2022-06-13 13:59:30	GPS	4382425.9558	536367.8329	4588223.8893	46.293663352	6.977763060	500.2763
2022-06-13 13:59:30	GLO	4382426.0210	536368.3118	4588224.0583	46.293663603	6.977769125	500.4835
2022-06-13 13:59:30	GAL	4382425.5391	536367.8734	4588223.5602	46.293663964	6.977764239	499.7560
2022-06-13 13:59:30	BDS	4382426.5017	536370.1428	4588227.1238	46.293678107	6.977791953	503.1829

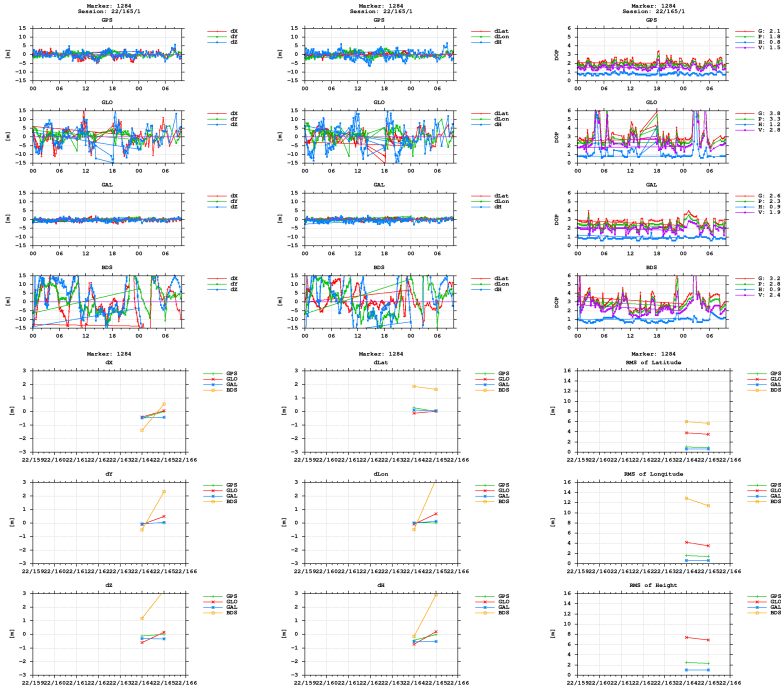

BNC

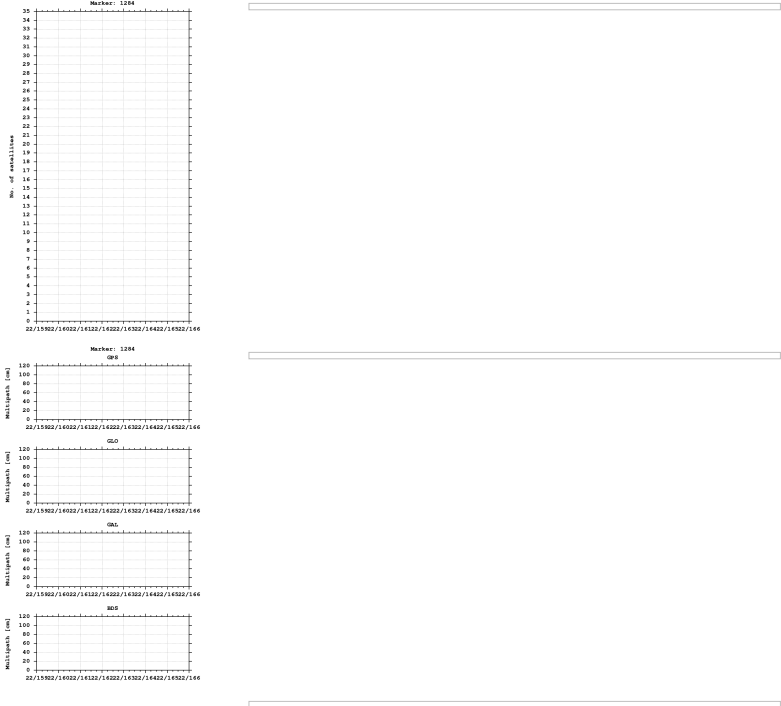

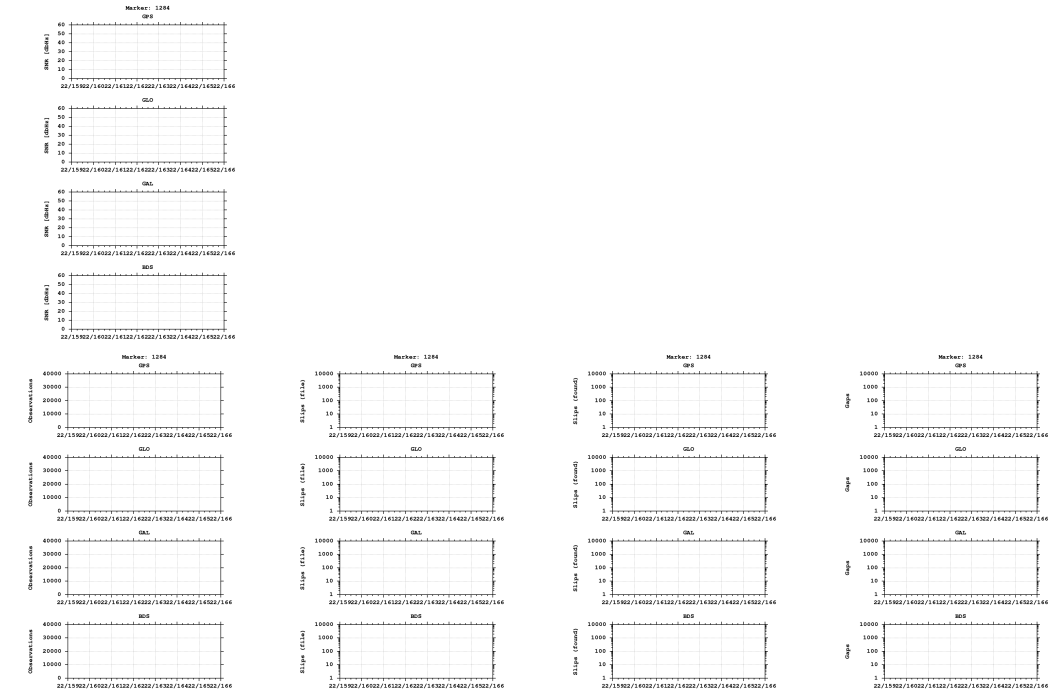

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)