


GNSS observation file monitoring for 0512


Last RINEX file: 05121671.220
RINEX version: 3.02
Marker: 1325
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

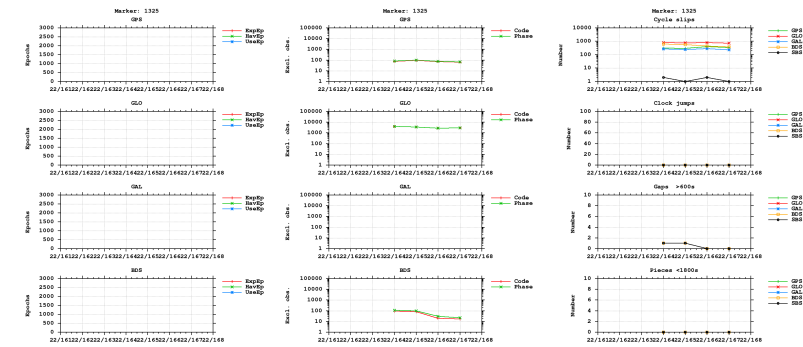



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

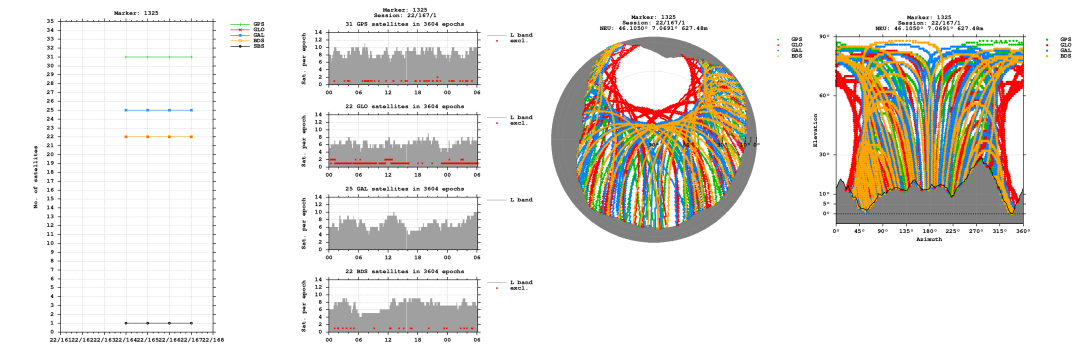


Bands

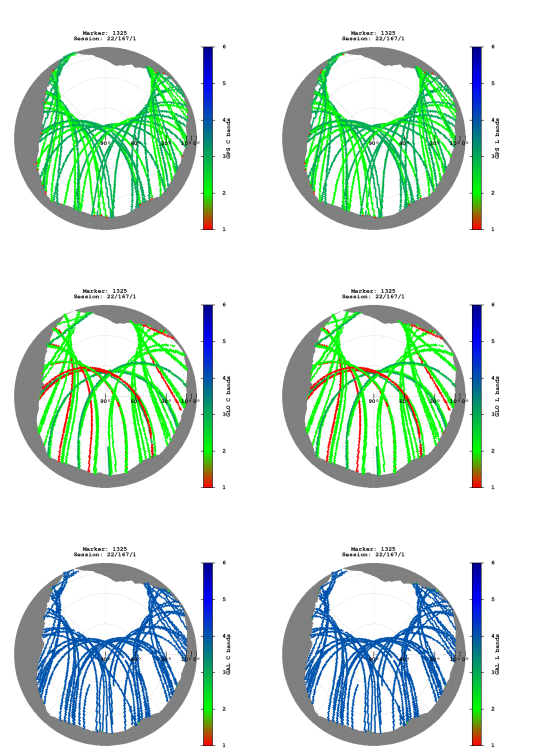


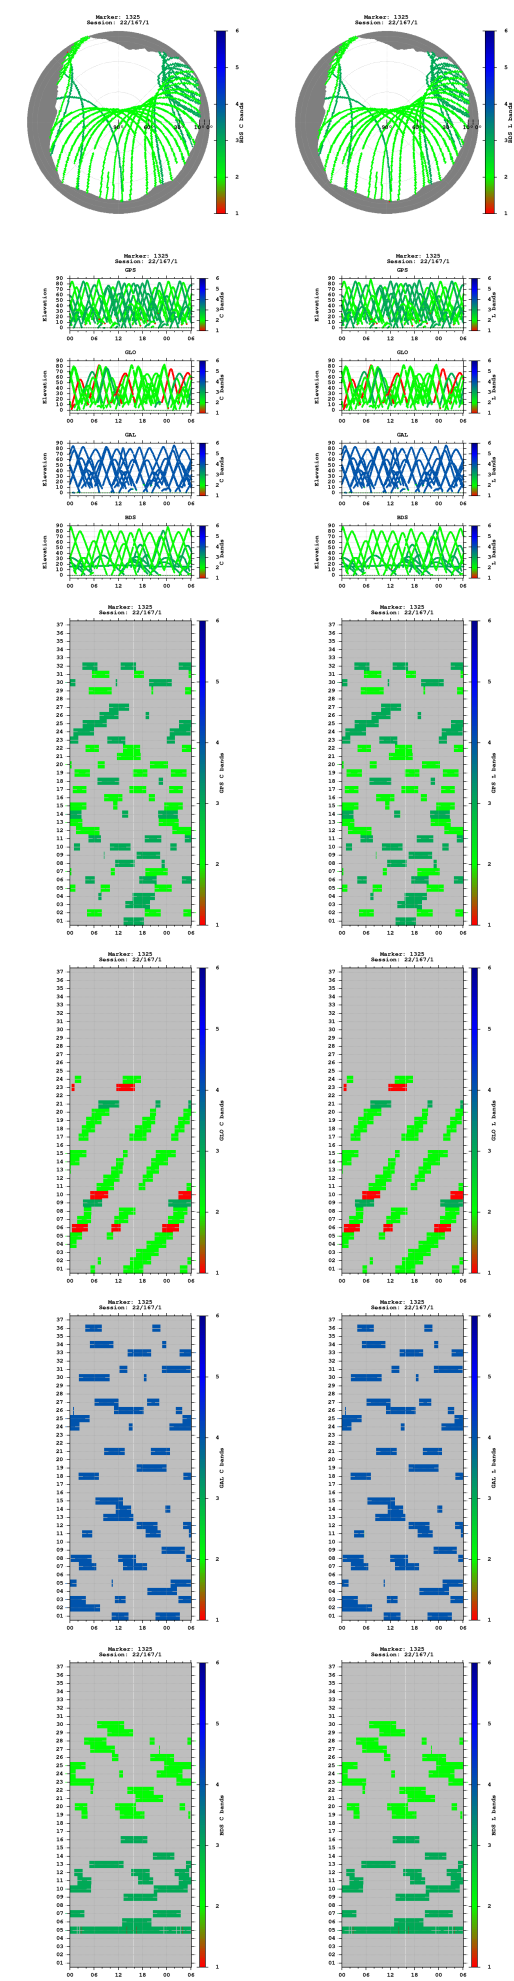


Observations

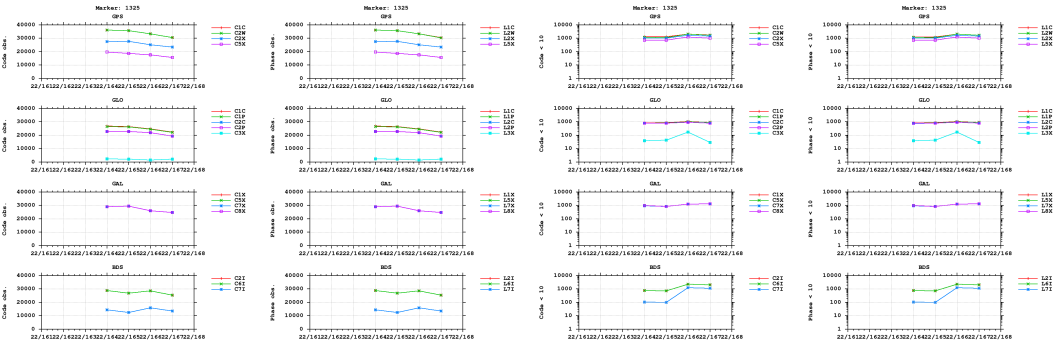



Multipath

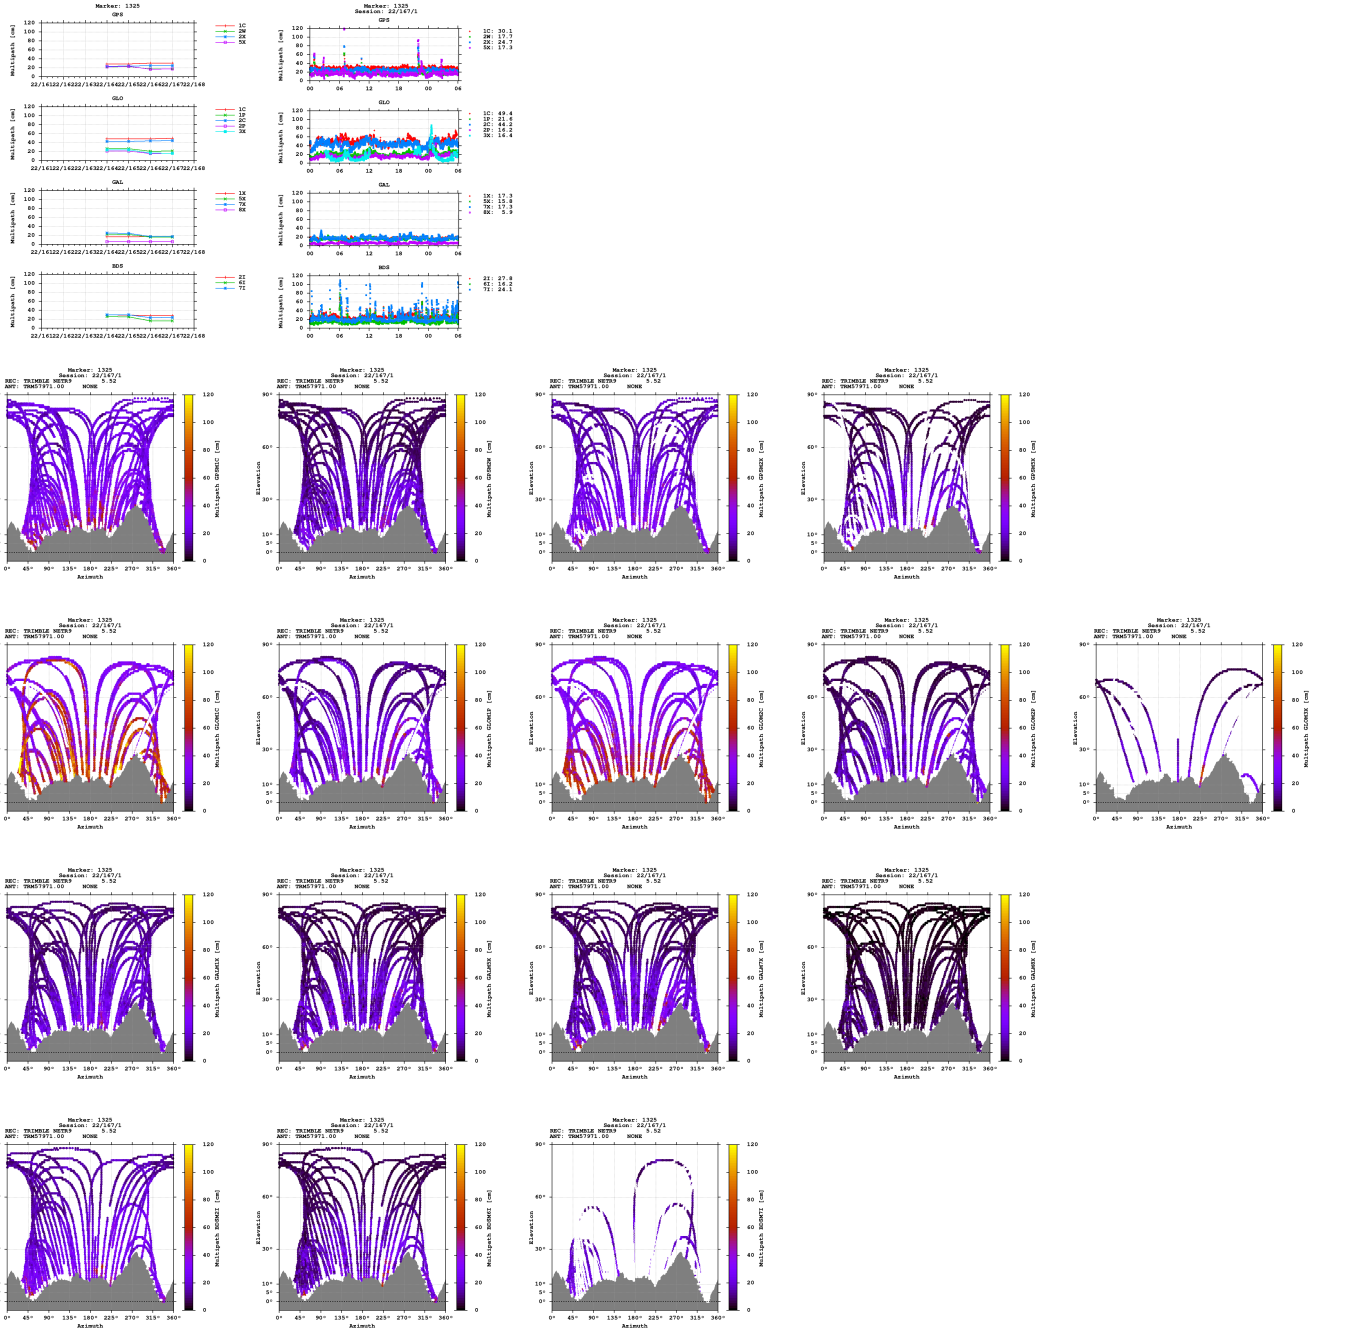


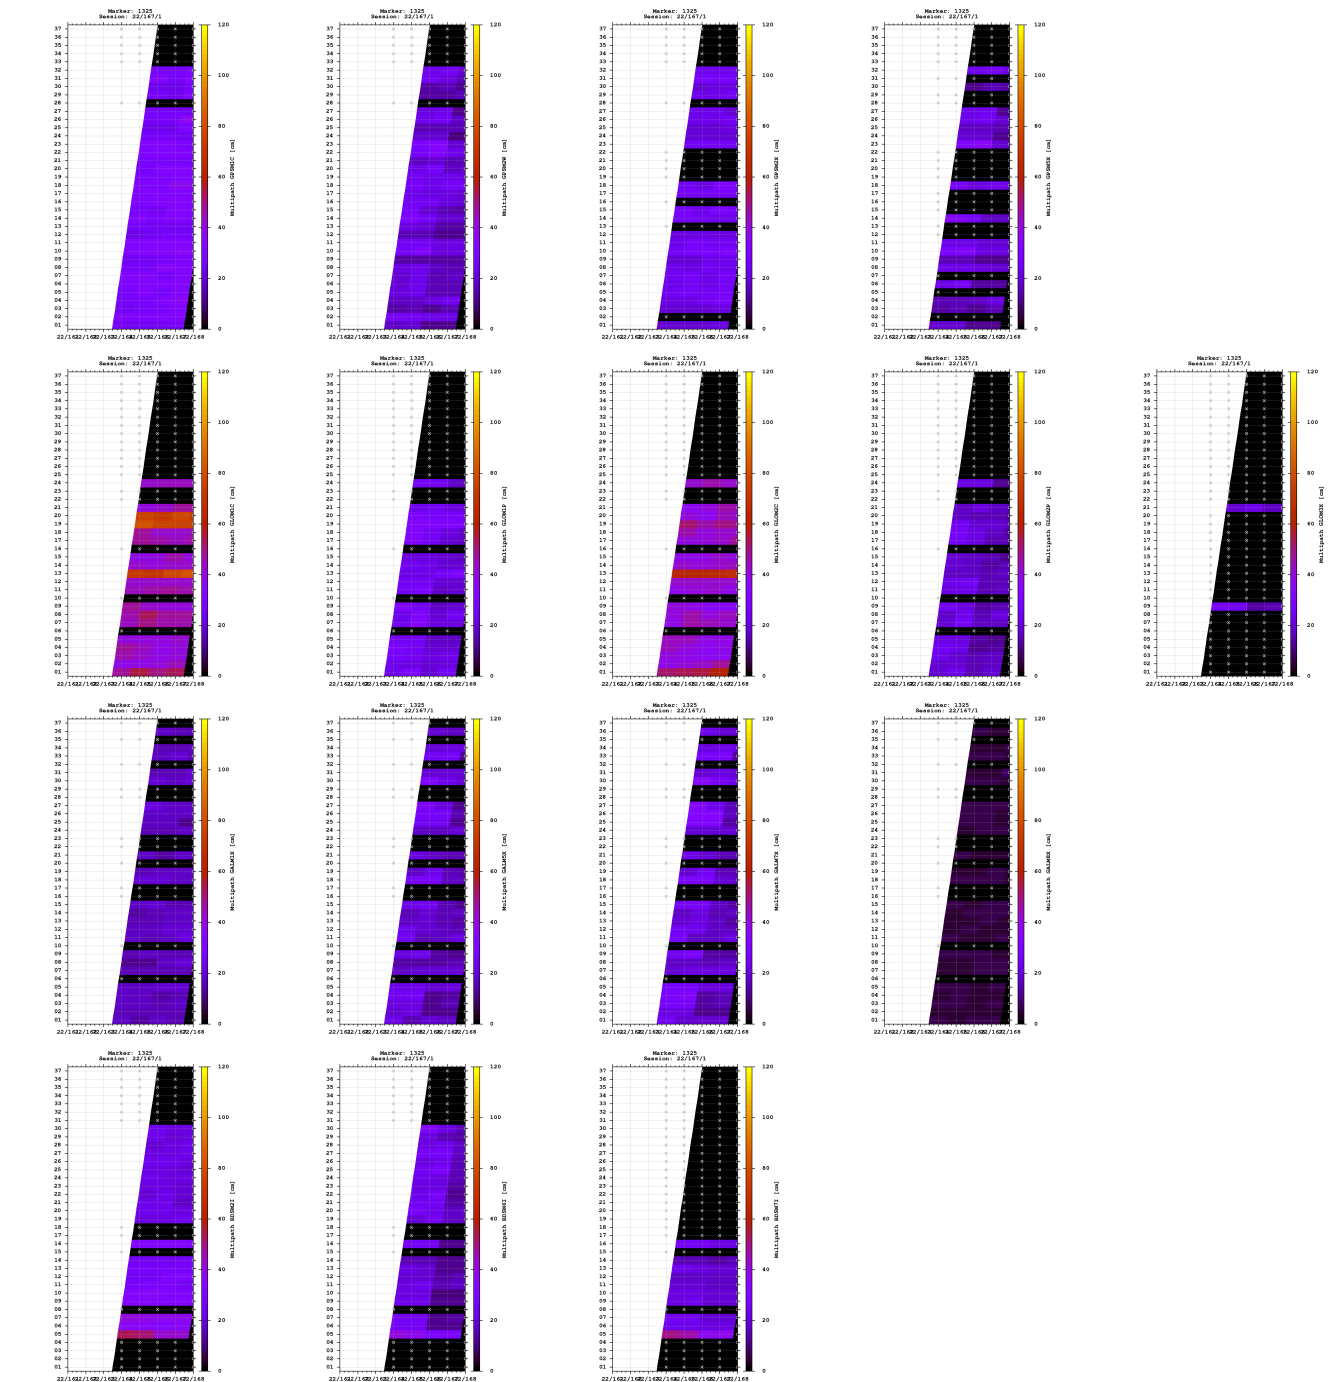


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

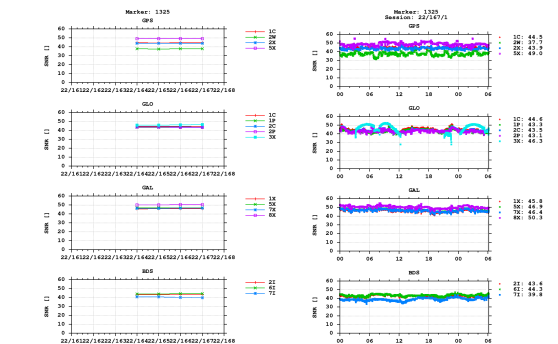


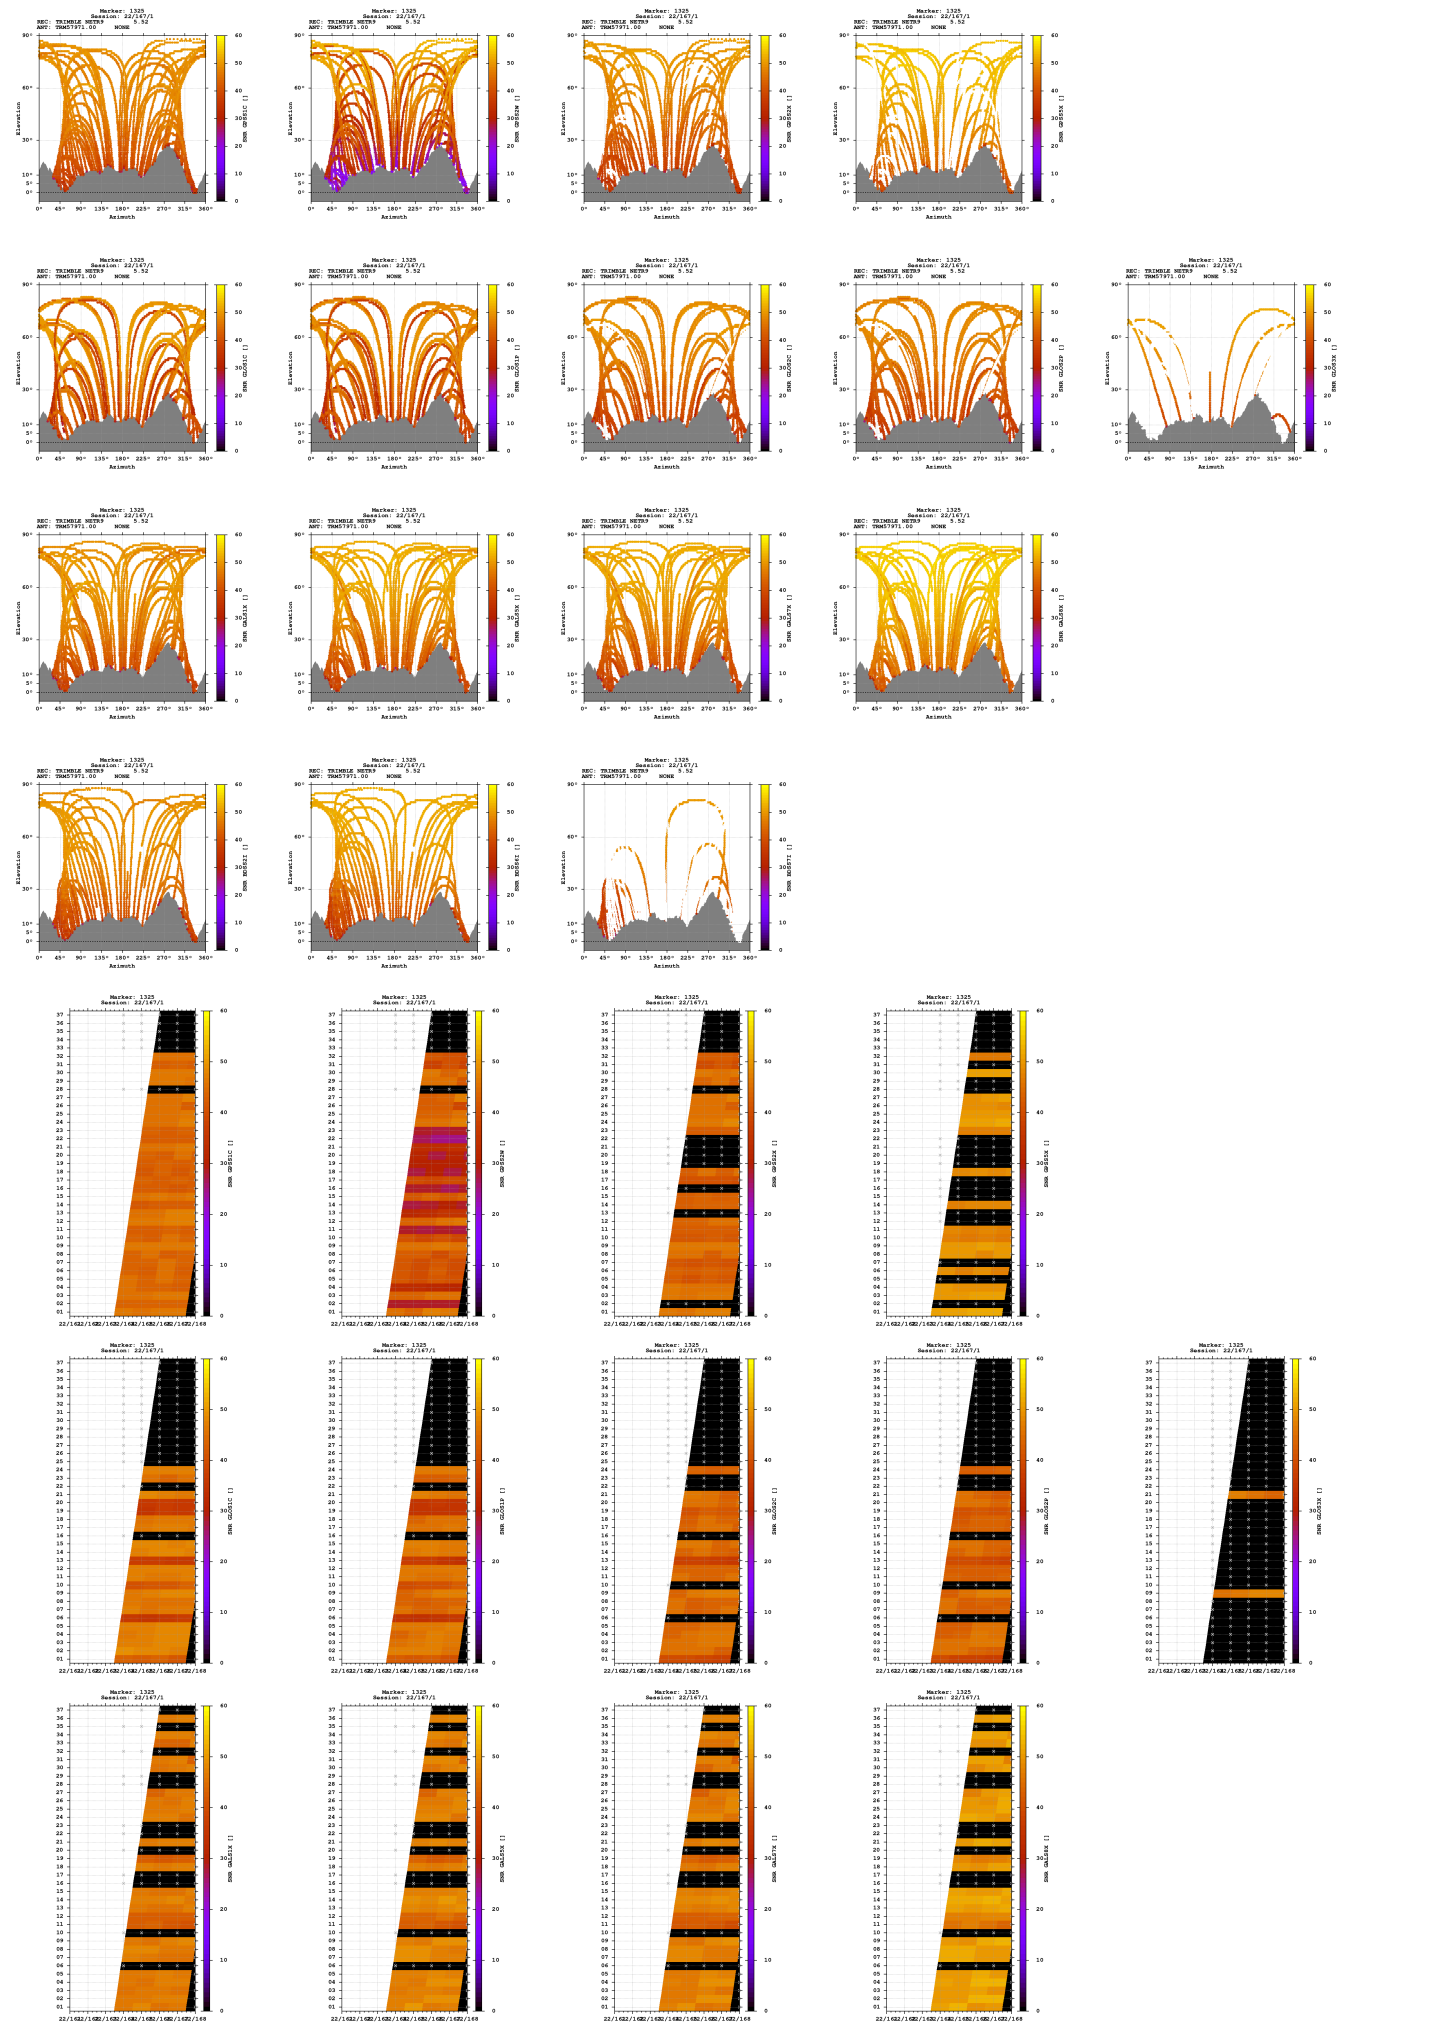

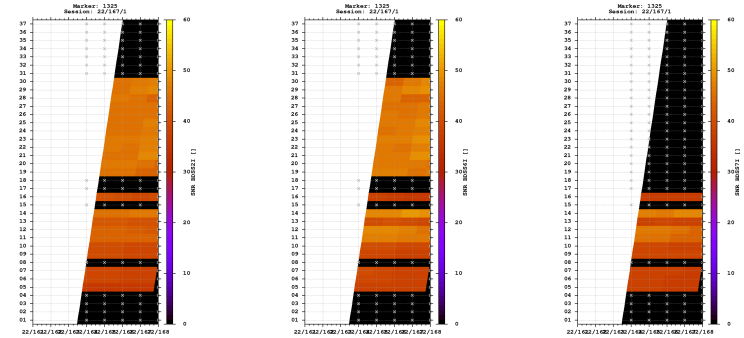



Estimates

2022-06-15 15:14:00	GPS	4396672.6194	545227.3937	4573801.3987	46.105026345	7.069108345	627.4801
2022-06-15 15:14:00	GLO	4396671.8019	545227.8664	4573800.2379	46.105023987	7.069115713	626.1215
2022-06-15 15:14:00	GAL	4396672.2024	545227.3690	4573801.0484	46.105026862	7.069108692	626.9387
2022-06-15 15:14:00	BDS	4396669.6276	545226.8338	4573800.9479	46.105043226	7.069105921	625.0489

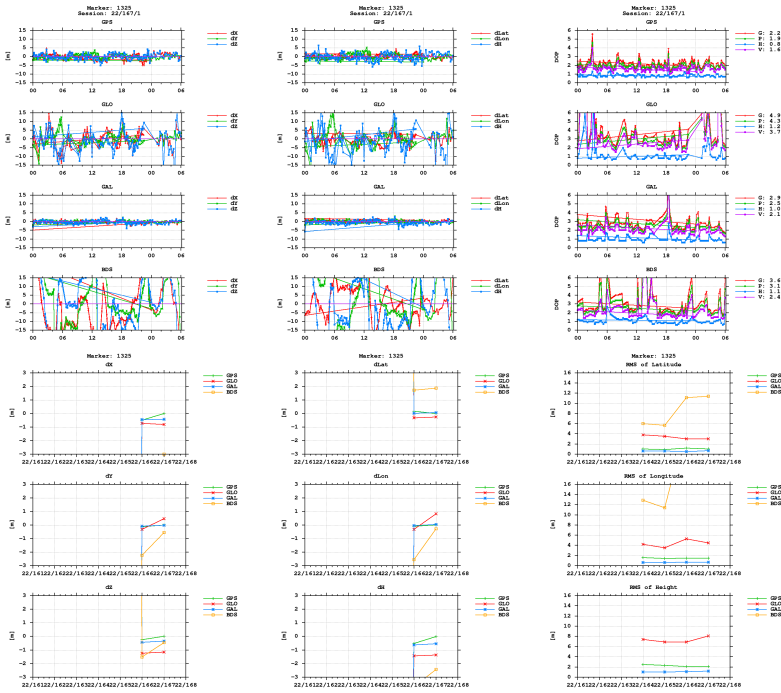

BNC

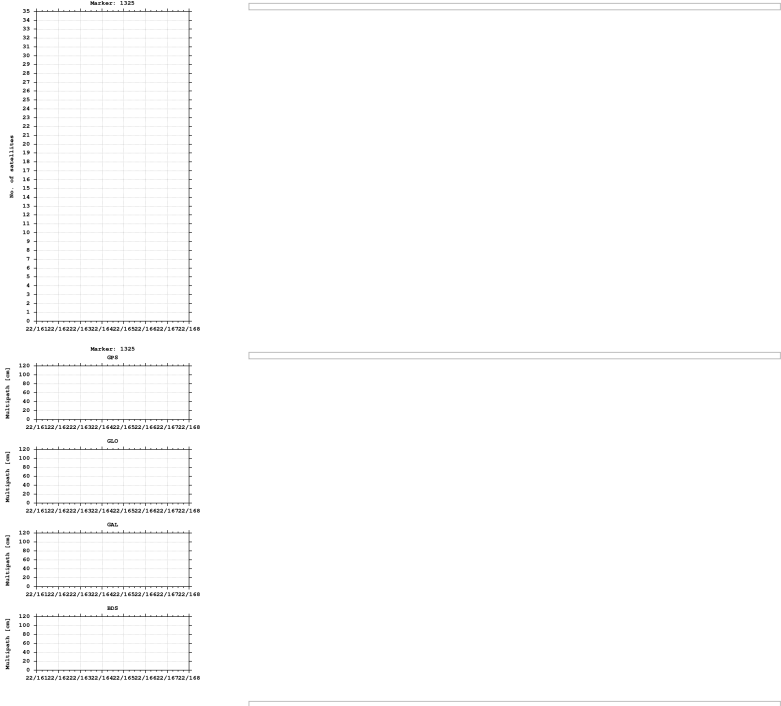

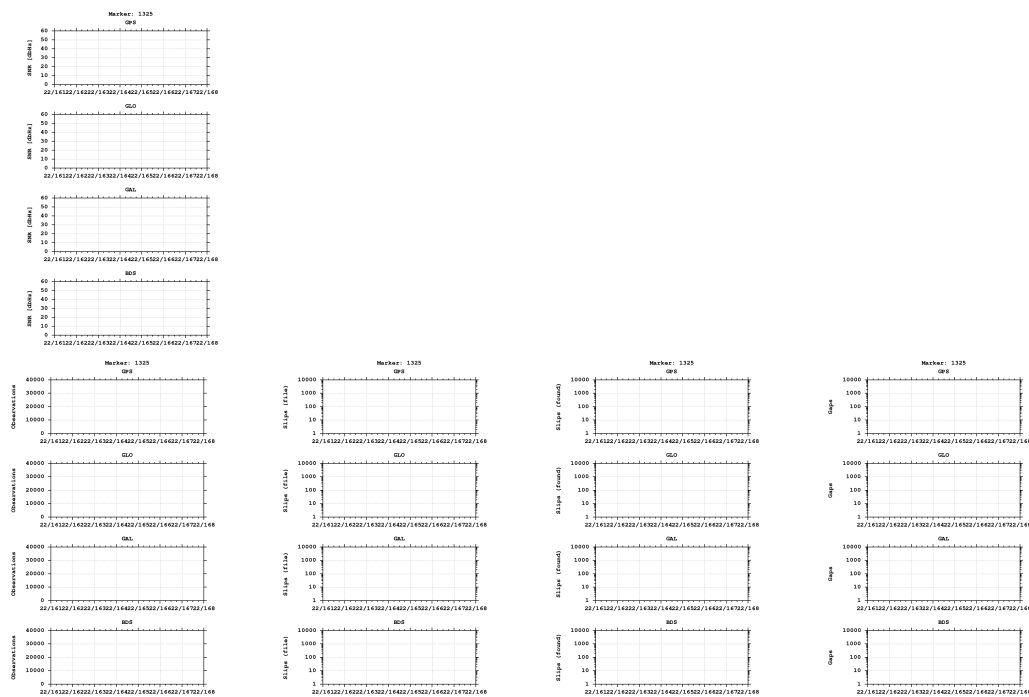

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)