

GNSS observation file monitoring for 0513

Last RINEX file: 05131671.220

RINEX version: 3.02

Marker: 1304

Receiver: 513

Antenna: 513


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

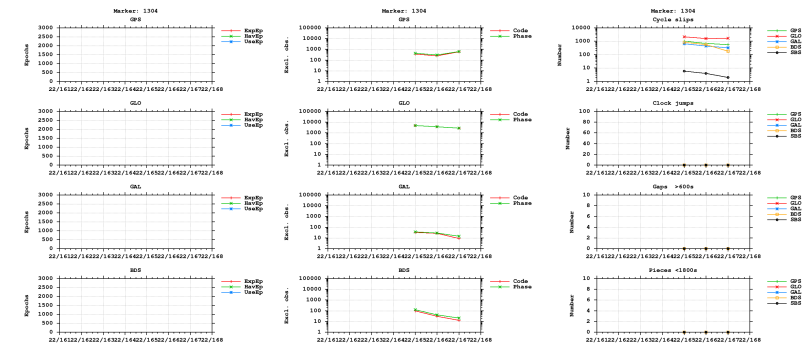



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

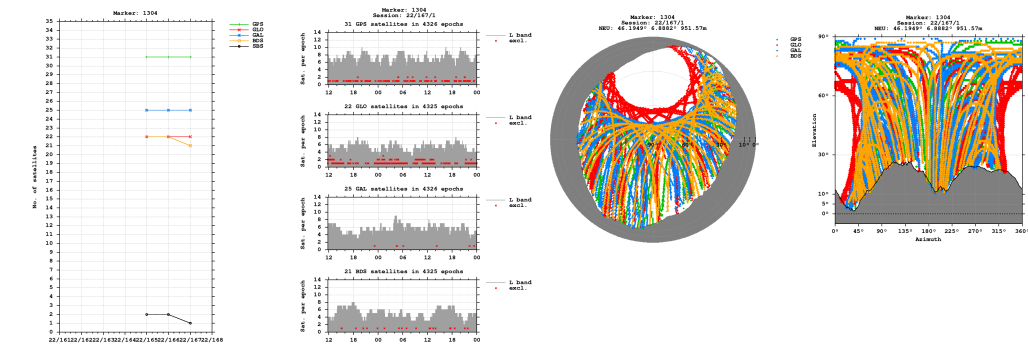


Bands

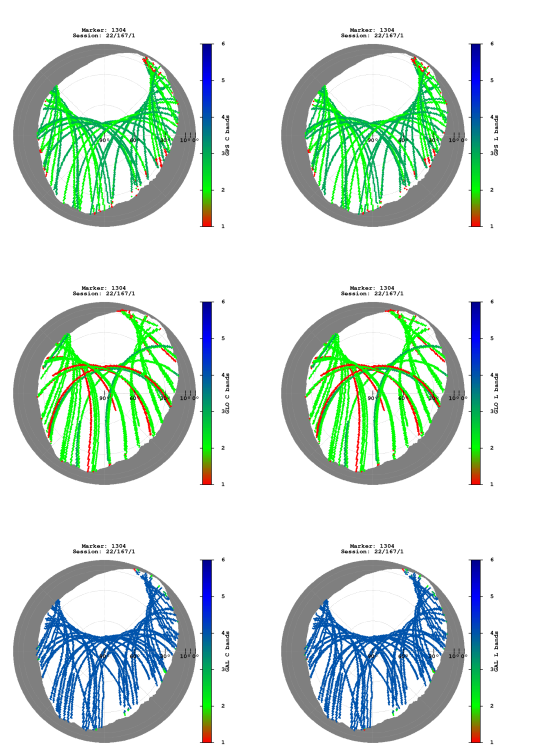


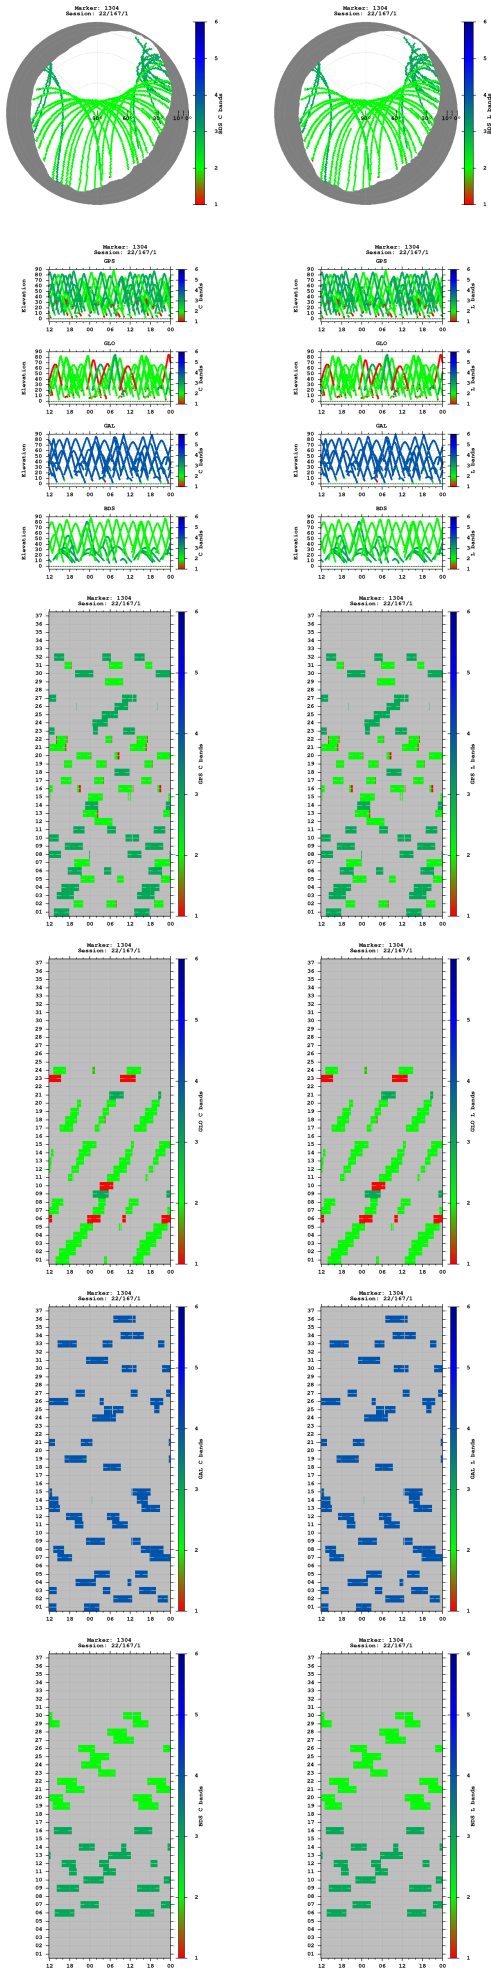


Observations

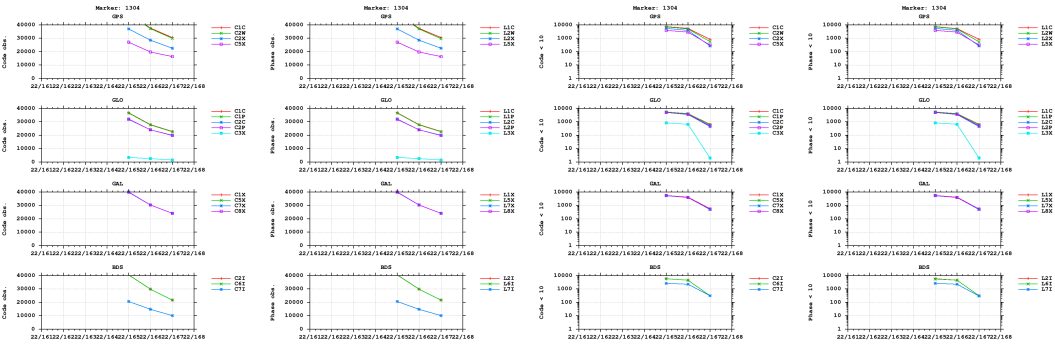


Multipath

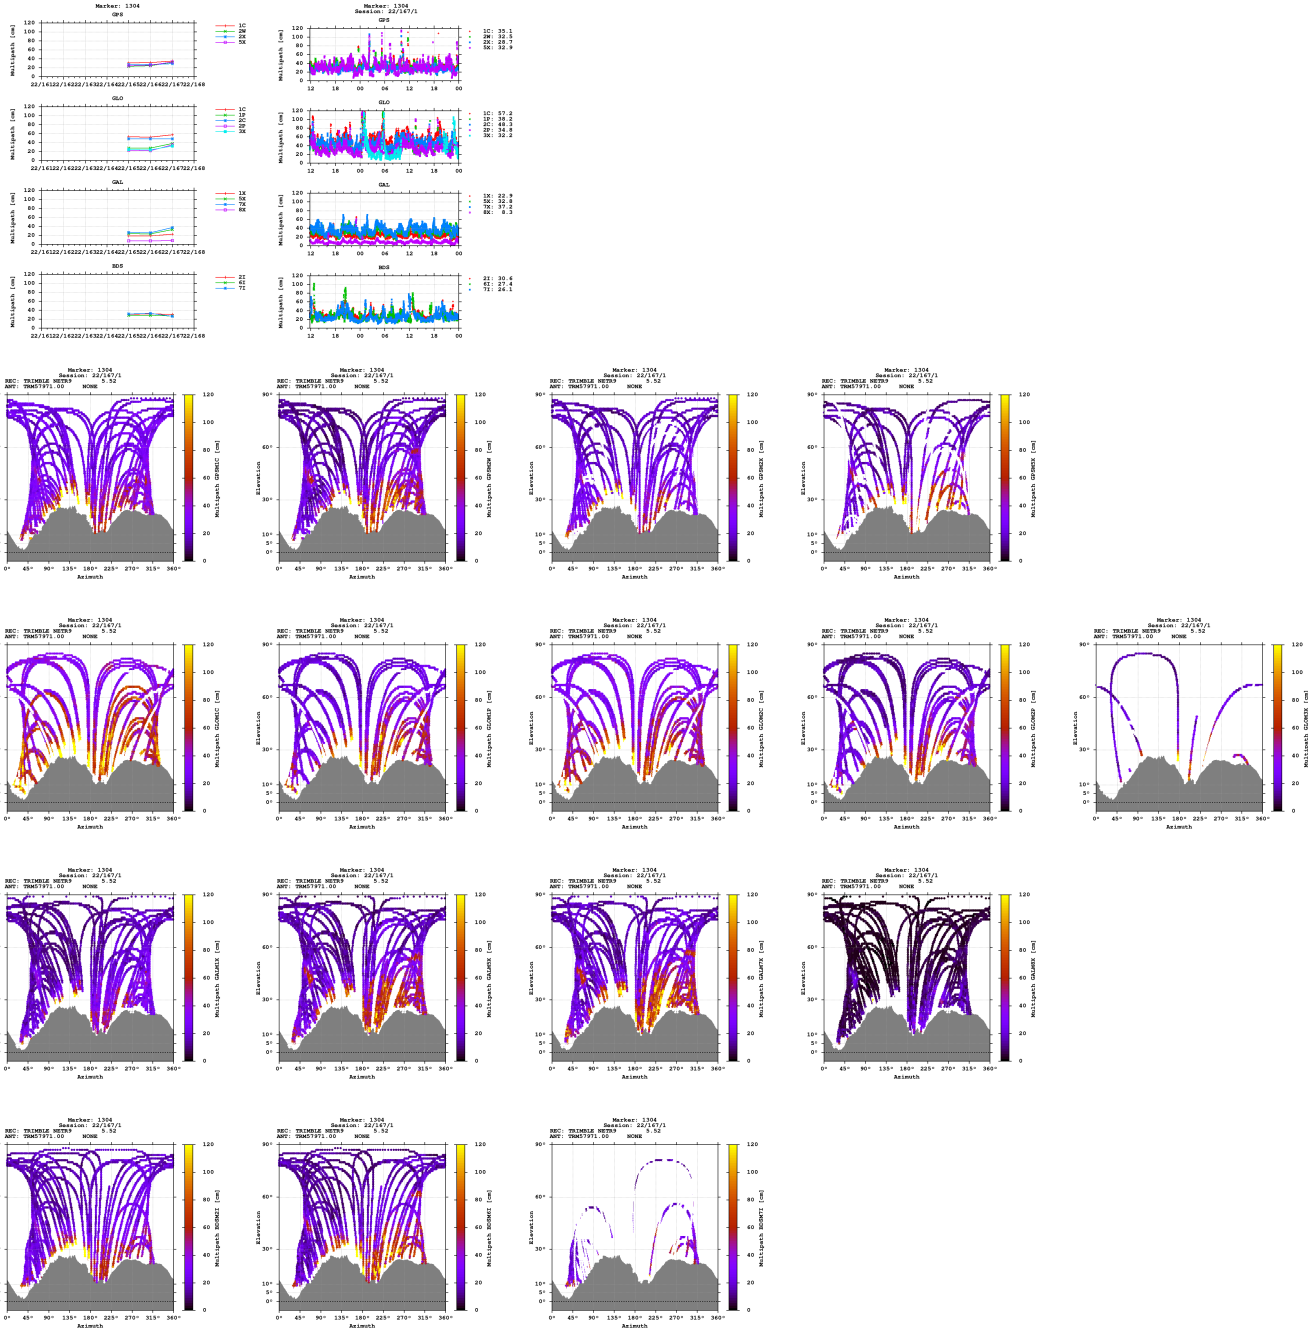


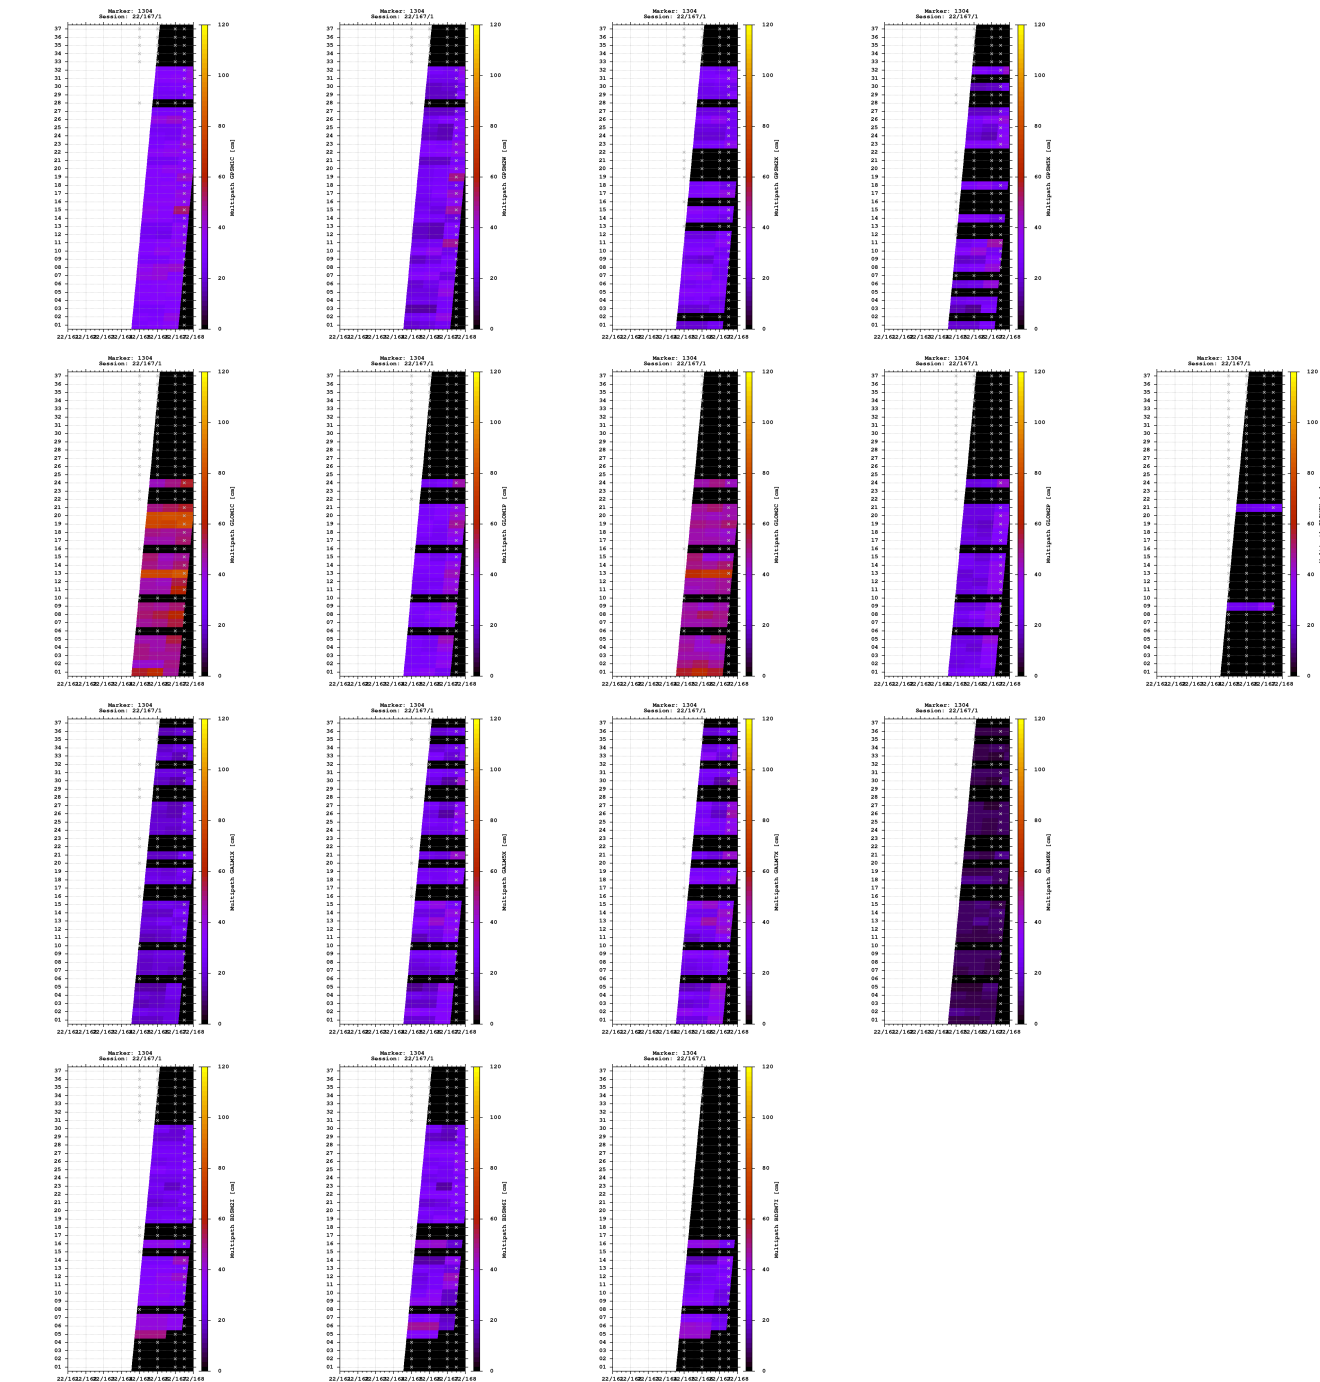


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

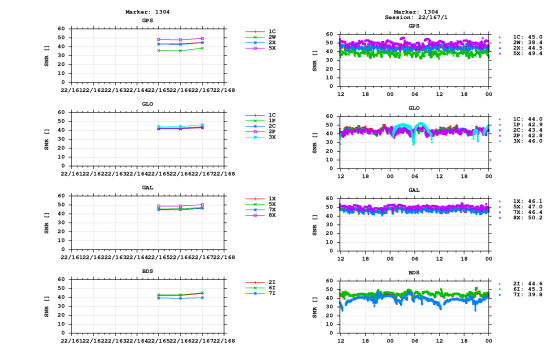


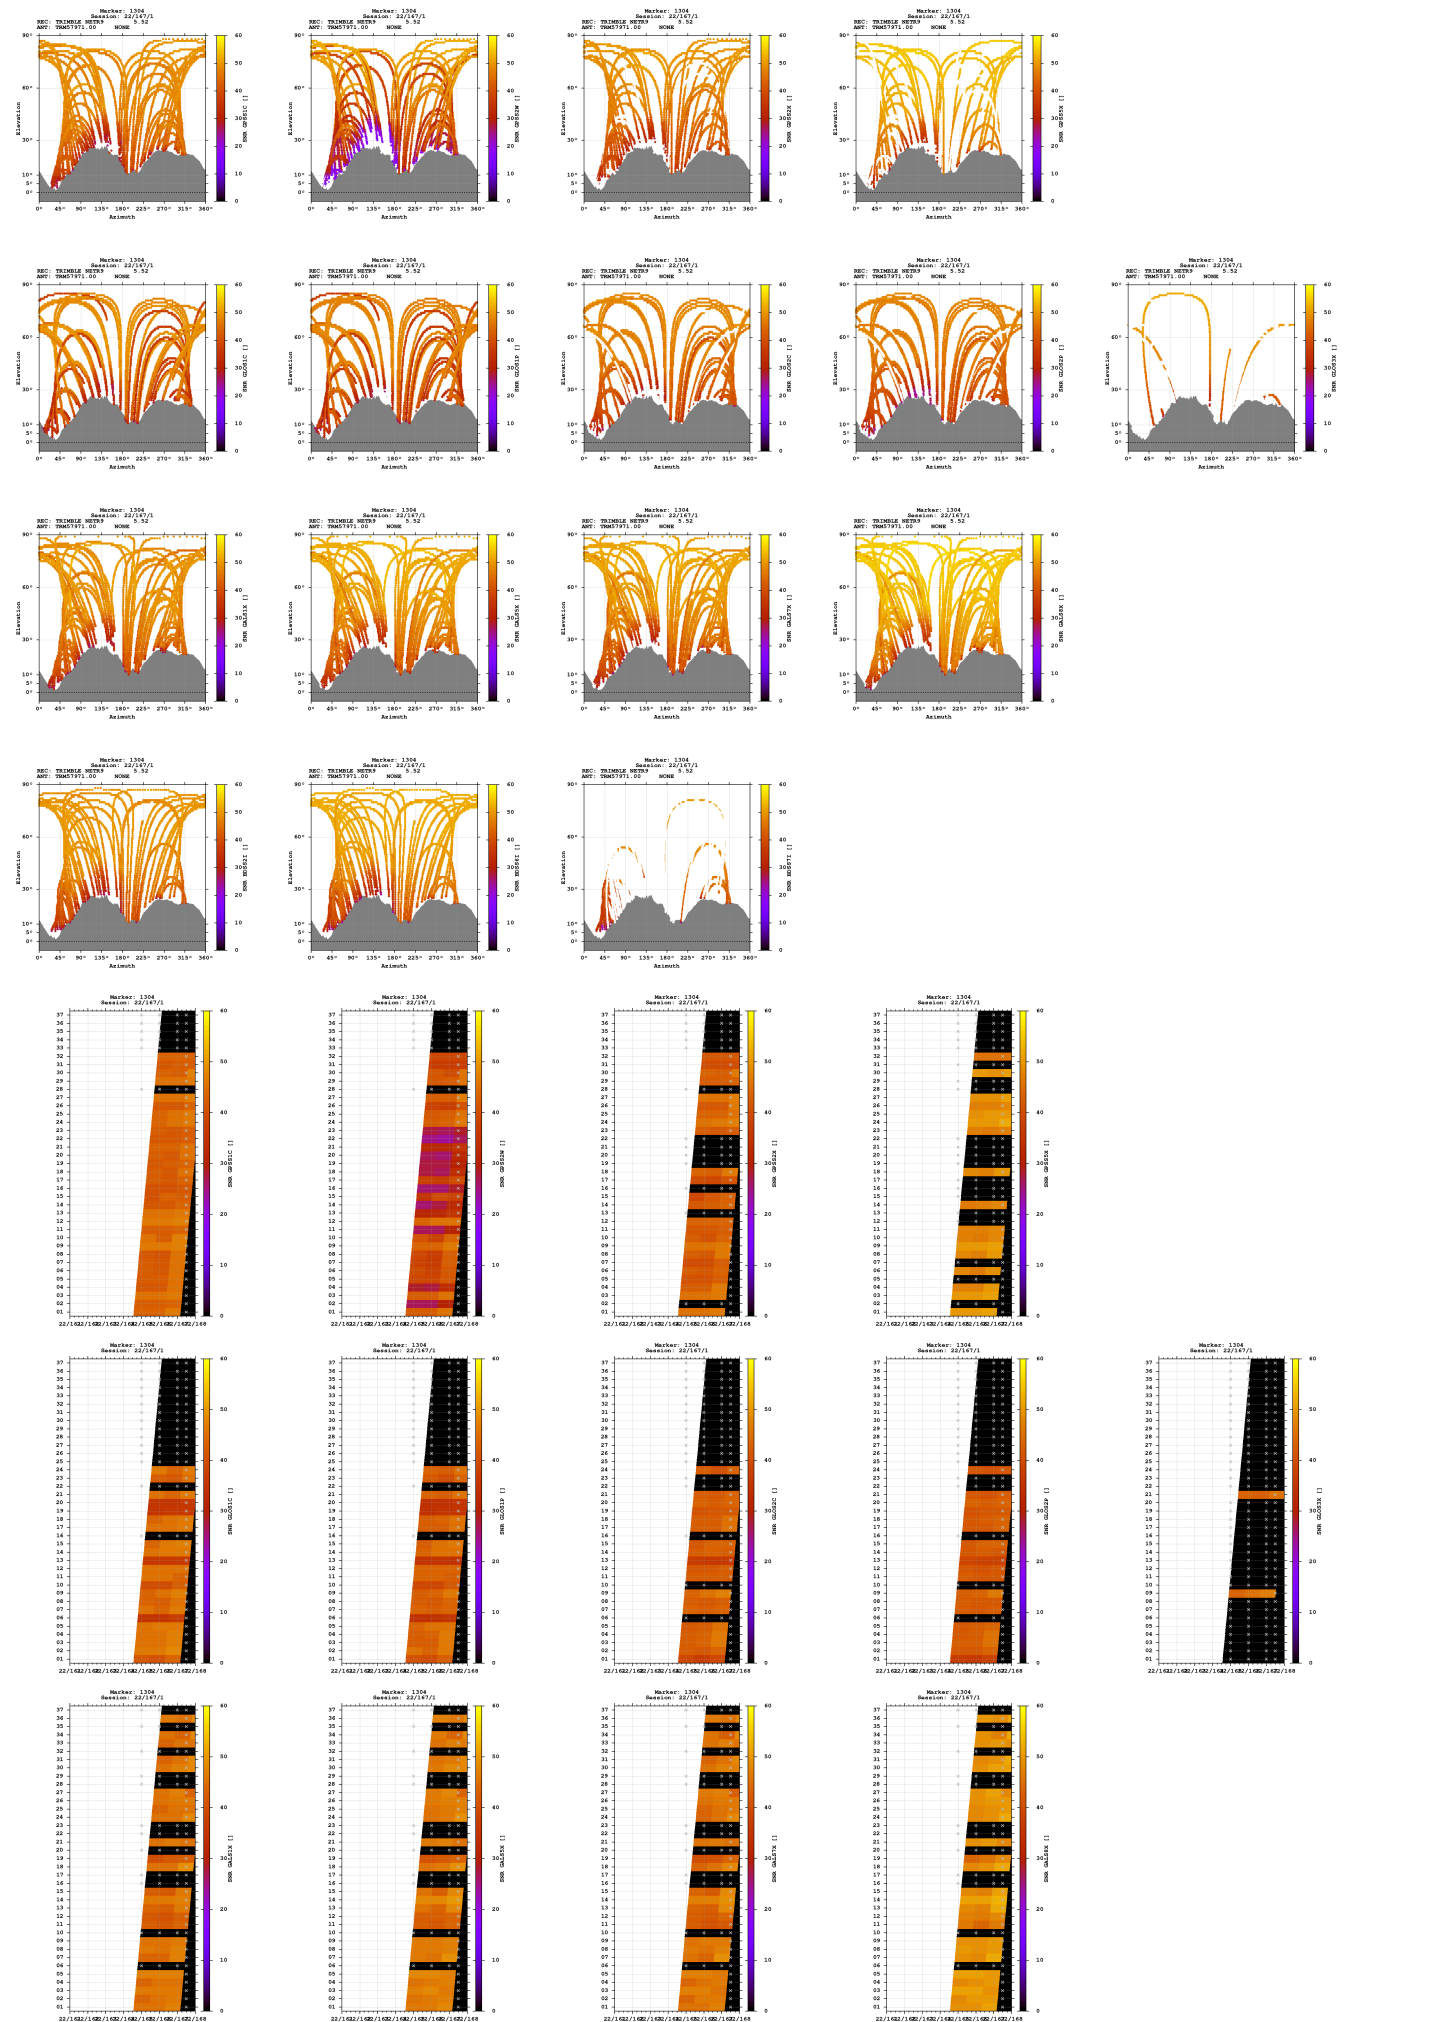

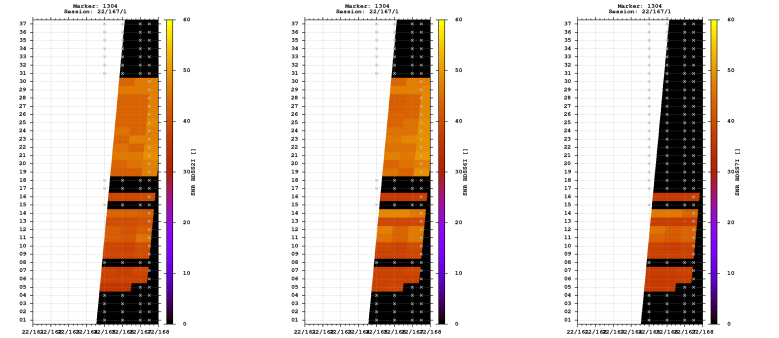



Estimates

2022-06-16 11:49:00	GPS	4391441.2782	530505.4075	4580957.3490	46.194908851	6.888203276	951.5702
2022-06-16 11:49:00	GLO	4391441.6493	530505.4450	4580957.3122	46.194906201	6.888203182	951.8018
2022-06-16 11:49:00	GAL	4391441.4189	530505.2974	4580957.3980	46.194908334	6.888201641	951.6931
2022-06-16 11:49:00	BDS	4391442.4654	530506.8788	4580960.9165	46.194922266	6.888220351	955.0829

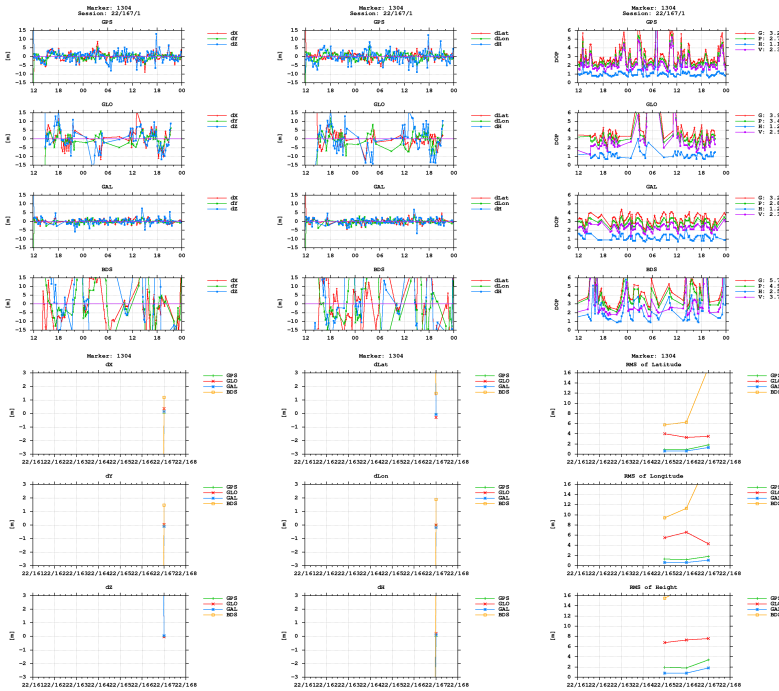

BNC

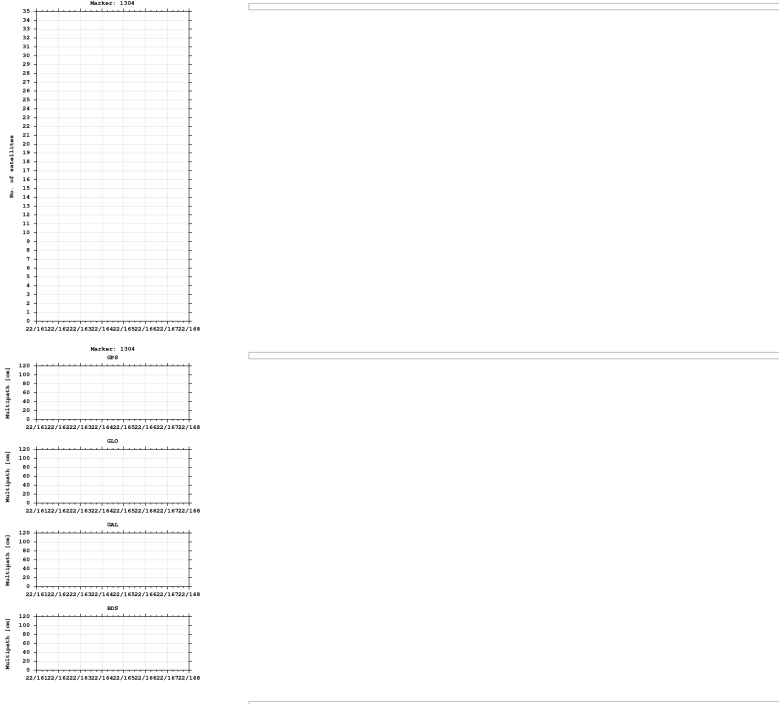

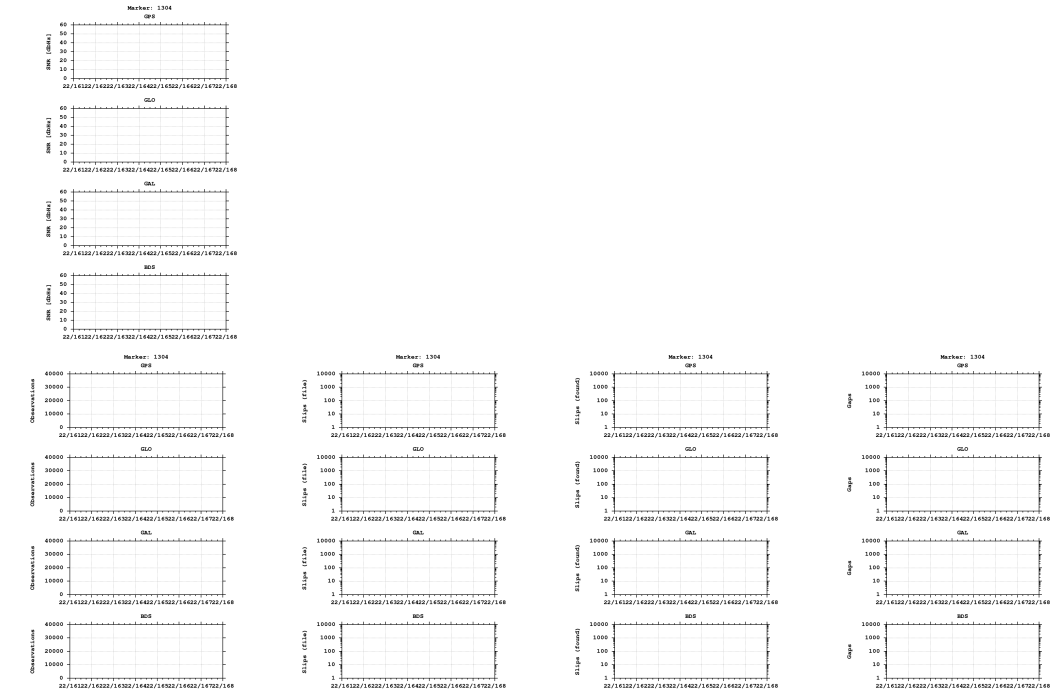

Equipment

2022-06-14 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)