


GNSS observation file monitoring for 0514


Last RINEX file: 05141651.22O
RINEX version: 3.02
Marker: 1264
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

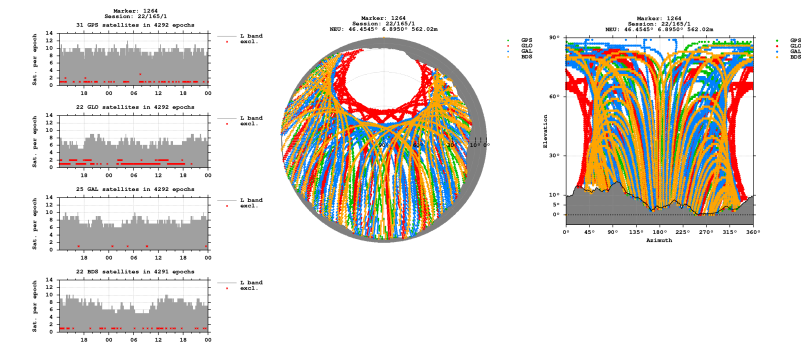


Bands

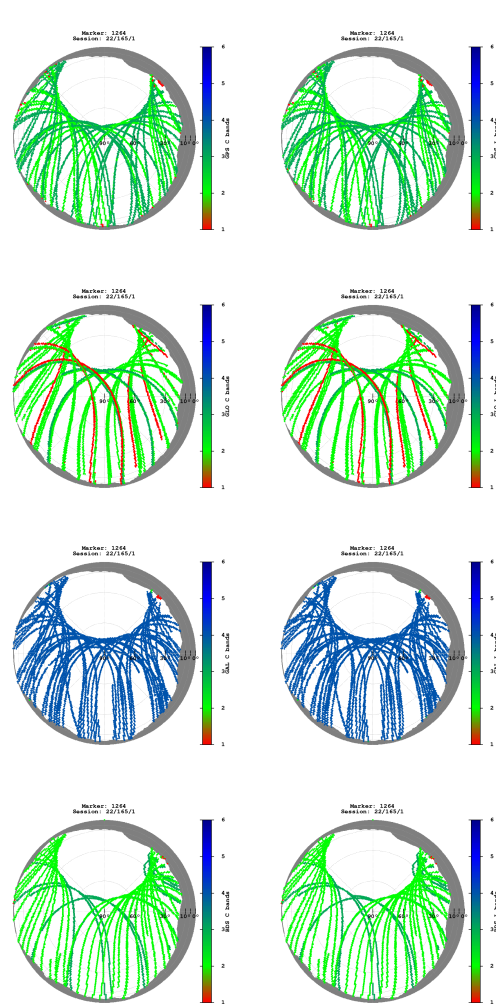

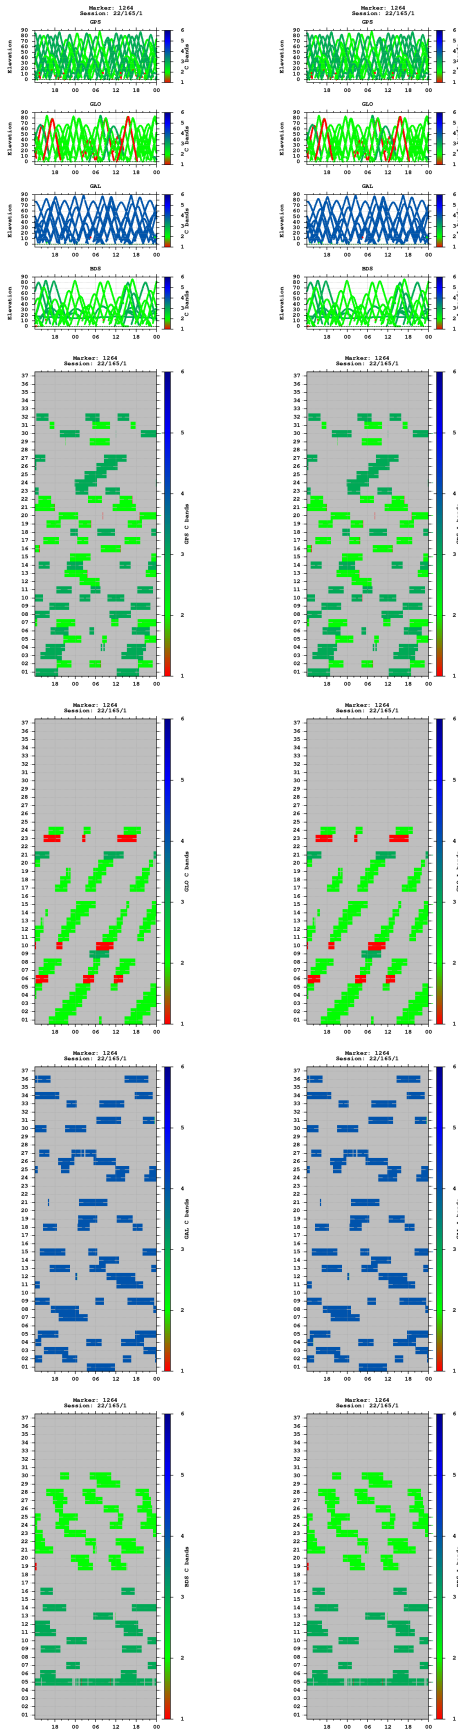



Multipath

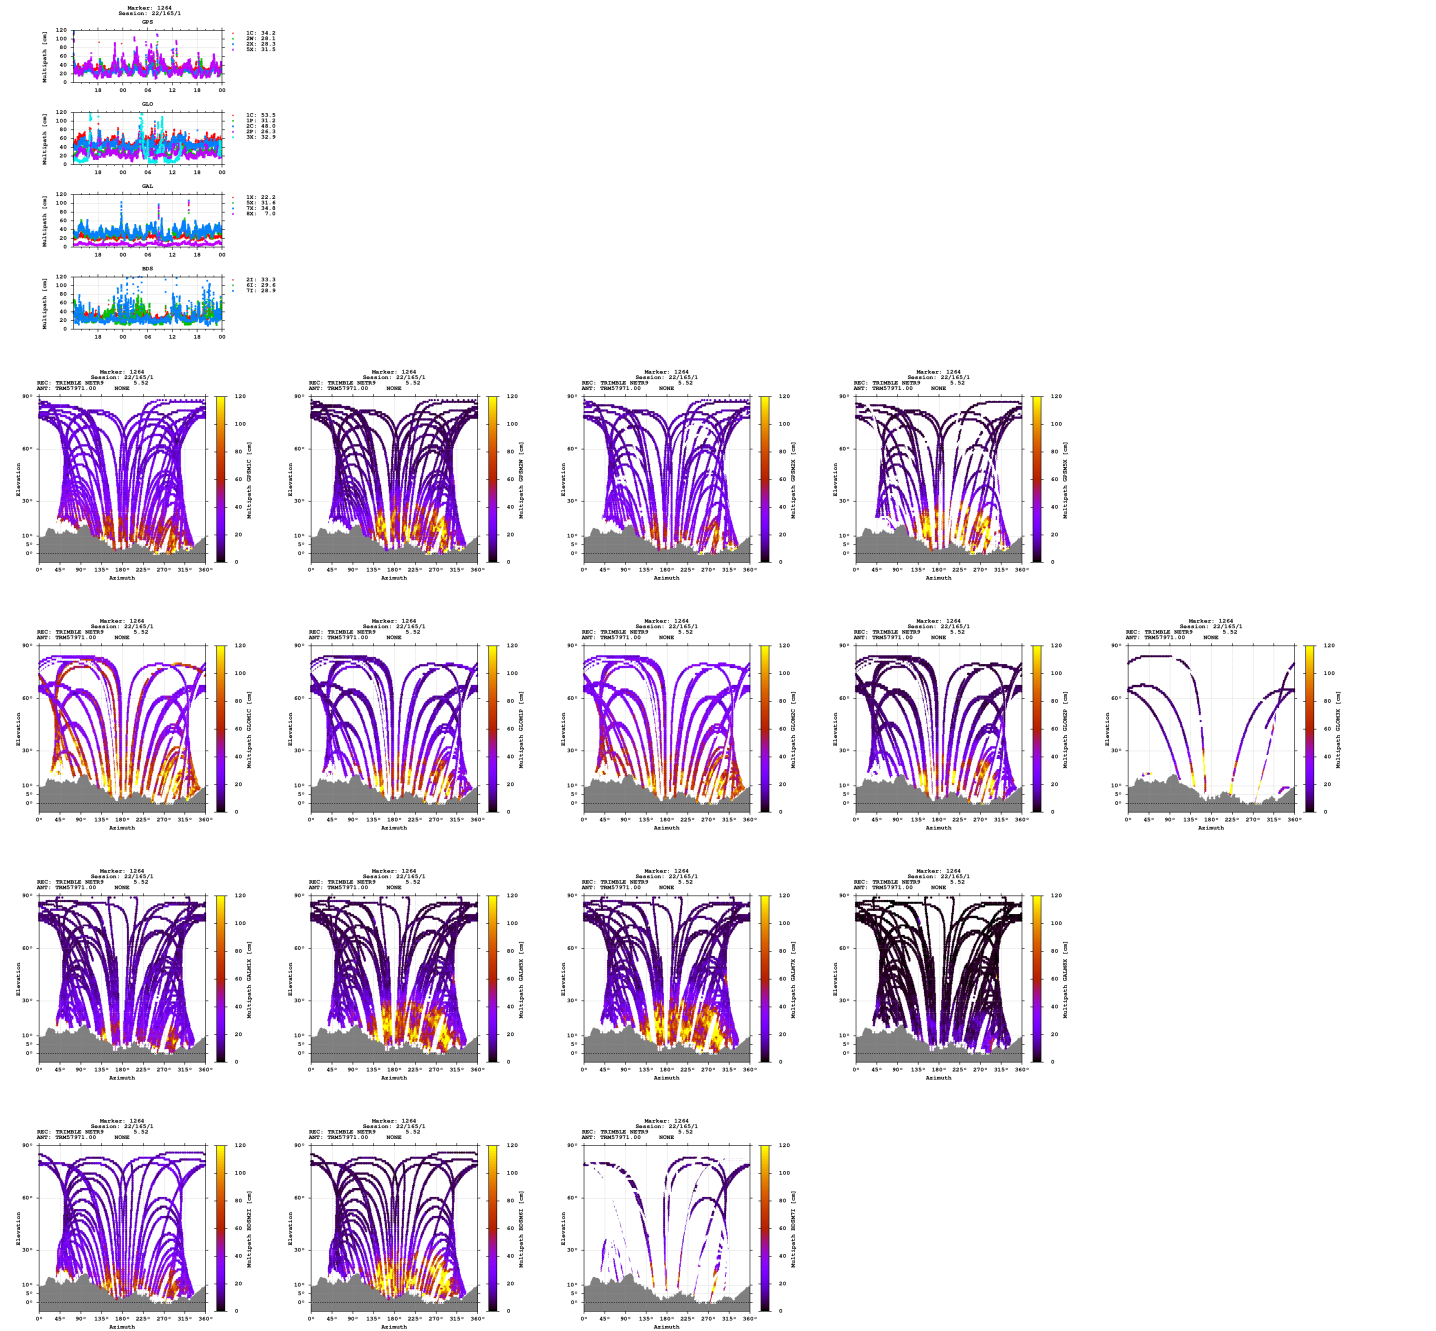

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

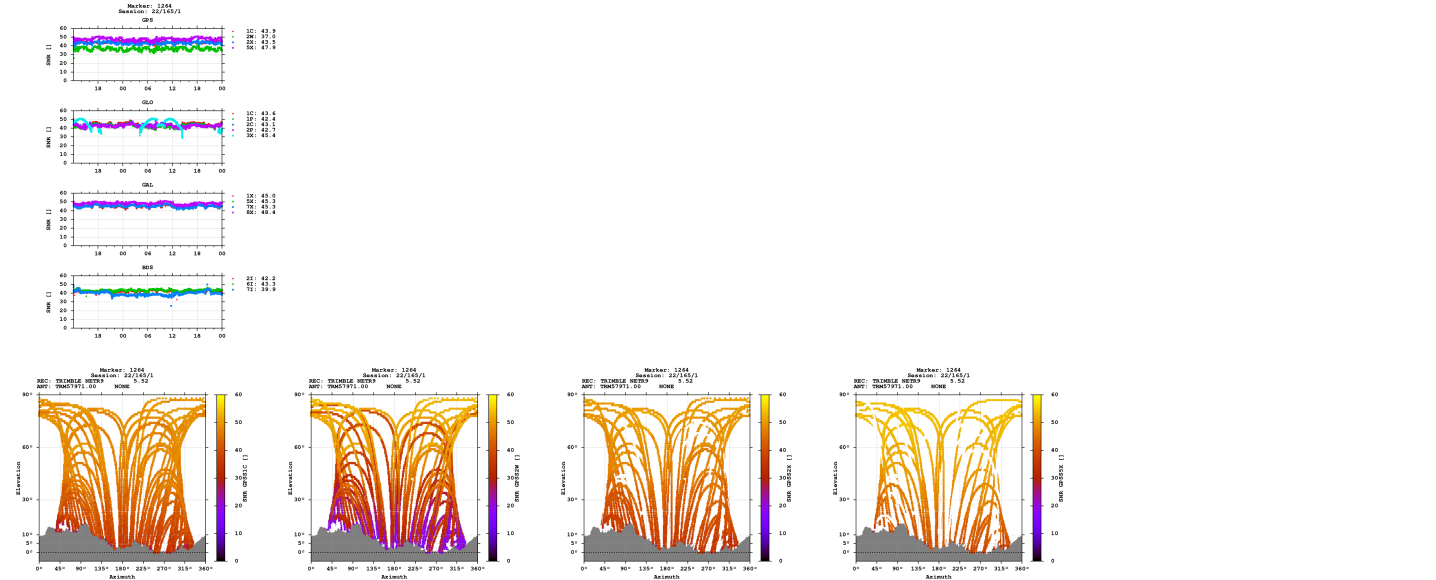

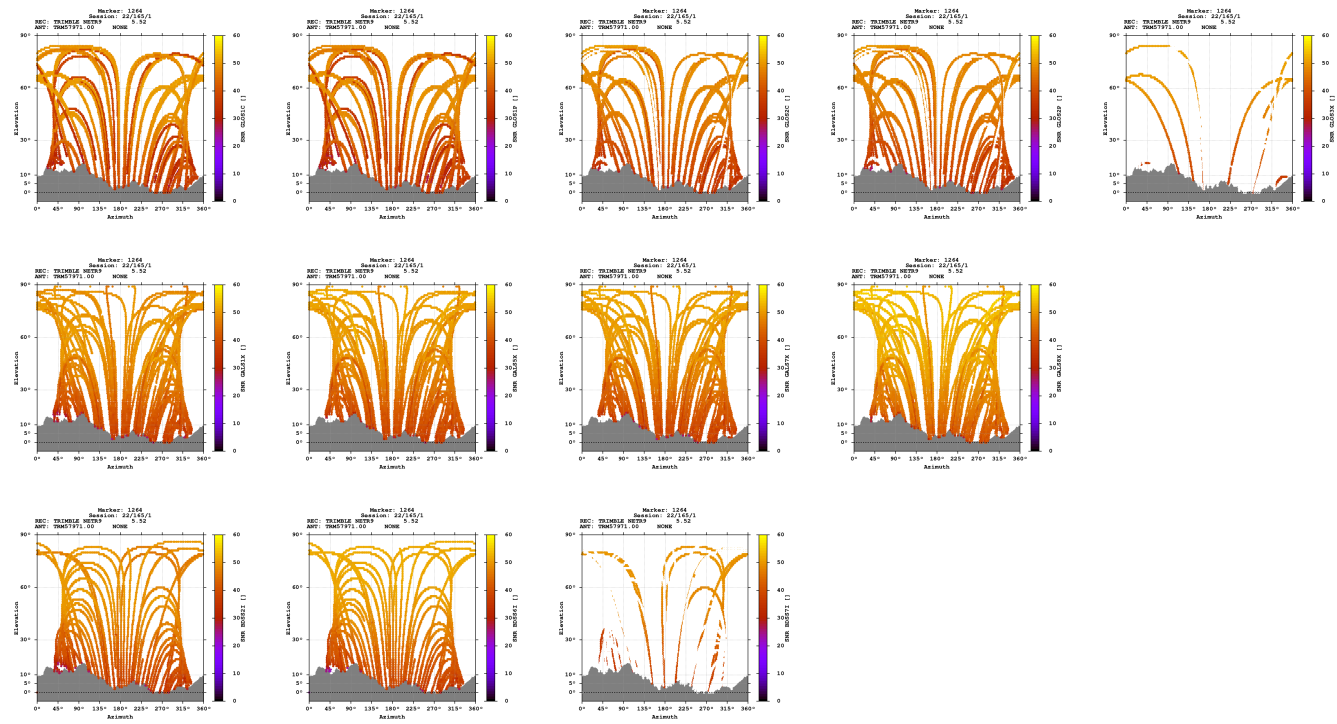

Estimates

2022-06-14 12:08:00	GPS	4370392.1516	528491.9917	4600601.8553	46.454462274	6.895043918	562.0212
2022-06-14 12:08:00	GLO	4370392.0823	528491.8967	4600601.3864	46.454459891	6.895042799	561.6261
2022-06-14 12:08:00	GAL	4370392.1970	528492.0551	4600601.5945	46.454460314	6.895044667	561.8686
2022-06-14 12:08:00	BDS	4370391.2209	528491.2456	4600602.0487	46.454470080	6.895035732	561.4632

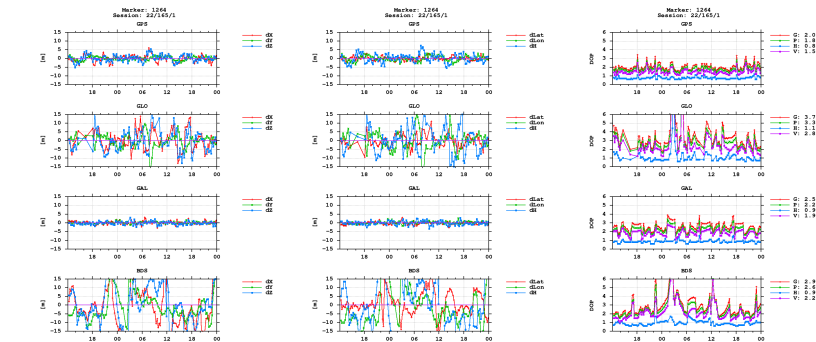

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)