

GNSS observation file monitoring for 0514

Last RINEX file: 05141661.220

RINEX version: 3.02

Marker: 1264

Receiver: 514

Antenna: 514


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

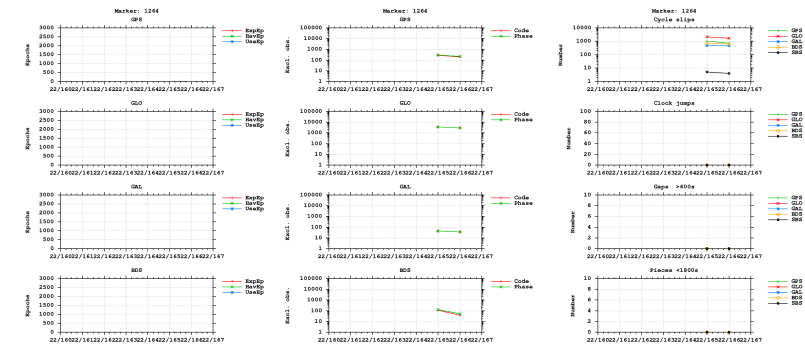



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

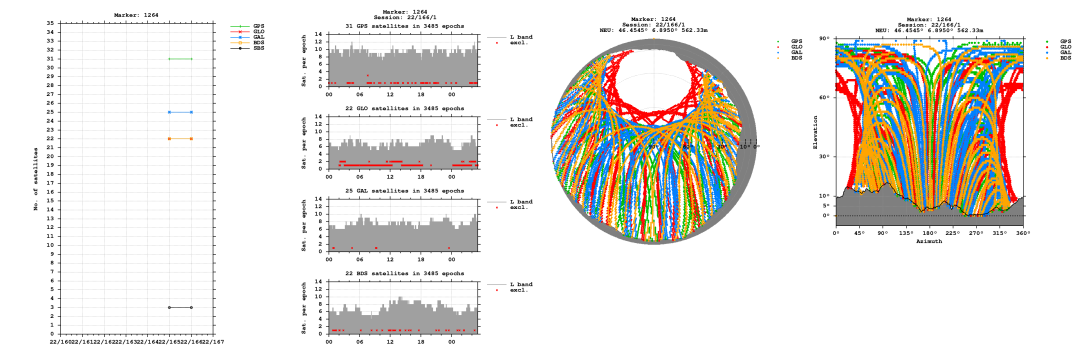


Bands

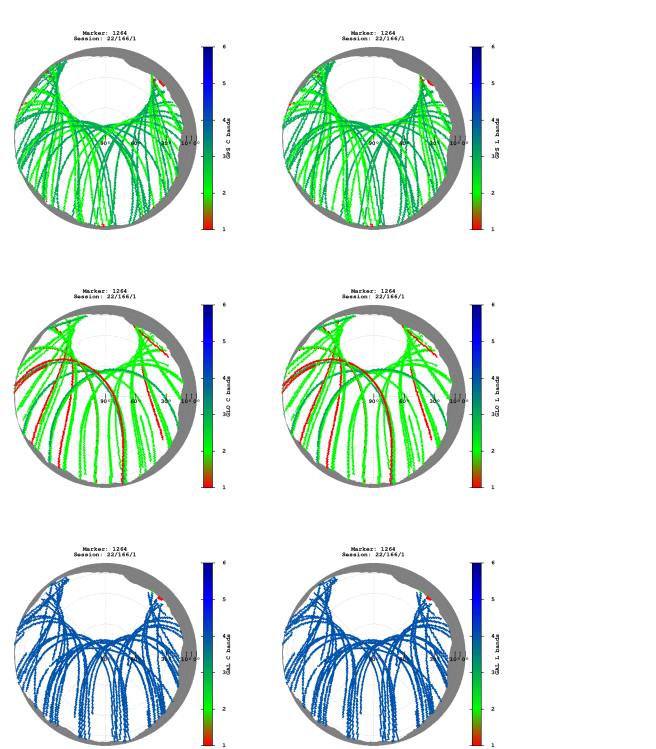


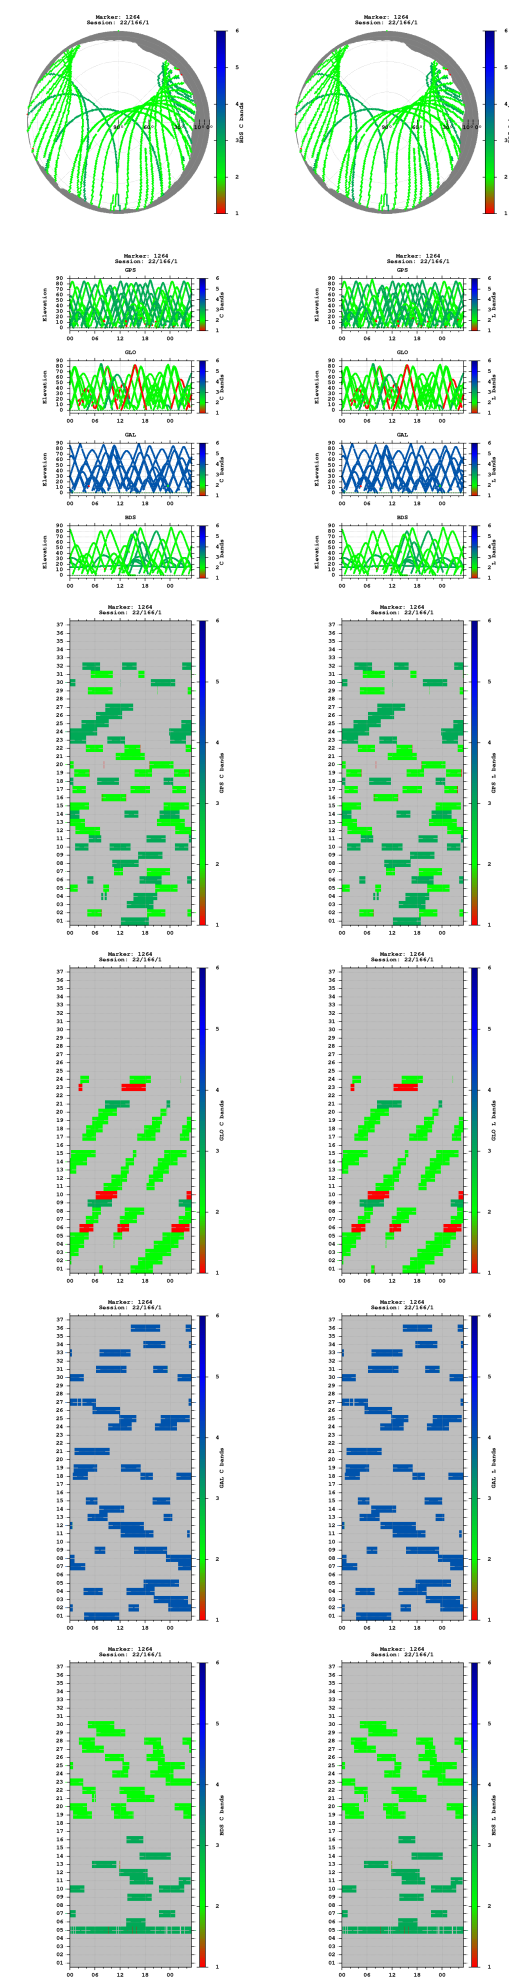


Observations

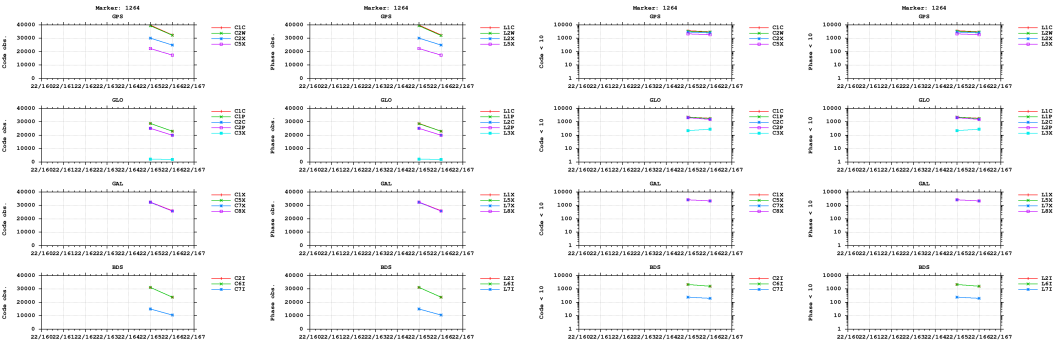


Multipath

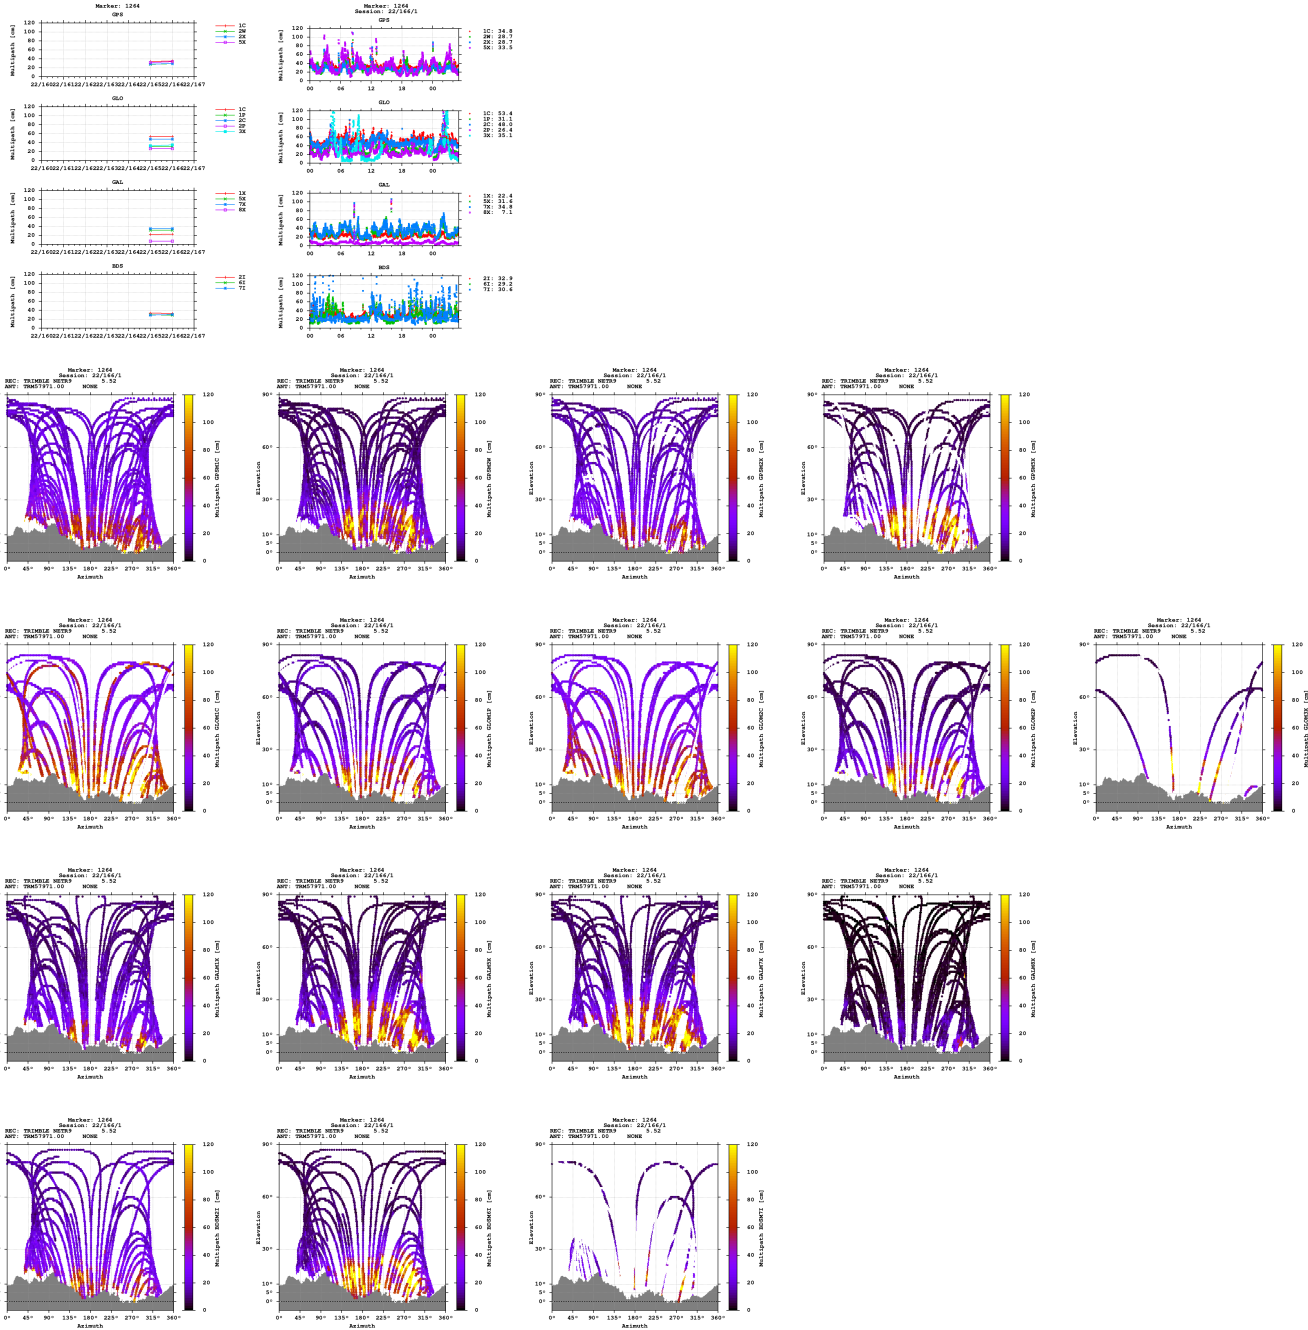


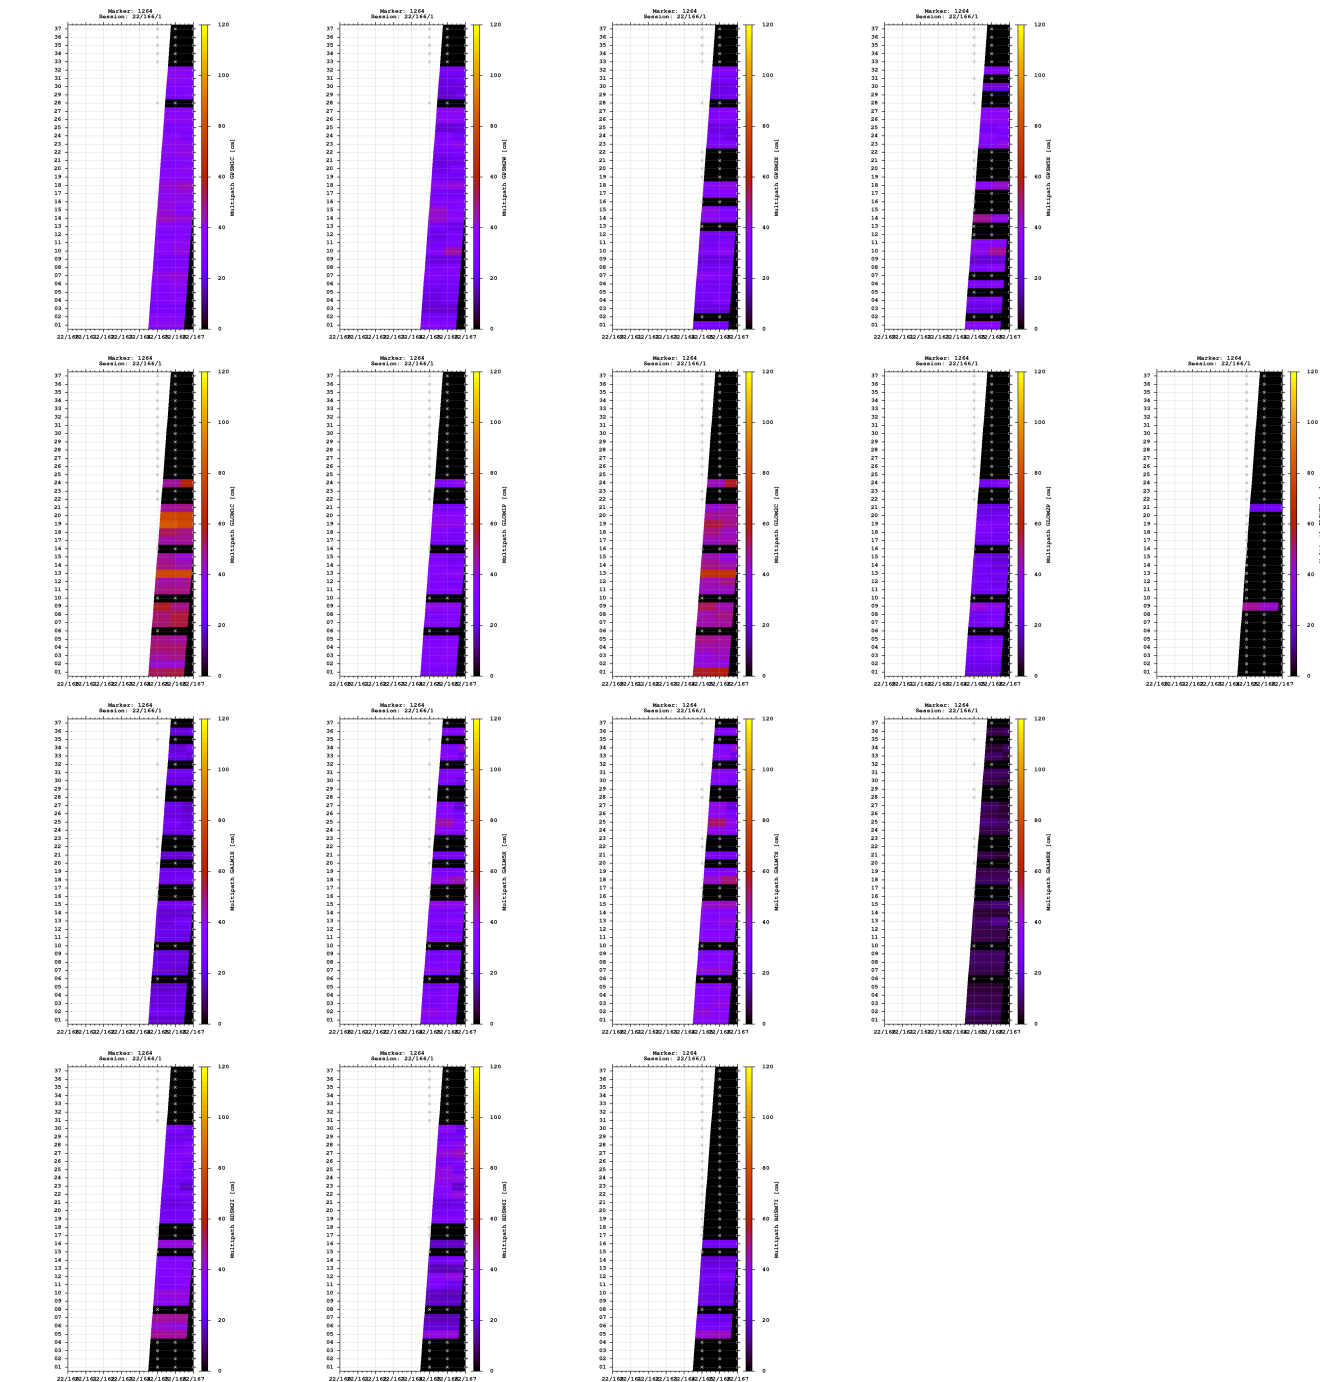


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

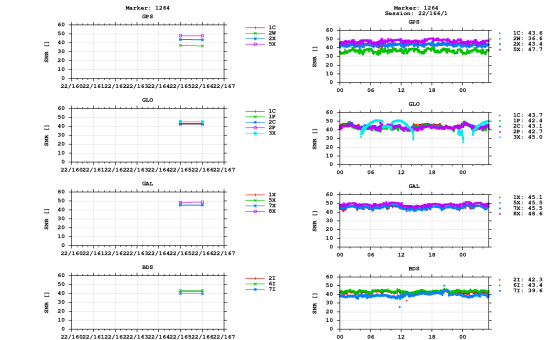


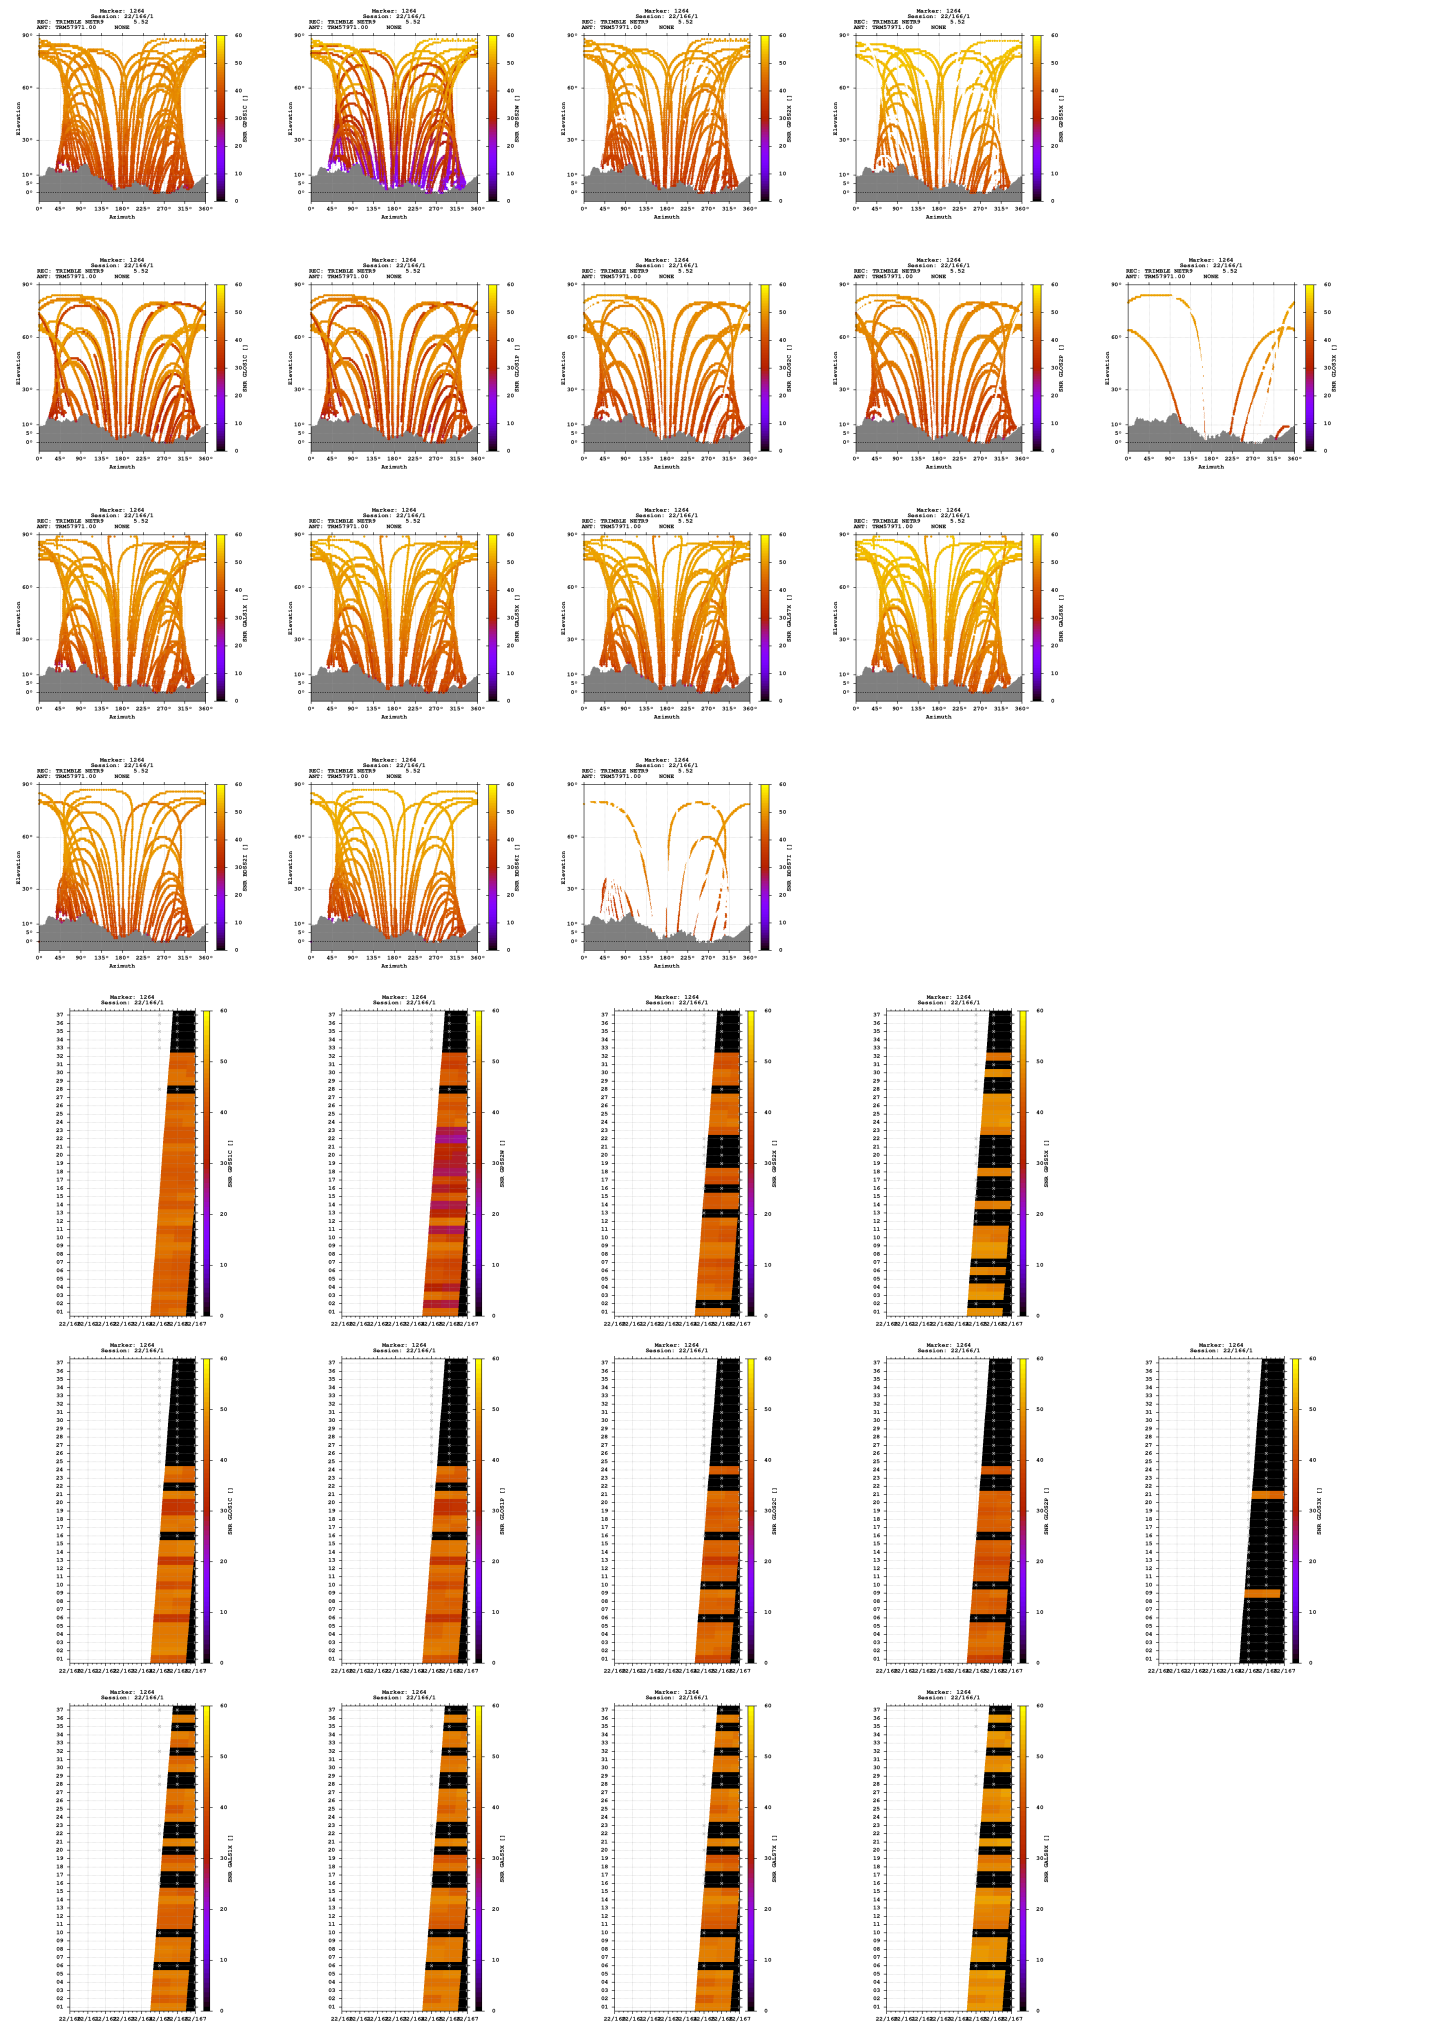

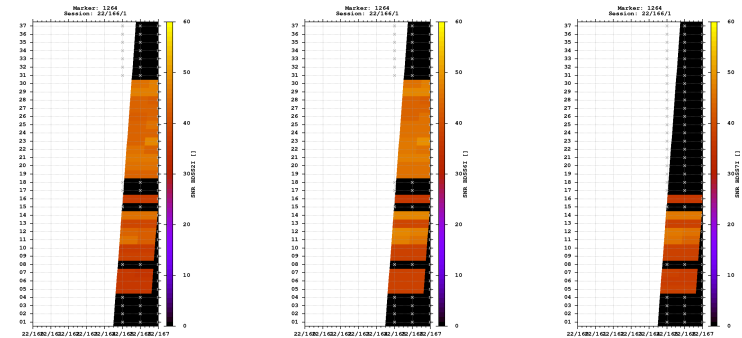



Estimates

2022-06-14 12:08:00	GPS	4370392.4709	528491.9790	4600601.9881	46.454461040	6.895043256	562.3349
2022-06-14 12:08:00	GLO	4370391.6068	528492.1897	4600600.9612	46.454460104	6.895047327	561.0170
2022-06-14 12:08:00	GAL	4370392.2098	528492.1556	4600601.6815	46.454460692	6.895045946	561.9486
2022-06-14 12:08:00	BDS	4370390.6257	528493.9538	4600600.3471	46.454461268	6.895071655	560.0467

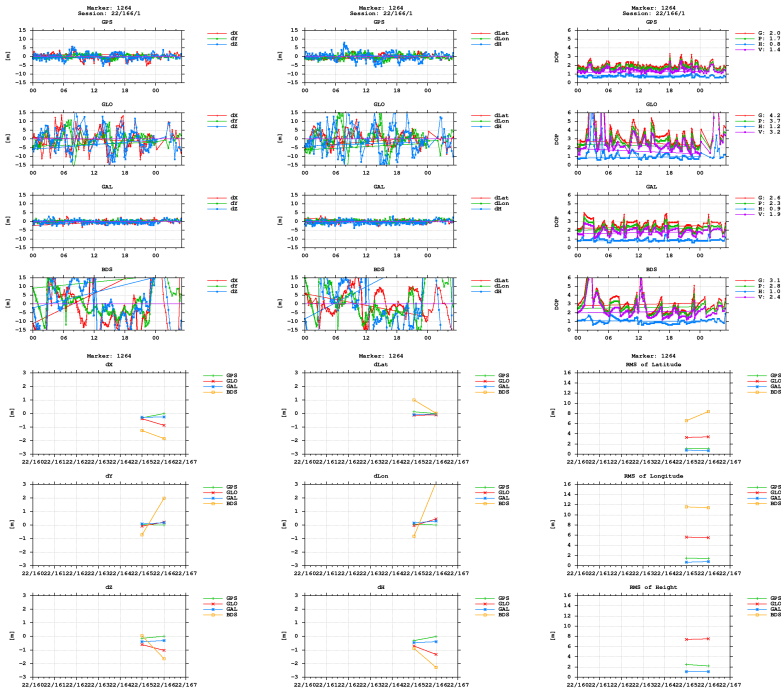

BNC

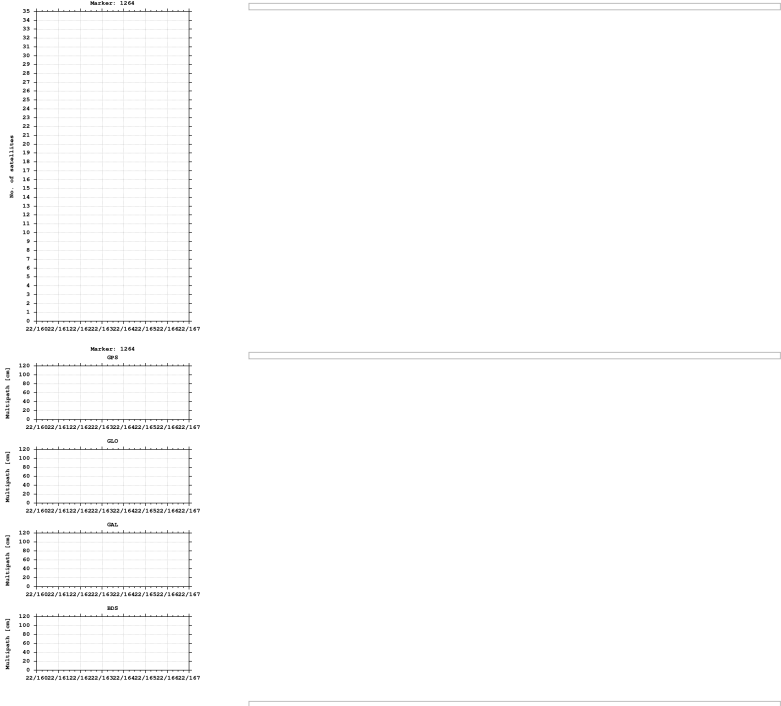

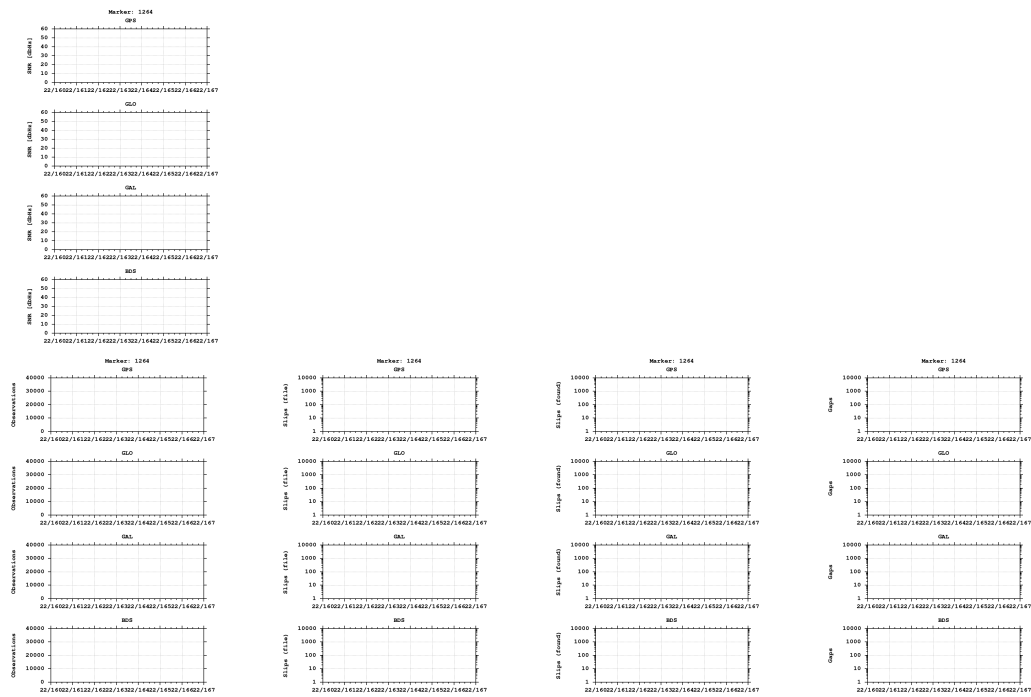

Equipment

2022-06-14 00:00:00	TRIMBLE NETR9	5.52	514	TRM57971.00	NONE	514
---------------------	---------------	------	-----	-------------	------	-----

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)