


GNSS observation file monitoring for 0514


Last RINEX file: 05141671.220
RINEX version: 3.02
Marker: 1345
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

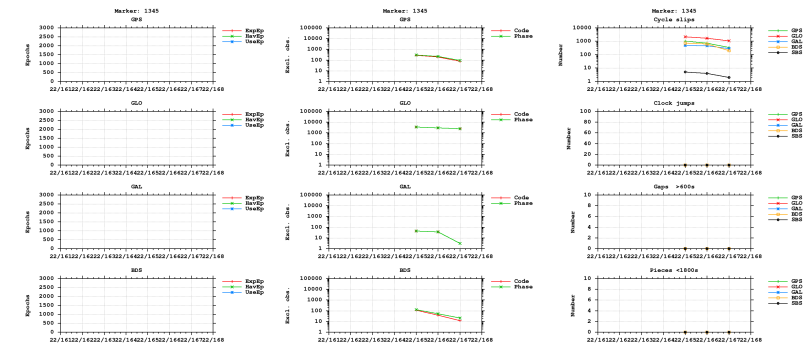



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

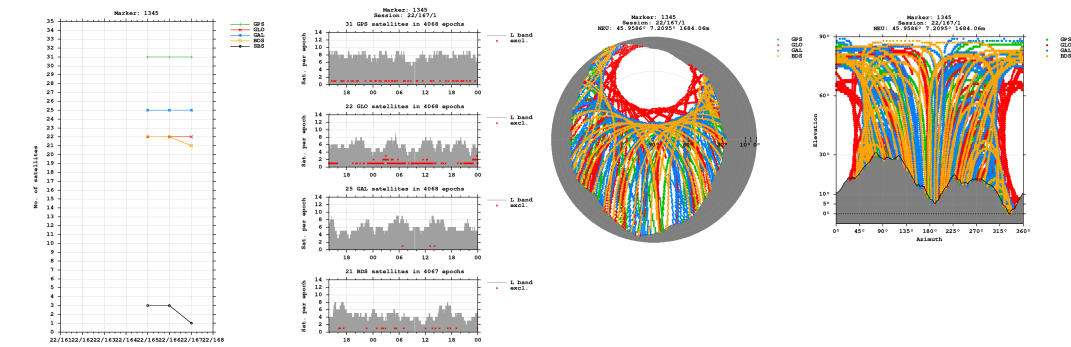


Bands

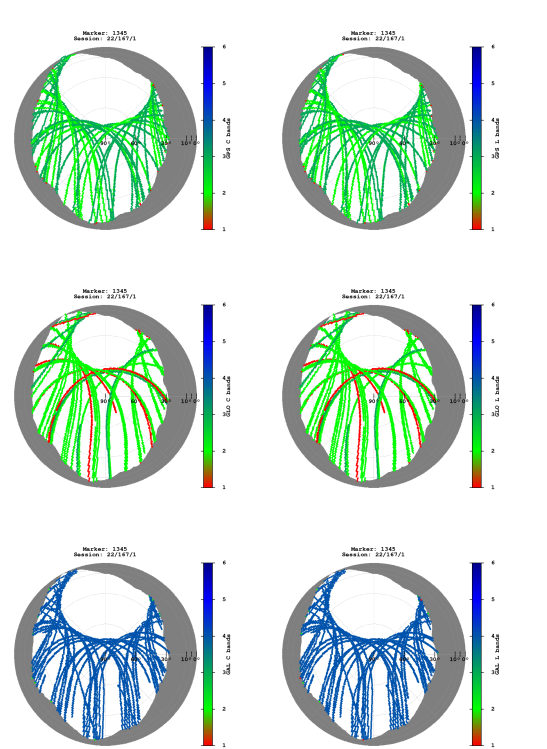


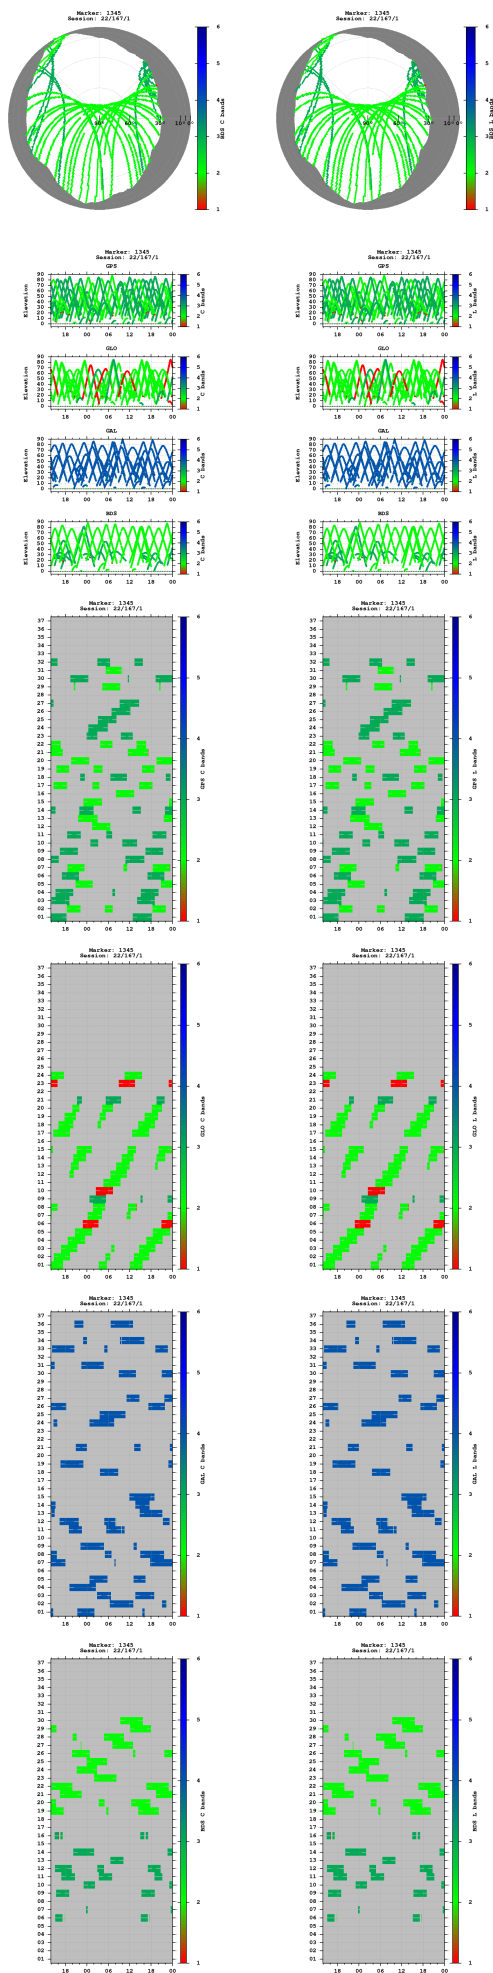


Observations

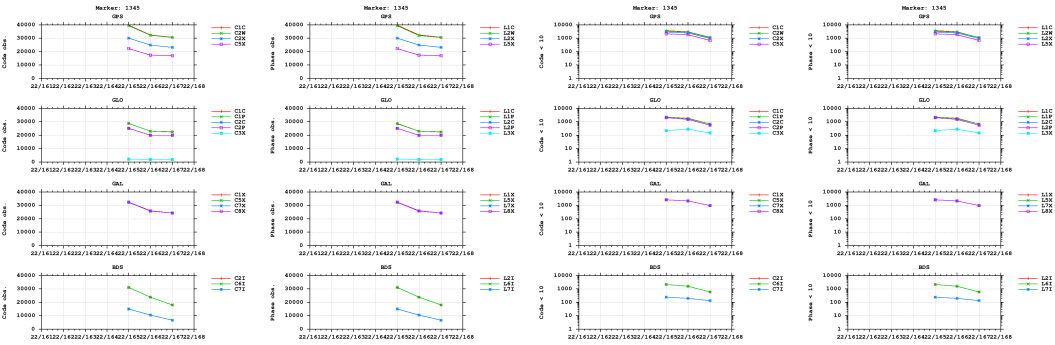



Multipath

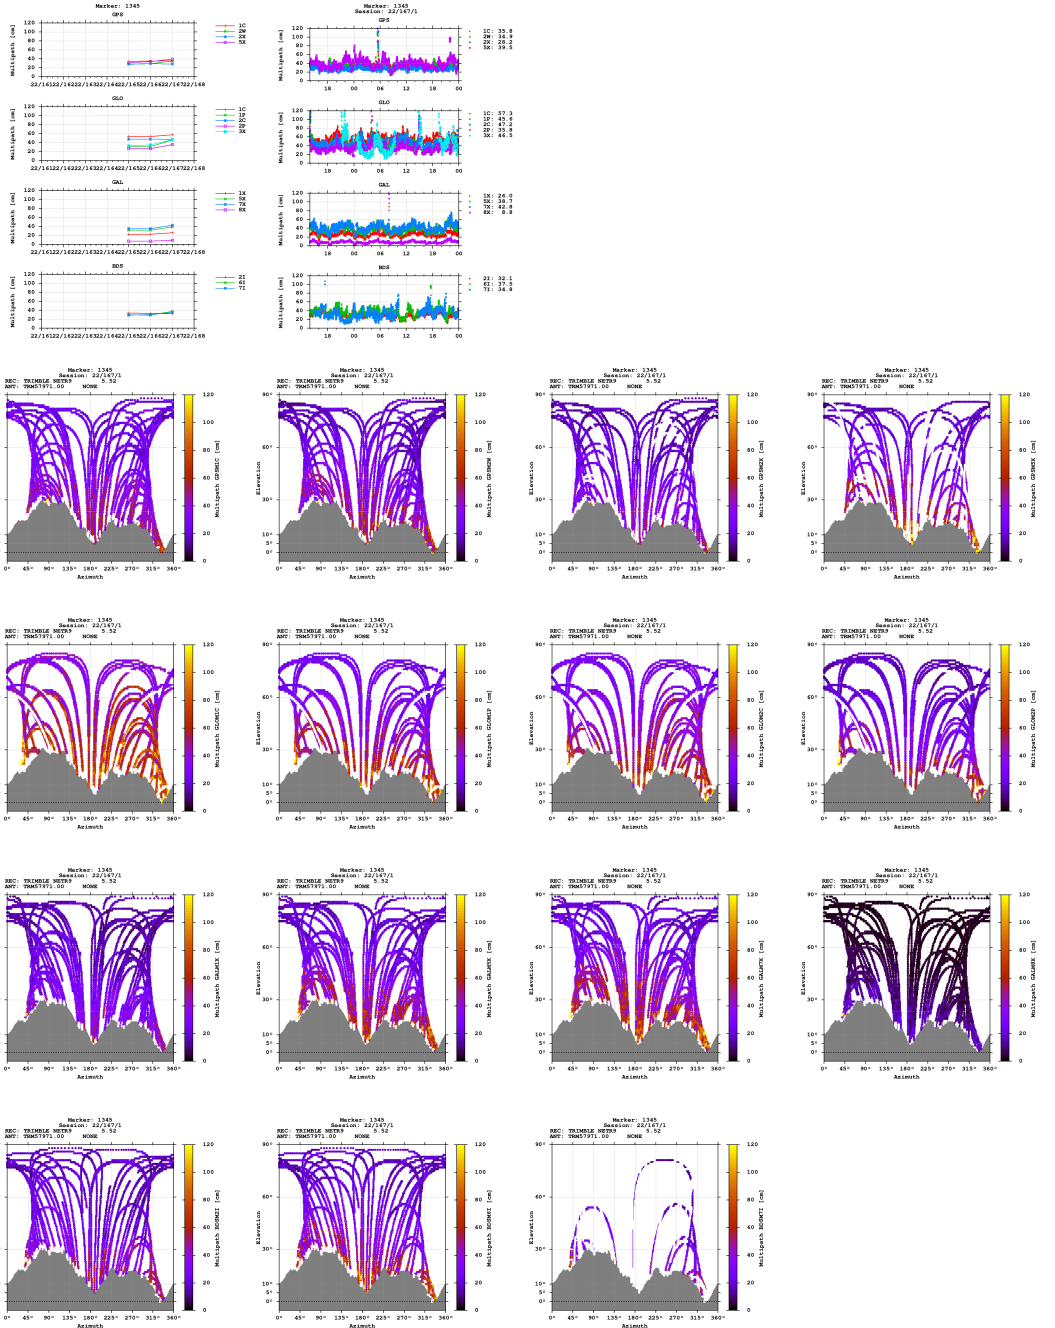


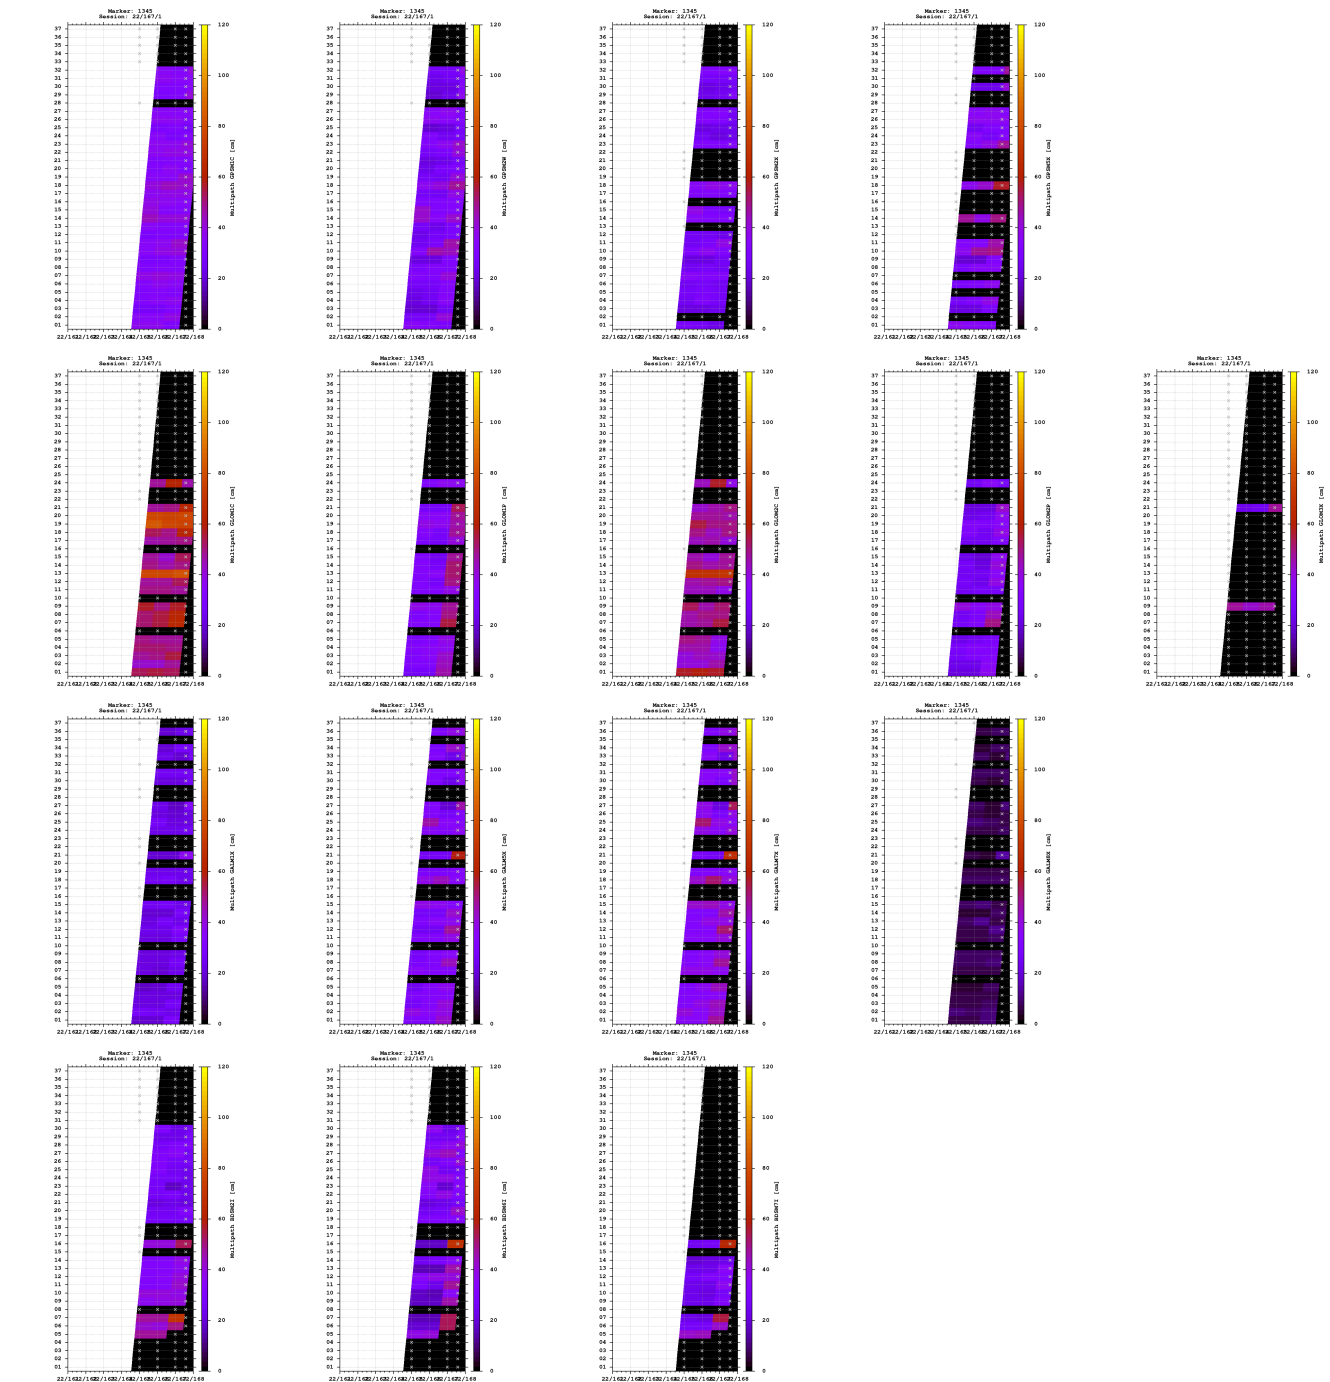


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

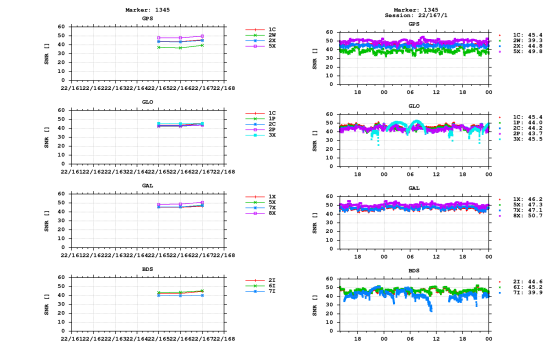


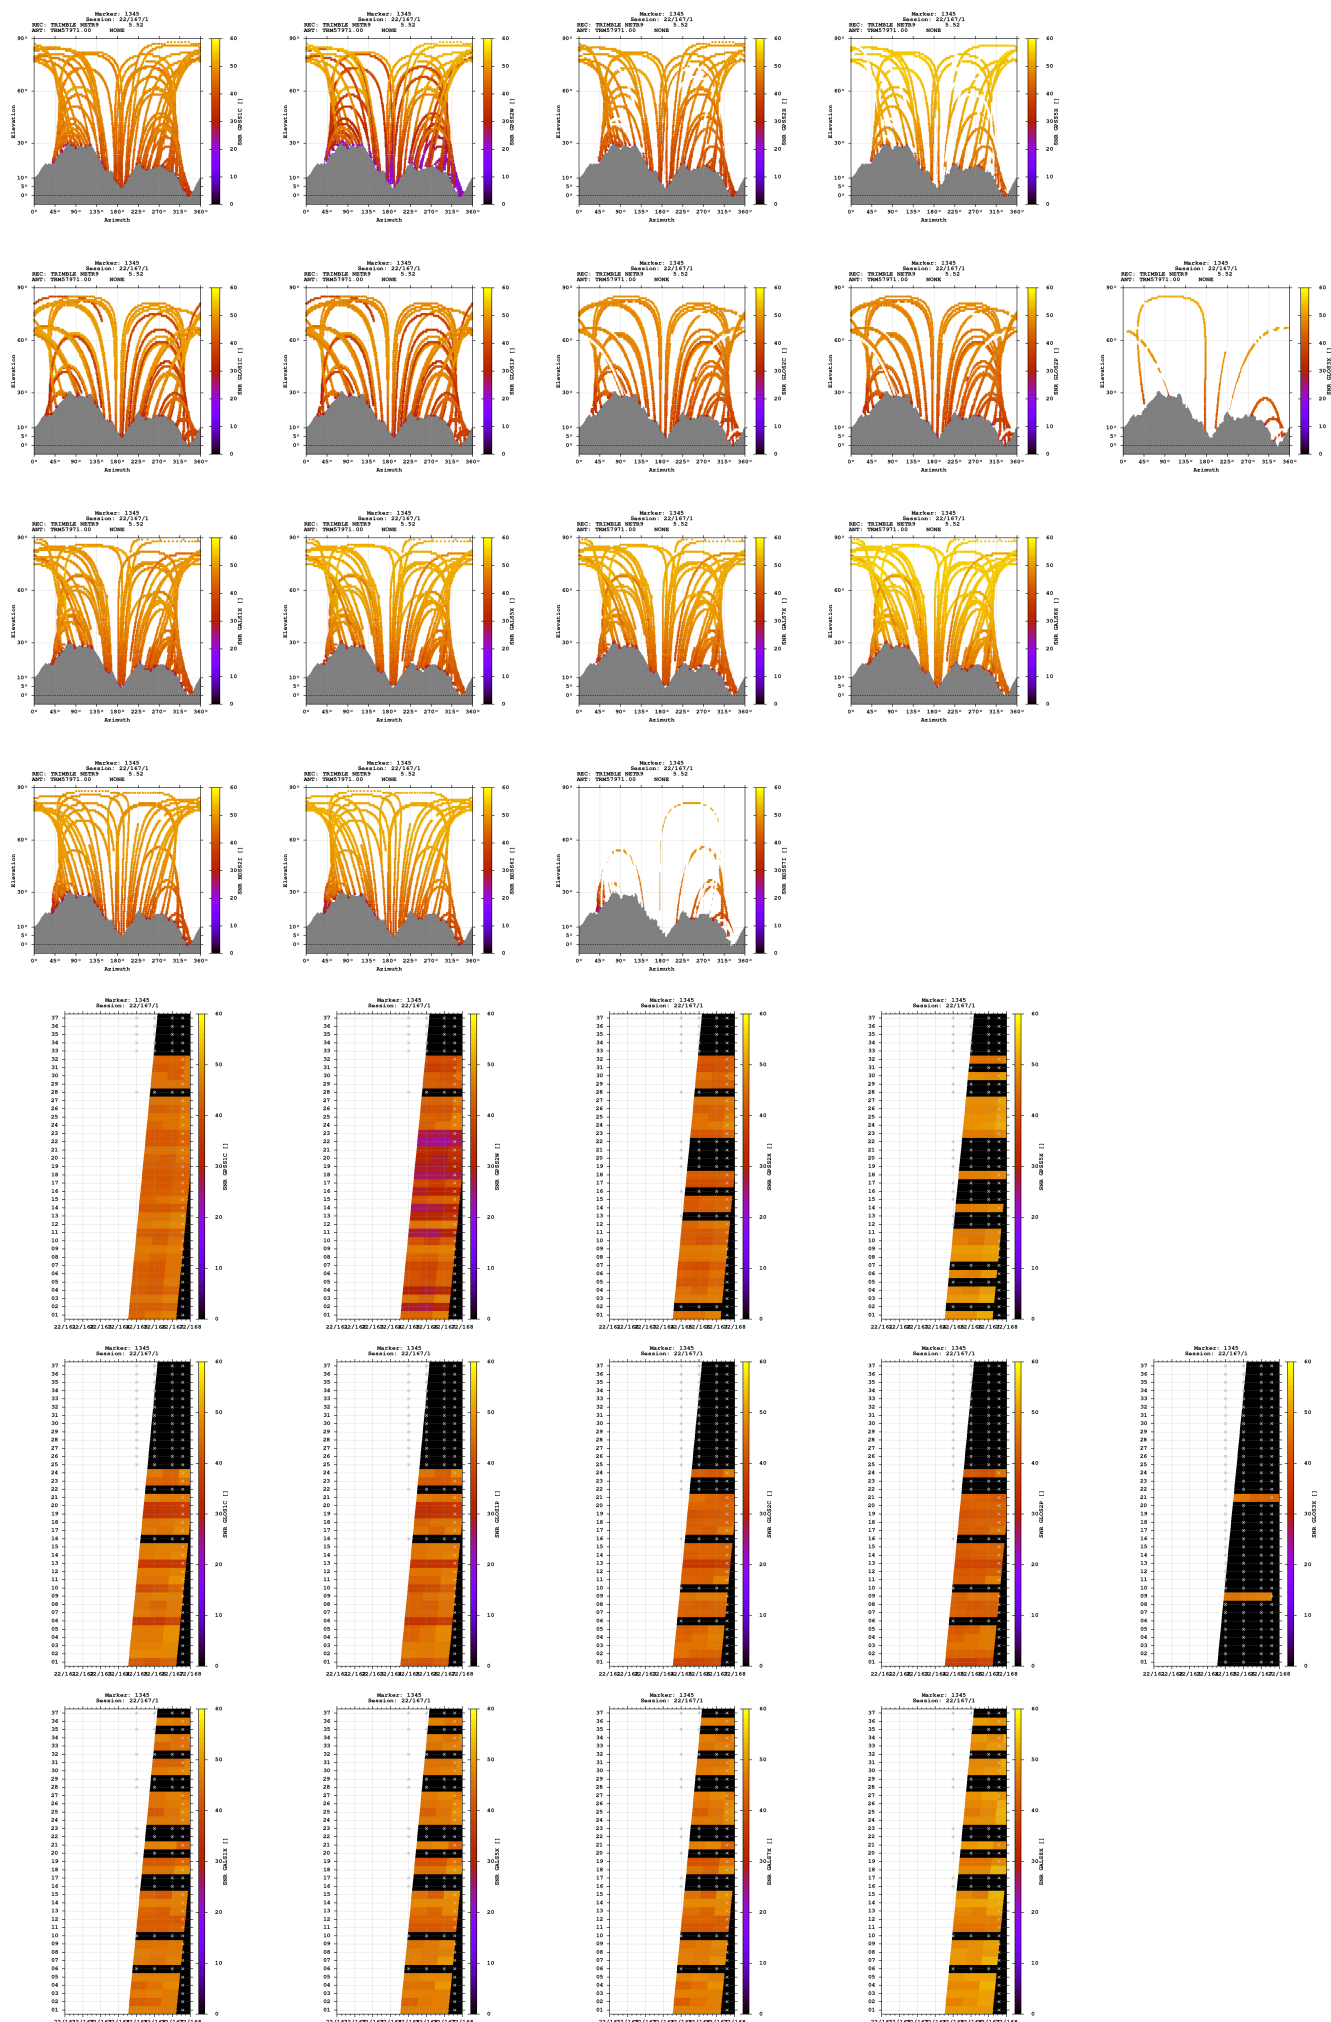

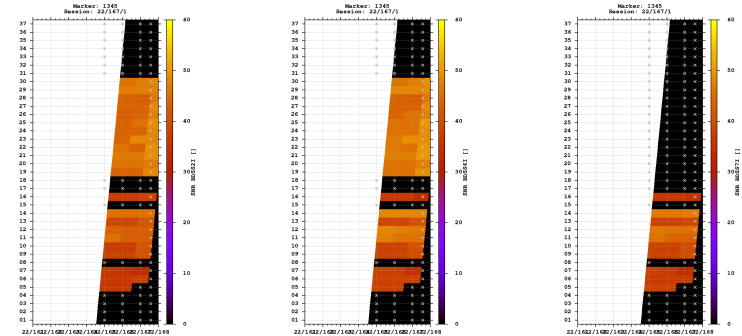



Estimates

2022-06-16 13:56:30	GPS	4407673.4723	557562.5994	4563261.2964	45.958612363	7.209518558	1684.0643
2022-06-16 13:56:30	GLO	4407674.3971	557561.9235	4563261.4633	45.958608023	7.209508413	1684.7630
2022-06-16 13:56:30	GAL	4407673.6759	557562.5296	4563261.1447	45.958610165	7.209517336	1684.0895
2022-06-16 13:56:30	BDS	4407669.7305	557564.0271	4563255.3616	45.958598097	7.209542881	1677.3420

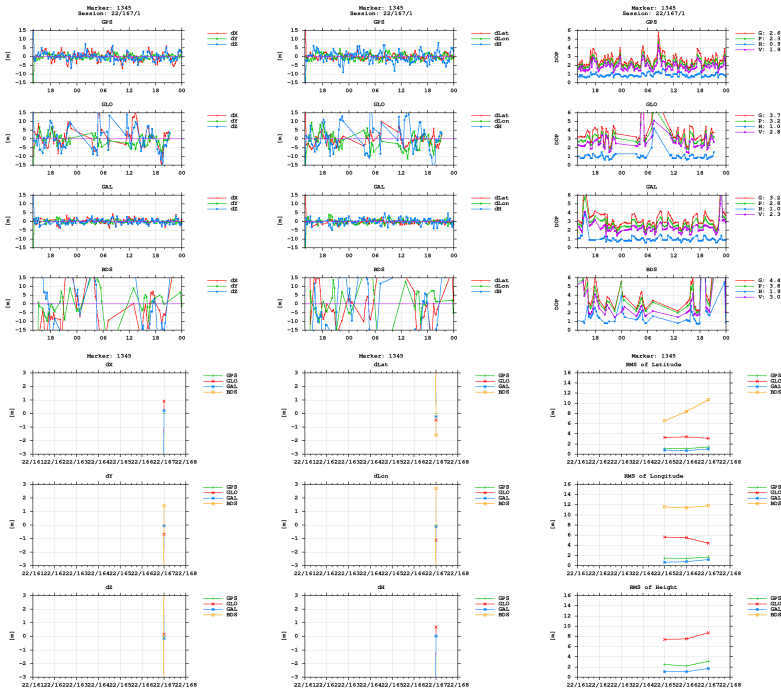

BNC

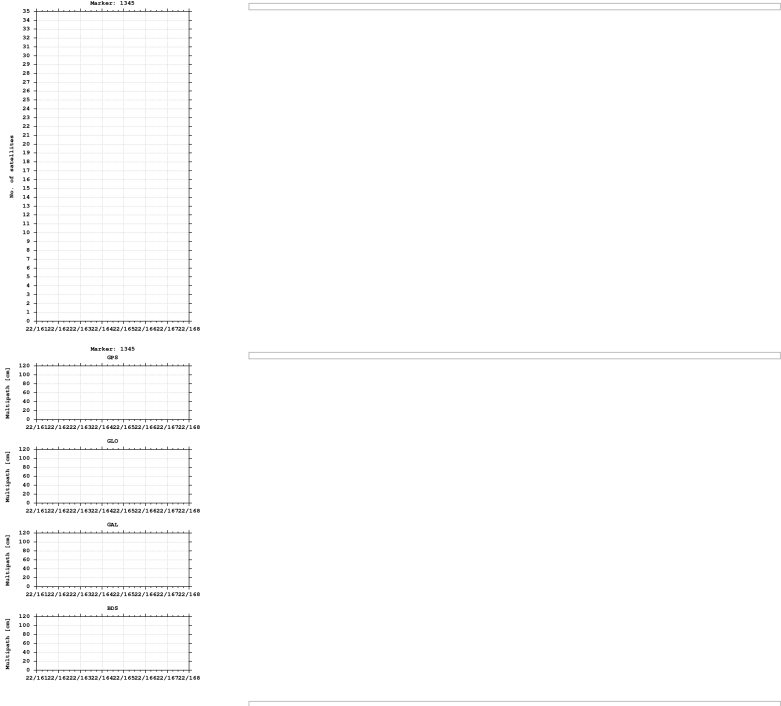

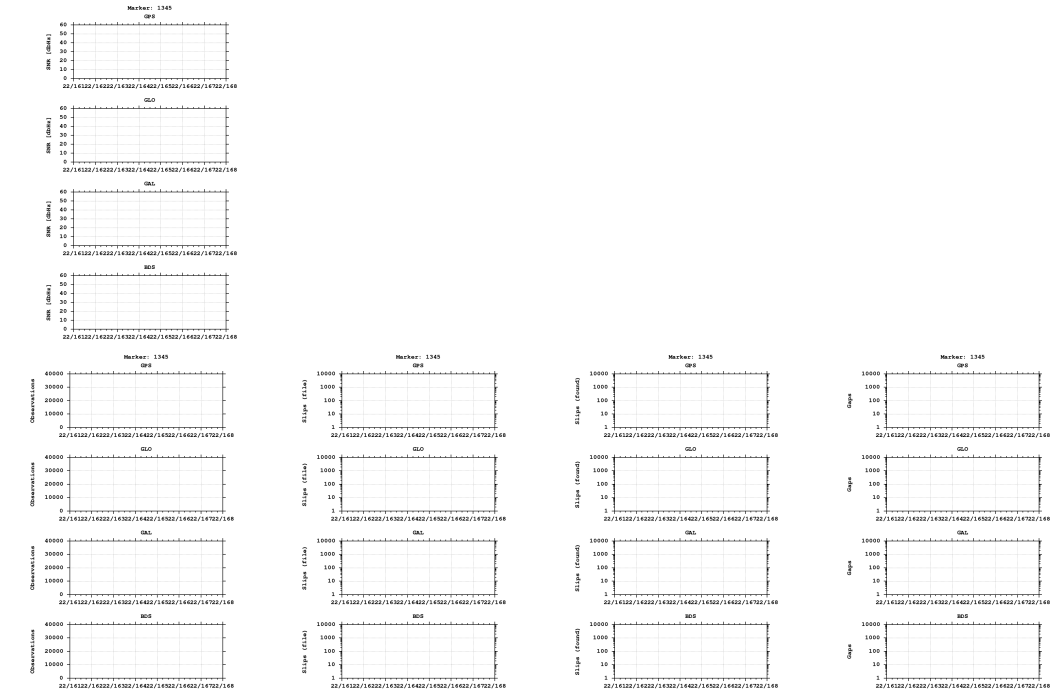

Equipment

2022-06-14 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)