


GNSS observation file monitoring for 0515


Last RINEX file: 05151641.22O
RINEX version: 3.02
Marker: 1204
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

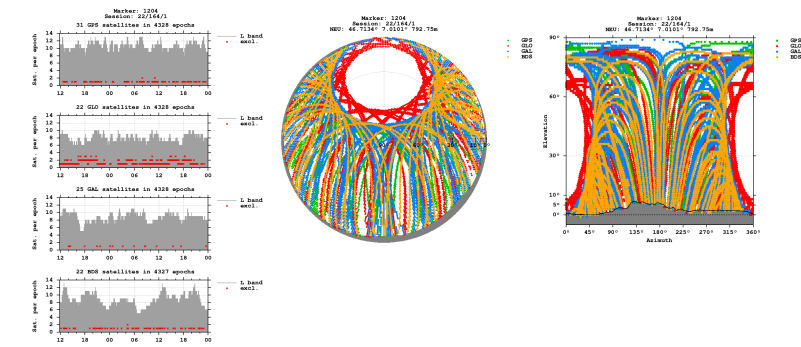


Bands

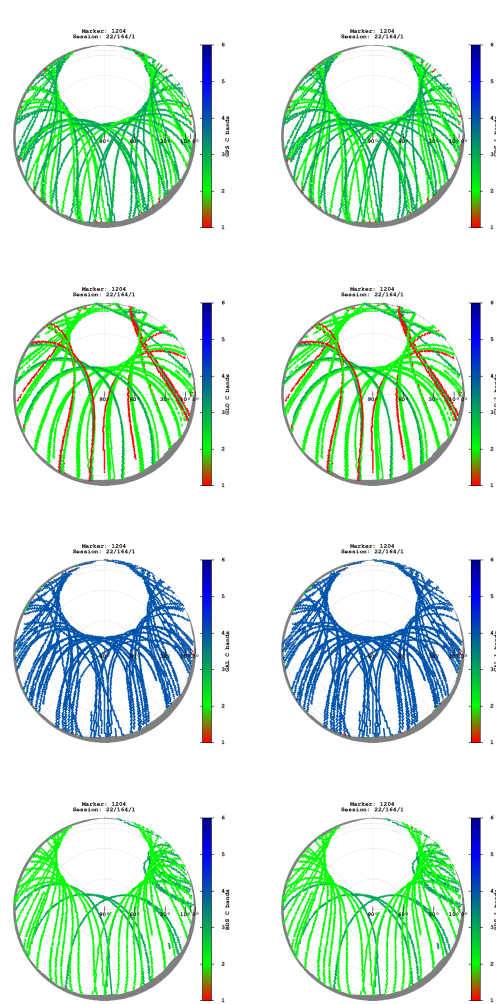

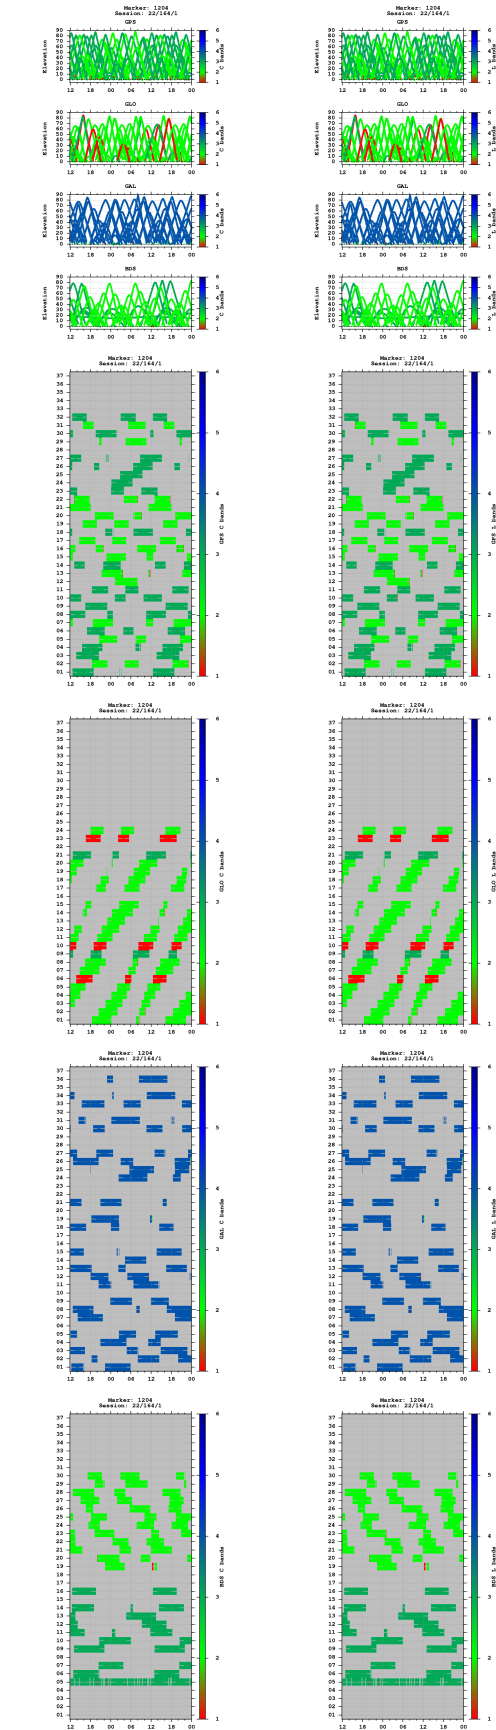



Multipath

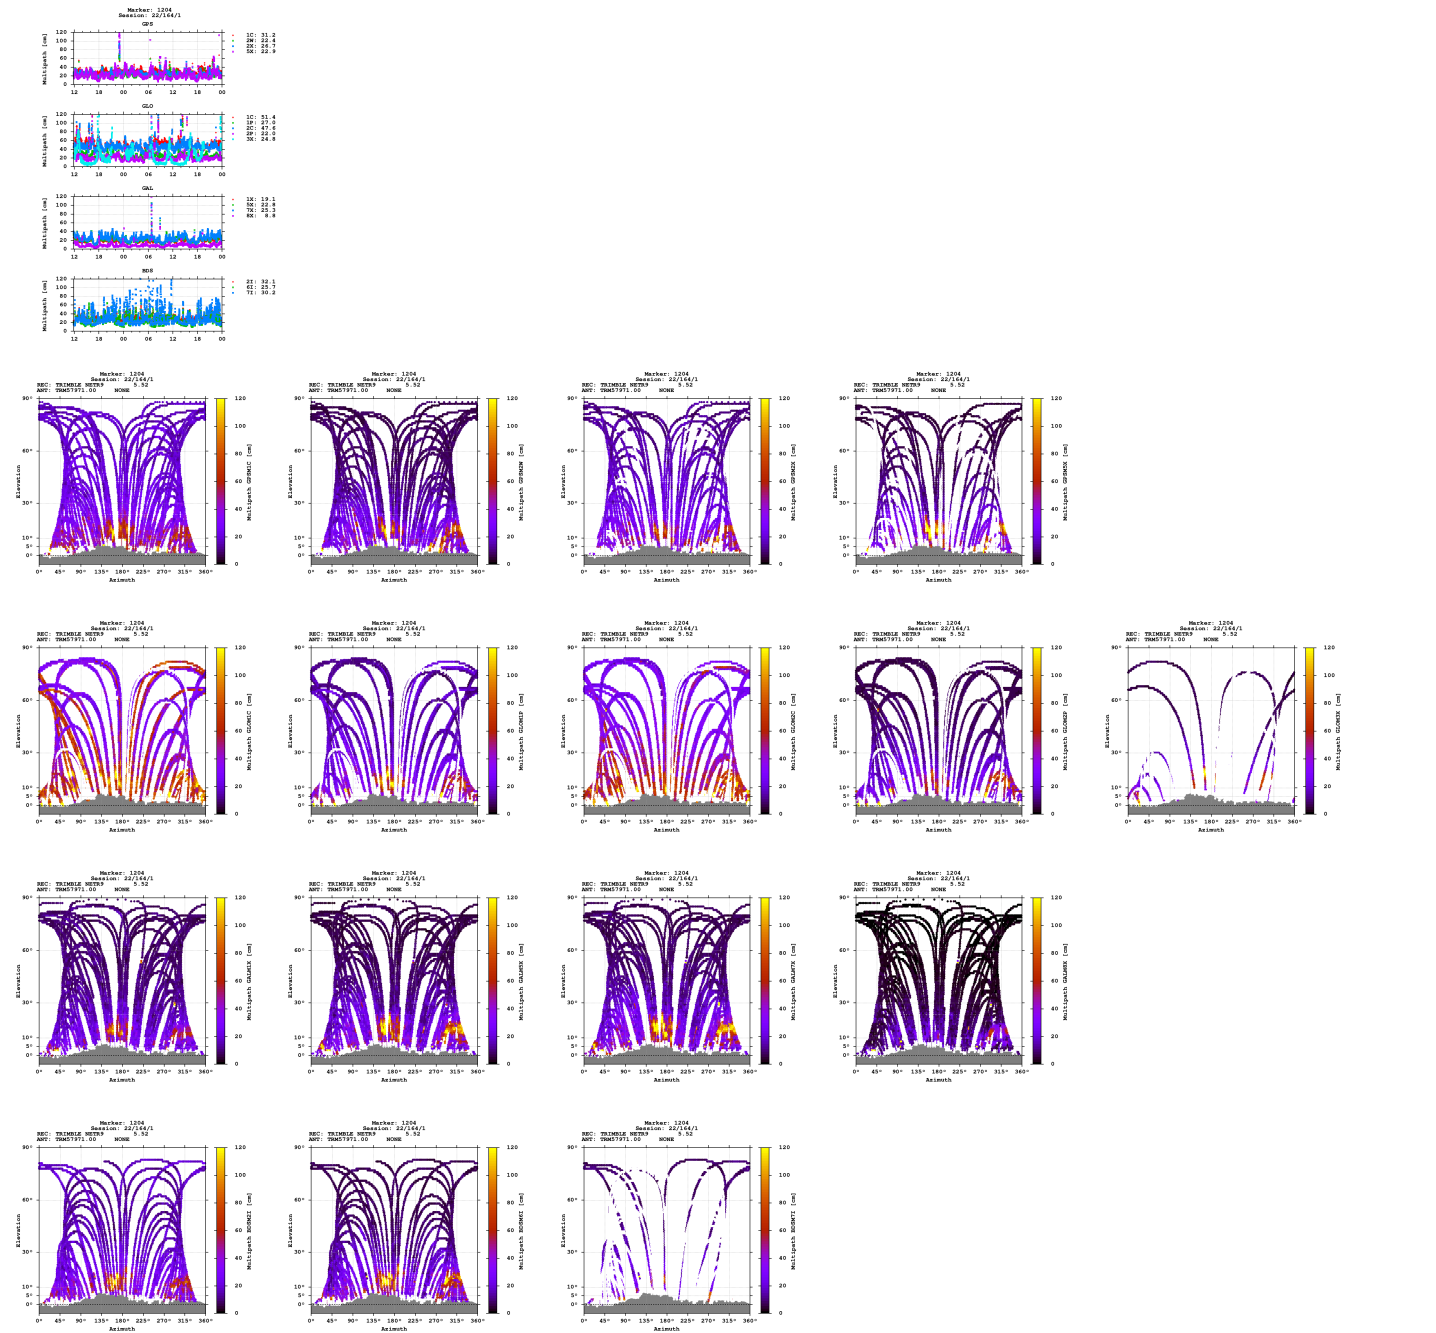

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

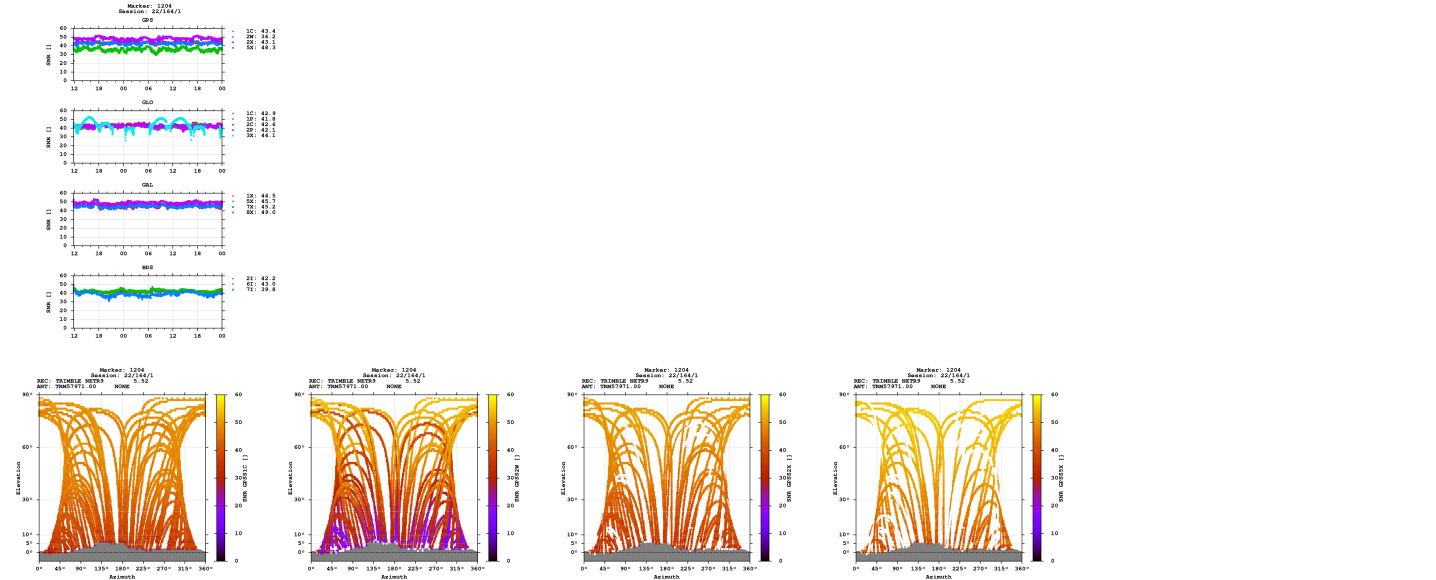

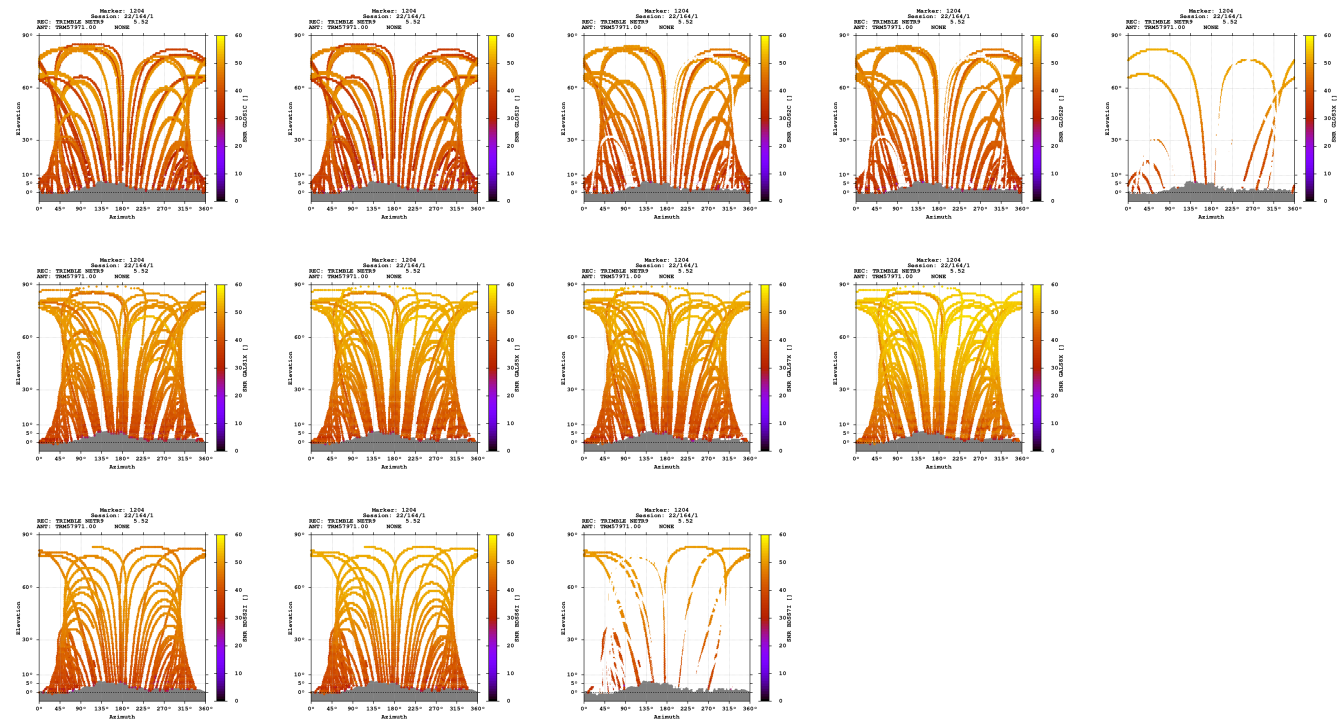

Estimates

2022-06-13 11:52:00	GPS	4348722.8578	534737.8635	4620556.5183	46.713424037	7.010147734	792.7537
2022-06-13 11:52:00	GLO	4348723.3436	534737.5555	4620556.5928	46.713421586	7.010142961	793.1126
2022-06-13 11:52:00	GAL	4348723.1898	534737.7805	4620556.4573	46.713421570	7.010146126	792.9282
2022-06-13 11:52:00	BDS	4348722.3814	534736.7531	4620558.6255	46.713441015	7.010134082	793.8704

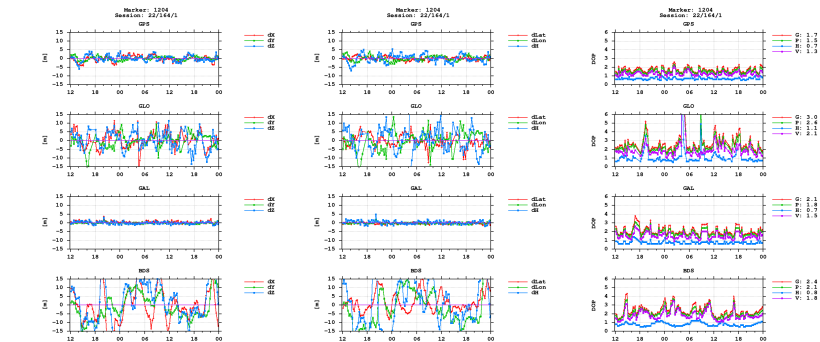

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)