


GNSS observation file monitoring for 0515


Last RINEX file: 05151651.220
RINEX version: 3.02
Marker: 1204
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

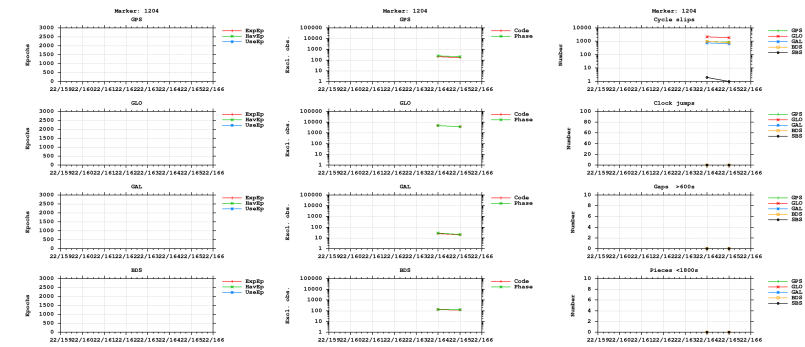



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

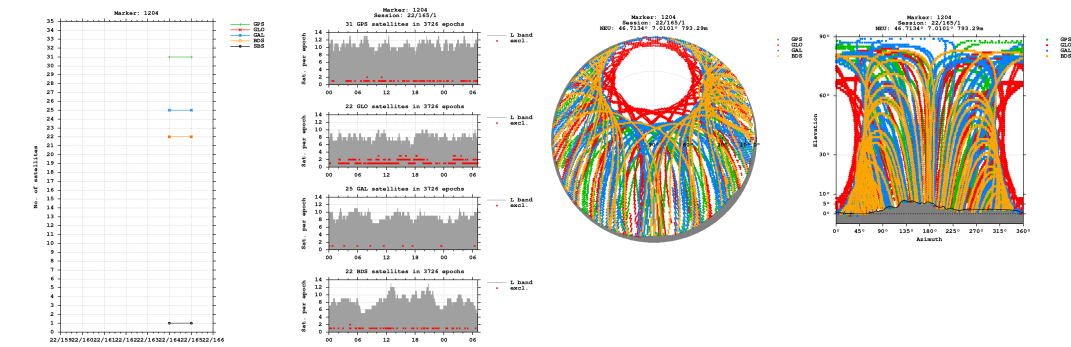


Bands

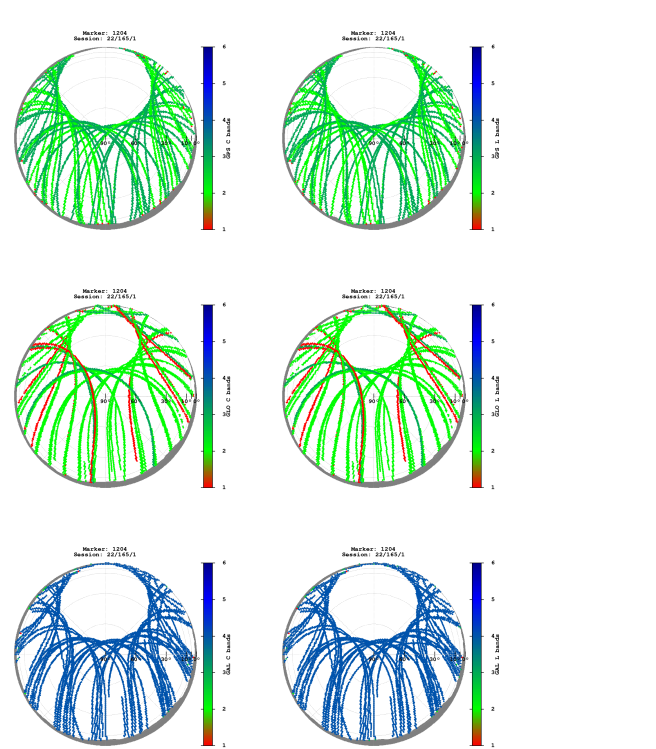


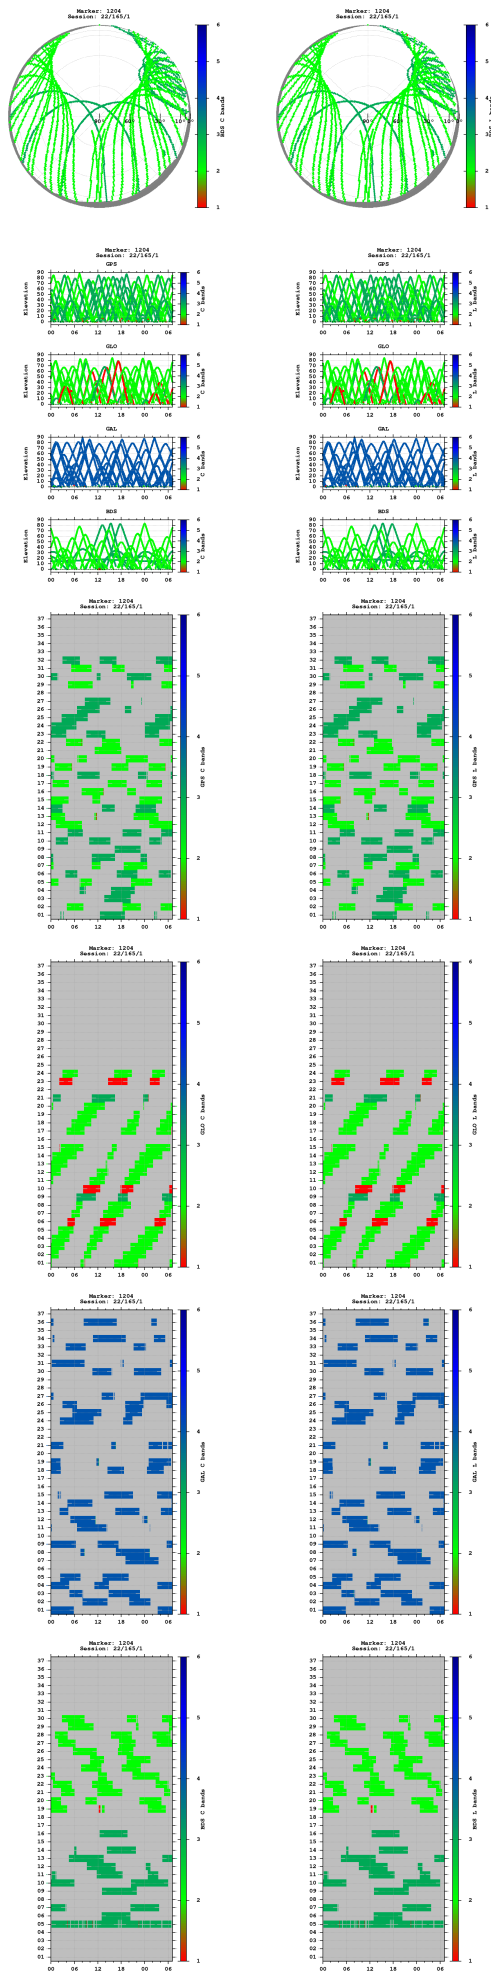


Observations

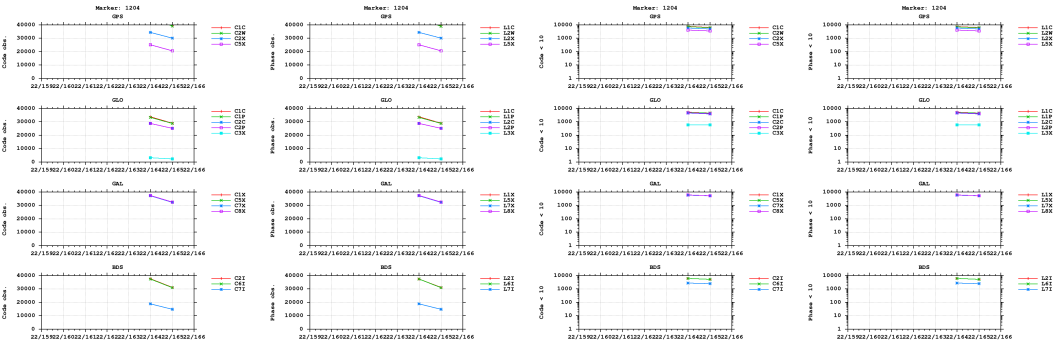



Multipath

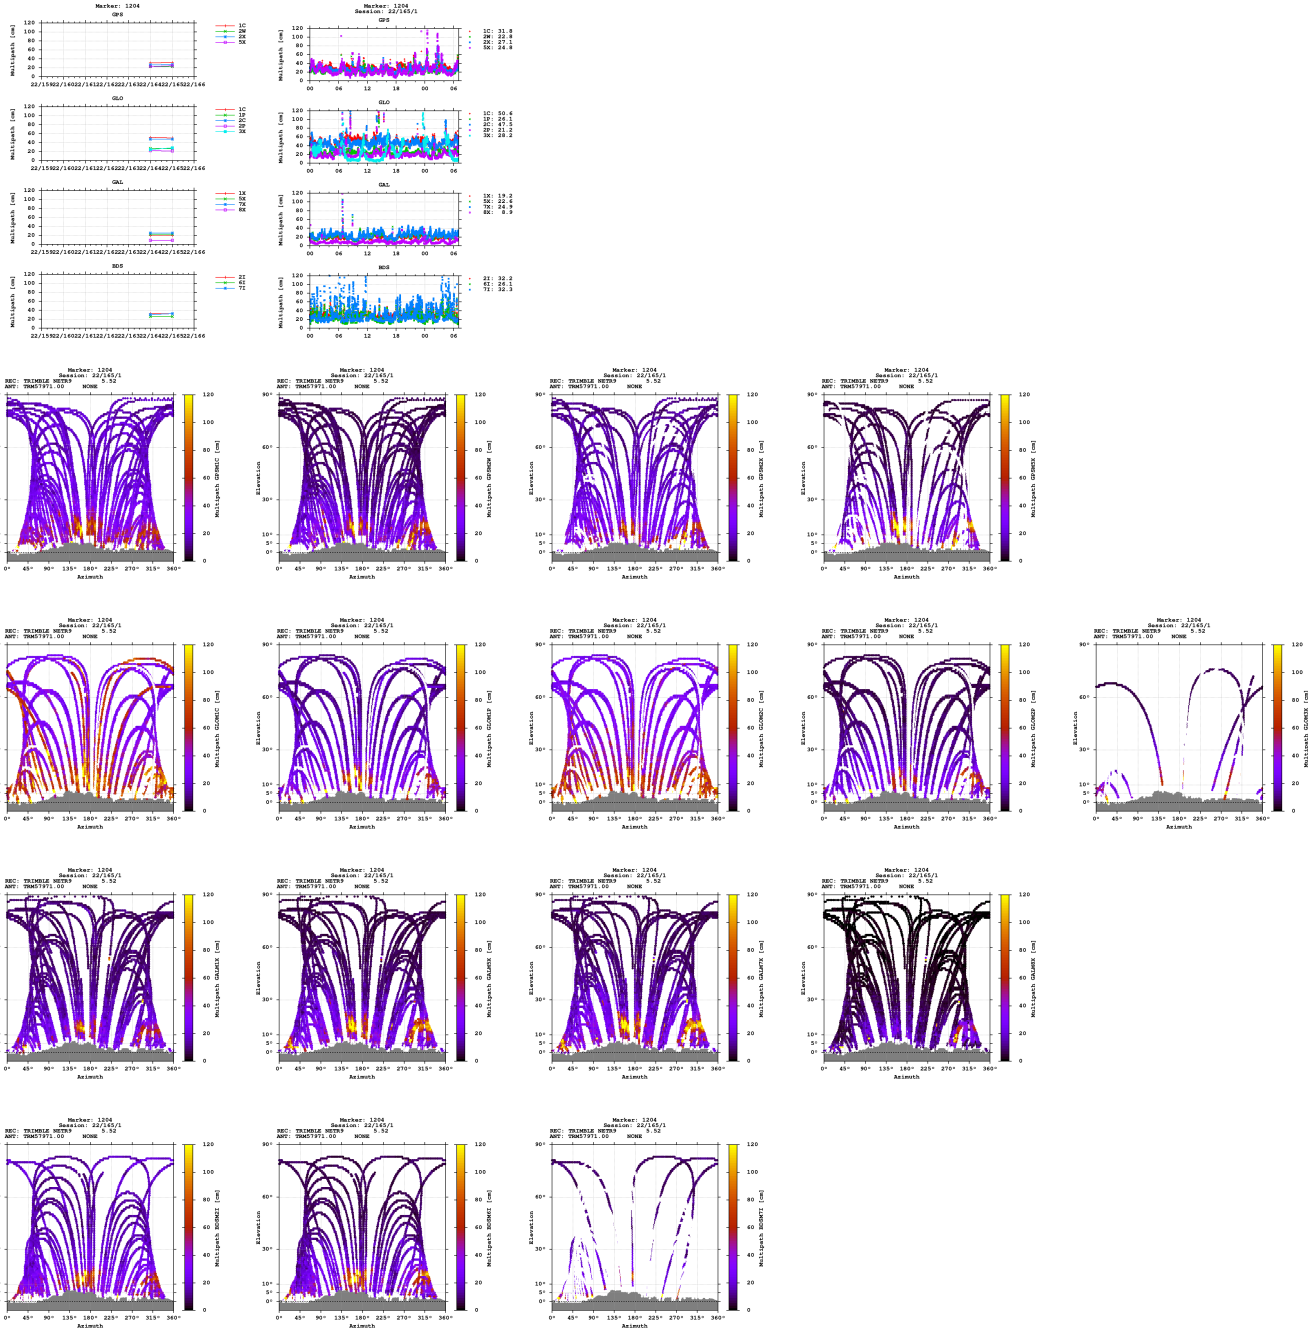


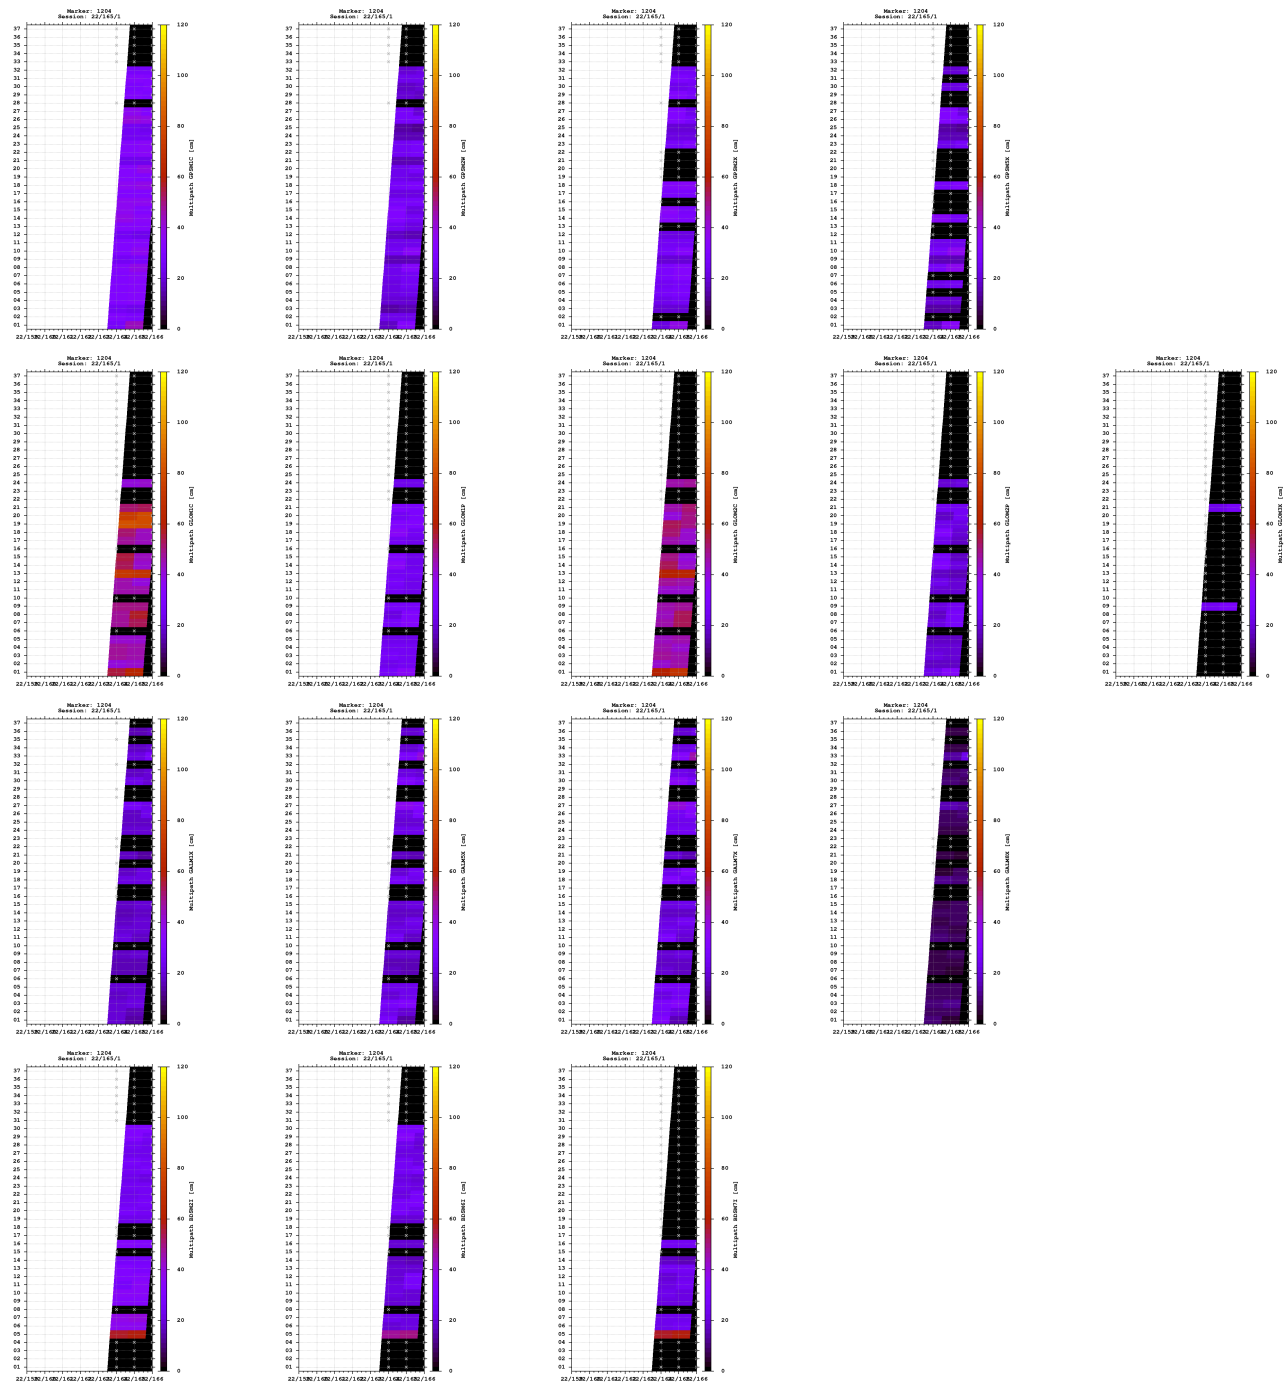


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

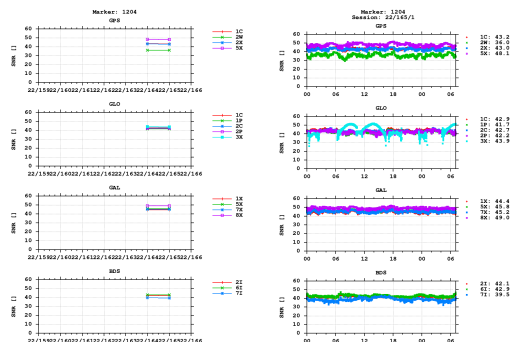


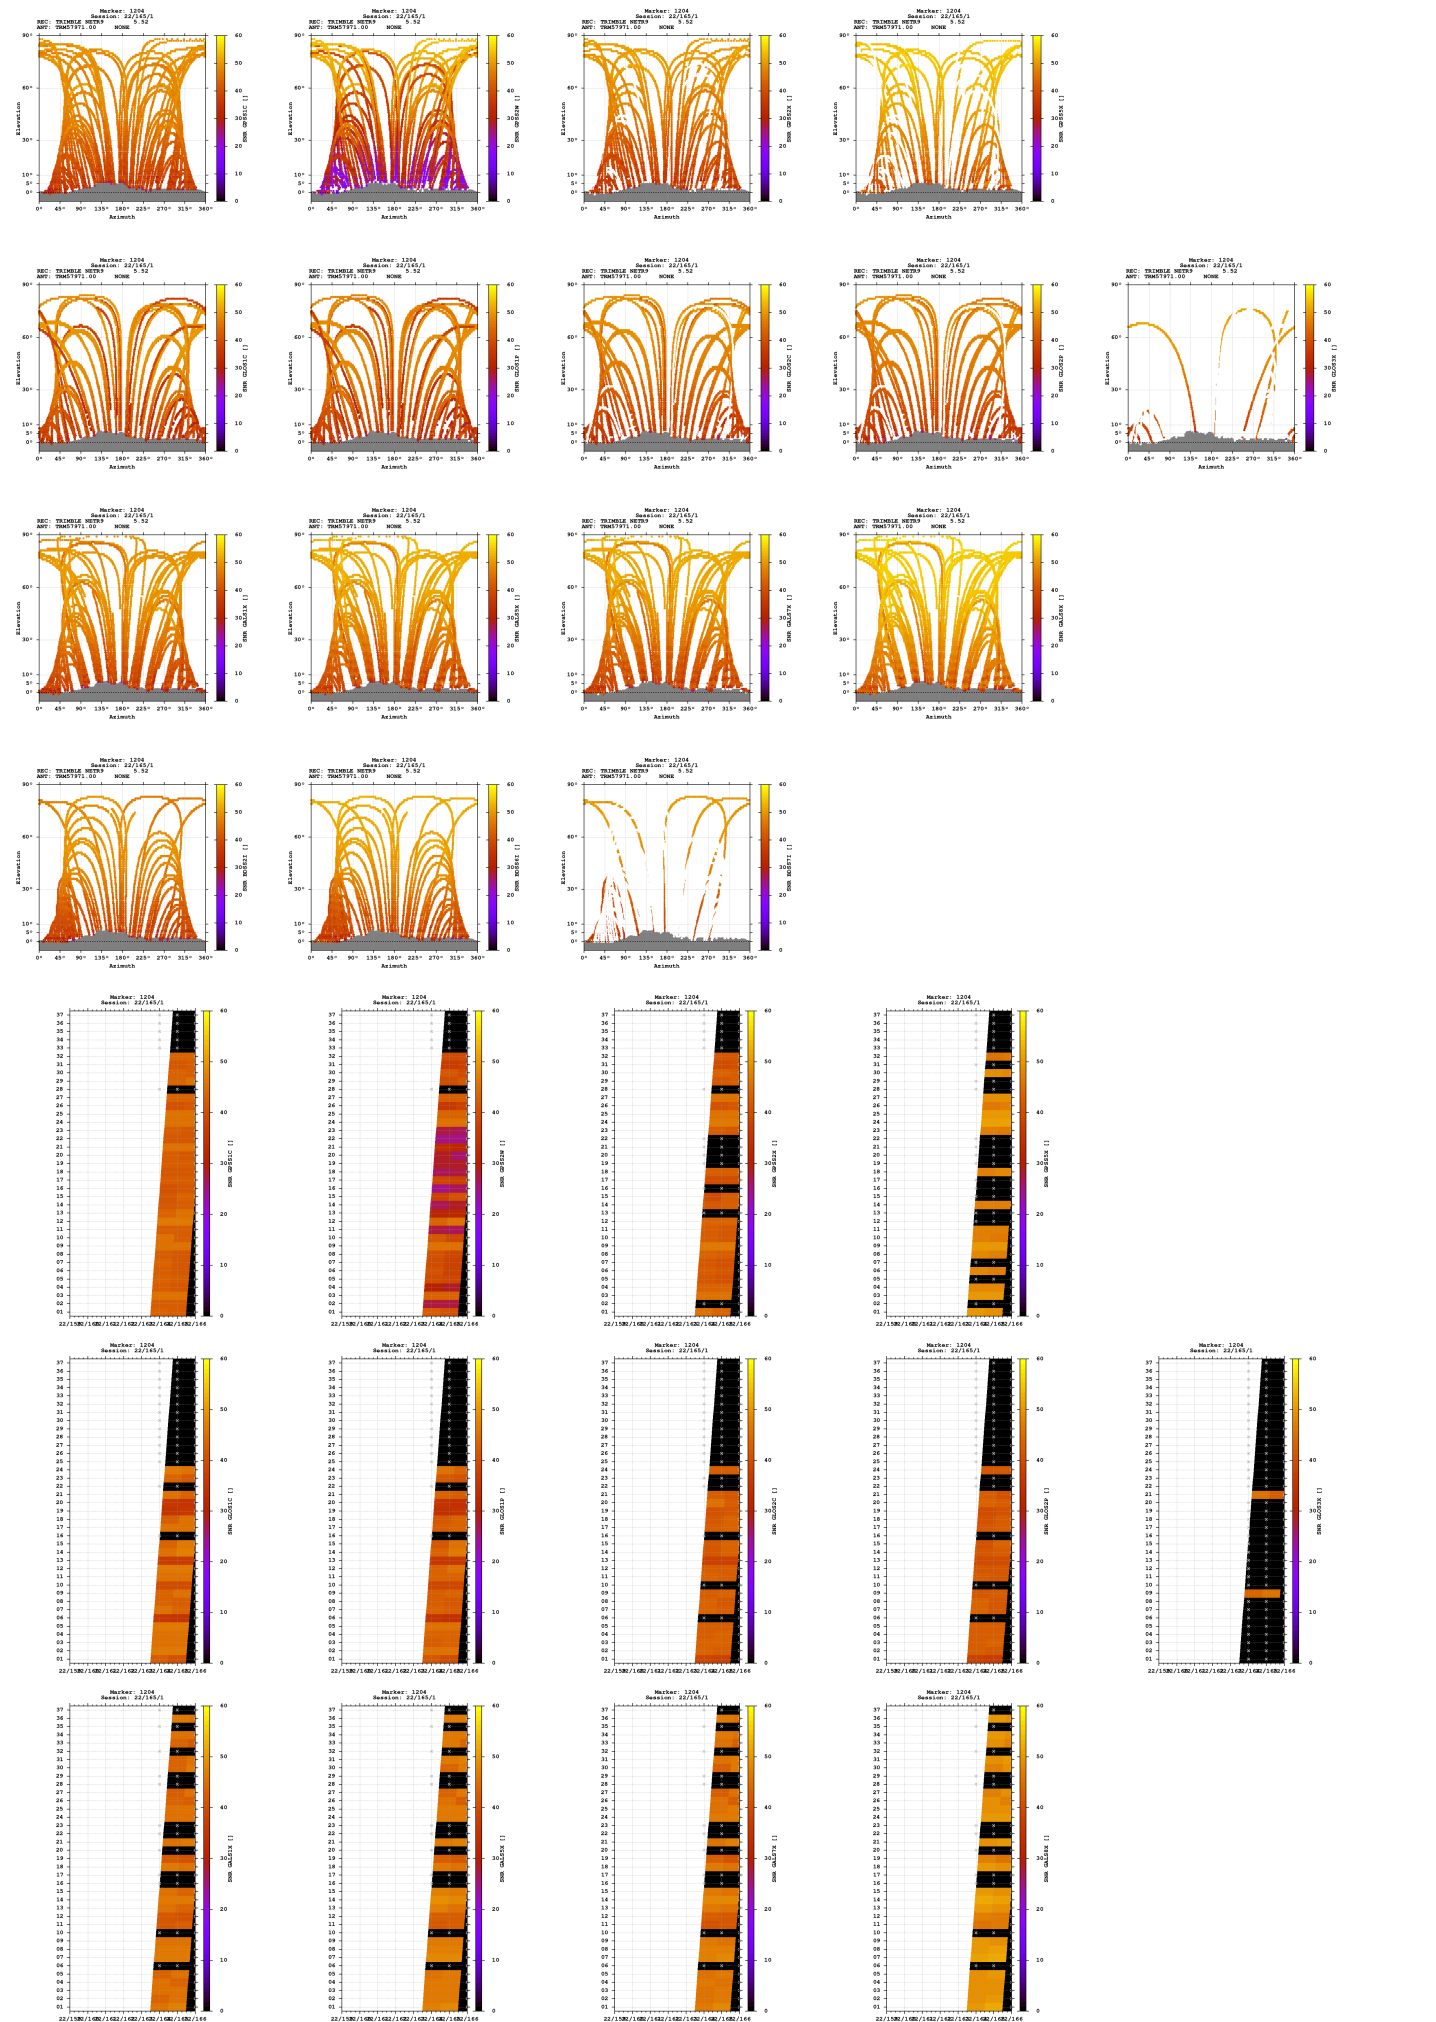

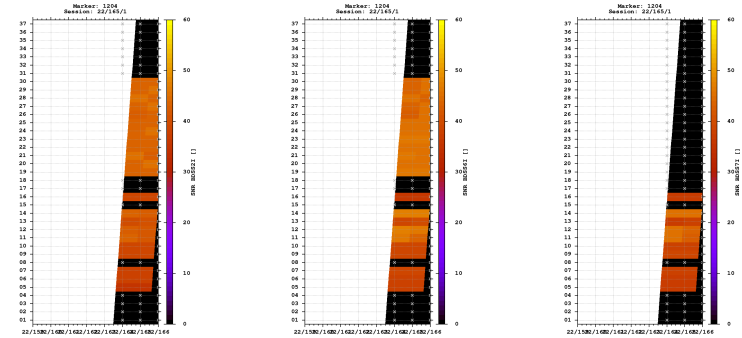



Estimates

2022-06-13 11:52:00	GPS	4348723.4969	534737.8144	4620556.6663	46.713420836	7.010146076	793.2922
2022-06-13 11:52:00	GLO	4348723.2873	534738.5425	4620556.4042	46.713420000	7.010155860	793.0197
2022-06-13 11:52:00	GAL	4348723.1107	534737.8121	4620556.4528	46.713422031	7.010146663	792.8737
2022-06-13 11:52:00	BDS	4348723.9220	534739.5645	4620559.4788	46.713434019	7.010168113	795.7752

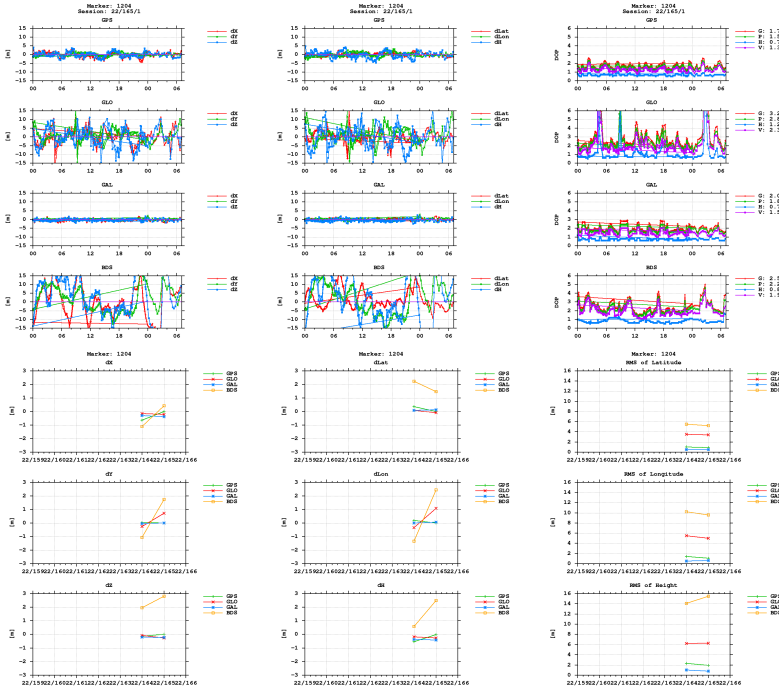

BNC

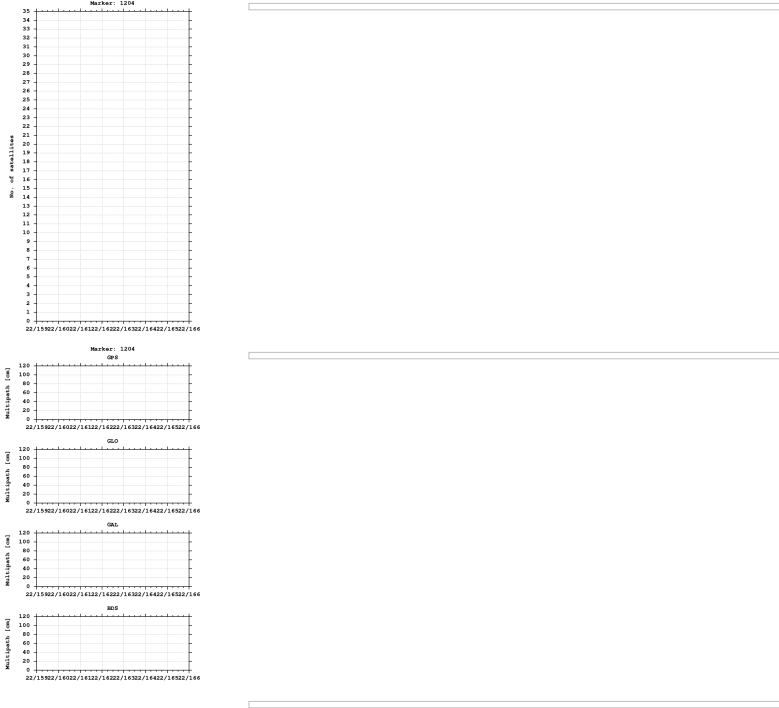

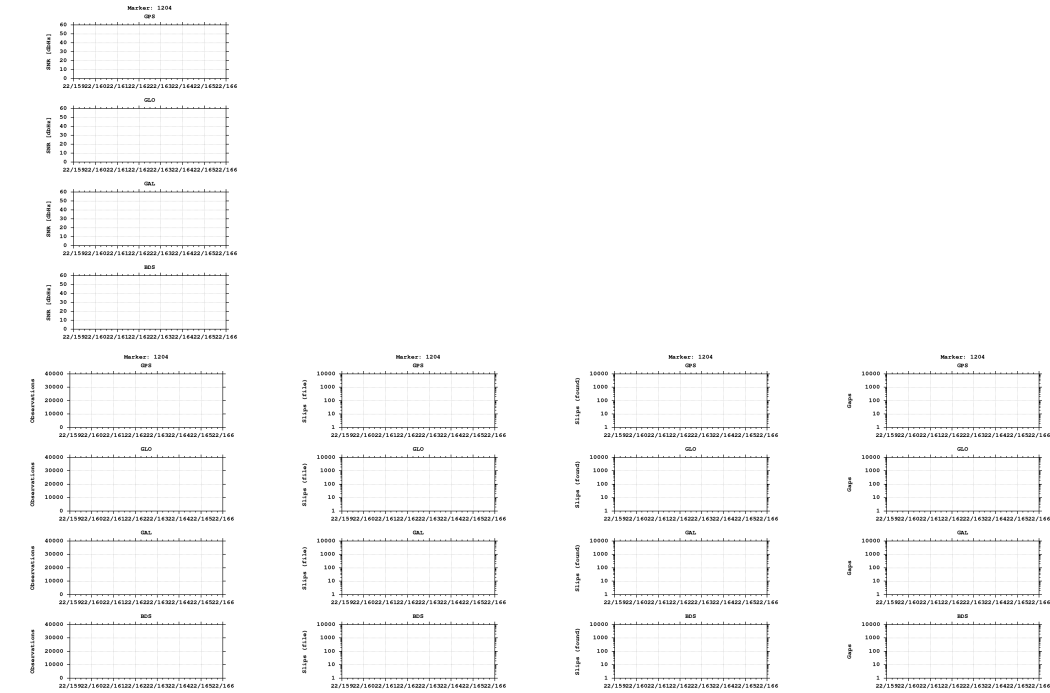

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)