

GNSS observation file monitoring for 0515

Last RINEX file: 05151661.220

RINEX version: 3.02

Marker: 1246

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

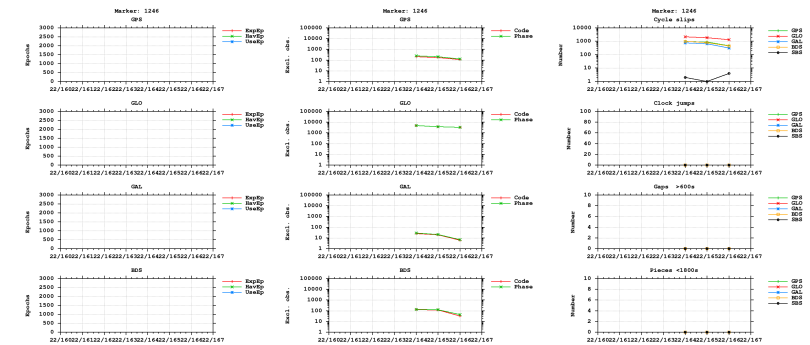



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

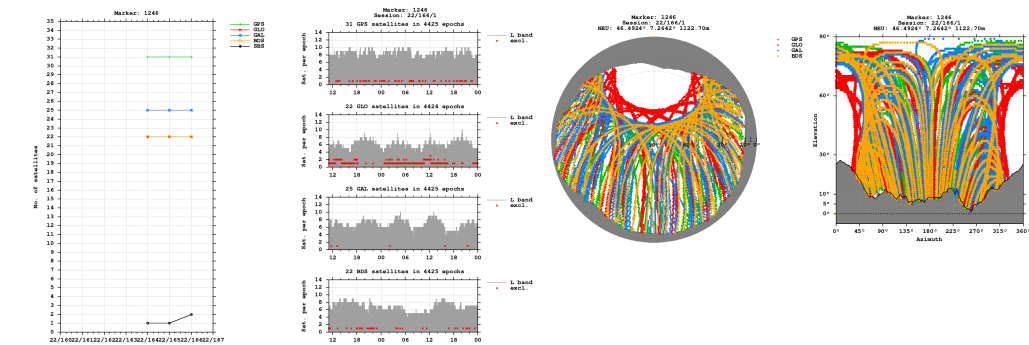


Bands

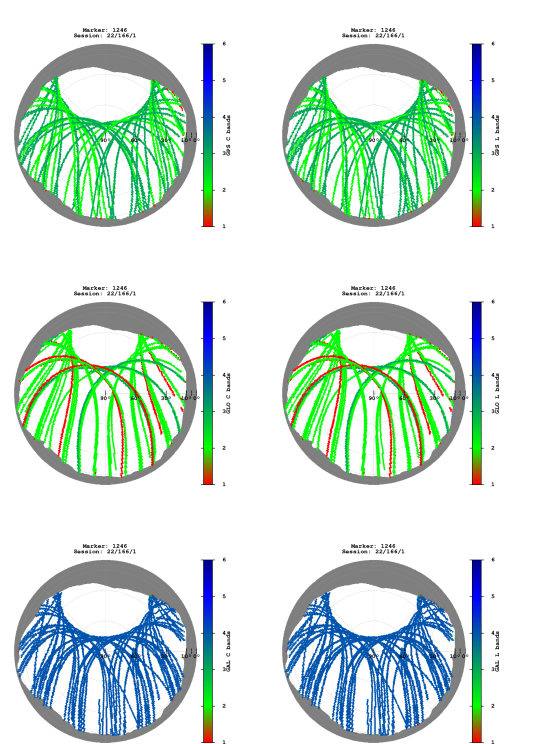


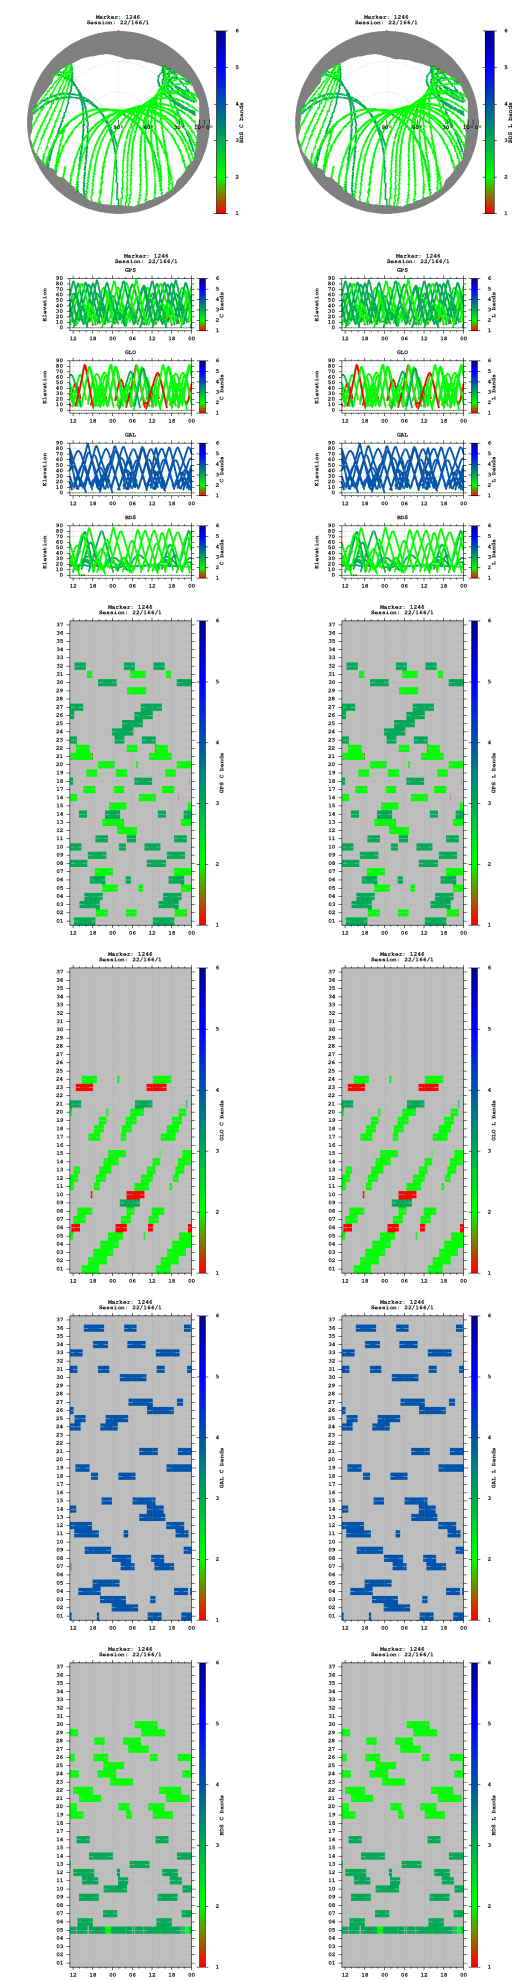


Observations

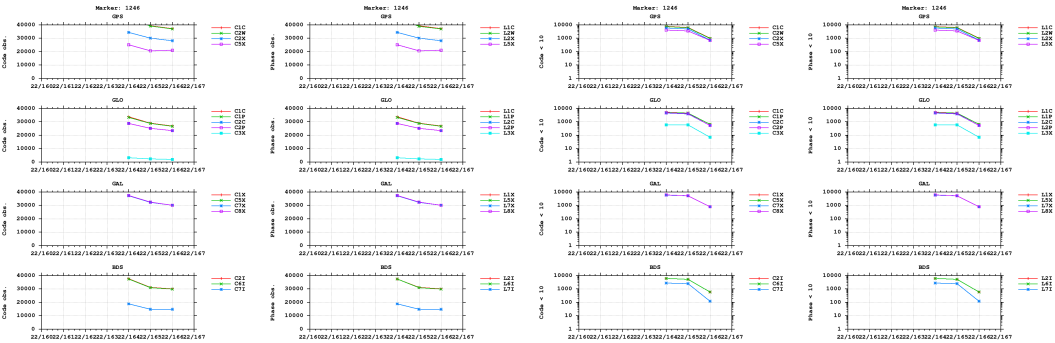


Multipath

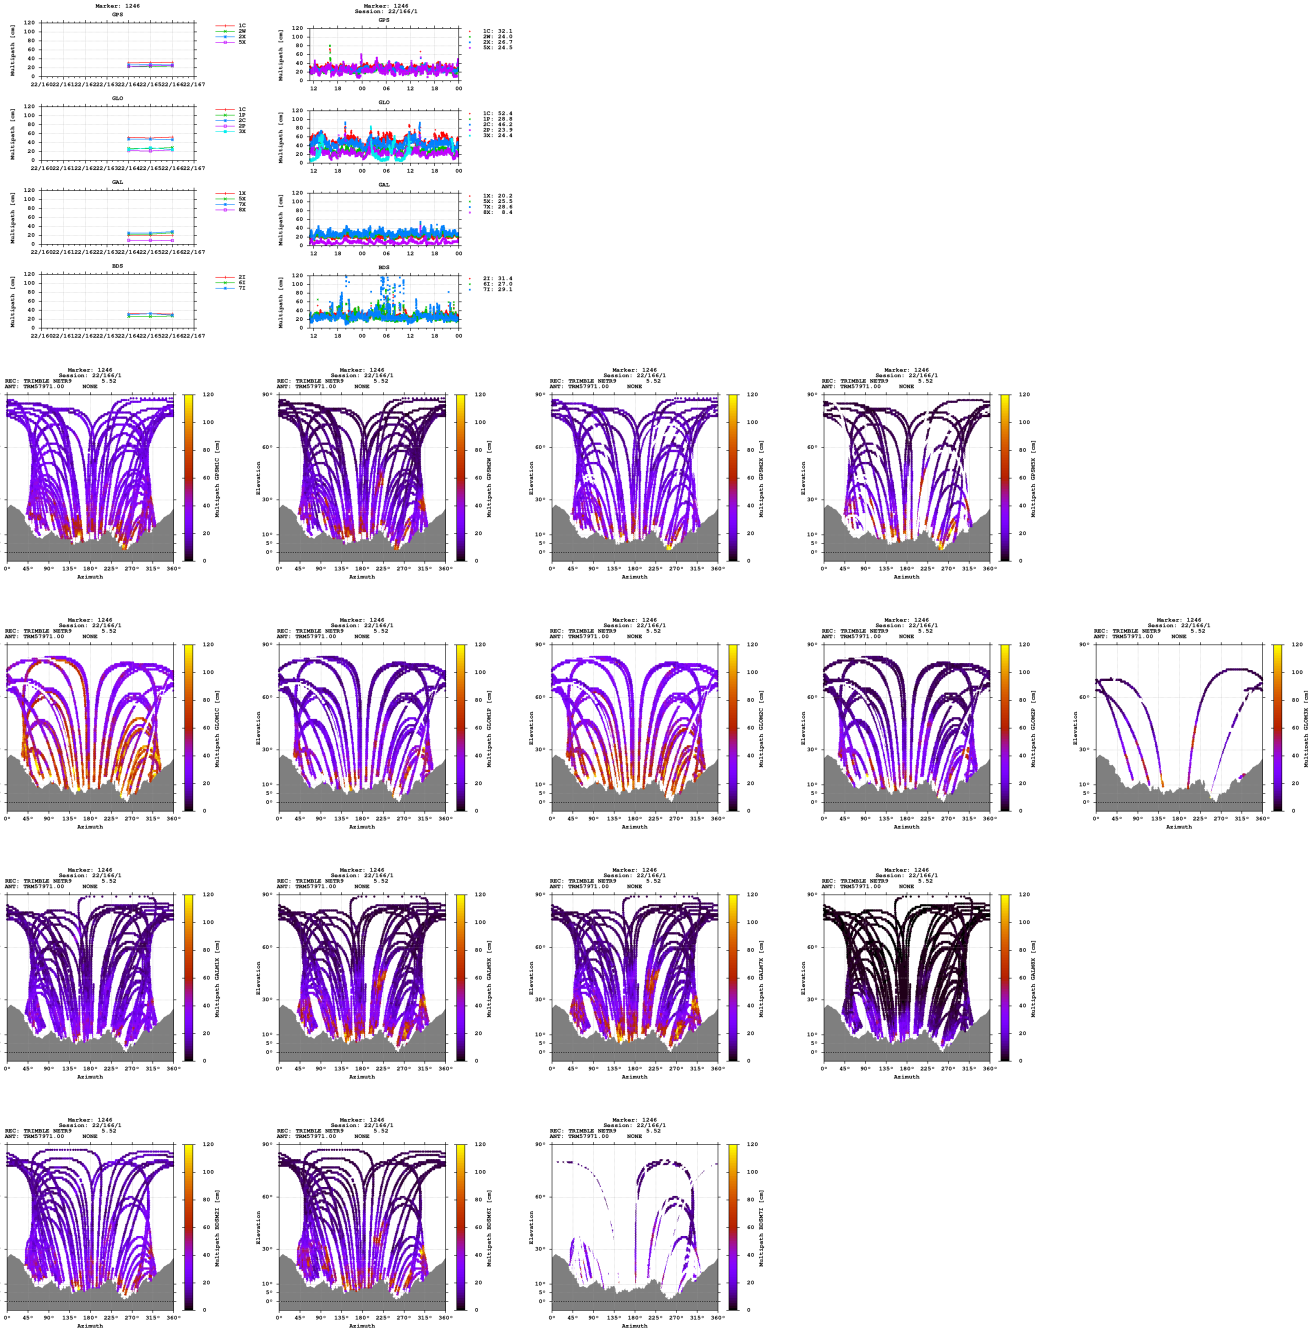


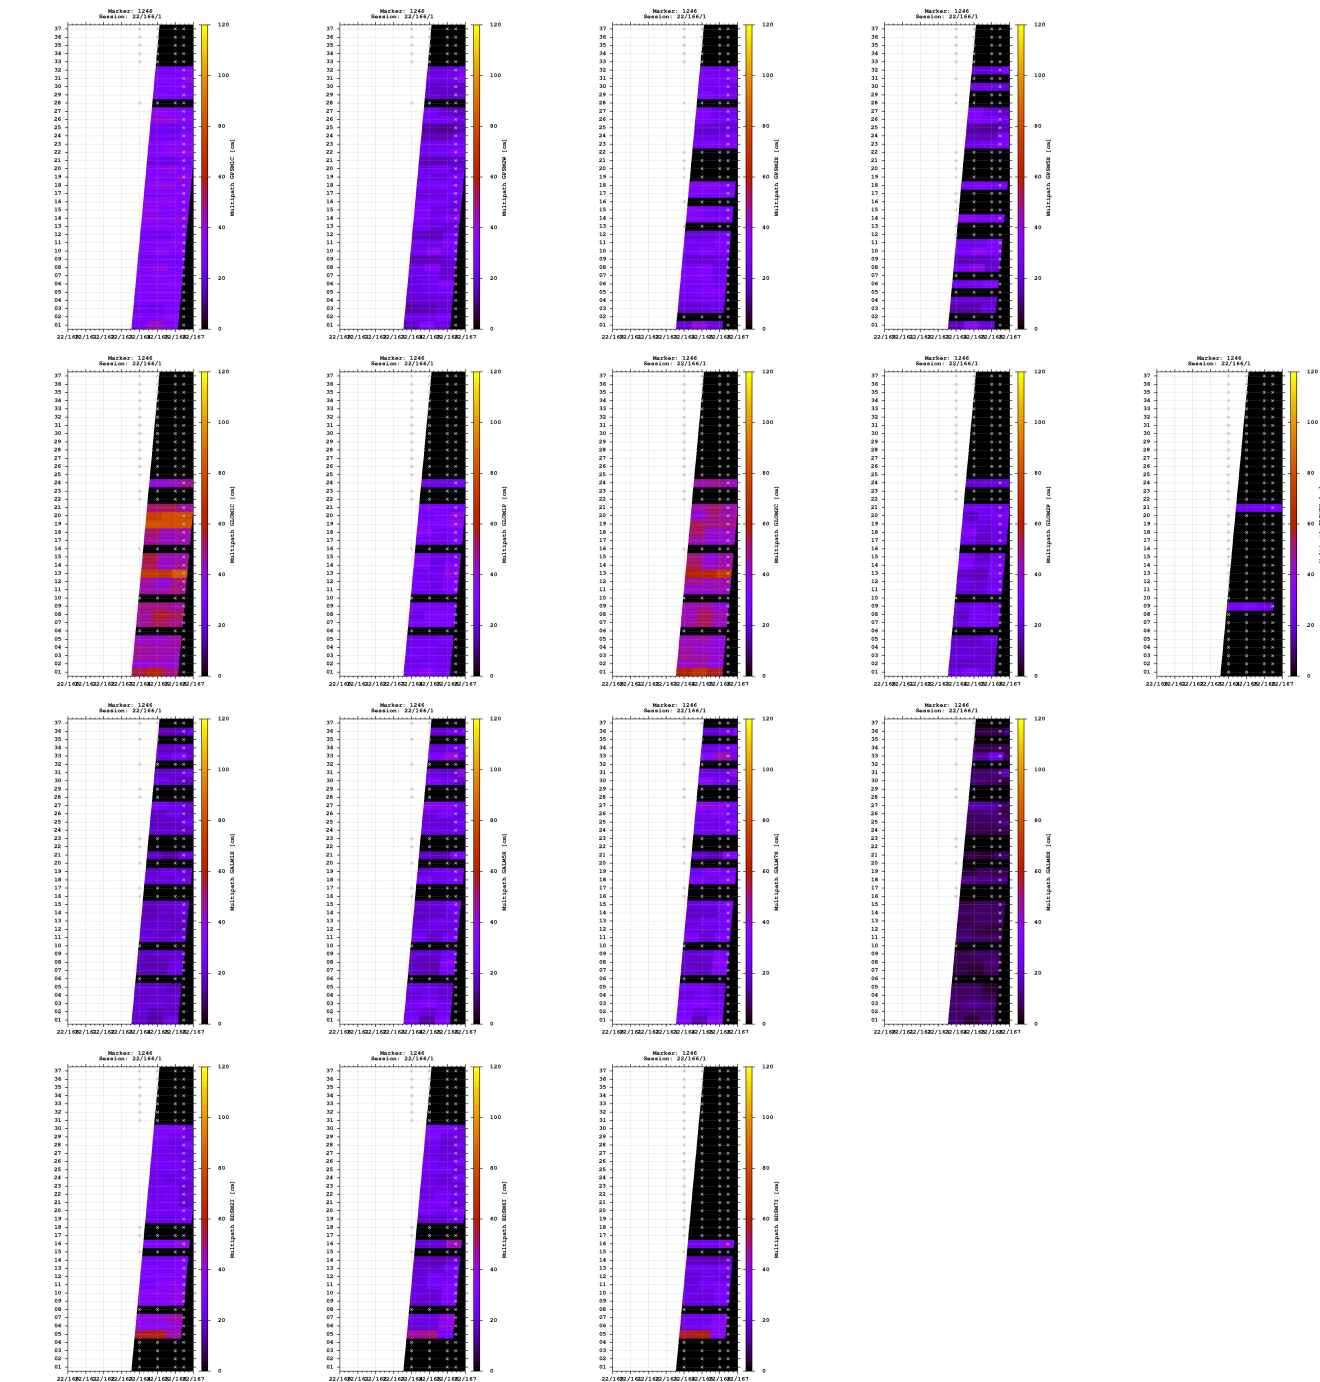


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

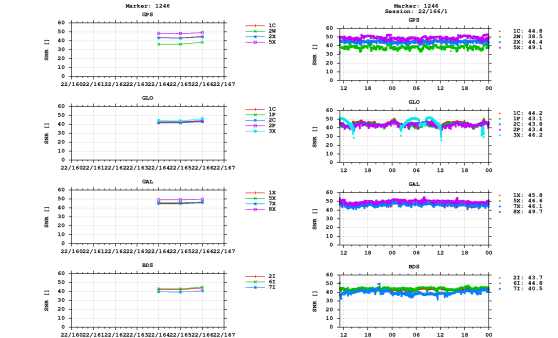


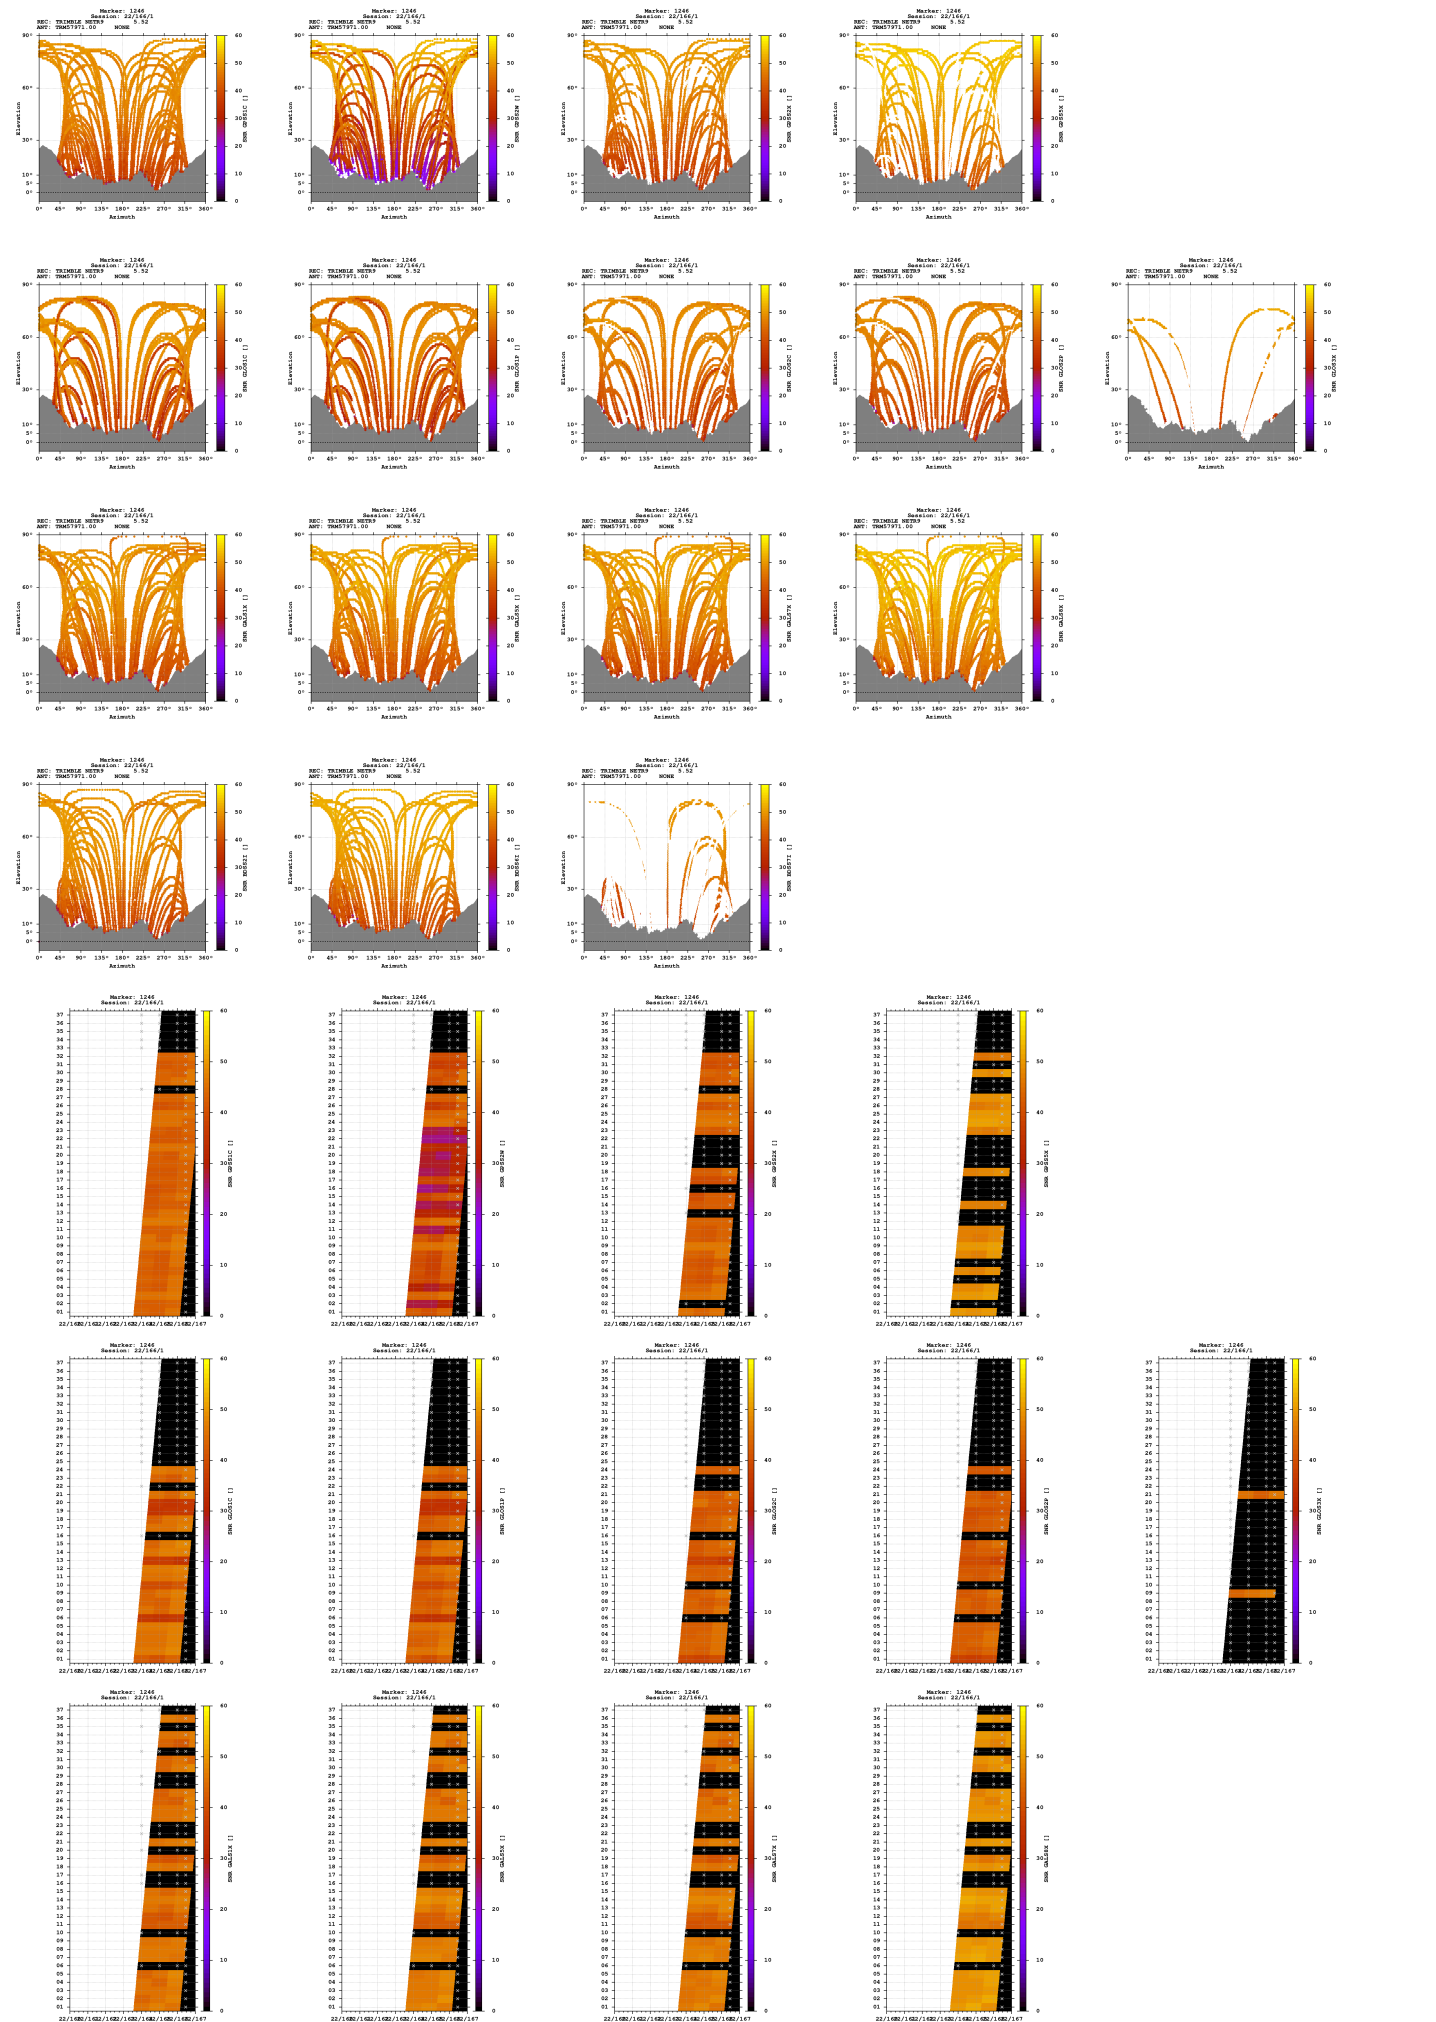

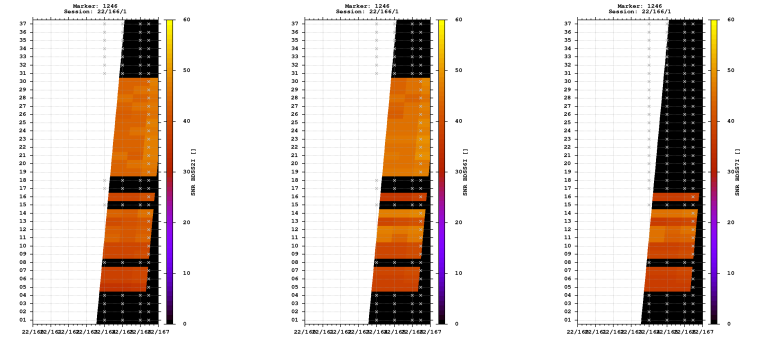



Estimates

2022-06-15 11:04:00	GPS	4364248.5811	556300.5273	4603910.6493	46.492368091	7.264184785	1122.6954
2022-06-15 11:04:00	GLO	4364248.8958	556300.5485	4603910.5093	46.492365171	7.264184541	1122.8106
2022-06-15 11:04:00	GAL	4364248.6679	556300.5568	4603910.4000	46.492365961	7.264185024	1122.5764
2022-06-15 11:04:00	BDS	4364245.3736	556299.9301	4603909.6066	46.492382883	7.264182353	1119.6966

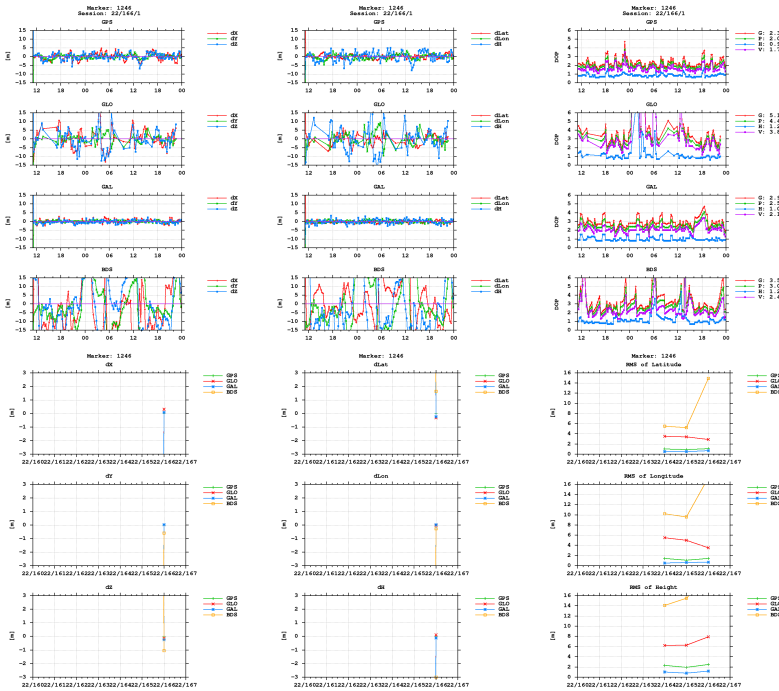

BNC

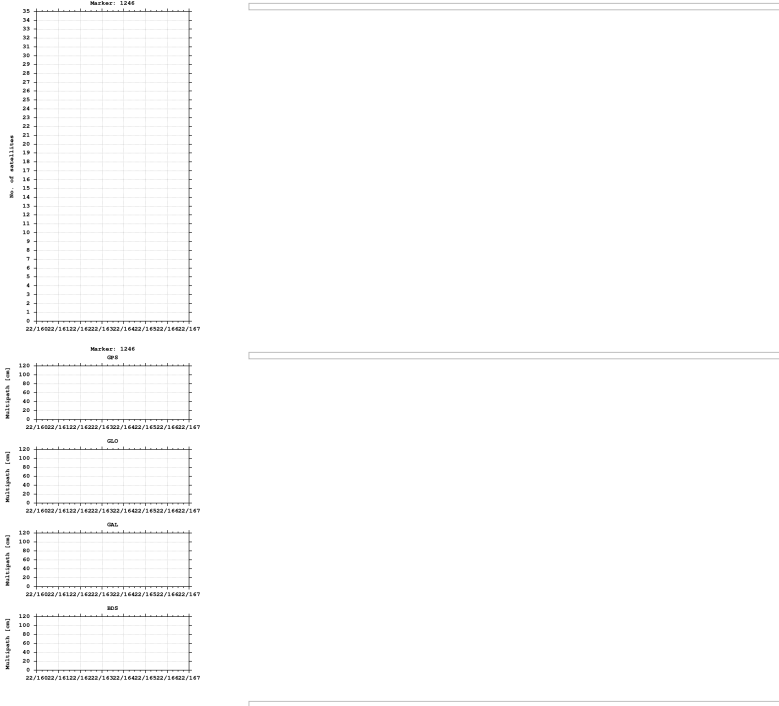

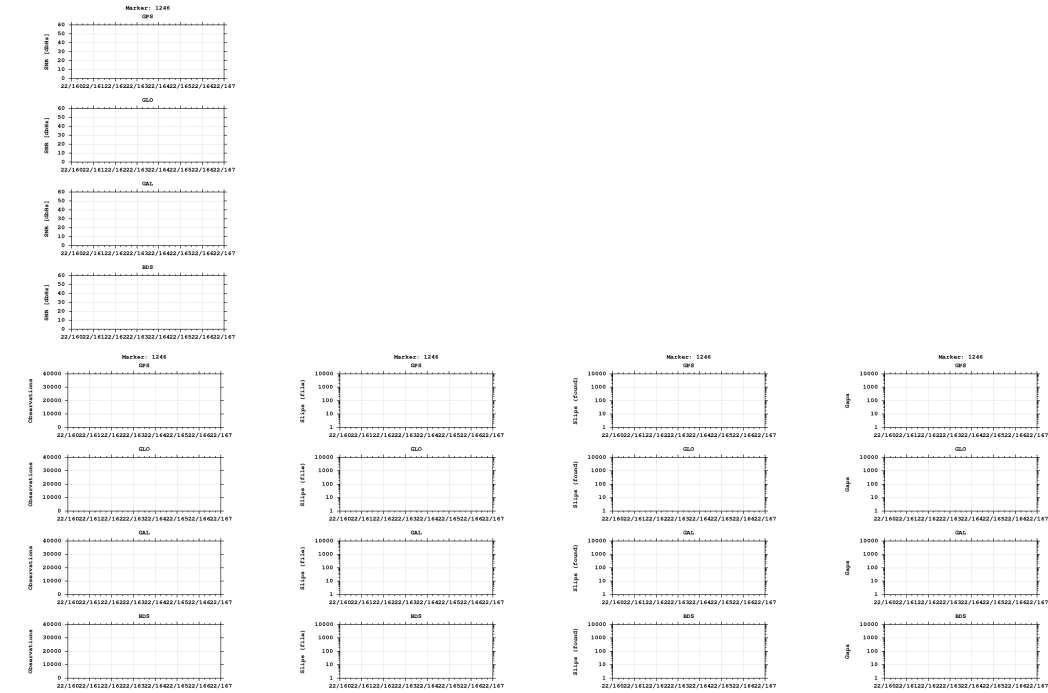

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)