


GNSS observation file monitoring for 0515


Last RINEX file: 05151671.220
RINEX version: 3.02
Marker: 1246
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

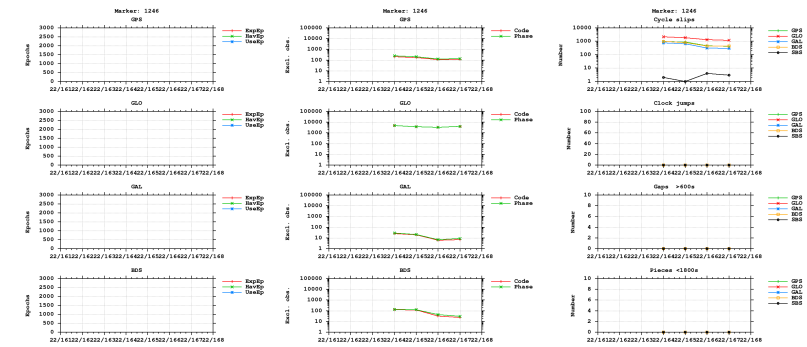



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

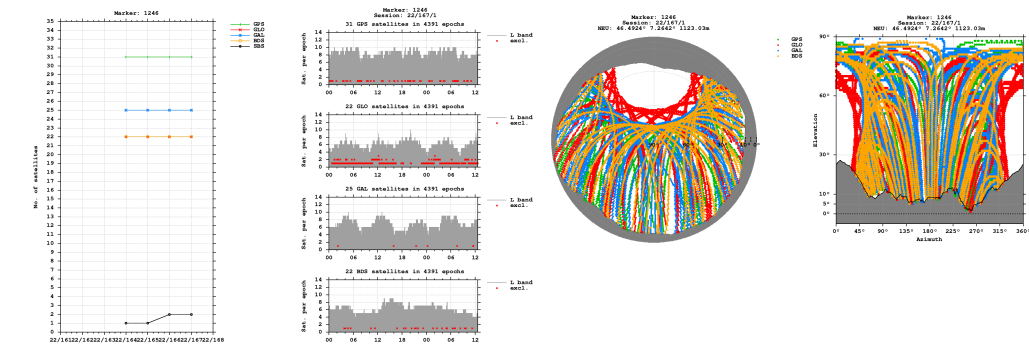


Bands

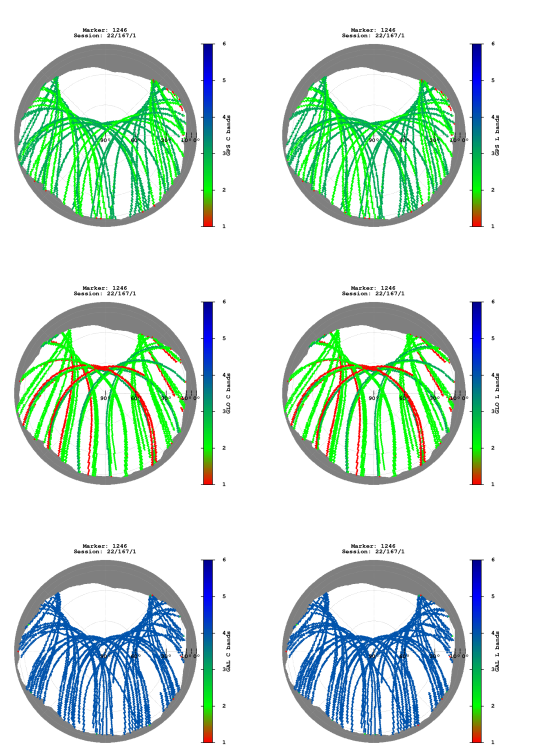


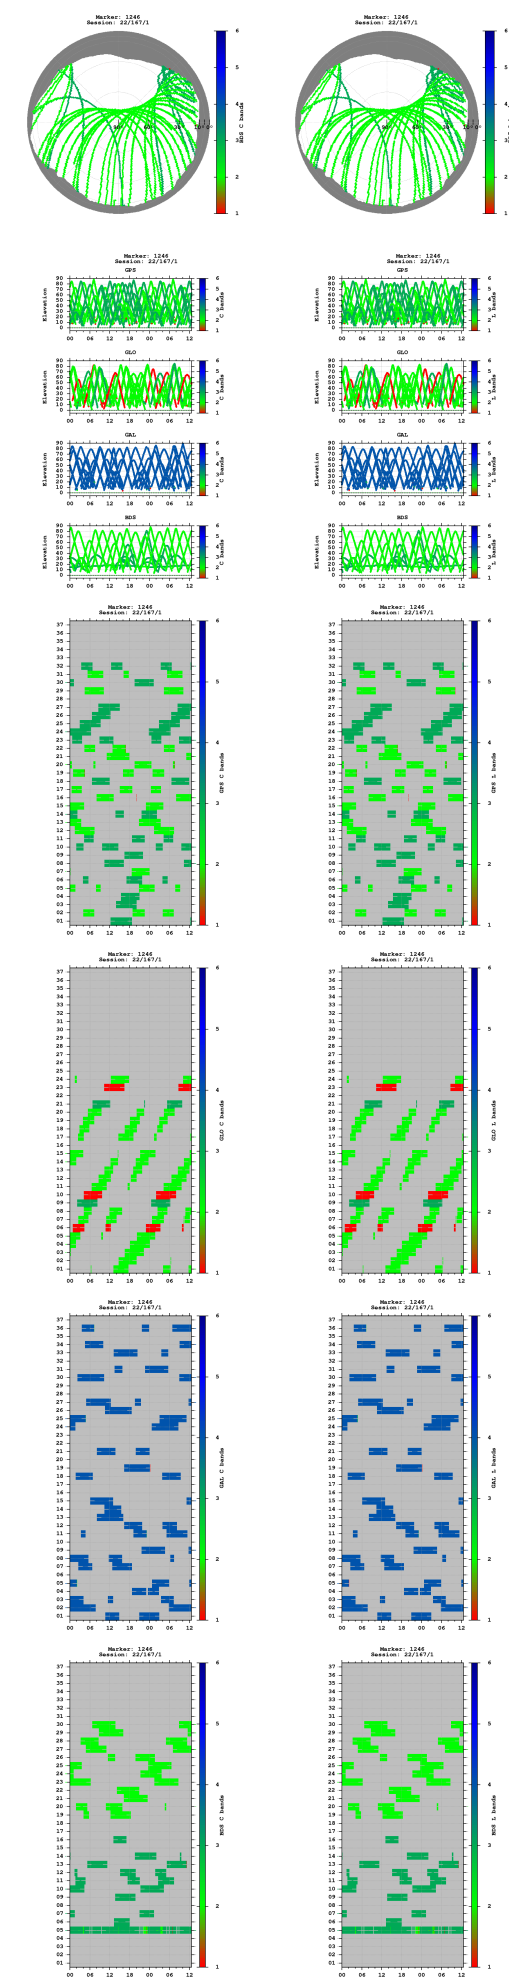

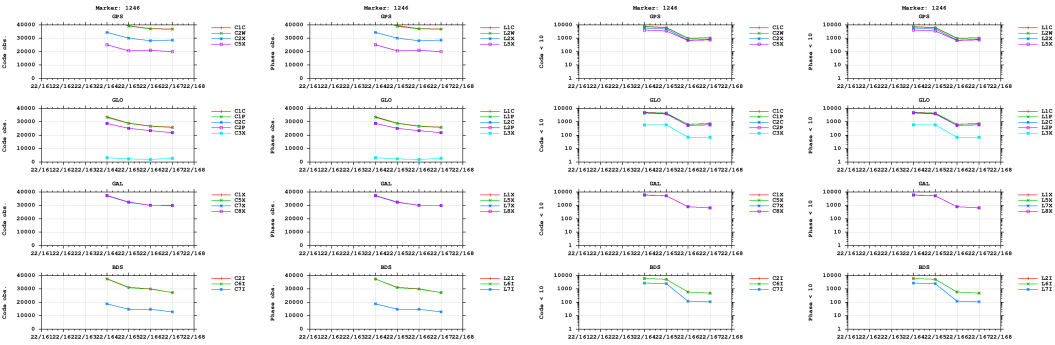



Multipath

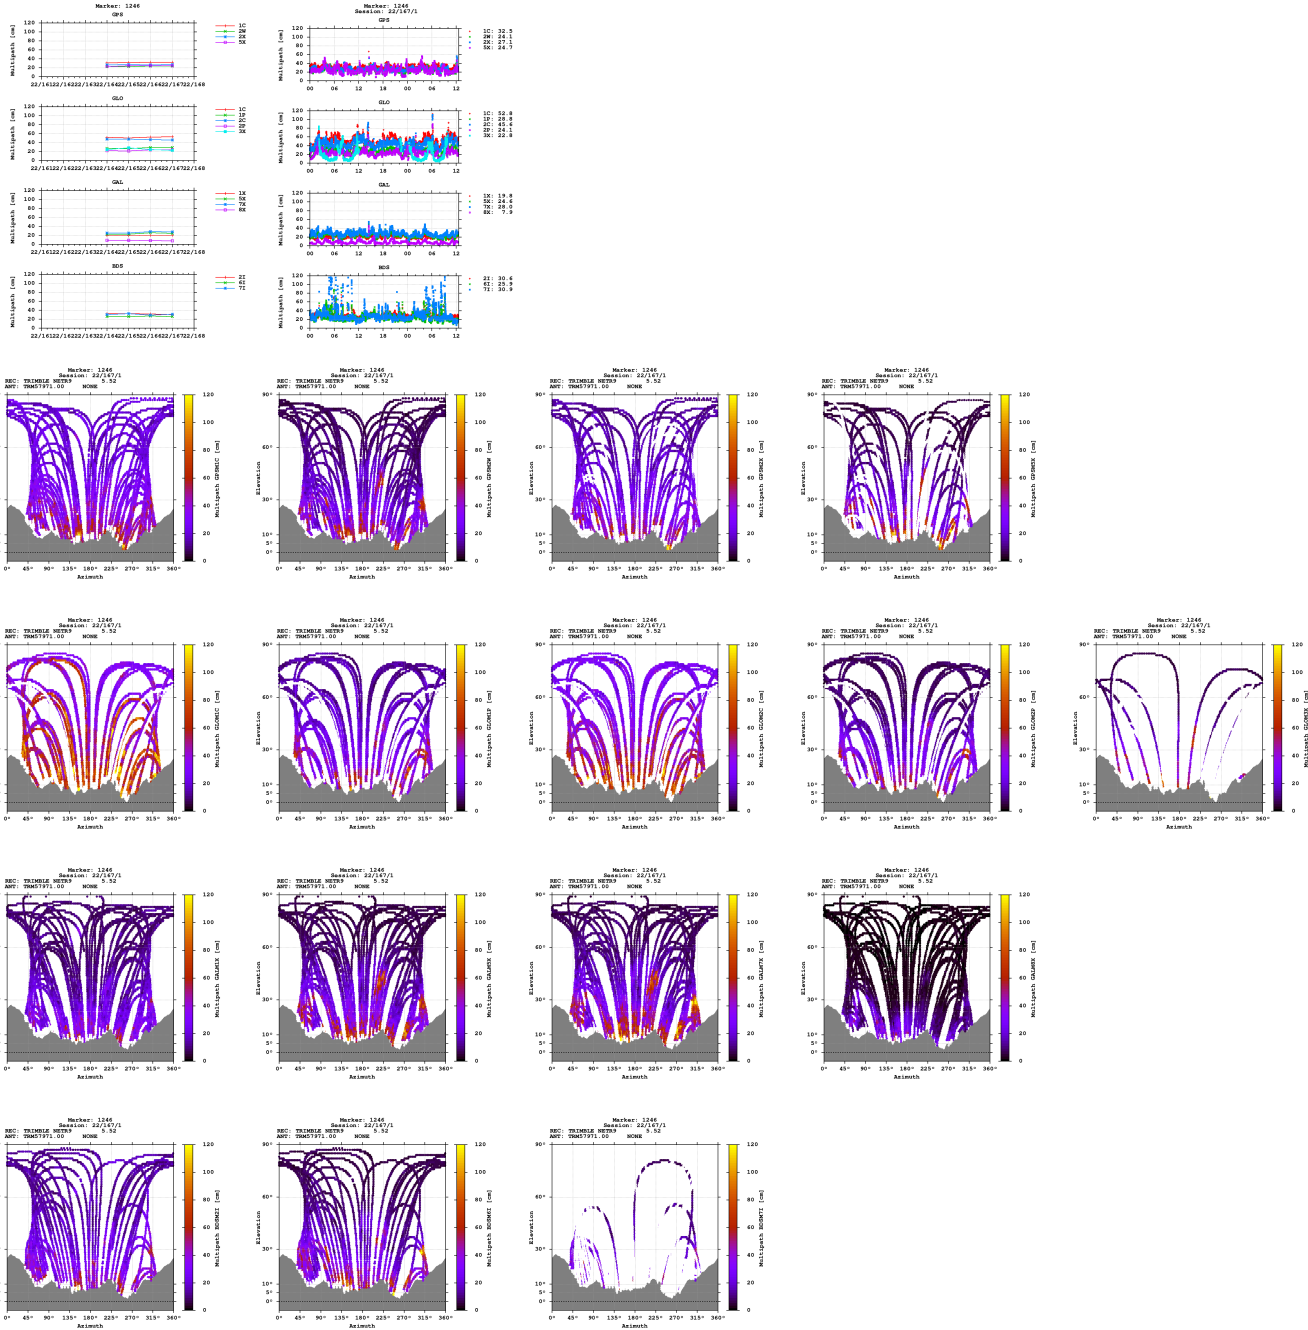


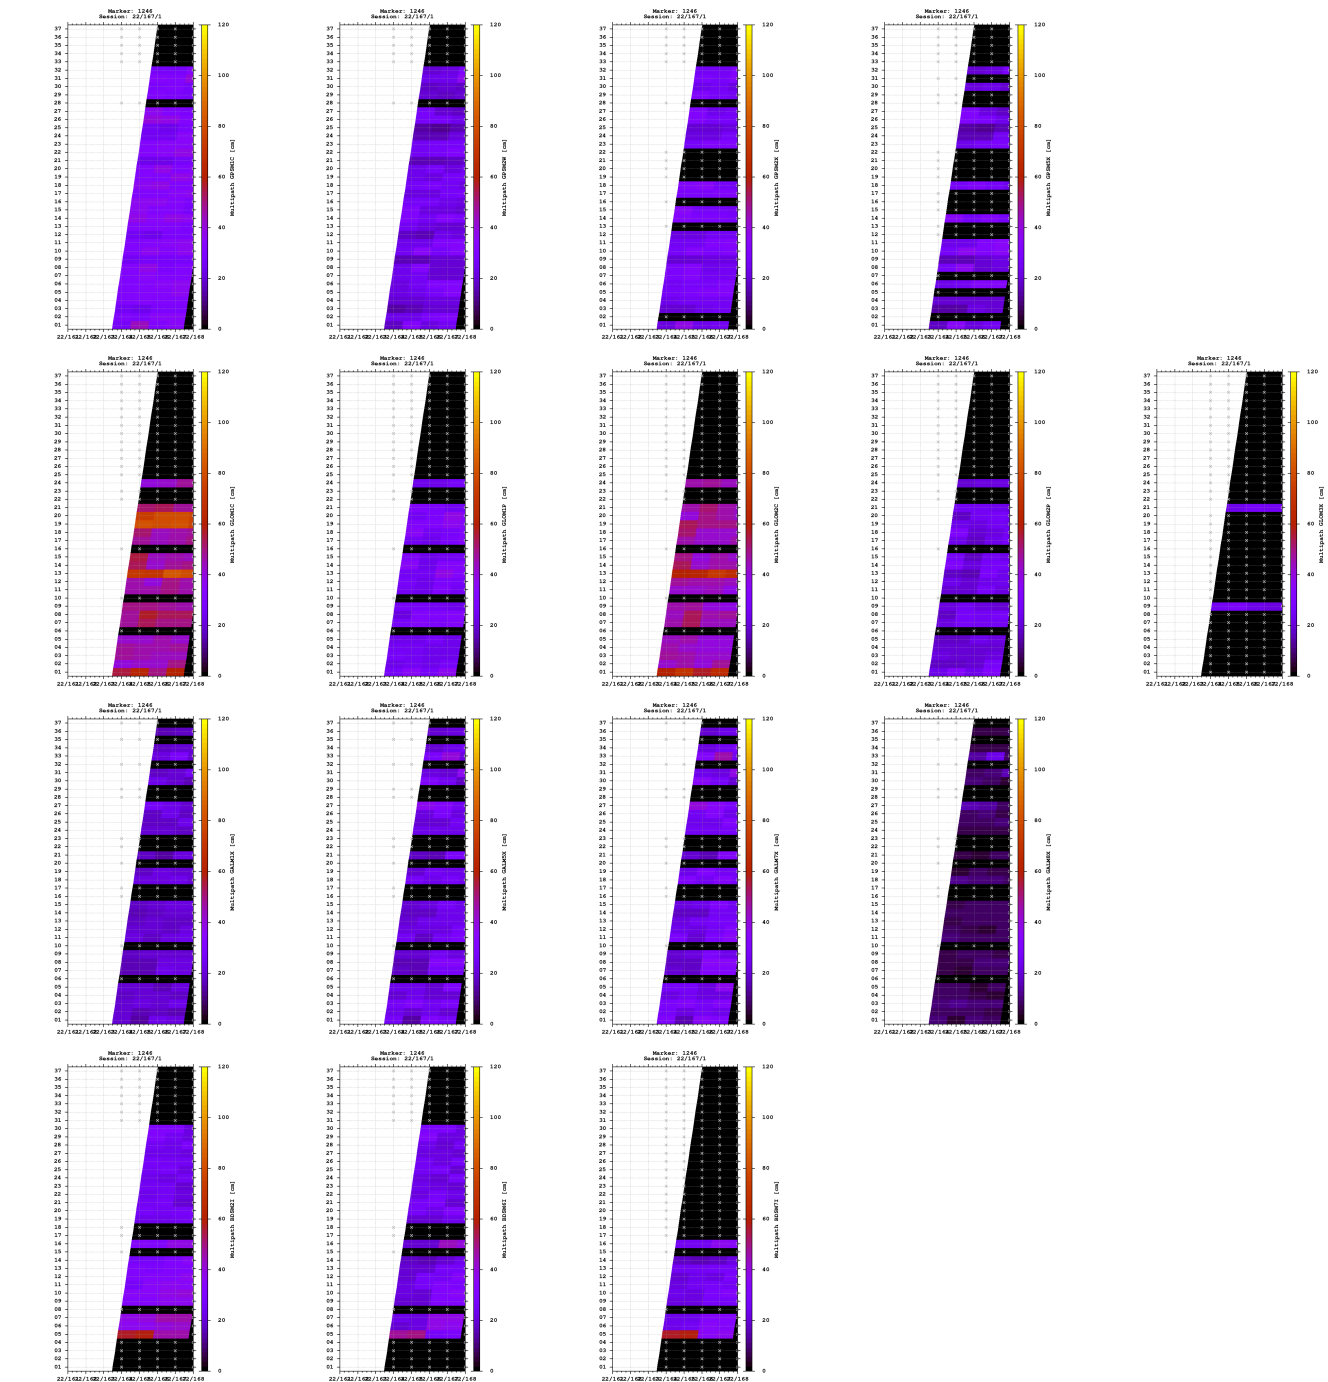

Signal-to-noise ratio

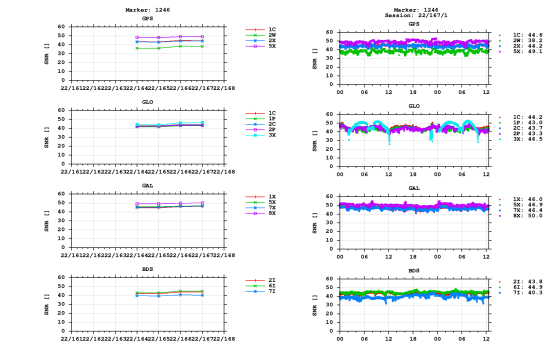


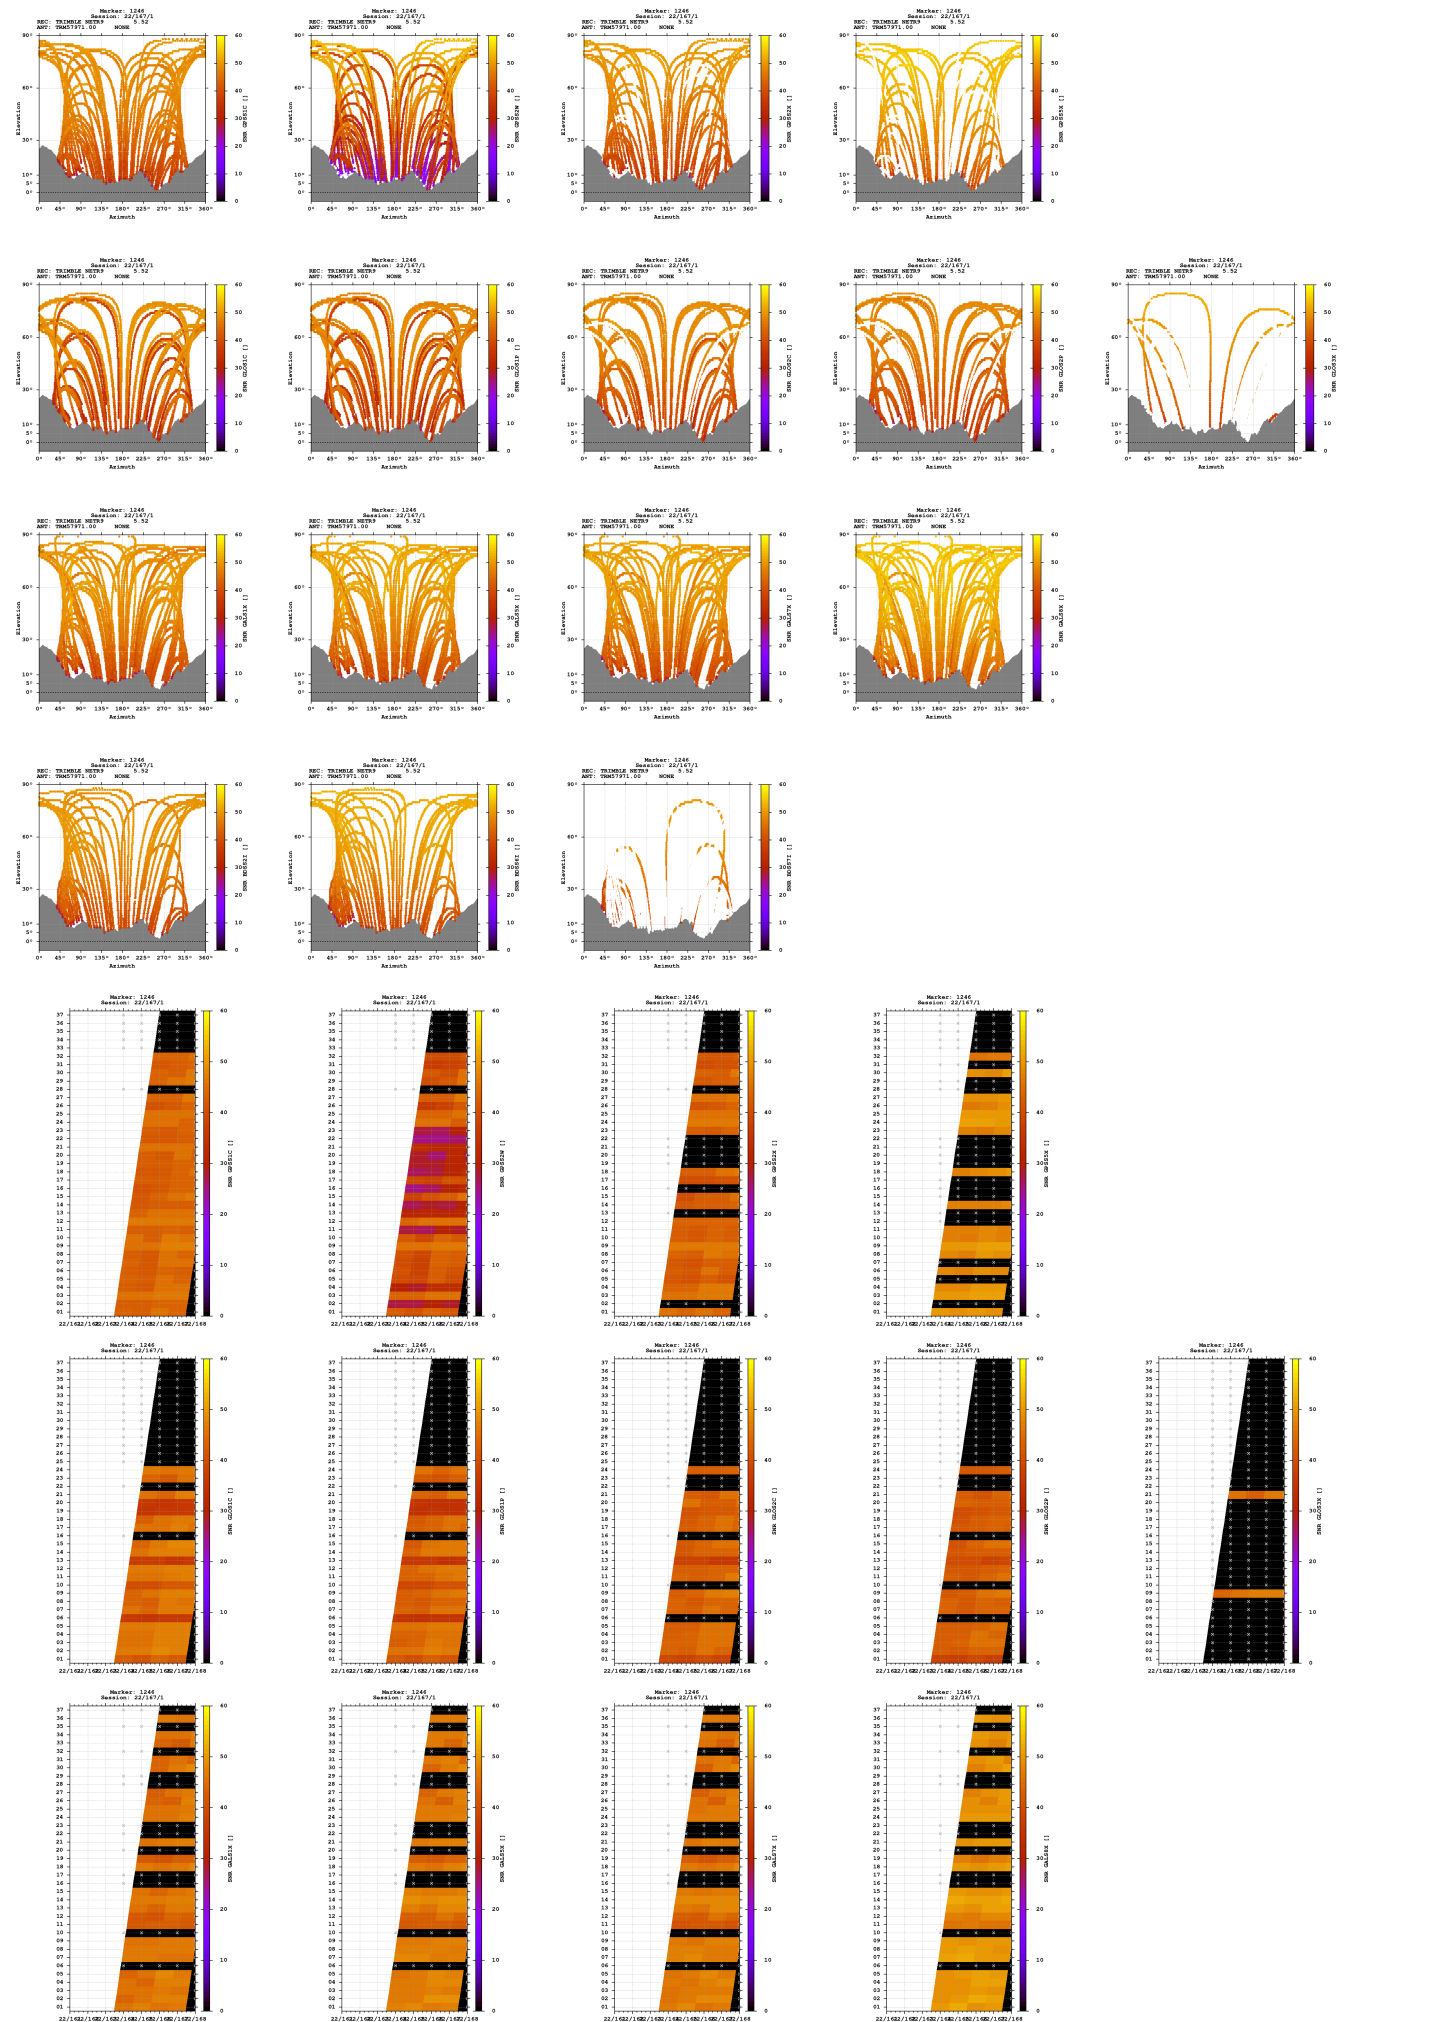

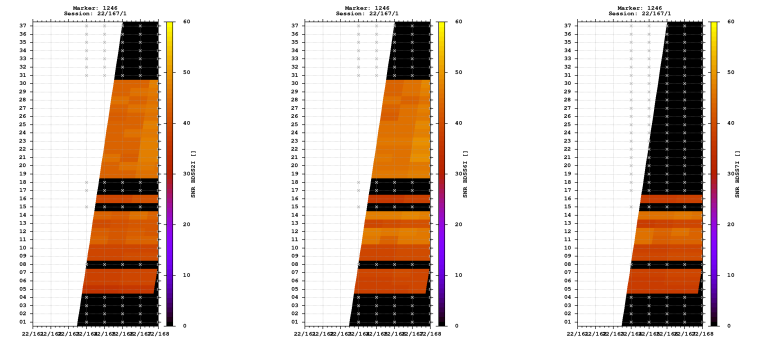



Estimates

2022-06-15 11:04:00	GPS	4364248.9690	556300.6609	4603910.7275	46.492365955	7.264185873	1123.0286
2022-06-15 11:04:00	GLO	4364248.0415	556300.5058	4603910.2832	46.492369334	7.264185397	1122.0595
2022-06-15 11:04:00	GAL	4364248.6083	556300.4642	4603910.3787	46.492366291	7.264183926	1122.5123
2022-06-15 11:04:00	BDS	4364243.9111	556300.1871	4603911.4447	46.492403516	7.264188081	1120.0534

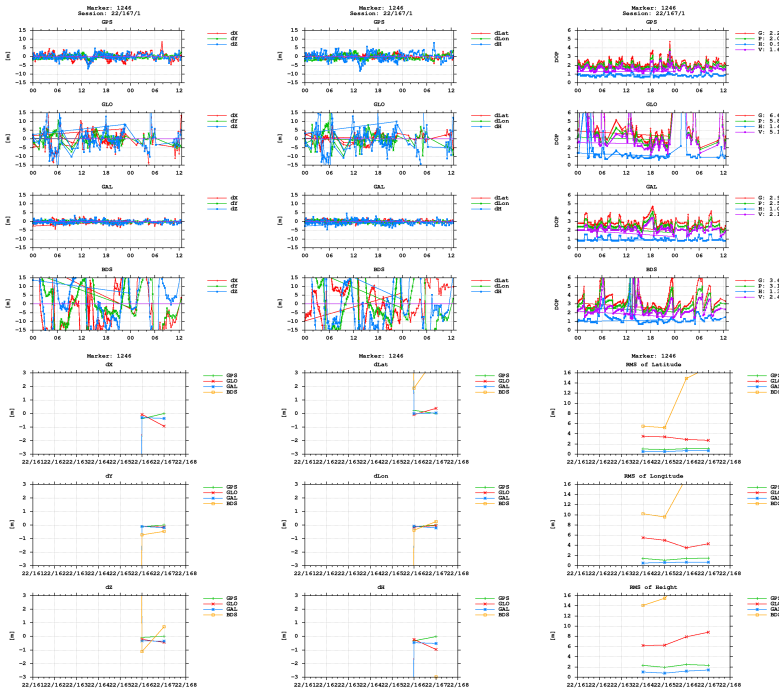

BNC

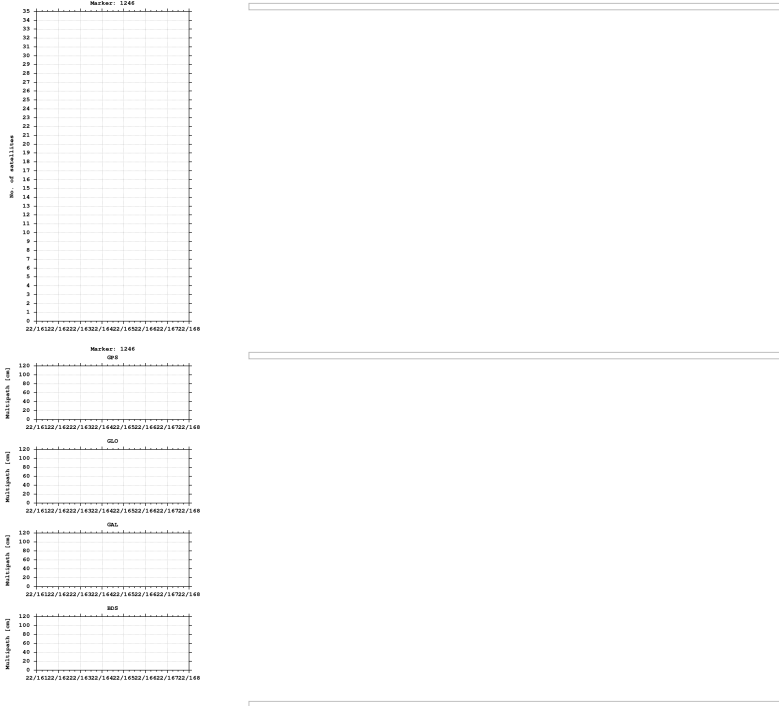

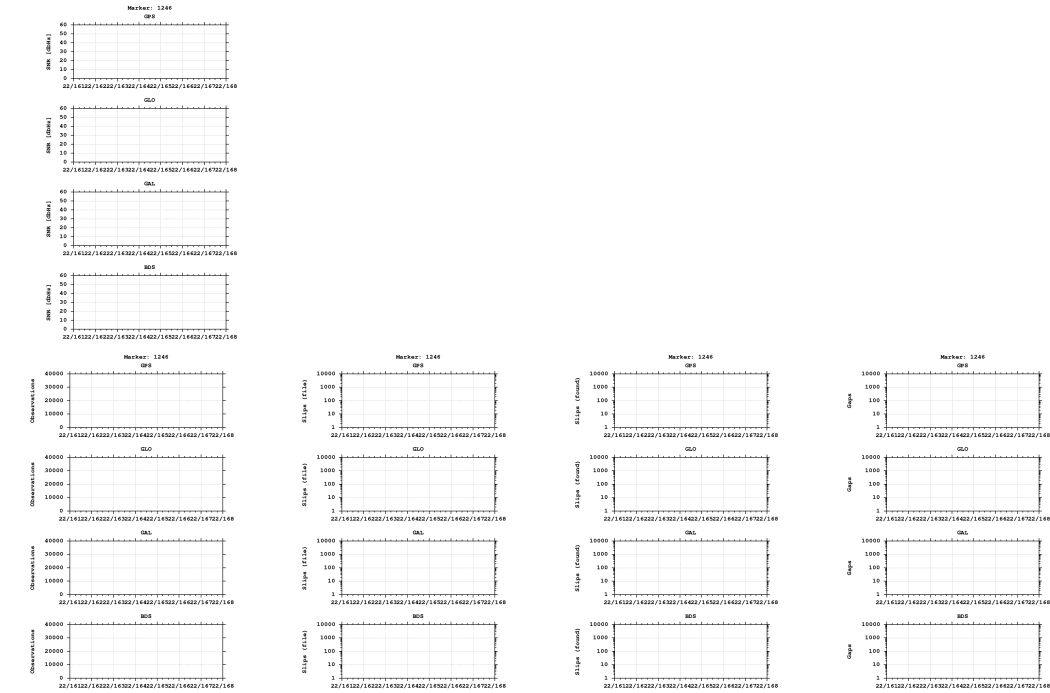

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)