


GNSS observation file monitoring for 0516


Last RINEX file: 05161651.22O
RINEX version: 3.02
Marker: 1224
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

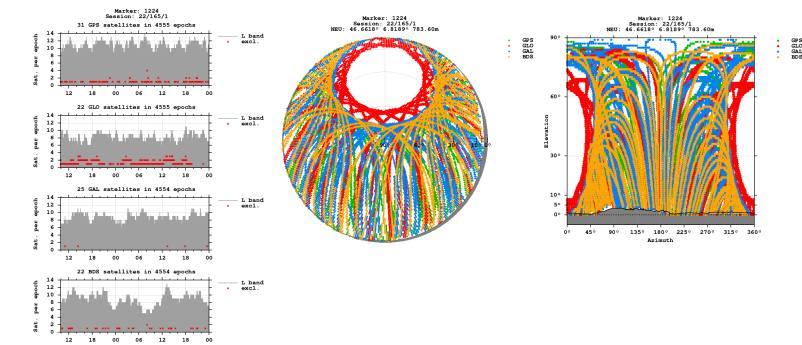


Bands

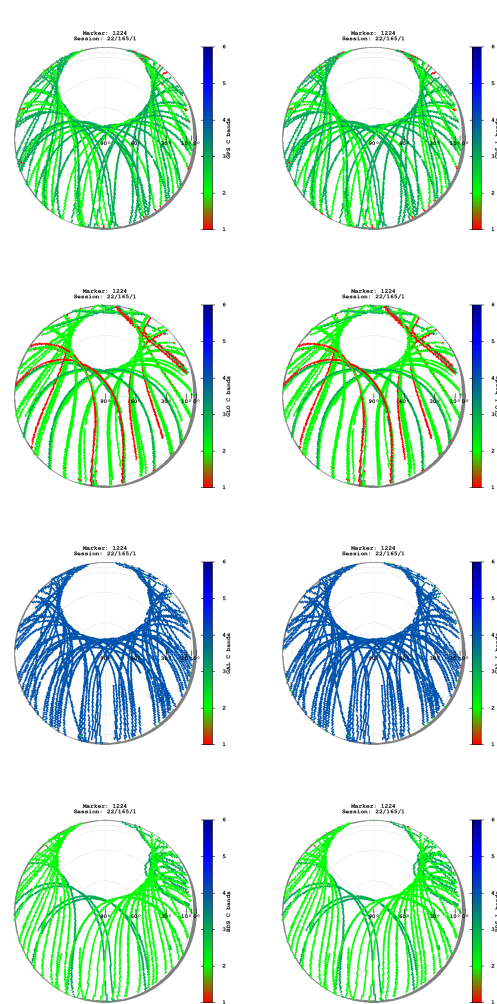

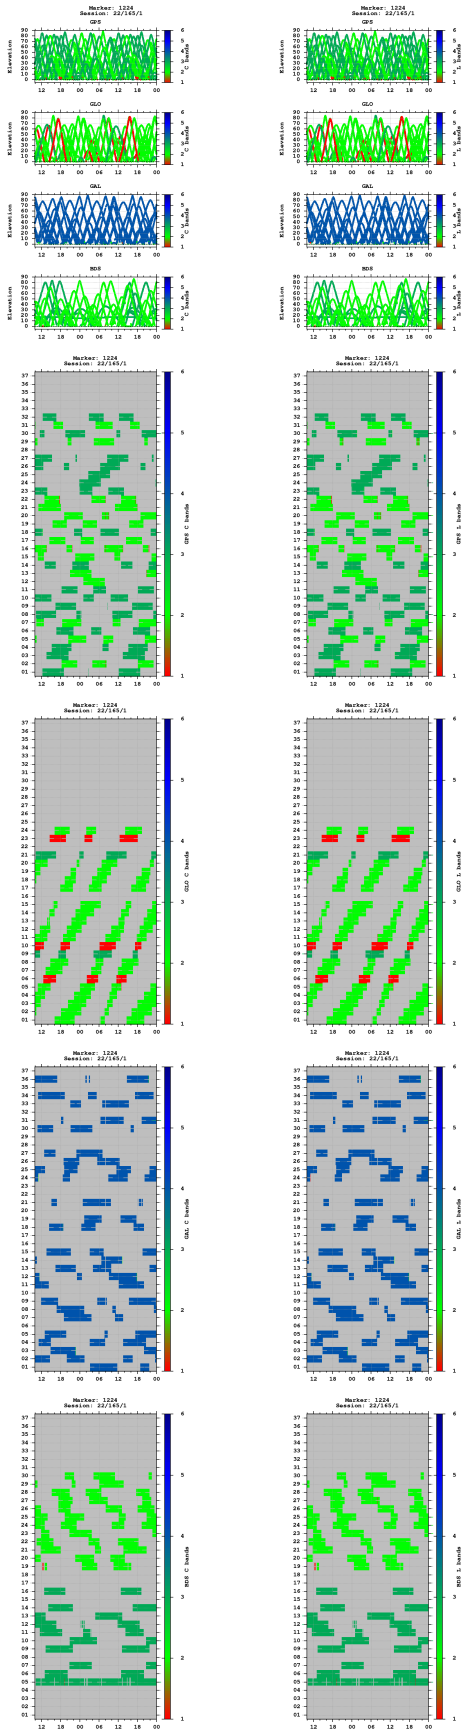



Multipath

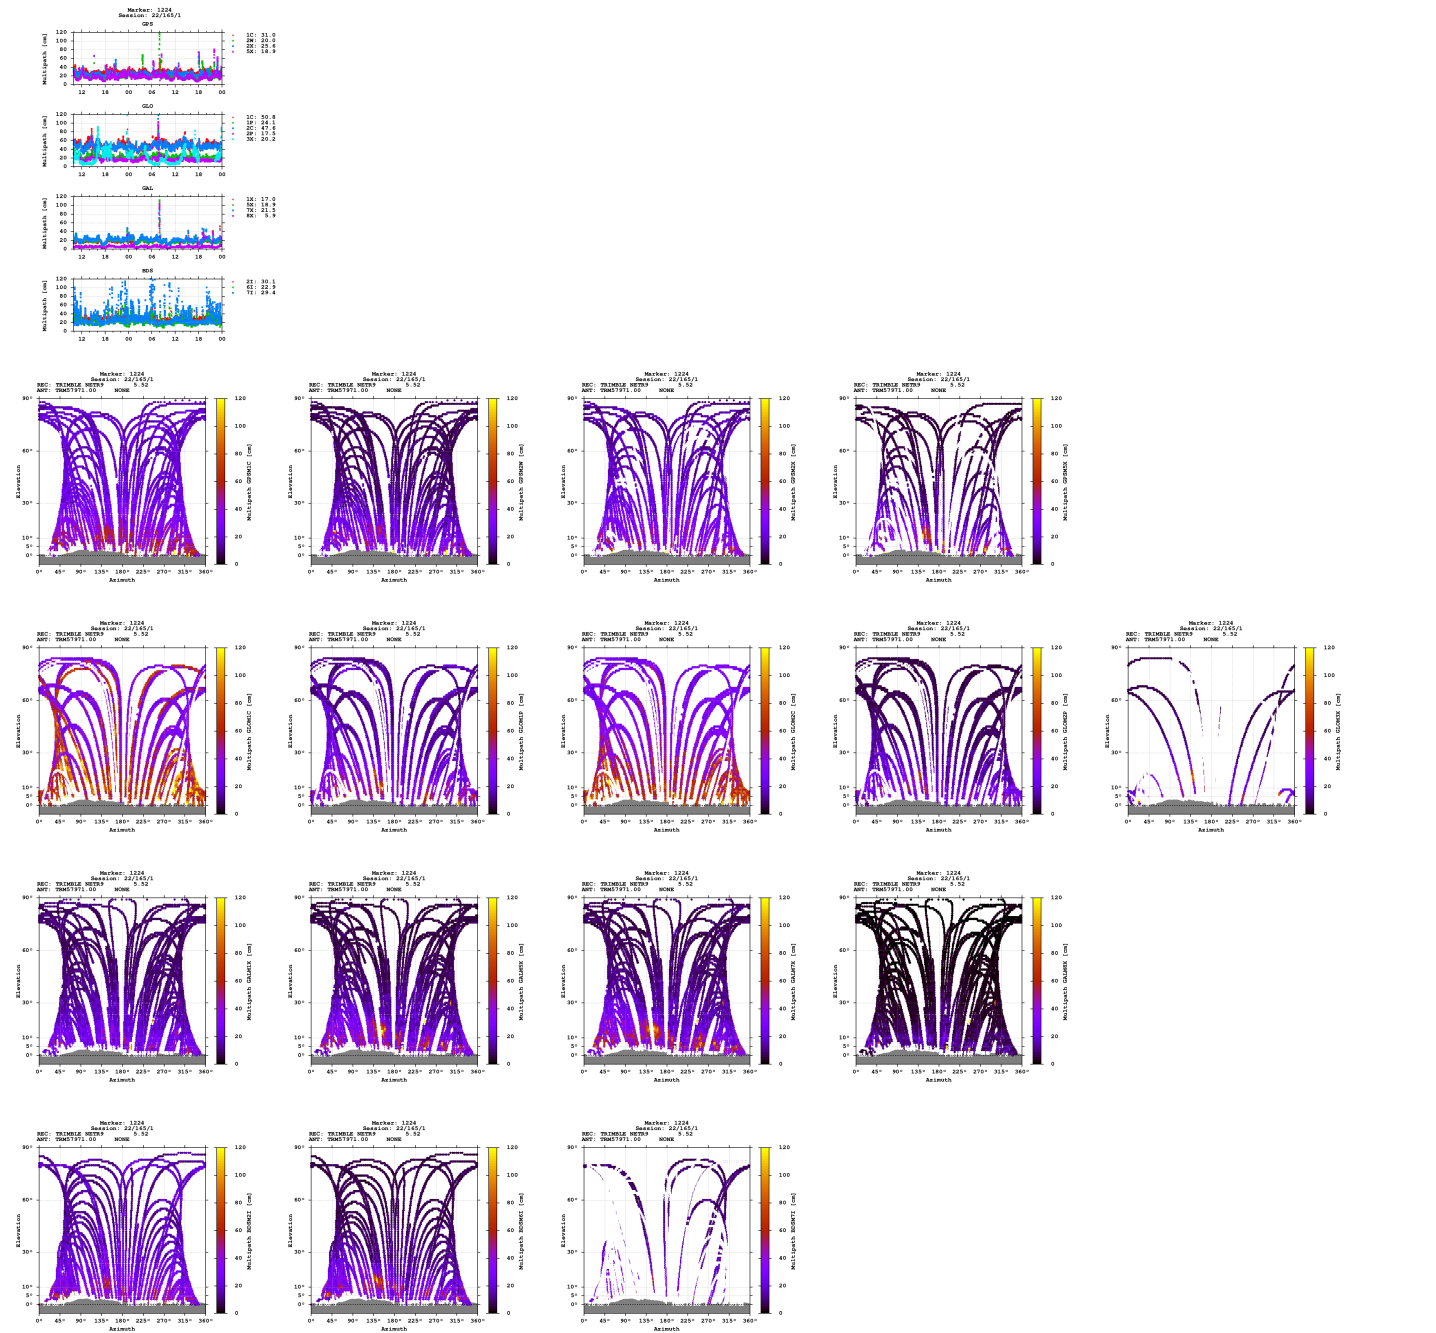

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

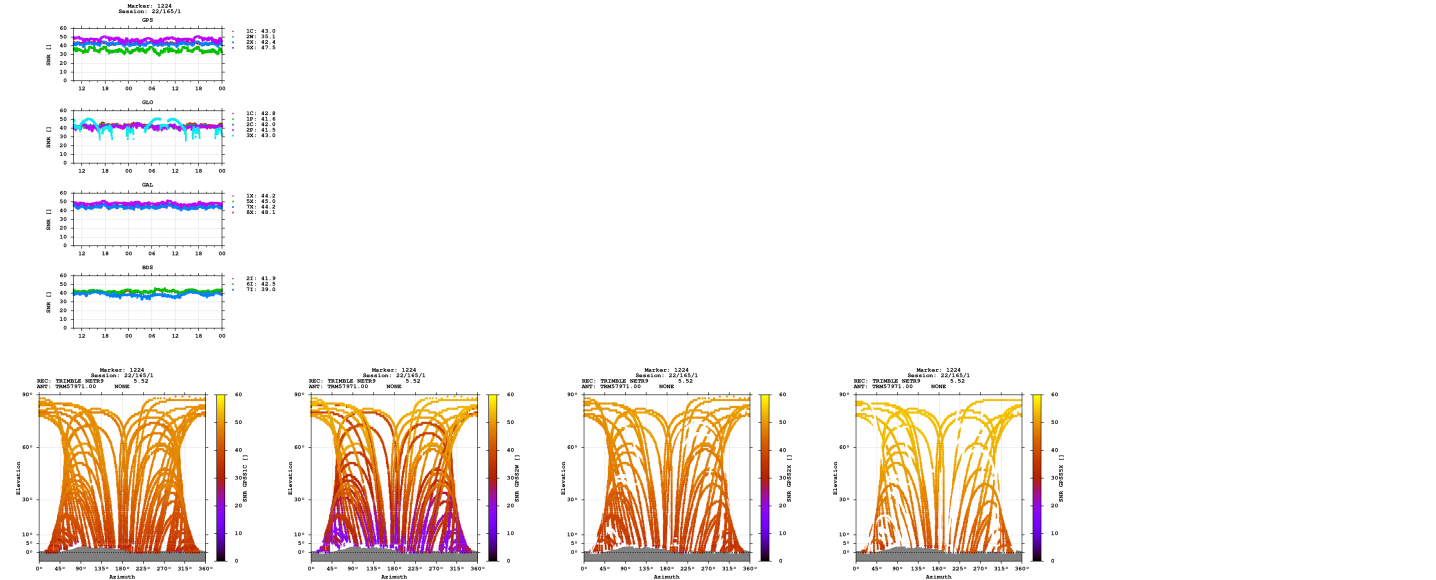

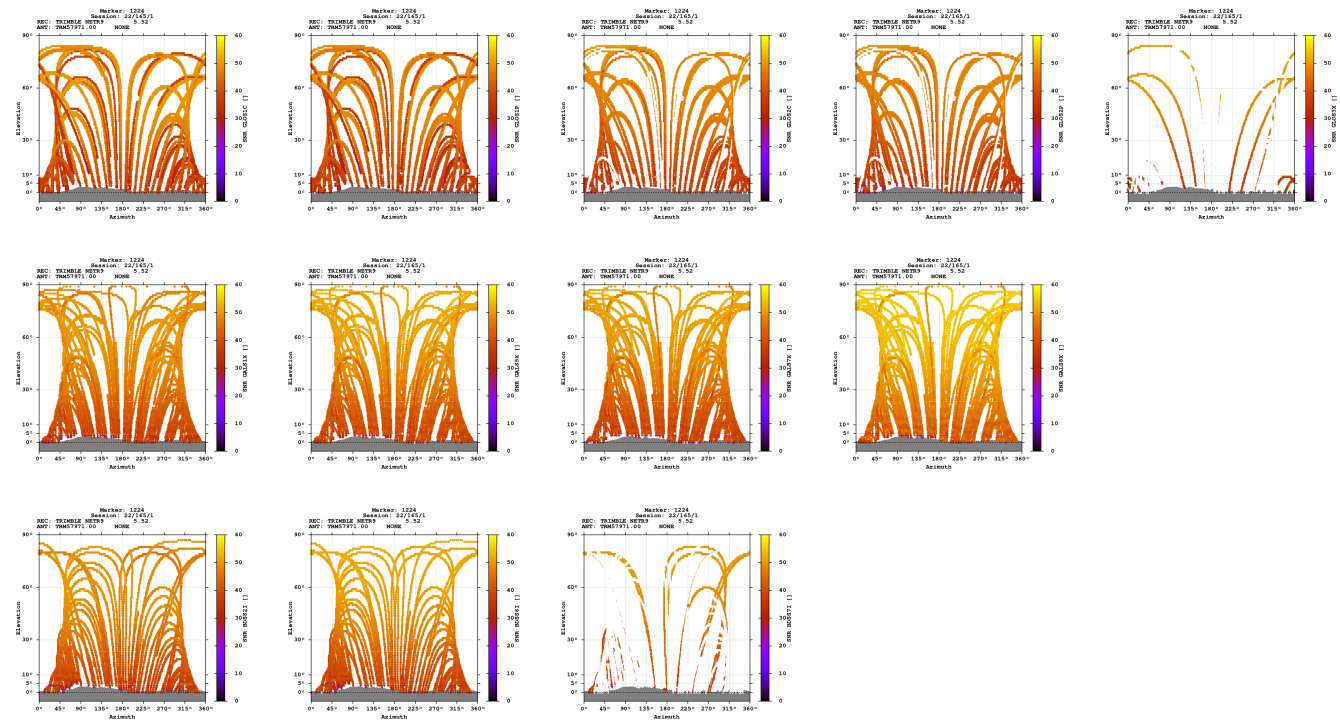

Estimates

2022-06-14 09:56:00	GPS	4354620.9811	520715.4631	4616615.3656	46.661834800	6.818918418	783.5974
2022-06-14 09:56:00	GLO	4354621.2859	520715.9138	4616614.7190	46.661828479	6.818923791	783.3716
2022-06-14 09:56:00	GAL	4354620.9159	520715.4405	4616615.0921	46.661833553	6.818918226	783.3522
2022-06-14 09:56:00	BDS	4354618.8545	520714.3363	4616614.9205	46.661846741	6.818907099	781.7328

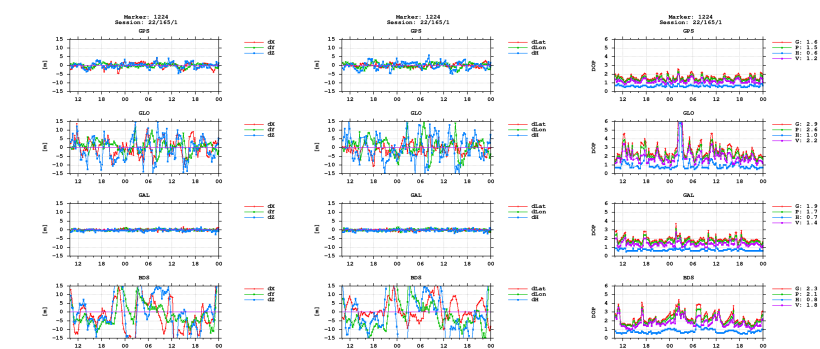

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)