

GNSS observation file monitoring for 0516

Last RINEX file: 05161671.220

RINEX version: 3.02

Marker: 1265

Receiver: 516

Antenna: 516


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

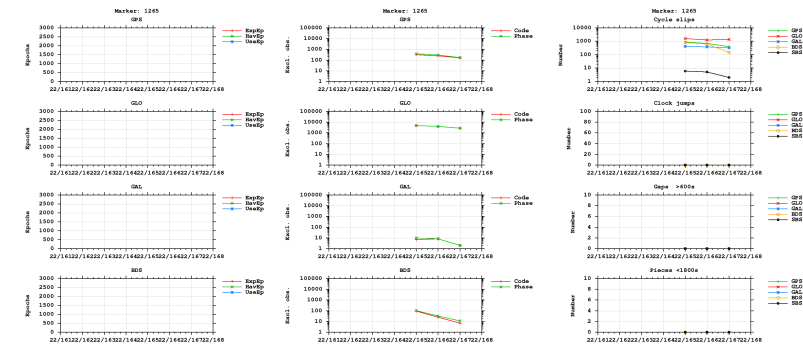



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

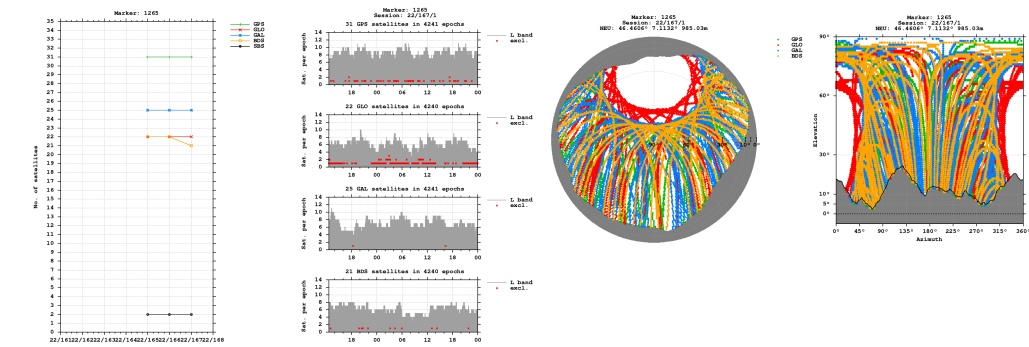


Bands

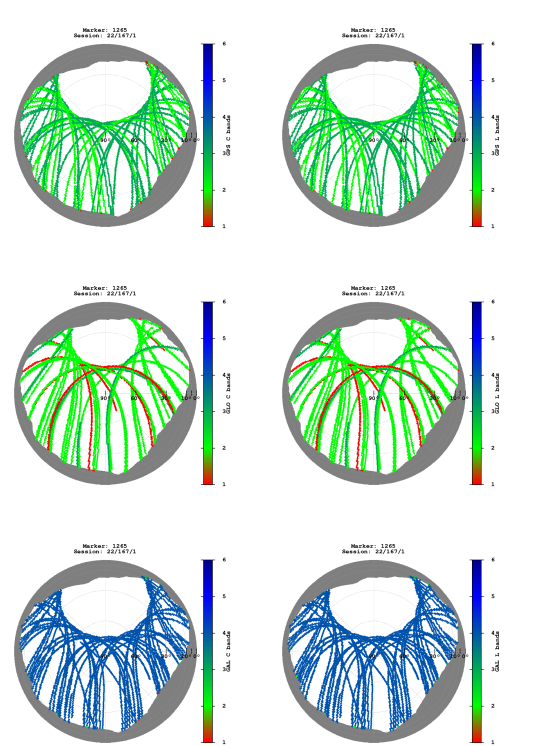


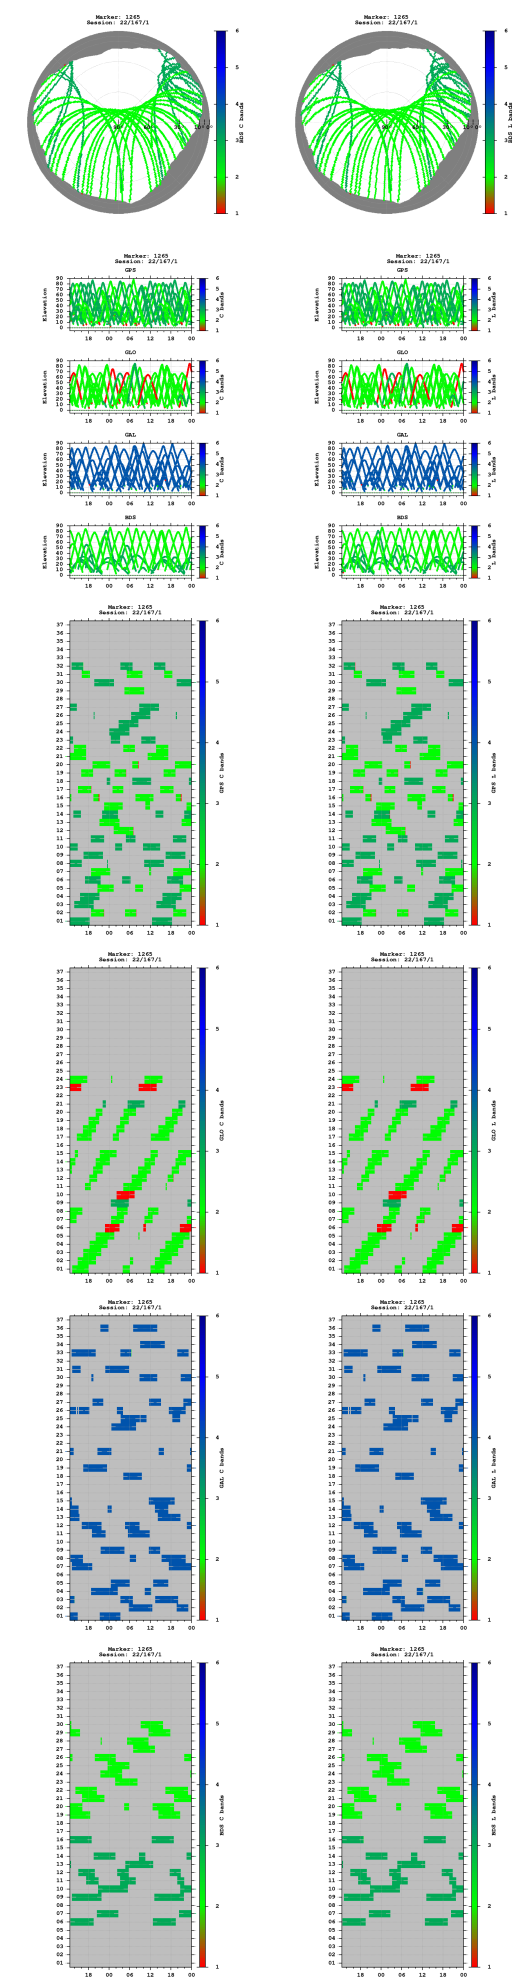


Observations

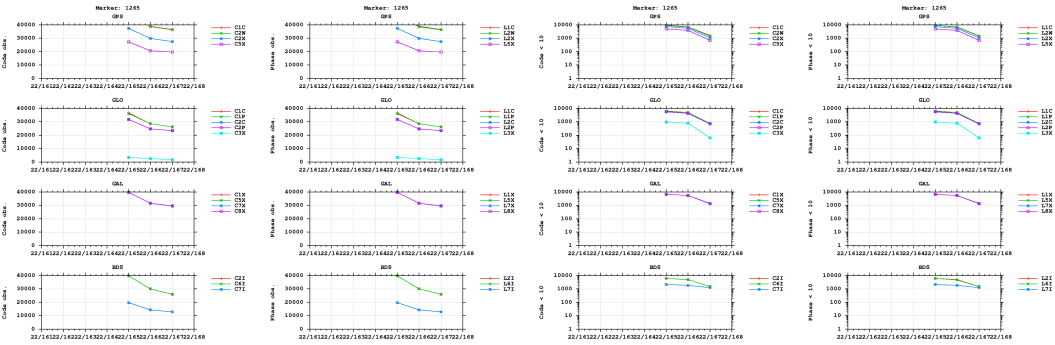


Multipath

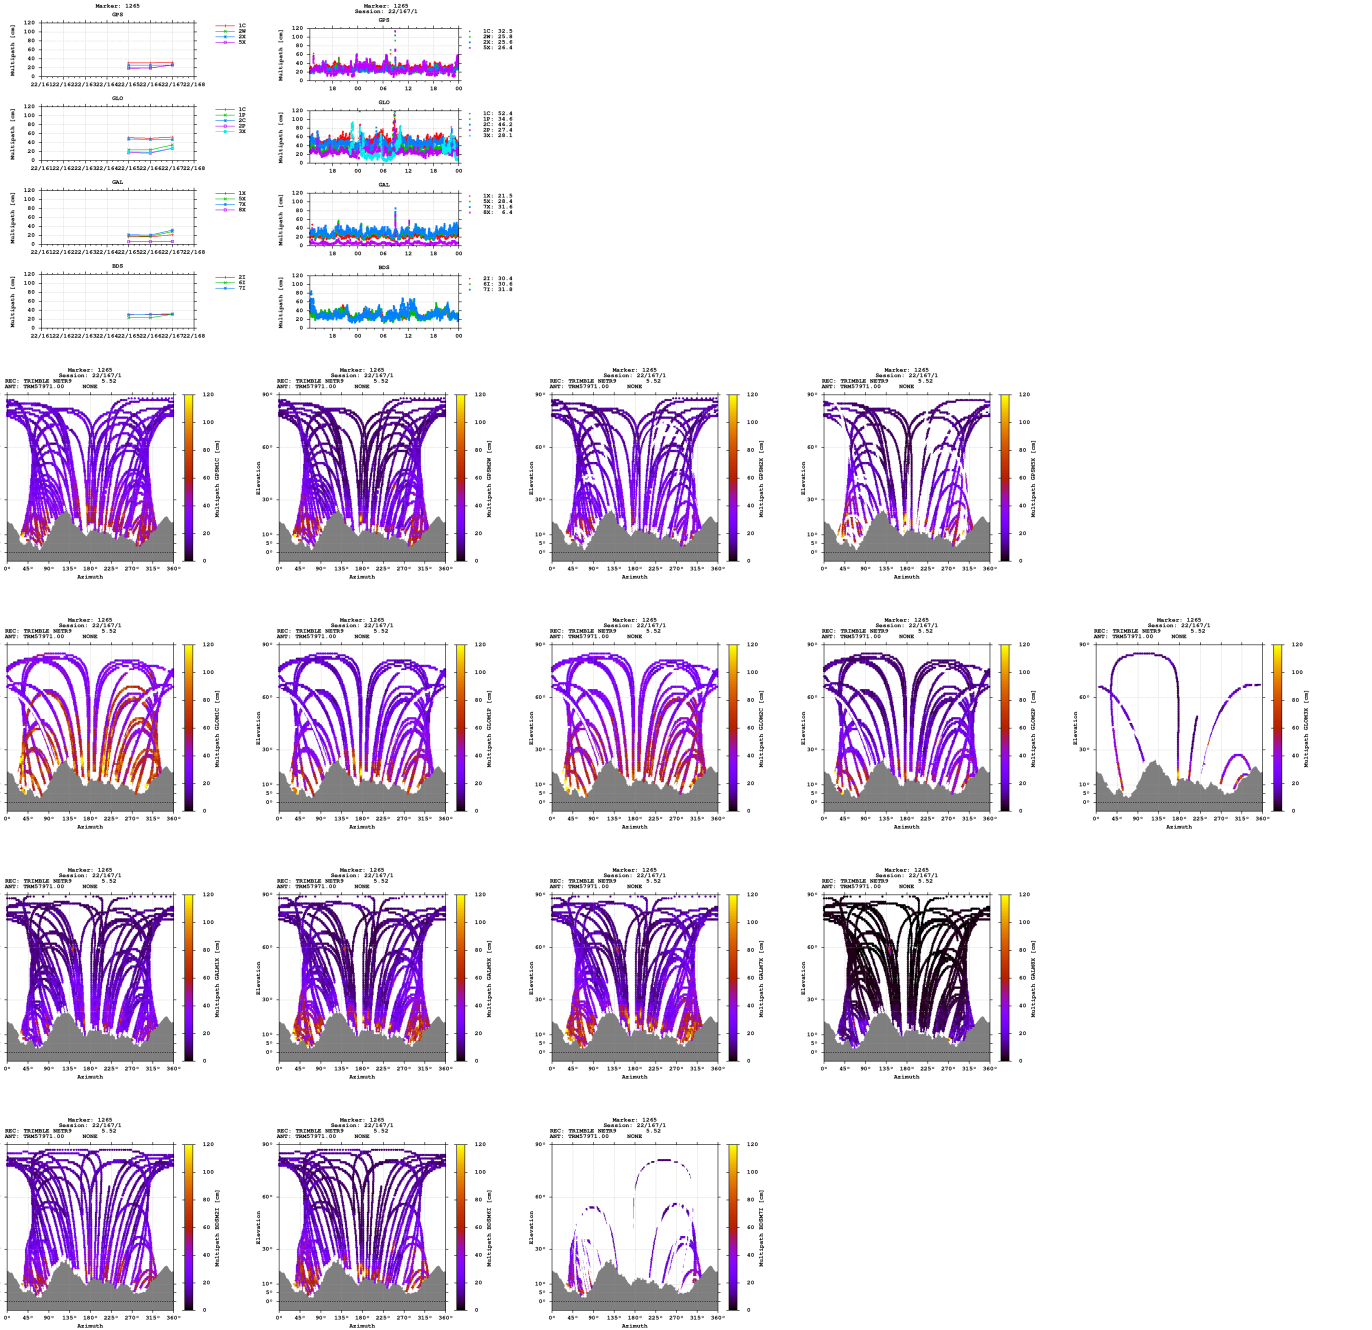


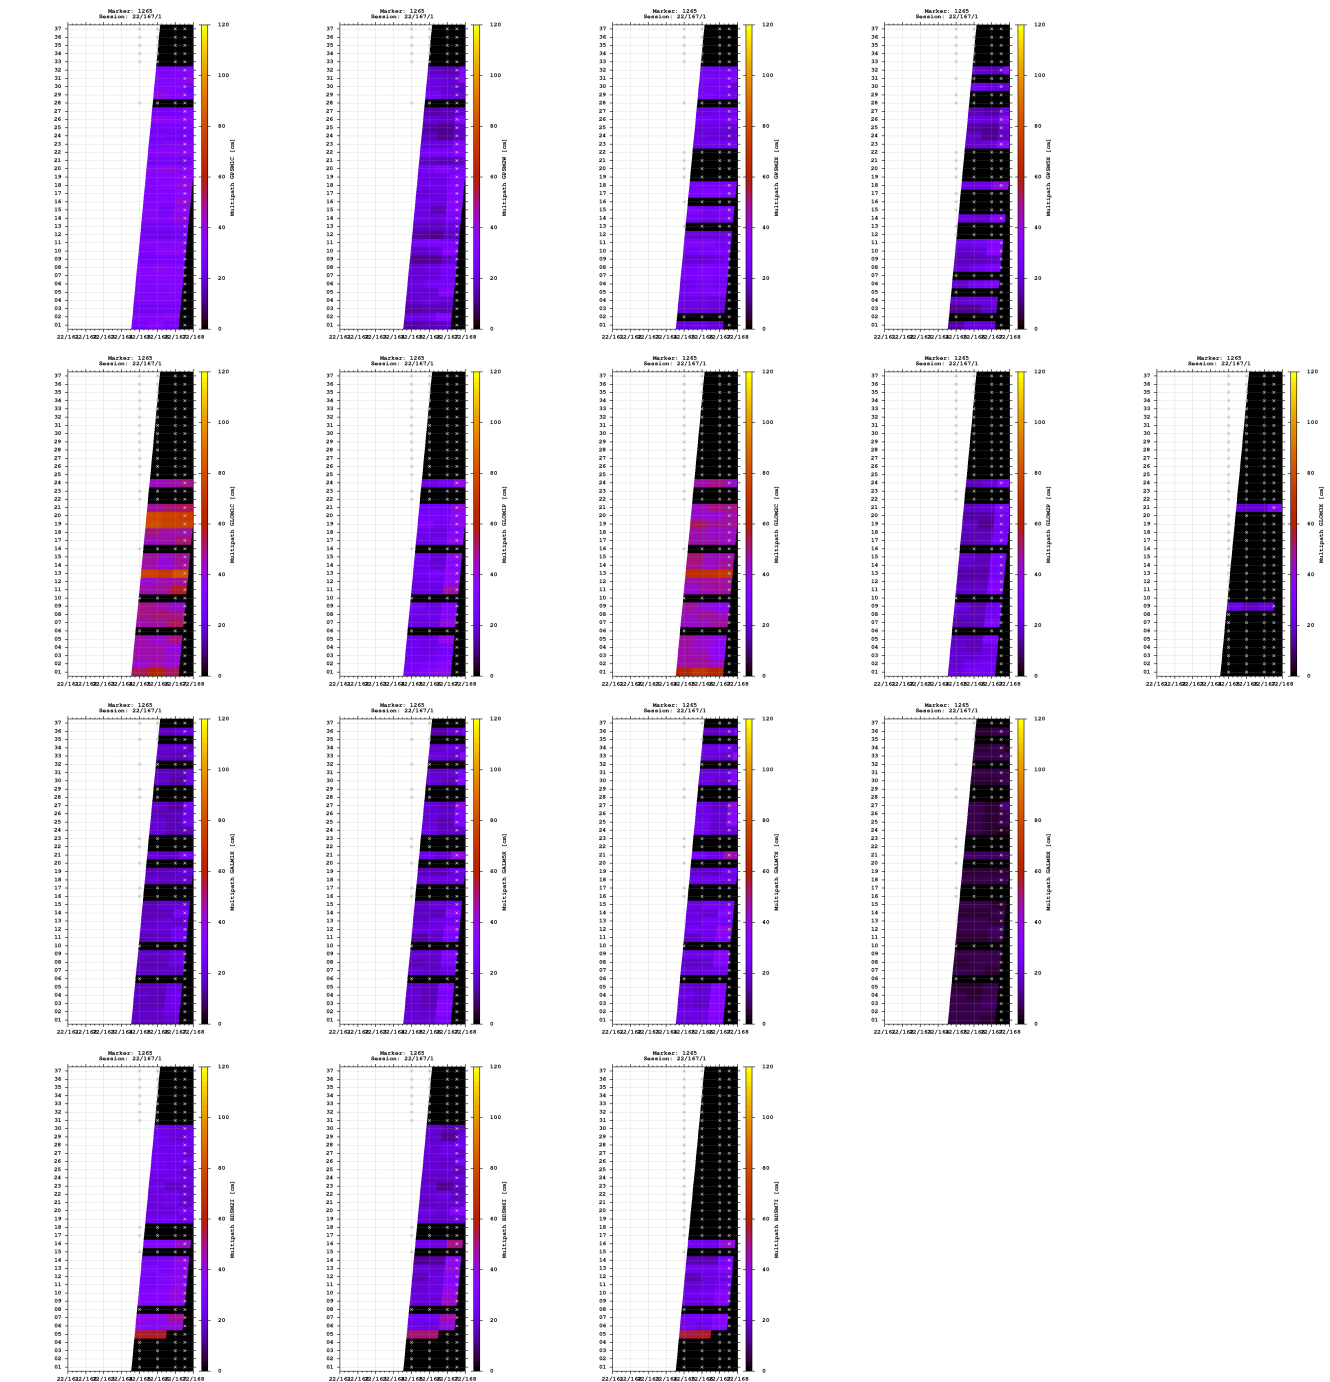


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

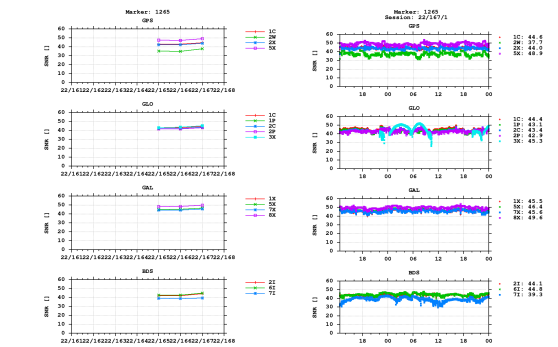


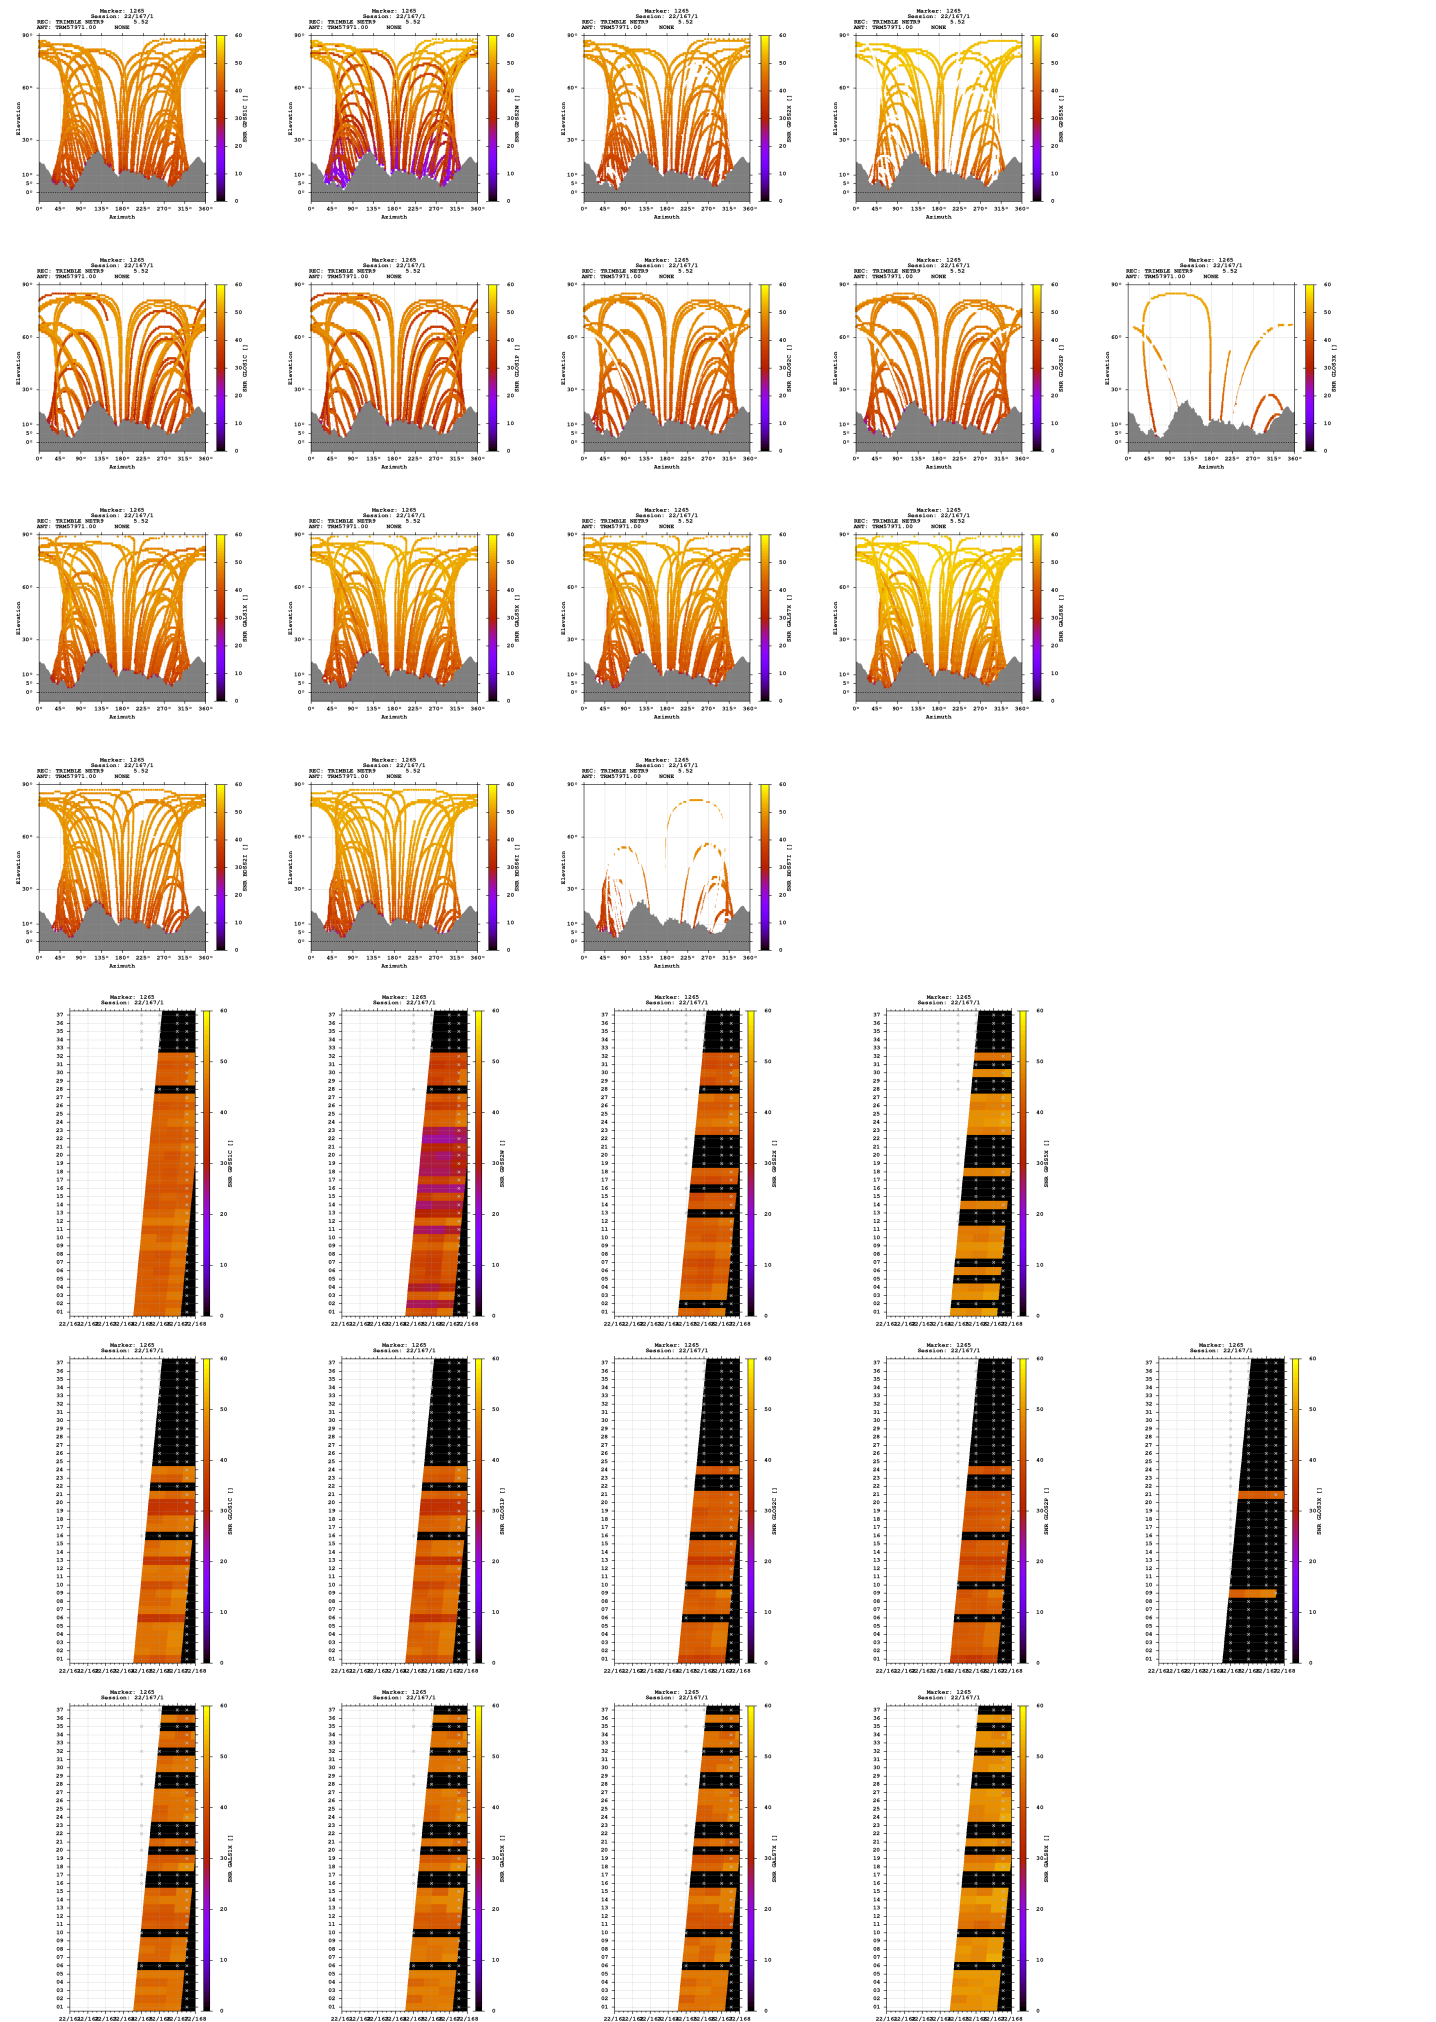

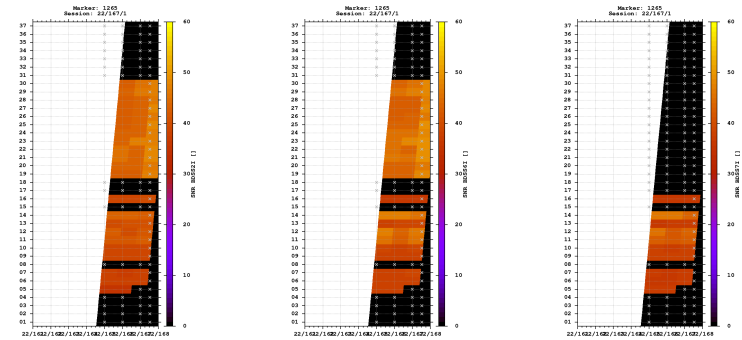



Estimates

2022-06-16 12:37:00	GPS	4368149.6773	545104.5241	4601375.4905	46.460560113	7.113209411	985.0271
2022-06-16 12:37:00	GLO	4368149.8484	545104.4513	4601375.2670	46.460557680	7.113208195	984.9758
2022-06-16 12:37:00	GAL	4368149.5972	545104.5154	4601375.3851	46.460559985	7.113209428	984.8952
2022-06-16 12:37:00	BDS	4368148.6427	545105.6895	4601375.7069	46.460567206	7.113226130	984.5762

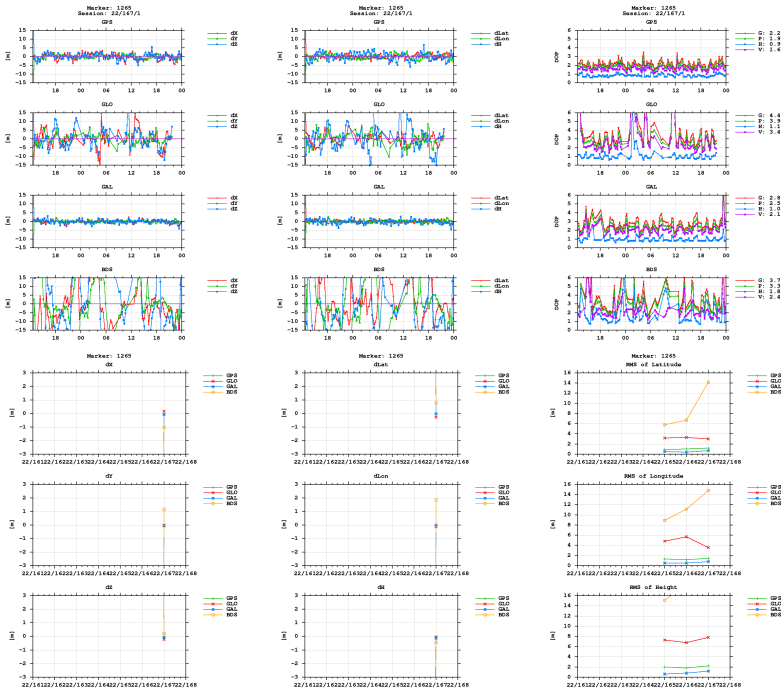

BNC

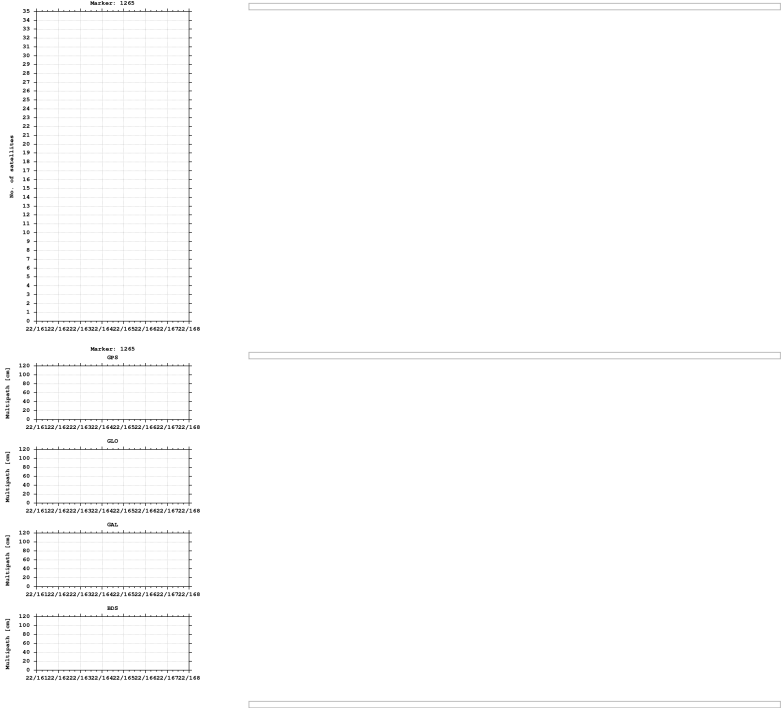

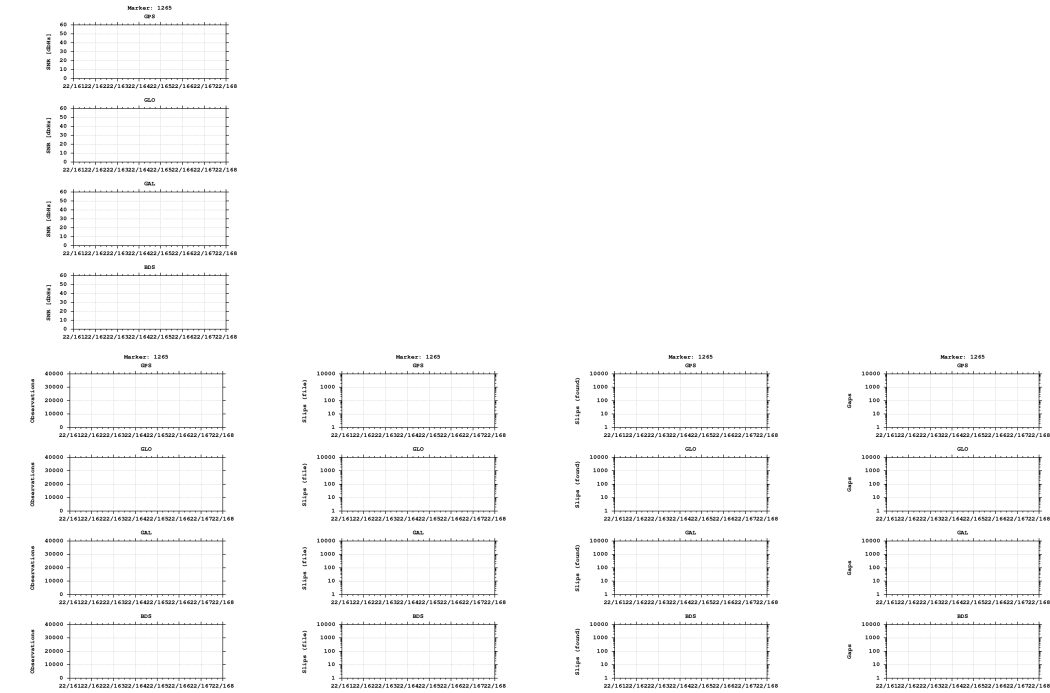

Equipment

2022-06-14 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)