


GNSS observation file monitoring for 0517


Last RINEX file: 05171641.22O
RINEX version: 3.02
Marker: 1185
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

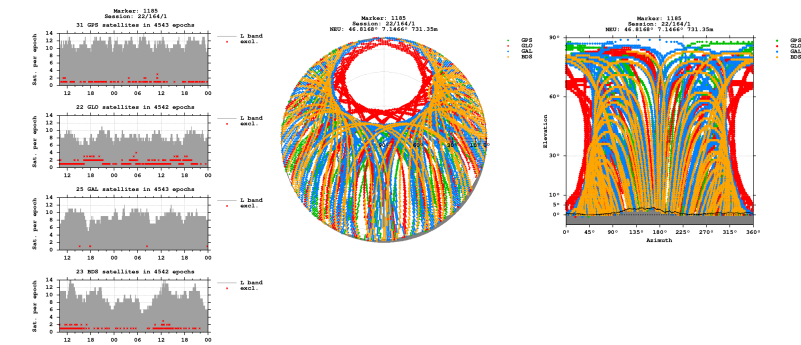


Bands

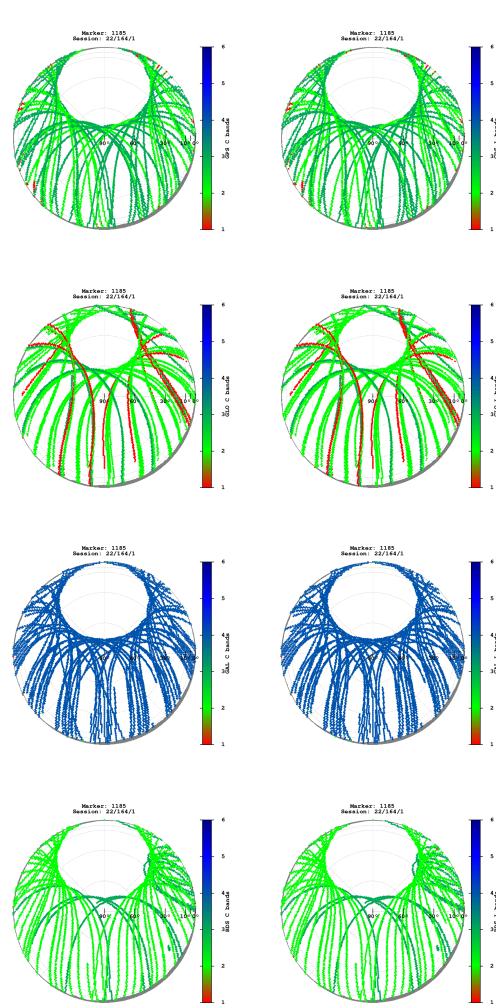

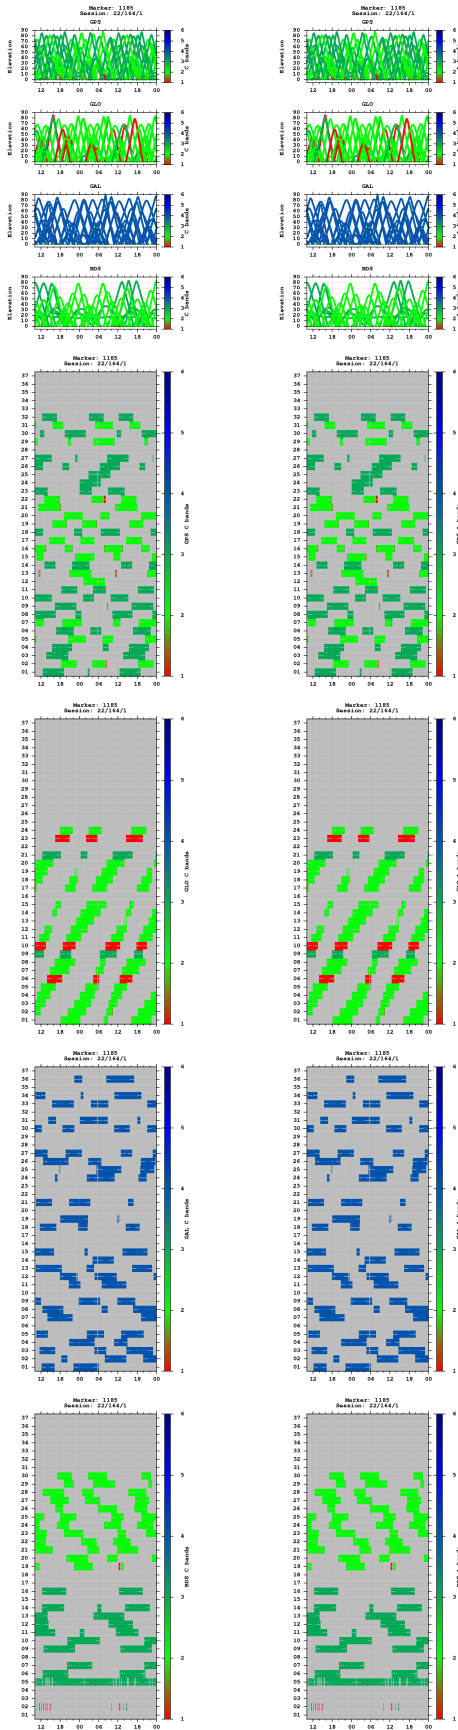



Multipath

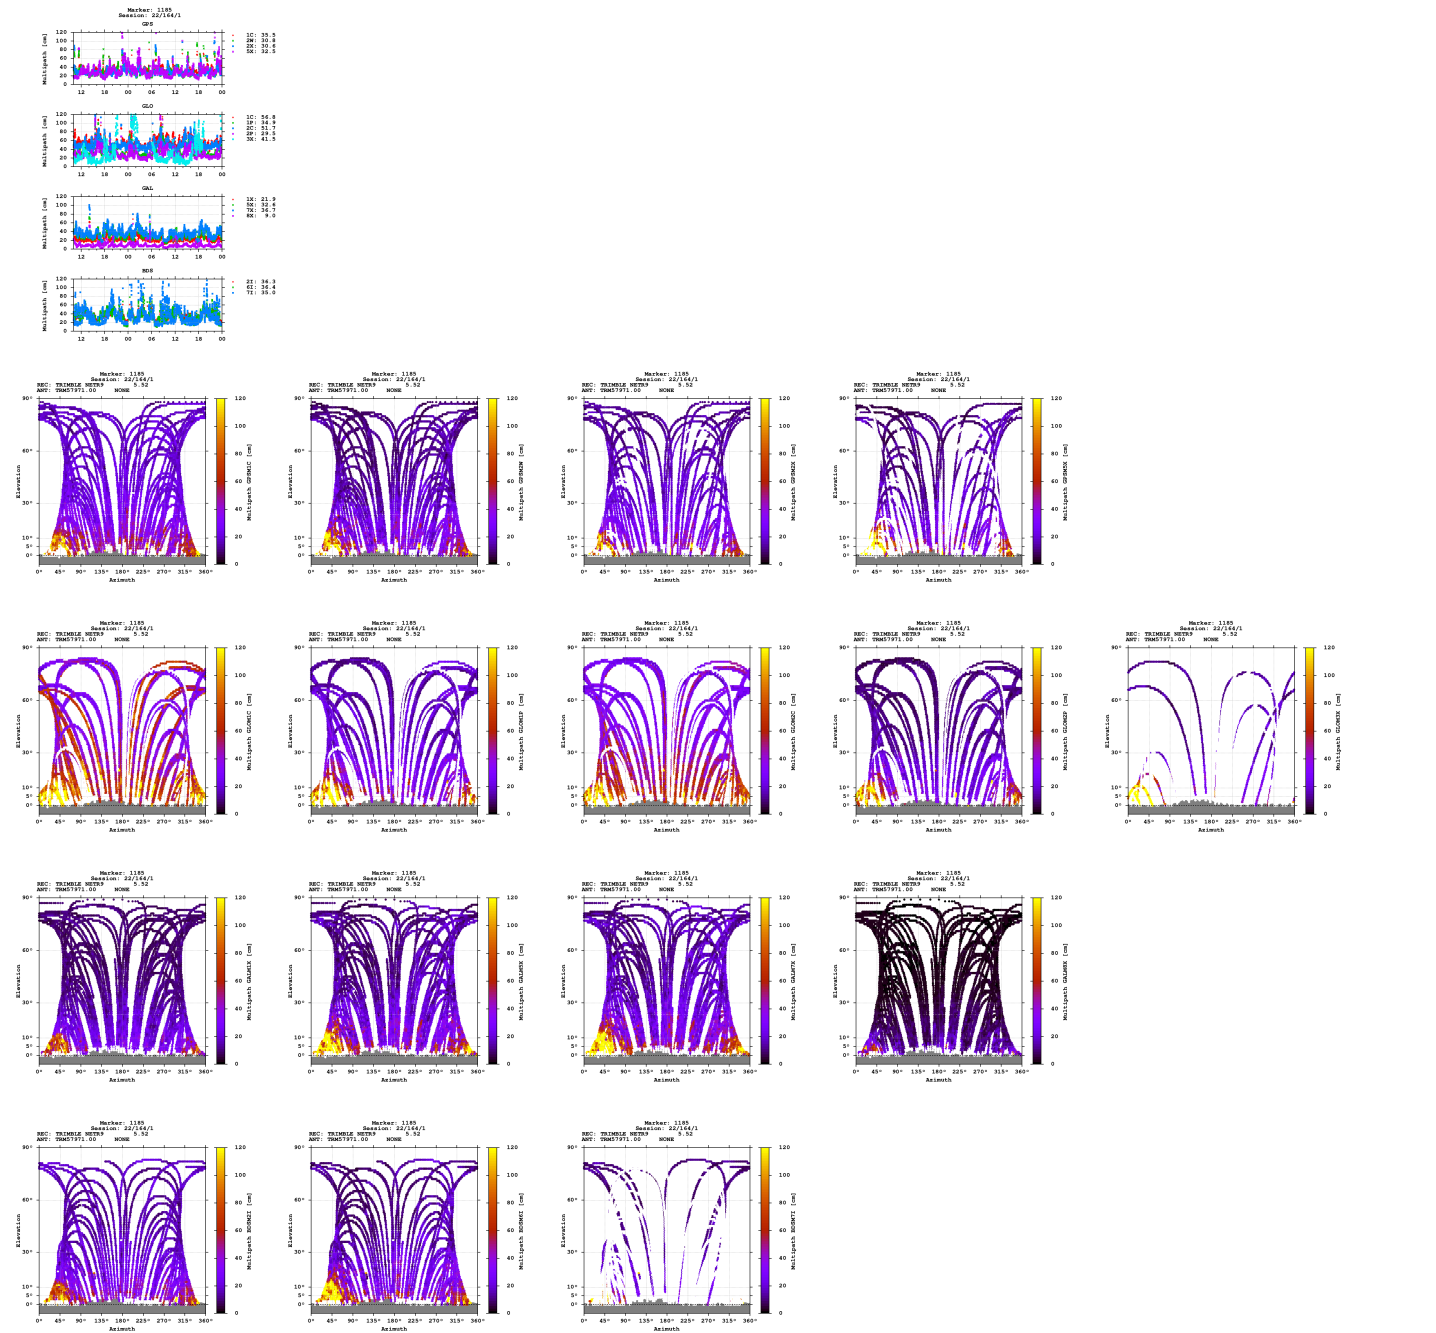

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

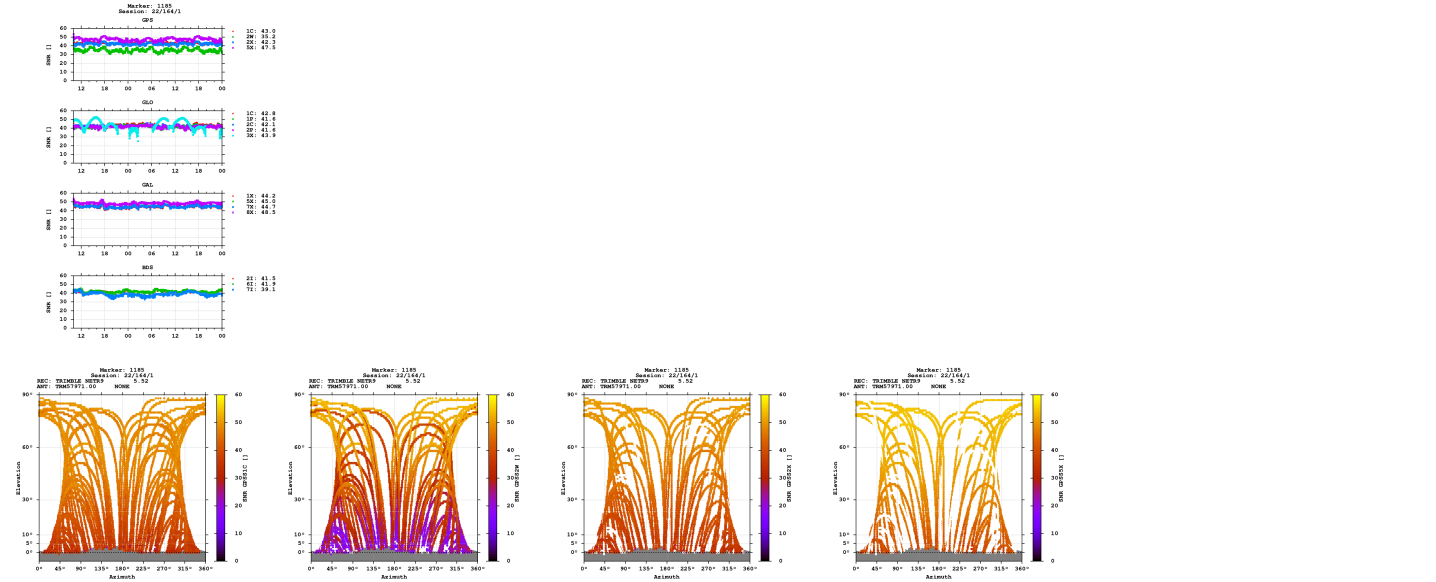

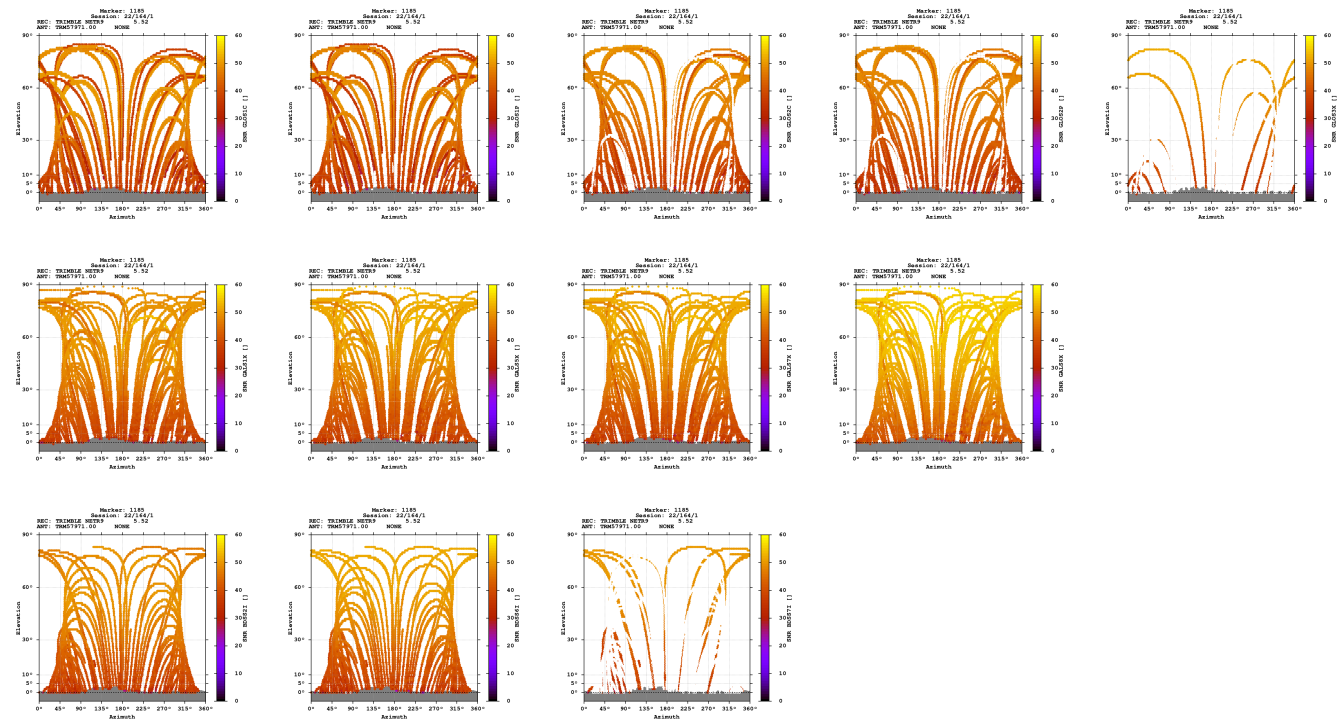

Estimates

2022-06-13 10:06:30	GPS	4339084.8883	544045.6135	4628386.4980	46.816825145	7.146597737	731.3529
2022-06-13 10:06:30	GLO	4339085.0280	544045.4190	4628386.7842	46.816826156	7.146594980	731.6398
2022-06-13 10:06:30	GAL	4339085.1635	544045.5676	4628386.5533	46.816823732	7.146596691	731.5761
2022-06-13 10:06:30	BDS	4339085.3889	544044.3247	4628389.8666	46.816843673	7.146580166	734.0393

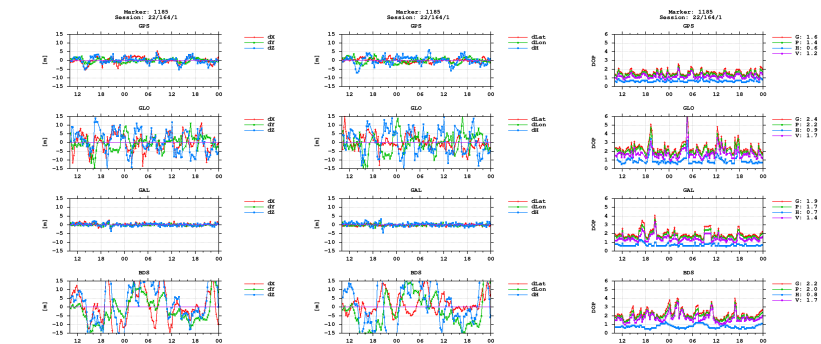

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)