


GNSS observation file monitoring for 0517


Last RINEX file: 05171661.220
RINEX version: 3.02
Marker: 1246
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

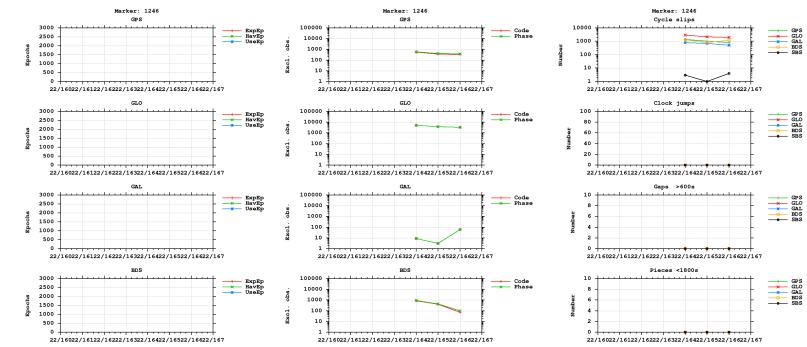



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

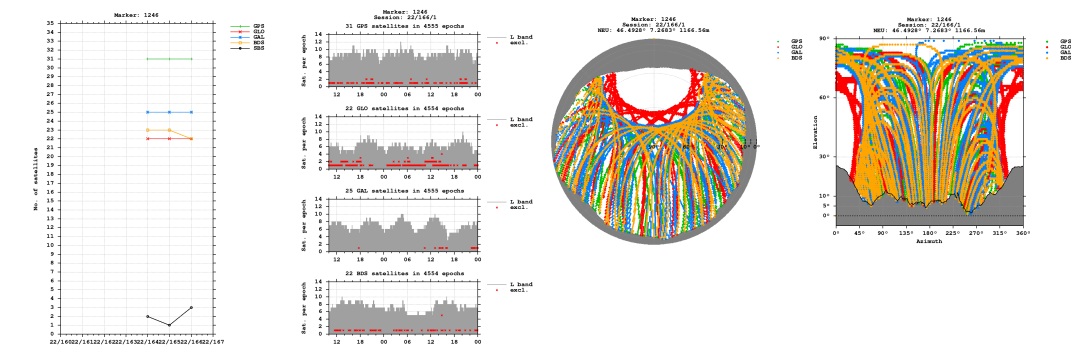


Bands

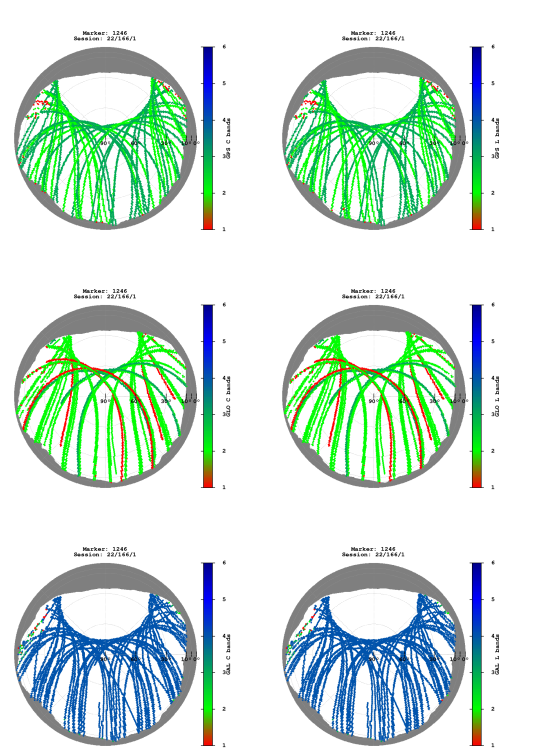

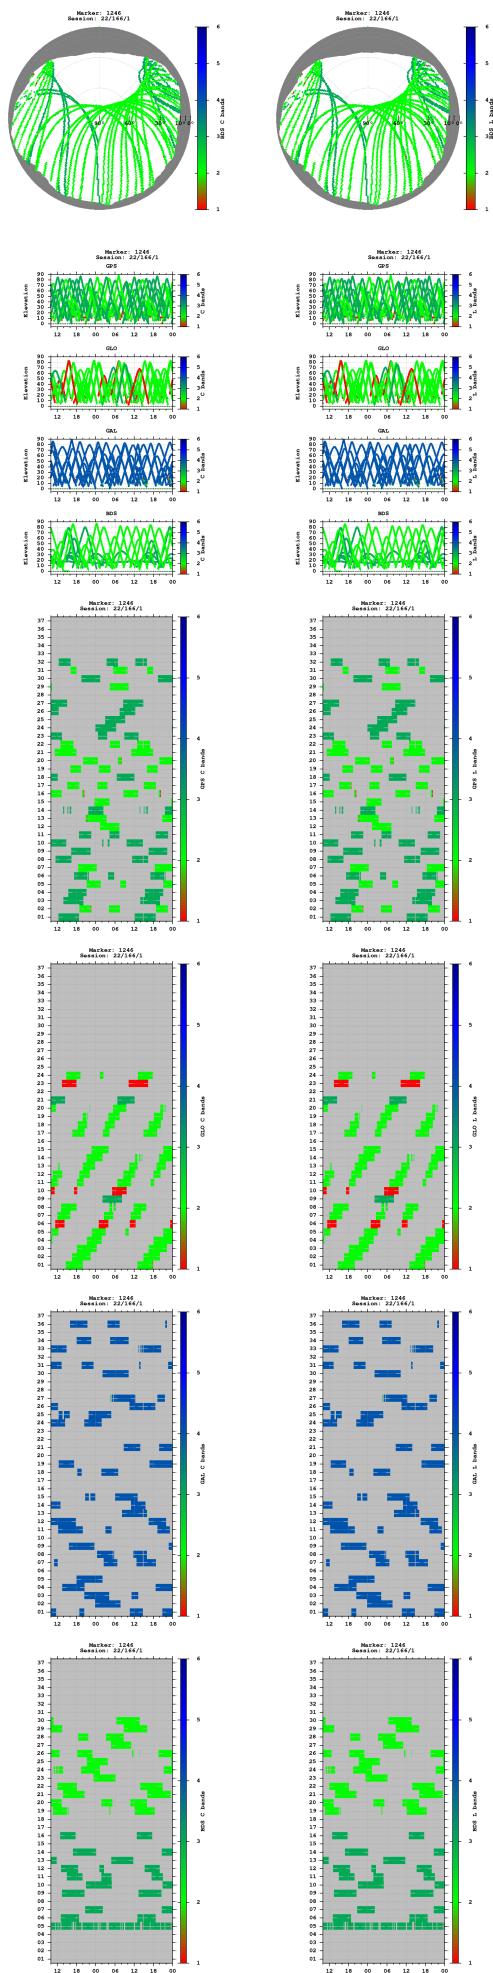


Observations




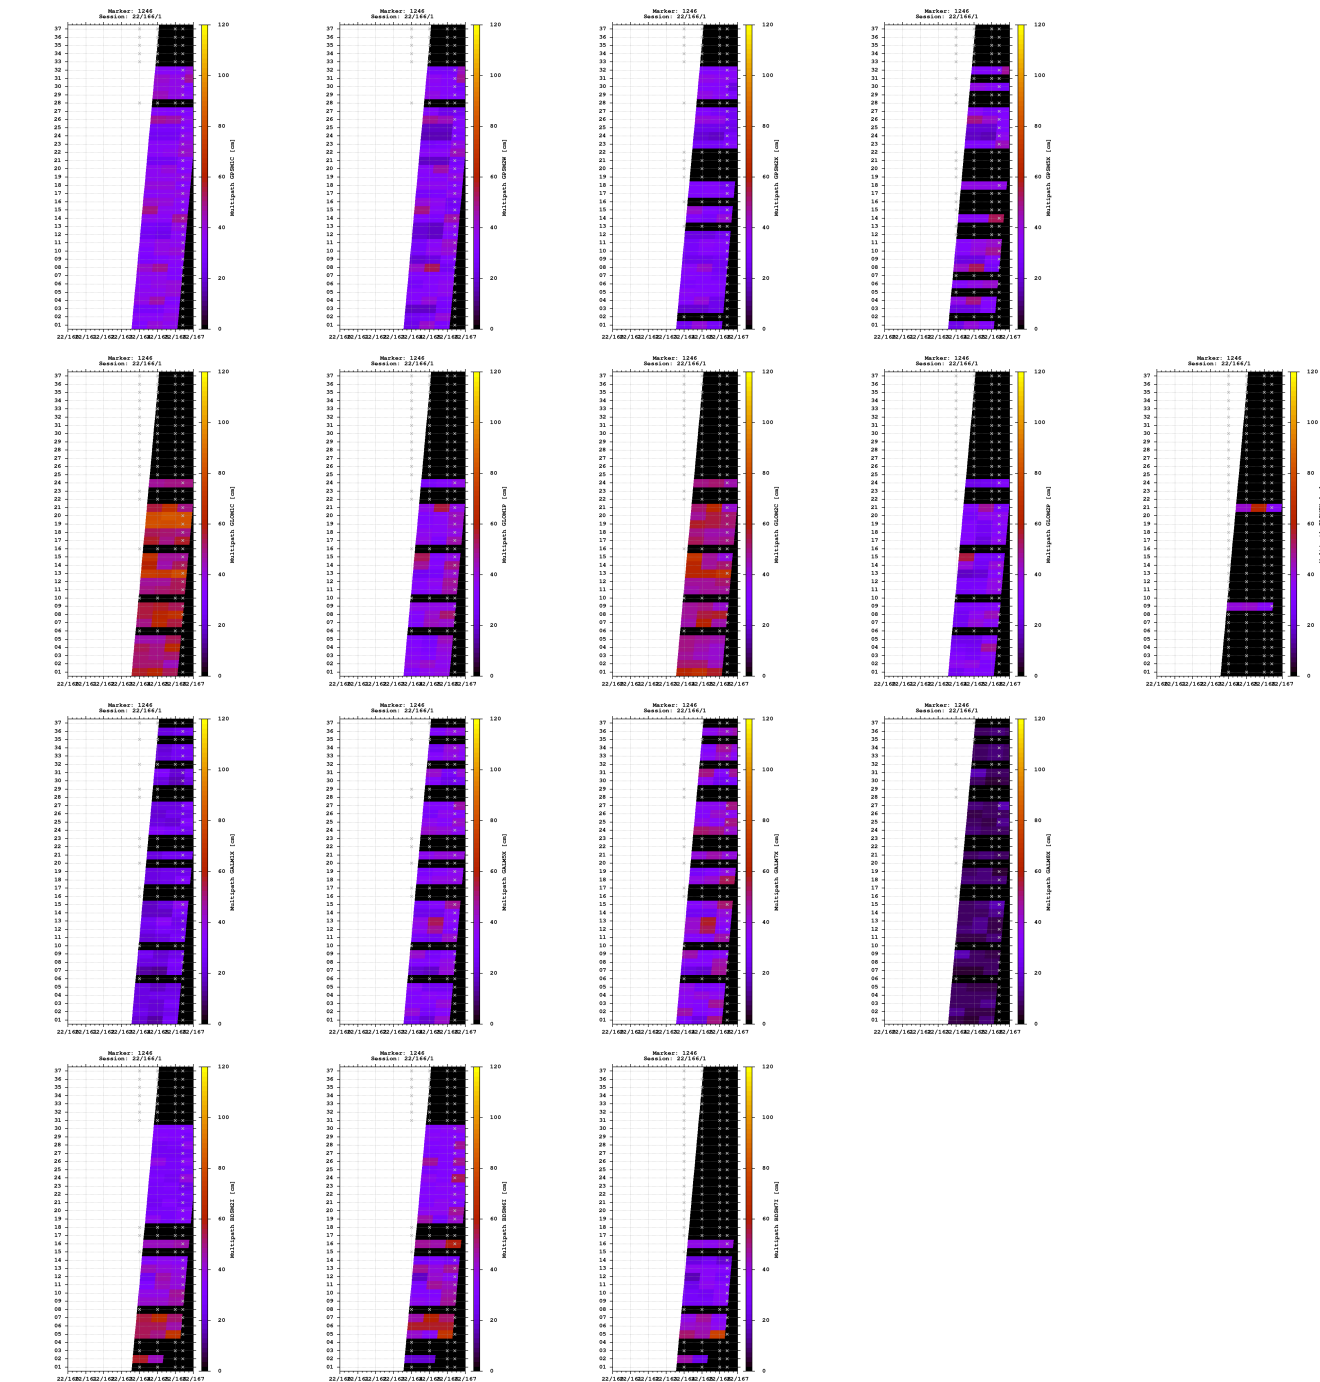


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

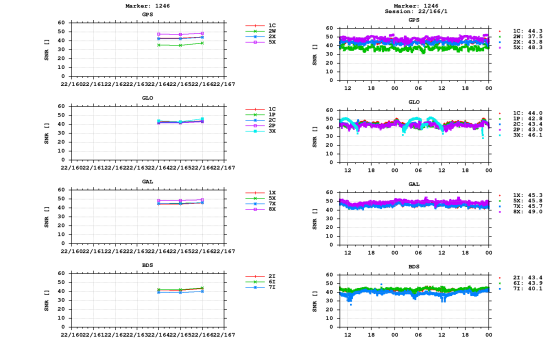


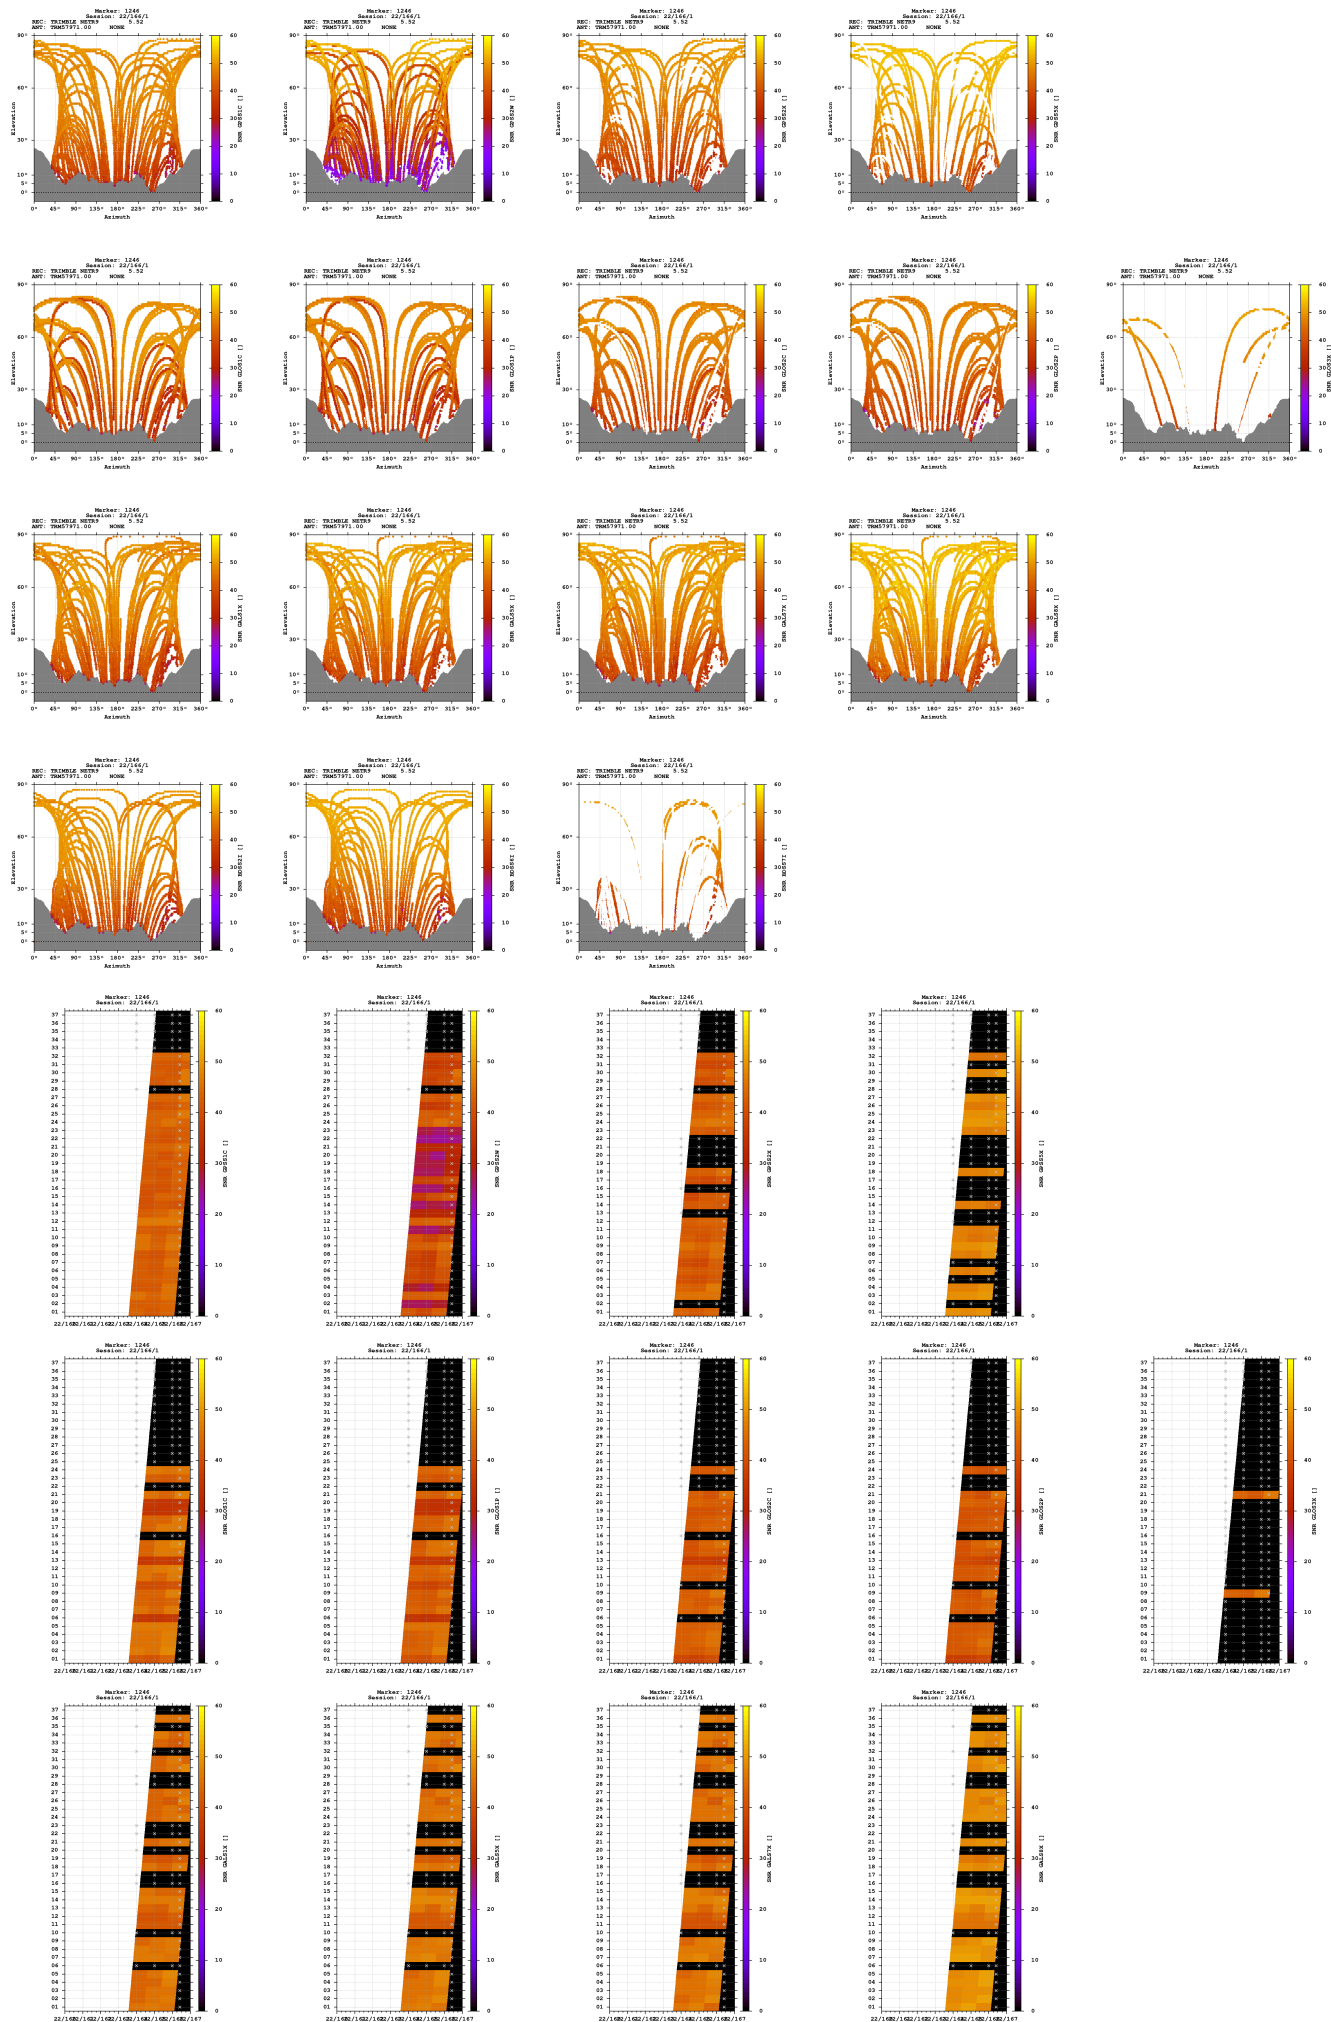

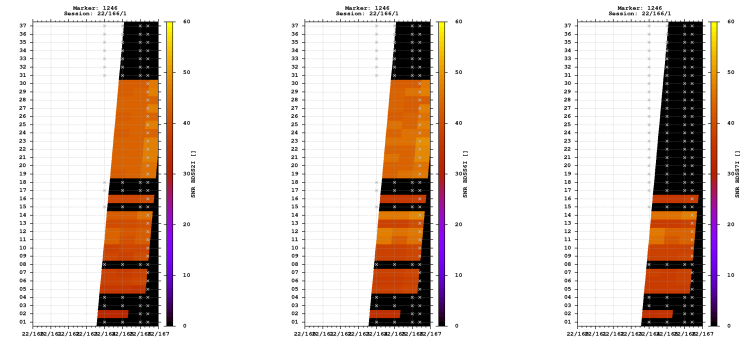



Estimates

2022-06-15 10:00:30	GPS	4364207.2509	556611.2553	4603972.7449	46.492763669	7.268266997	1166.5637
2022-06-15 10:00:30	GLO	4364207.5062	556611.5209	4603972.4666	46.492760074	7.268270008	1166.5594
2022-06-15 10:00:30	GAL	4364207.4270	556611.4039	4603972.5933	46.492761468	7.268268628	1166.5871
2022-06-15 10:00:30	BDS	4364204.7147	556610.3951	4603971.1865	46.492771141	7.268260064	1163.6266

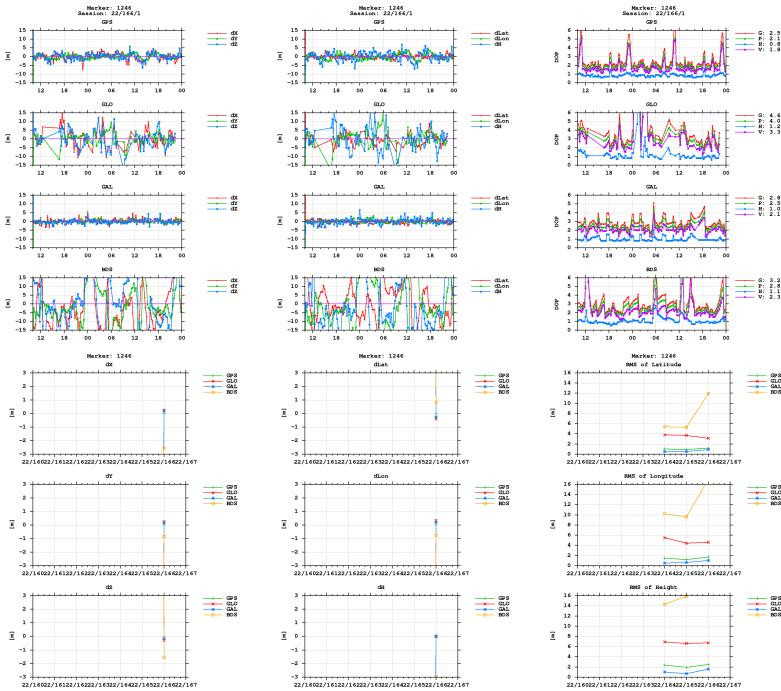

BNC

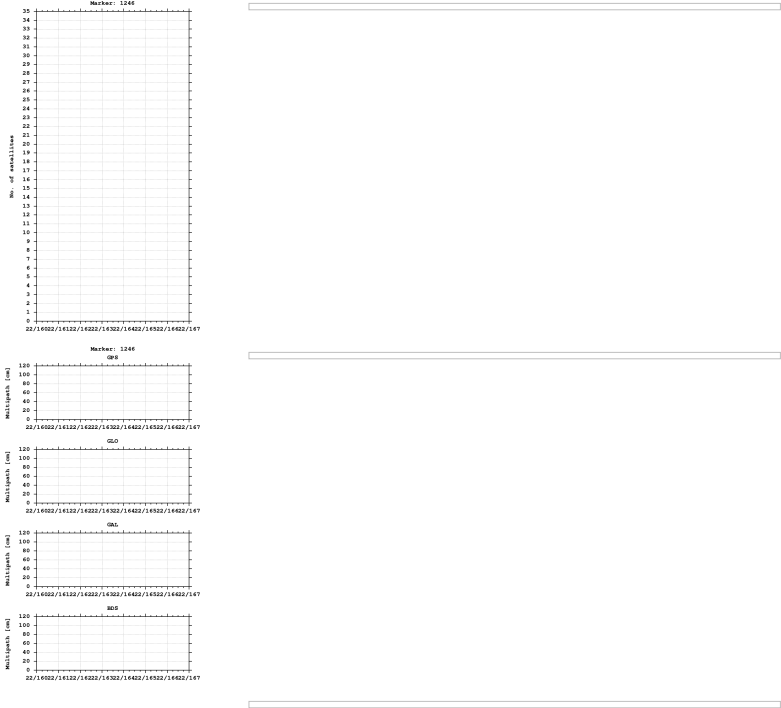

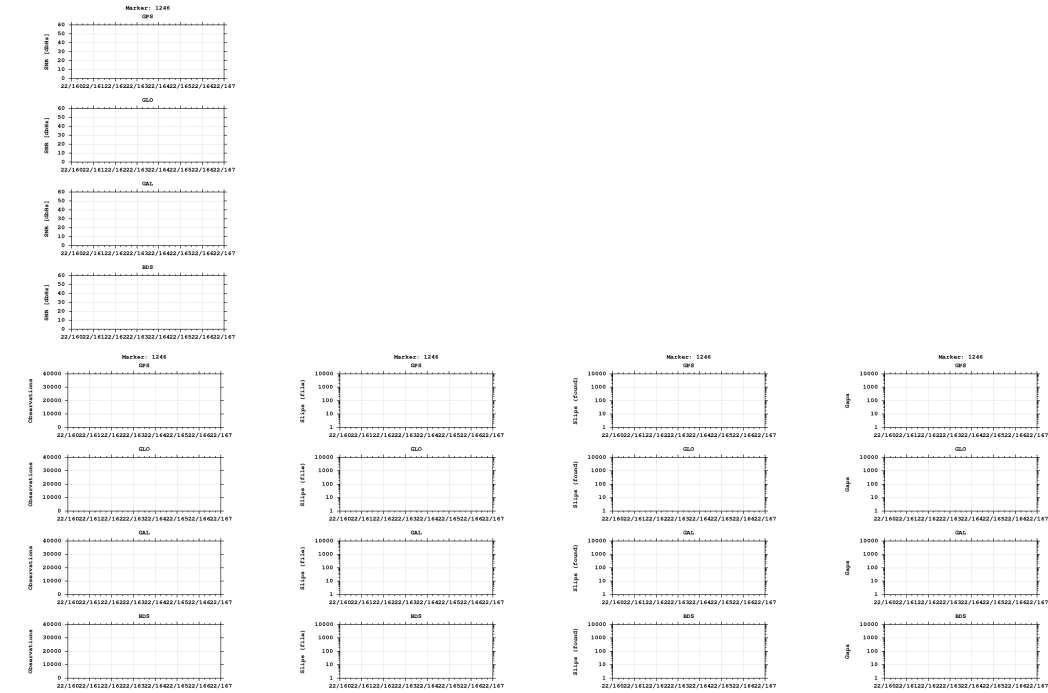

Equipment

2022-06-13 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)