


GNSS observation file monitoring for 0518


Last RINEX file: 05181651.22O
RINEX version: 3.02
Marker: 1227
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

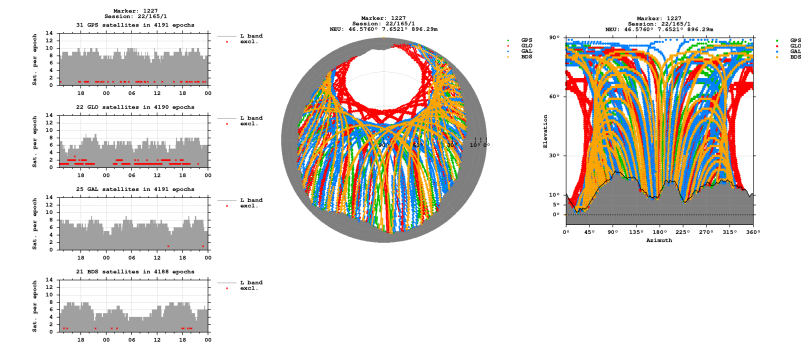


Bands

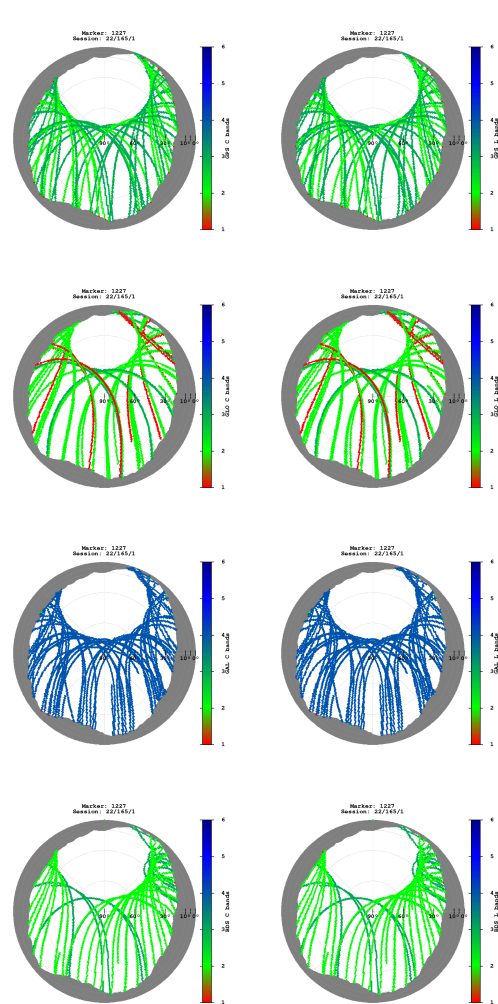

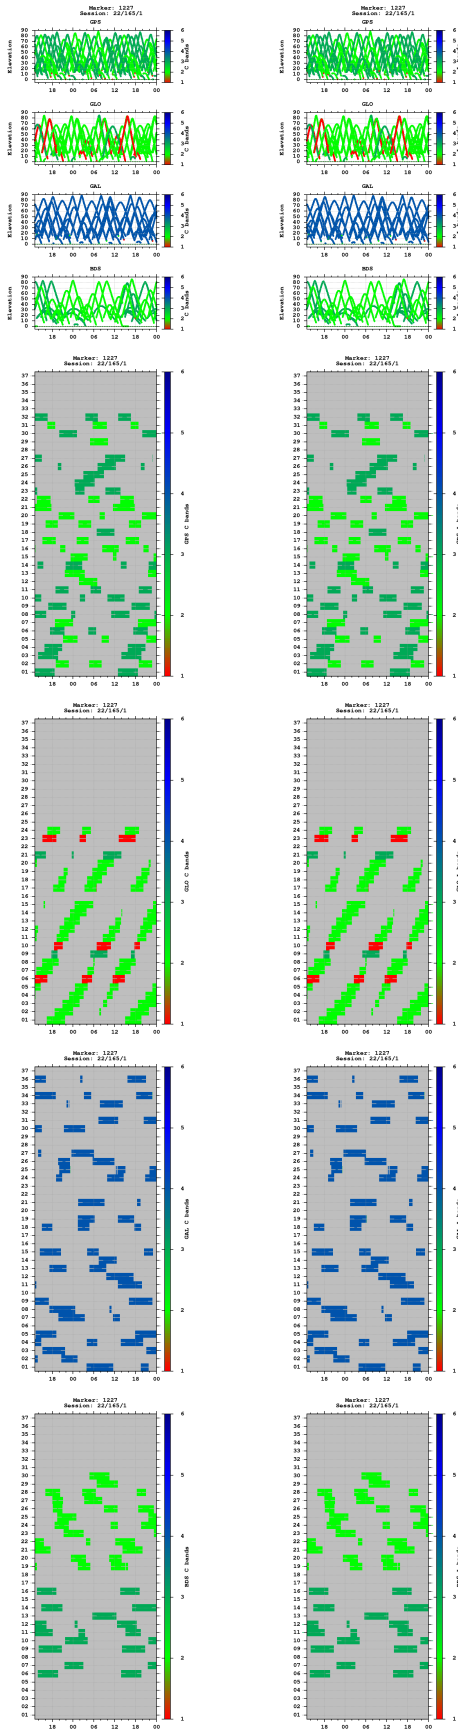



Multipath

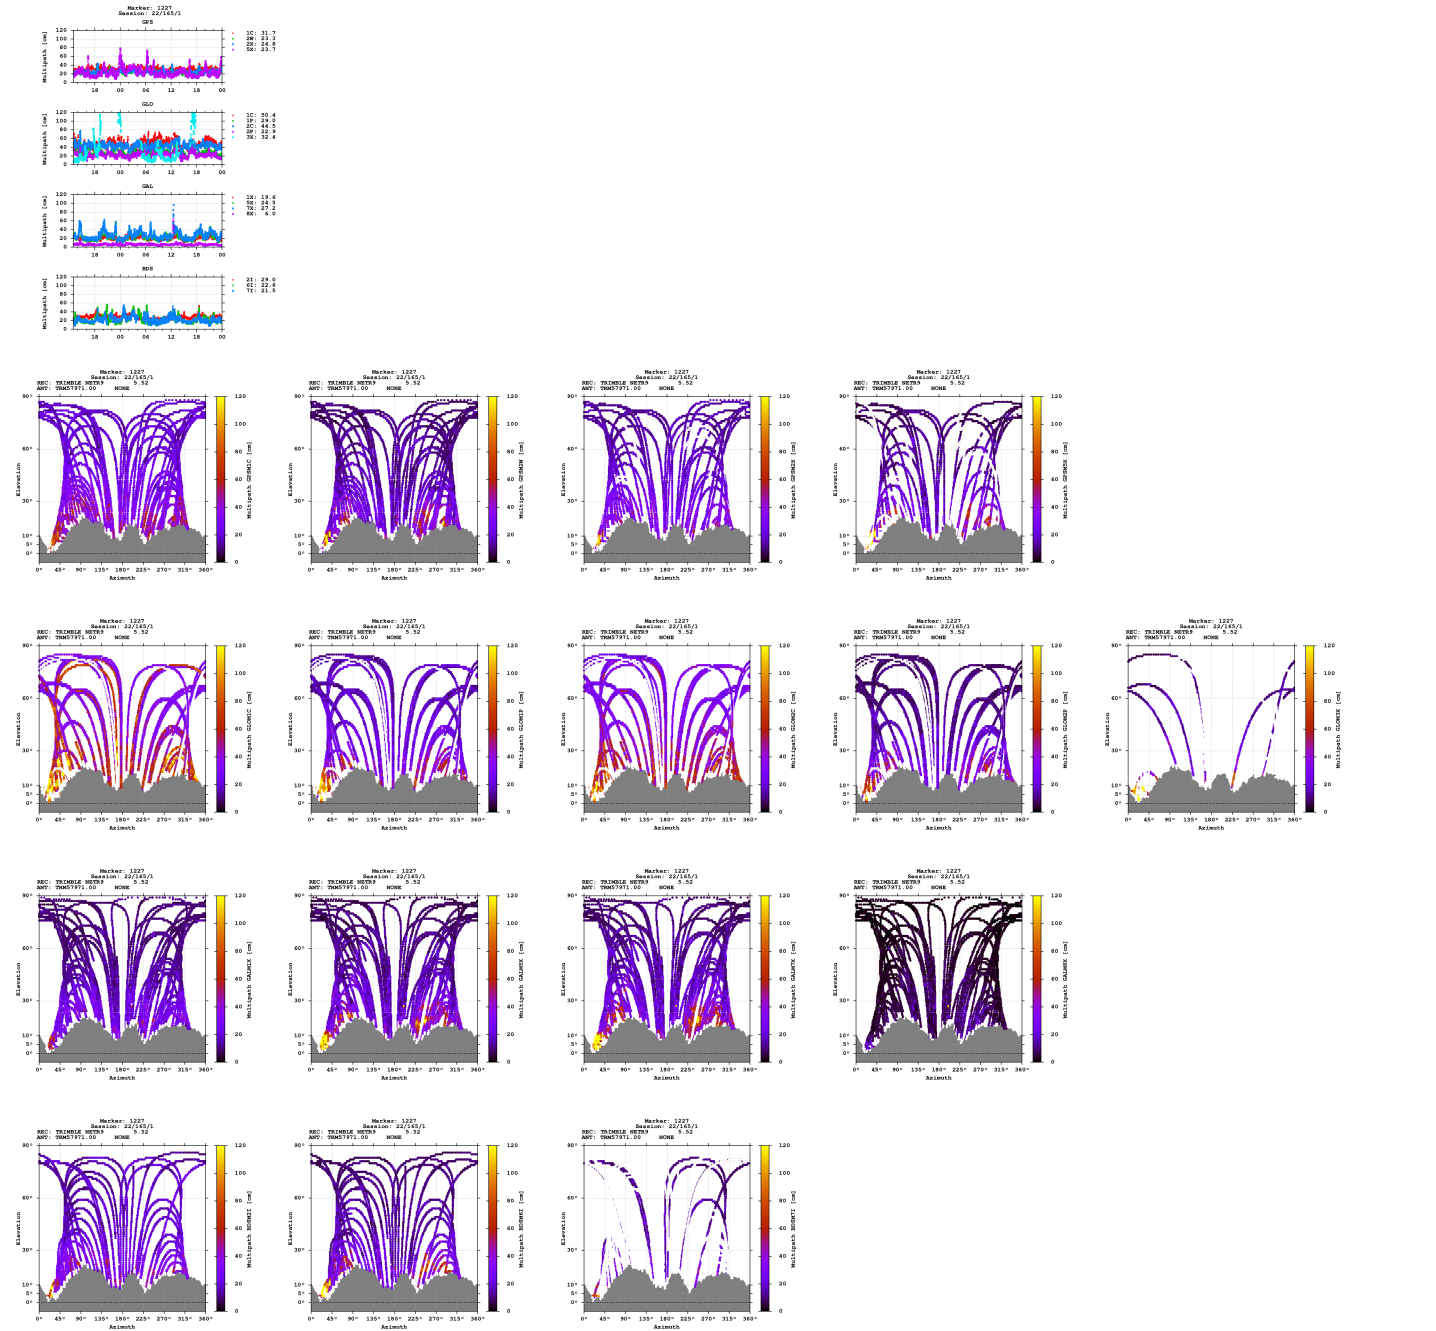

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

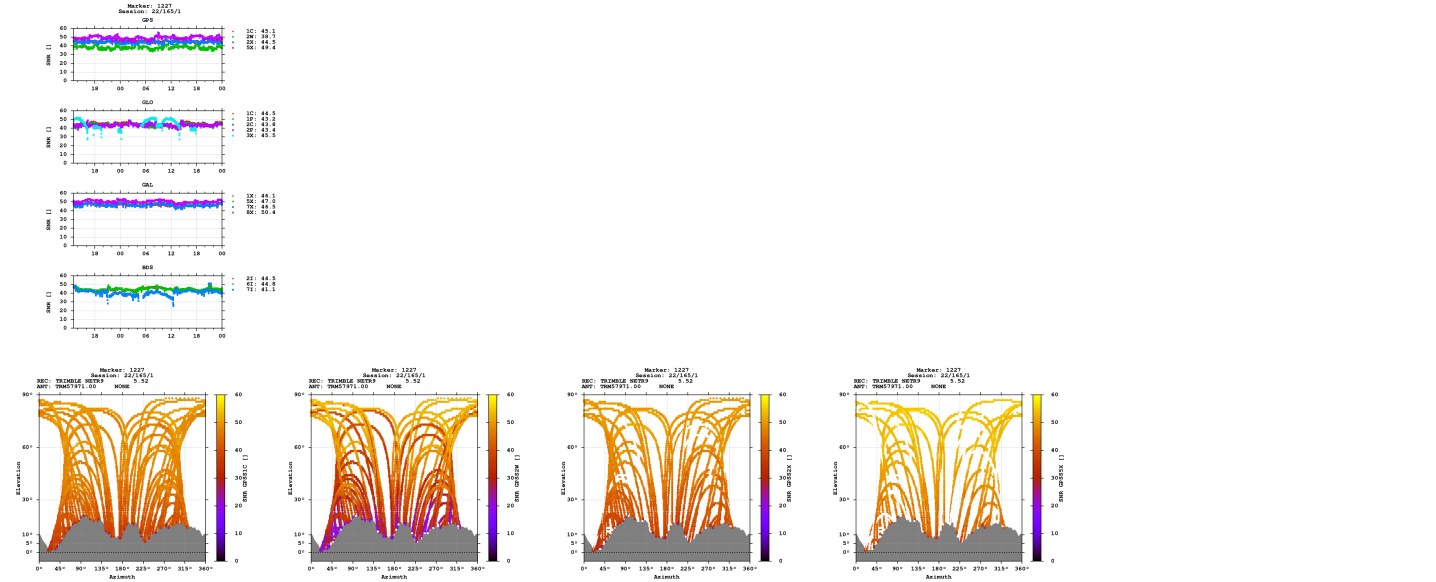

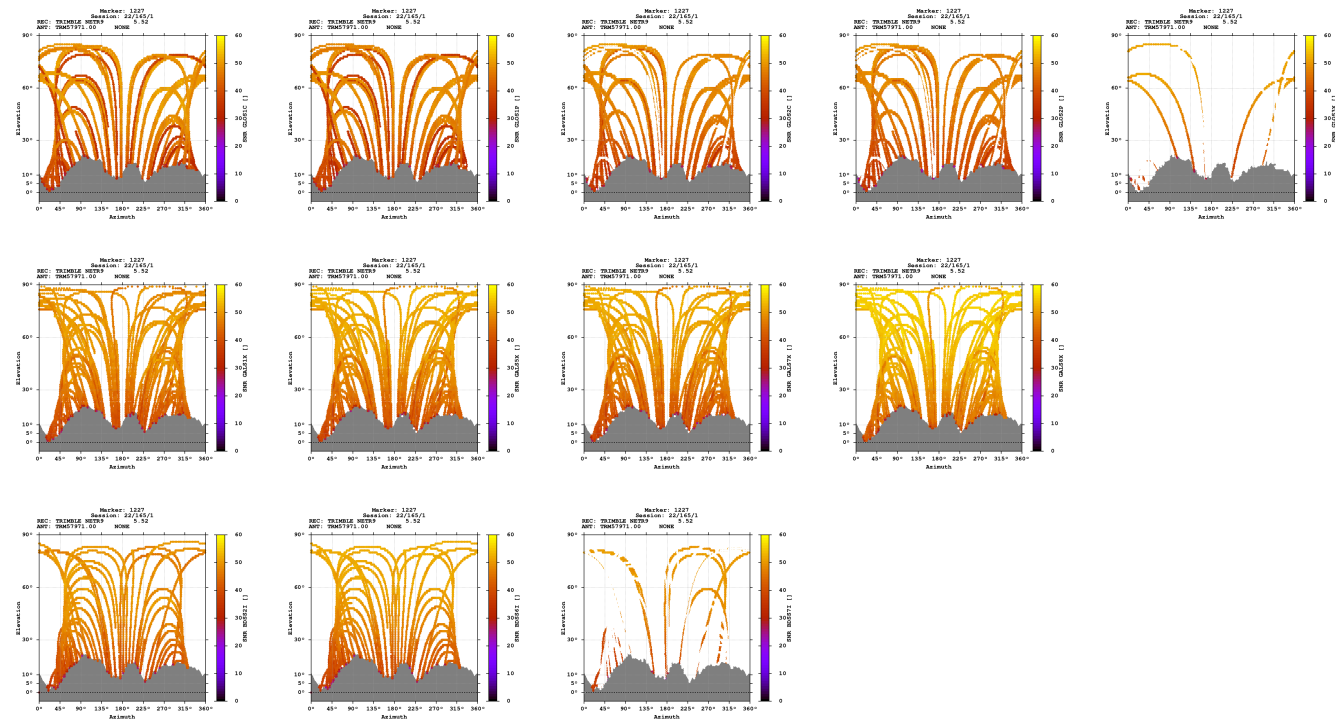

Estimates

2022-06-14 13:02:00	GPS	4353540.7186	584915.6271	4610141.6067	46.575985406	7.652094301	896.2910
2022-06-14 13:02:00	GLO	4353541.2256	584915.2319	4610141.3361	46.575980794	7.652088312	896.4037
2022-06-14 13:02:00	GAL	4353540.9085	584915.7044	4610141.4052	46.575982864	7.652094971	896.2811
2022-06-14 13:02:00	BDS	4353537.7062	584912.5508	4610139.2702	46.575993140	7.652059766	892.2602

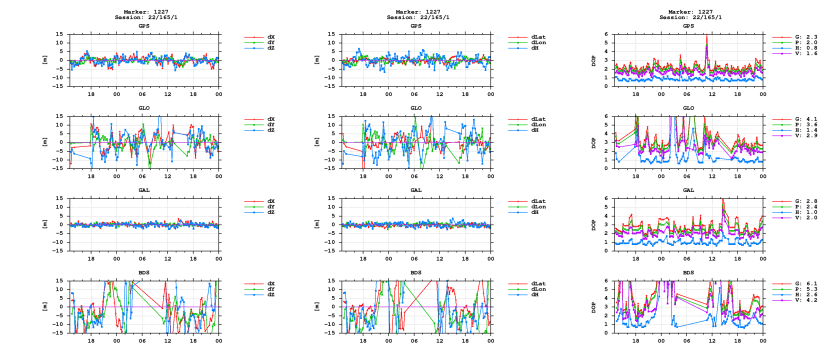

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)