

GNSS observation file monitoring for 0518

Last RINEX file: 05181681.220


RINEX version: 3.02

Marker: FR_1

Receiver: 518 TRIMBLE NETR9 5.52

Antenna: 518 TRM57971.00 NONE


Epochs

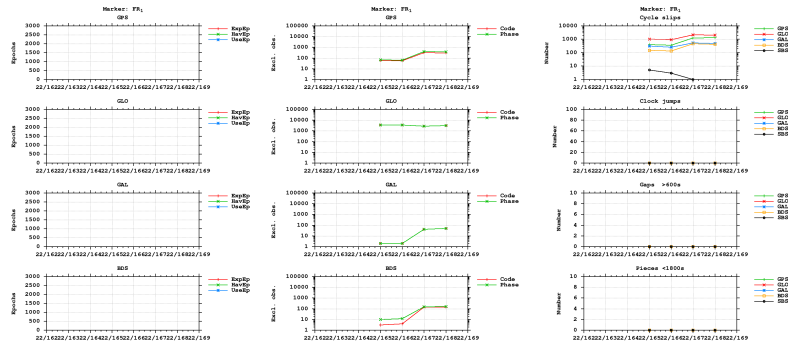


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

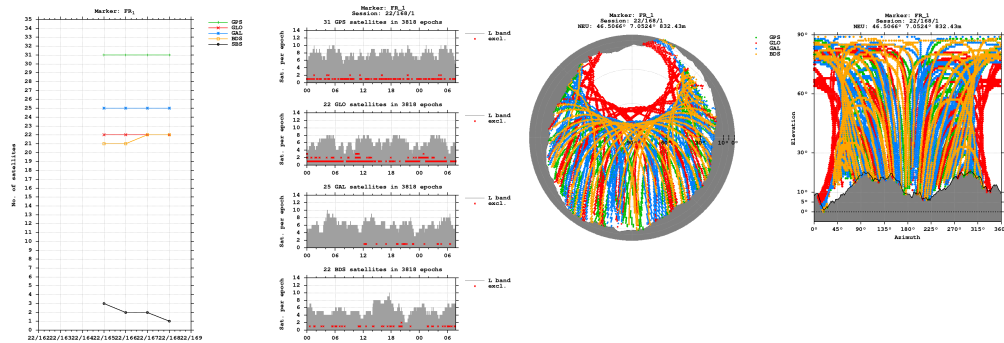


Bands

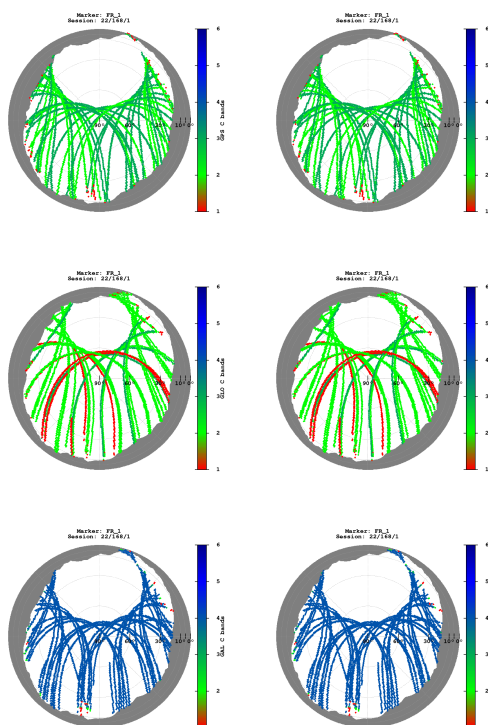

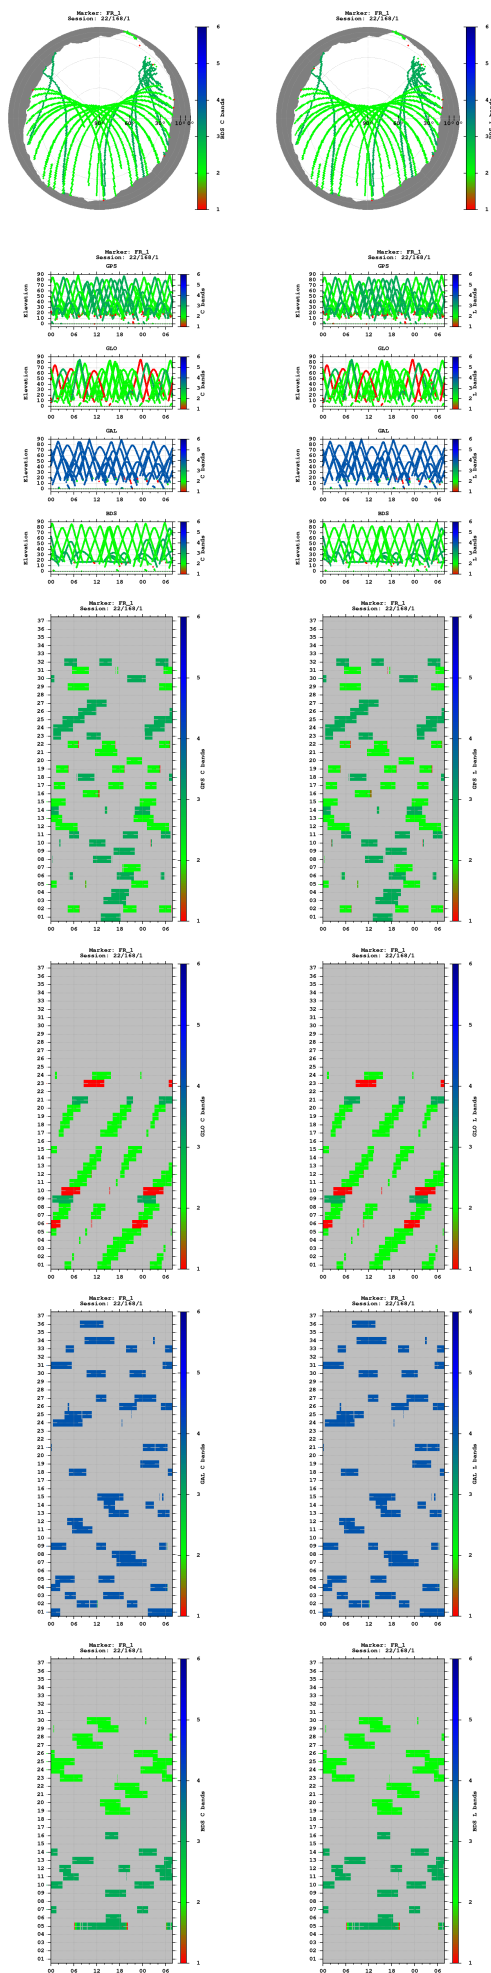



Observations




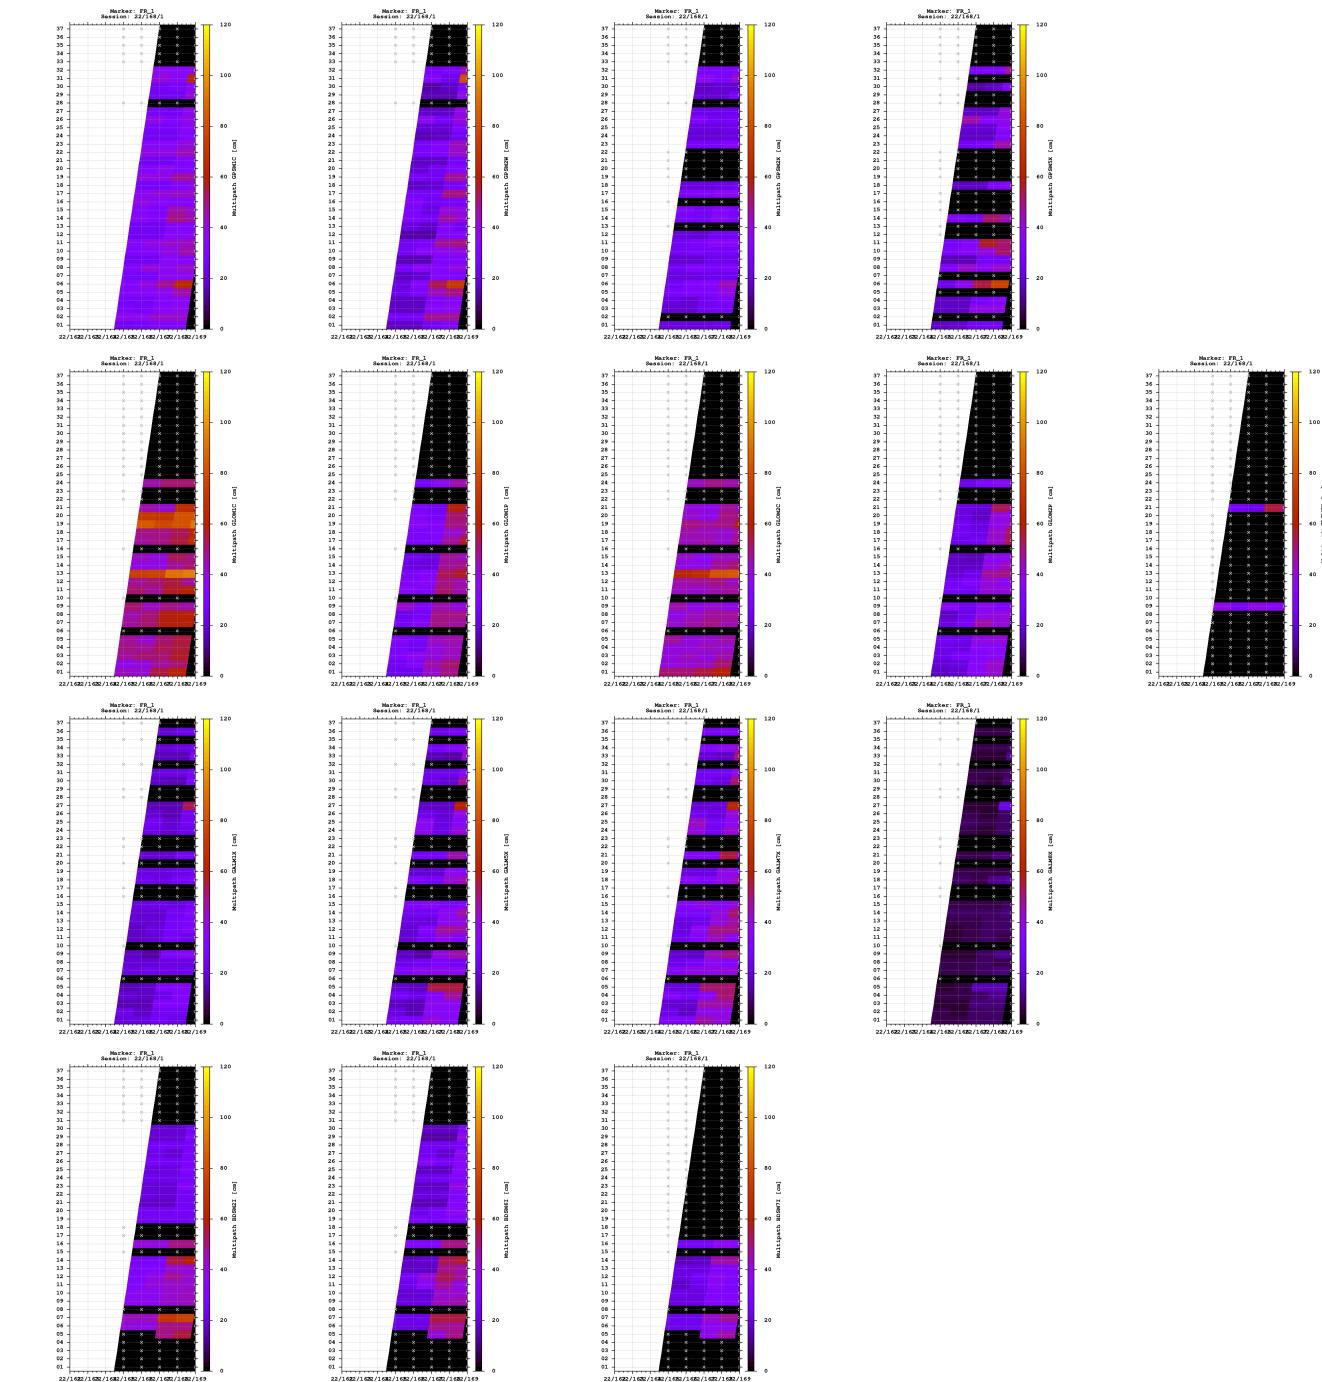


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

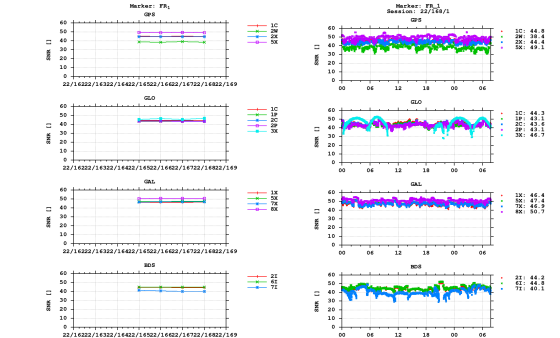


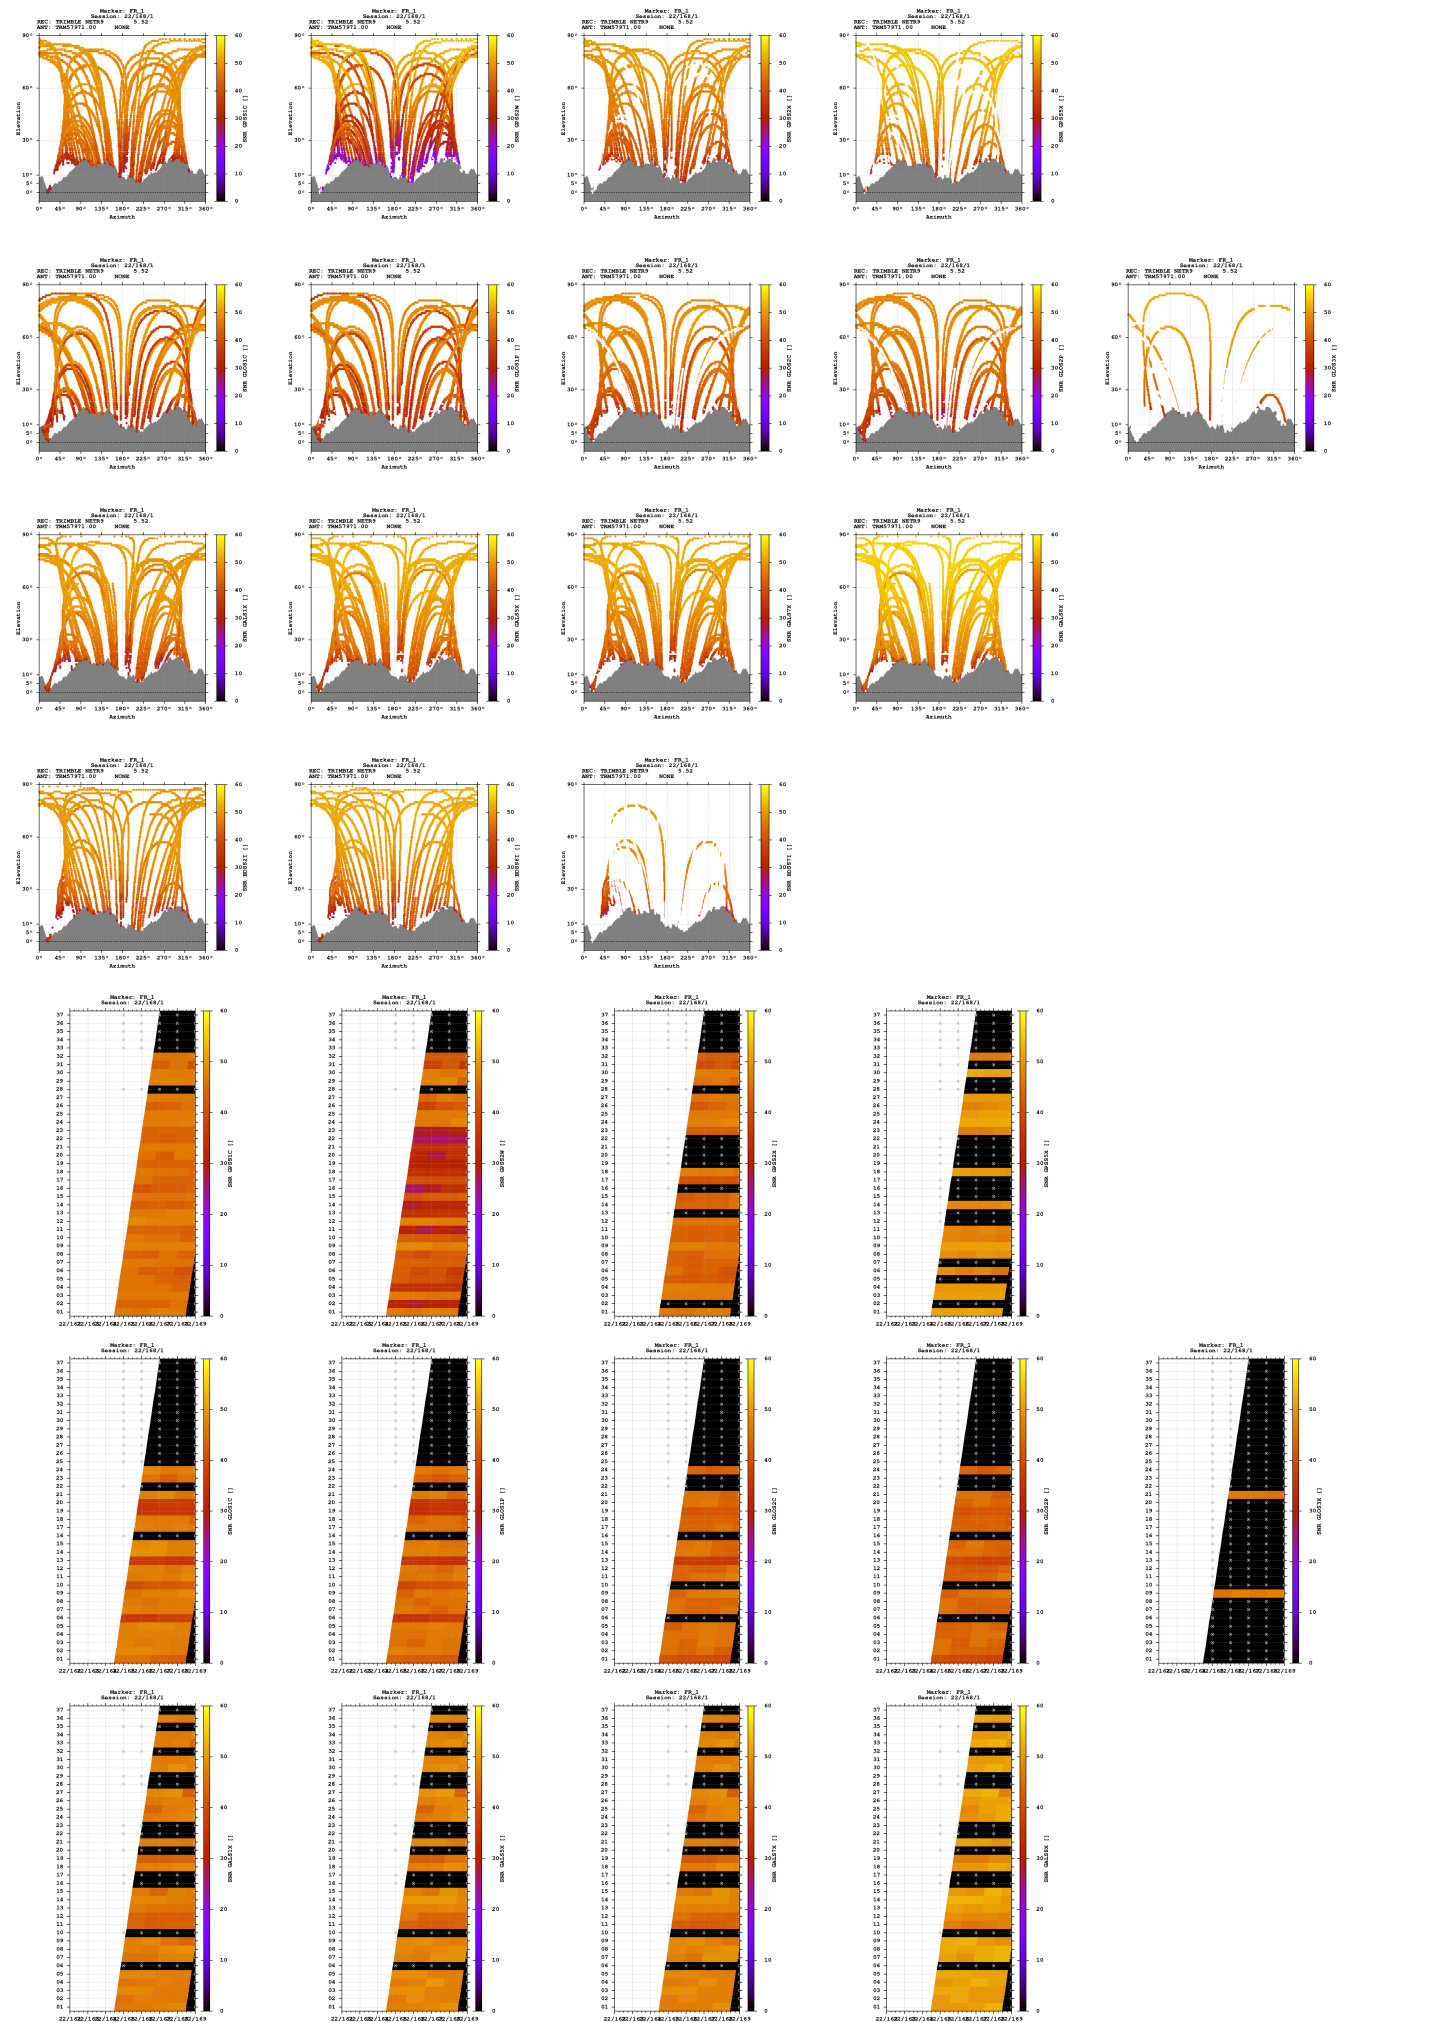

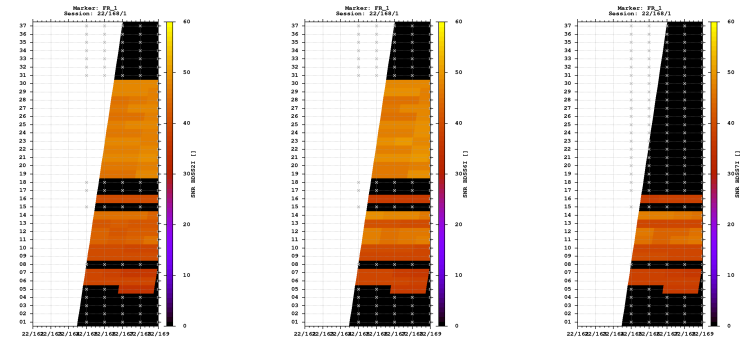



Estimates

2022-06-16 13:26:00	GPS	4364935.1339	539999.9643	4604791.6436	46.506630897	7.052409293	832.4318
2022-06-16 13:26:00	GLO	4364934.9323	539999.1526	4604791.6749	46.506633047	7.052399122	832.2481
2022-06-16 13:26:00	GAL	4364935.0398	540000.0275	4604791.6417	46.506631444	7.052410261	832.3715
2022-06-16 13:26:00	BDS	4364932.6826	539998.9287	4604792.4447	46.506652561	7.052399824	831.2511

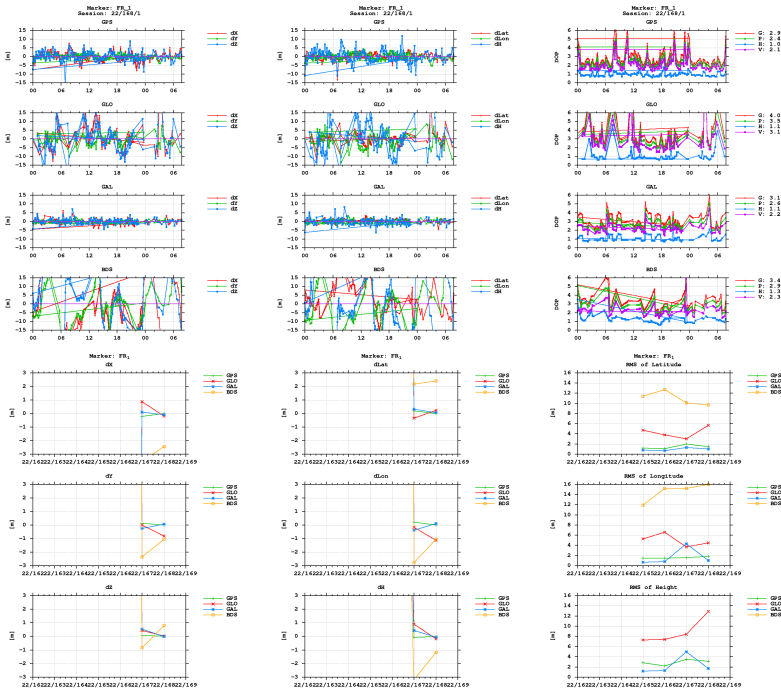

BNC

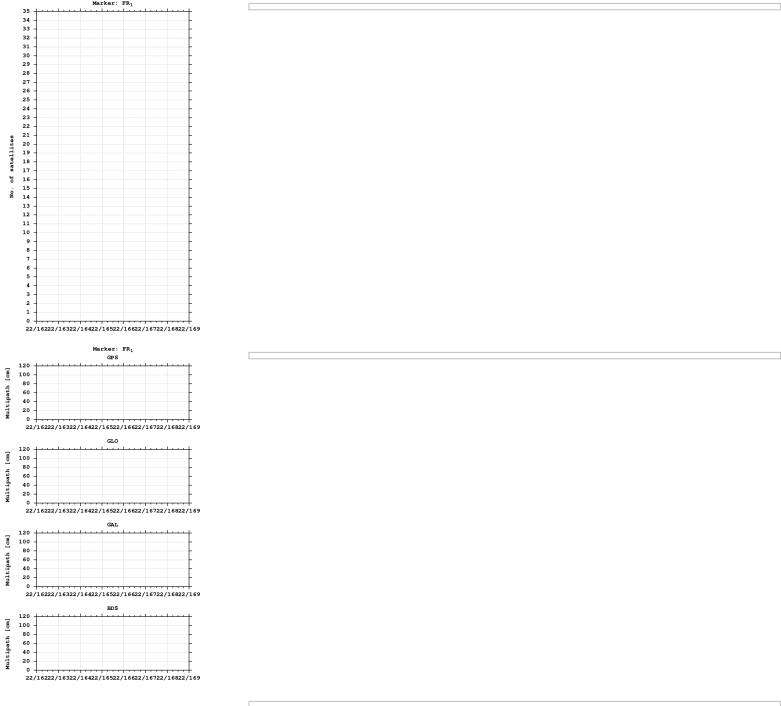

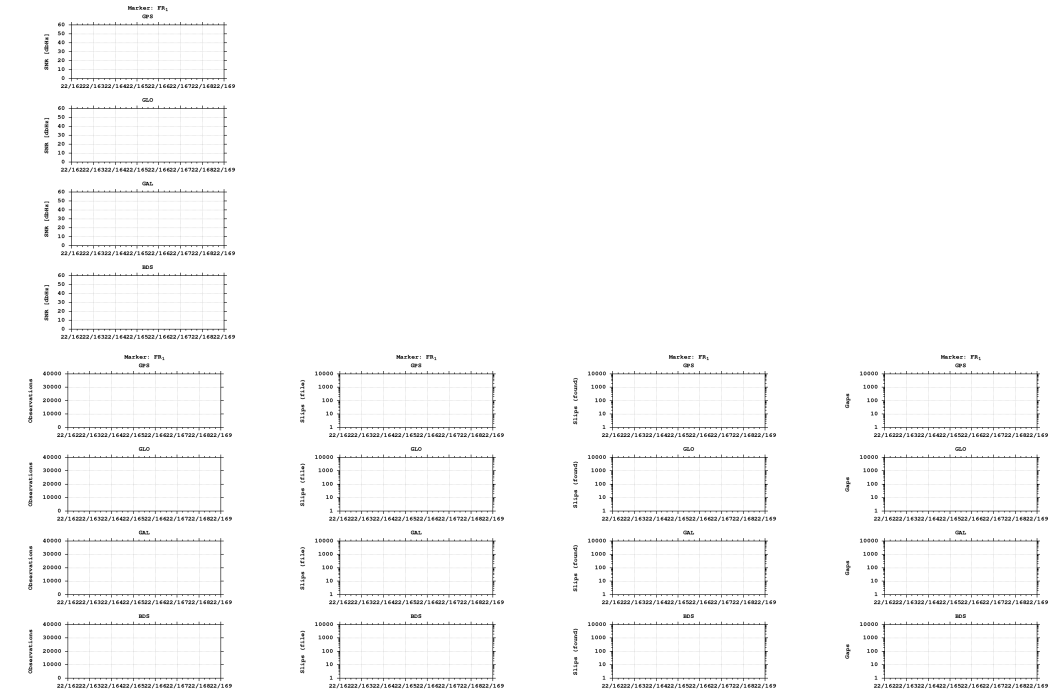

Equipment

2022-06-14 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)